MIL-C-52126D(ME)
13 July 1987
SUPERSEDING
MIL-C-52126C(ME)
9 March 1981

MILITARY SPECIFICATION

CONVEYOR, BELT, PORTABLE, WHEEL-MOUNTED, ELECTRIC-MOTOR-DRIVEN, 50-FOOT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of a portable, wheel mounted, electric-motor-driven, elevating-troughing conveyor for handling bulk aggregate materials obtained from rock quarry and gravel pit operations.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3910

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-781	-	Steel, Strapping, Flat.
TT-V-121	-	Varnish, Spar Water-Resistant.
TT-P-664	-	Primer, Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
UU-T-81	-	Tags, Shipping and Stock.
PPP-P-40	-	Packaging and Packing of Hand Tools.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-P-116	-	Preservation, Methods of.
MIL-B-121	-	Barrier Material, Grease-proofed, Waterproofed, Flexible.
MIL-V-173	-	Varnish, Moisture-and-Fungus-Resistant (for the Treatment of Communications, Electronic, and Associated Electrical Equipment).
MIL-P-514	-	Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	-	Treatment and Painting of Materiel.
MIL-C-3432	-	Cable and Wire, Electrical (Power and Control; Semi-Flexible, Flexible and Extra Flexible, 300 and 600 Volts).
MIL-C-3774	-	Crates, Wood; Open, 12,000- and 16,000-Pound Capacity.
MIL-C-13486	-	Cable, Special Purpose, Electrical: Low-Tension, Heavy Duty Single-Conductor and Multiconductor.
MIL-P-13983	-	Paint, Temporary, Lusterless, Gasoline Removable.
MIL-T-22085	-	Tape, Adhesive, Preservation and Sealing.
MIL-I-45208	-	Inspection Systems Requirements.
MIL-C-46168	-	Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

MIL-STD-130	-	Identification Marking of US Military Property.
MIL-STD-209	-	Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-642	-	Identification Marking of Administrative, Combat, and Tactical Transport Vehicles.
MIL-STD-838	-	Lubrication of Military Equipment.
MIL-STD-889	-	Dissimilar Metals.
MIL-STD-1186	-	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1474	-	Noise Limits for Army Materiel.
MS75020	-	Connector, Plug, Electrical - 12 Contact, Intervehicular, 28 Volt, Waterproof.
MS75021	-	Connector, Receptacle, Electrical - 12 Contact, Intervehicular, 28 Volt, Waterproof.

HANDBOOKS

MILITARY

MIL-HDBK-113	-	Guide for the Selection of Lubricants, Fluids, Preservatives and Speciality Products for Use in Ground Equipment Systems.

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DEPARTMENT OF LABOR (DOL)

29CFR 1910	-	Occupational Safety and Health Standards (OSHA).
29CFR 1926	-	Construction Safety Standards.

(Applications for copies should be addressed to the local DOL Office or the Superintendent of Documents, U.S. Government Printing Office, 710 North Capitol Street, NW, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the currentversion before use.

DEPARTMENT OF TRANSPORTATION (DOT)

49CFR 393	-	DOT Federal Motor Carrier Safety Regulations (FMCSR).
49CFR 567 and 568	-	Certification.
49CFR 571	-	DOT Federal Motor Vehicle Safety Standards (FMVSS).

(Applications for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, 710 North Capitol Street, NW, Washington, DC 20402.)

(Copies of specifications, standards, handbooks, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN GEAR MANUFACTURERS ASSOCIATION (AGMA)

AGMA Standards.

(Applications for copies should be addressed to the American Gear Manufacturers Association, Suite 1000, 1901 North Fort Myer Drive, Arlington, VA 22209.)

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI/NFPA-70 - National Electric Code.
ANSI Z35.1 - Industrial Accident Prevention Signs, Specification for.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY OF AGRICULTURAL ENGINEERS (ASAE)

ASAE R276 - Emblem for Identifying Slow-Moving Vehicles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society of Agricultural Engineers, P.O. Box 229, Saint Joseph, Michigan 49085.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME Boiler and Pressure Vessel Code, Section IX, Brazing and Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 242 - High-Strength, Low-Alloy Structural Steel.
ASTM A 536 - Ductile Iron Castings.
ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY, INC.

AWS Standard Qualification Procedure.
AWS Welding Handbook.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 NW 7th Street, Miami, FL 33125.)

ANTI-FRICTION BEARING MANUFACTURERS ASSOCIATION (AFBMA)

AFBMA Standards.

(Applications for copies should be addressed to the Anti-Friction Bearing Manufacturers Association, 2341 Jefferson Davis Highway, Arlington, VA 22202.)

CONVEYOR EQUIPMENT MANUFACTURERS ASSOCIATION (CEMA)

Standard No. 502 - Bulk Handling Conveyors, Troughing and Return Idlers.

(Application for copies should be addressed to Conveyor Equipment Manufacturers Association, 1000 Vermont Avenue, NW, Washington, DC 20005.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ICS - Circuit Breakers, and Controls Molded Case, Industrial.
ICS - Industrial Controls and Systems.
MG-1 - Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 815 Fifteenth Street, NW, Washington, DC 20005.)

NATIONAL WHEEL AND RIM ASSOCIATION (NWRA)

NWRA Standards.
NWRA No. X-4919.

(Applications for copies should be addressed to the National Wheel and Rim Association, 4836 Victor Street, Jacksonville, FL 32207.)

RUBBER MANUFACTURER'S ASSOCIATION (RMA)

RMA IP-20-1977 - Engineering Standards for Multiple V-Belt Drives.

(Application for copies should be addressed to the Rubber Manufacturer's Association, 1400 K Street, N.W., Washington, DC 20005.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

THE MAINTENANCE COUNCIL - AMERICAN TRUCKING ASSOCIATIONS (TMC-ATA).

TMC - ATA Recommended Practices Manual.
TMC - ATA VMRS (Vehicle Maintenance Reporting System).
TMC - ATA Recommended Practice RP-305.

(Applications for copies should be addressed to the Maintenance Council-ATA, 1616 P Street, NW, Washington, DC 20036.)

TIRE AND RIM ASSOCIATION, INC. (TRA)

TRA Year Book

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to the Tire and Rim Association, Inc., 3200 West Market Street, Akron, OH 44313.)

TRUCK-TRAILER MANUFACTURERS ASSOCIATION, INC.

TTMA - Recommended Practices.
TTMA - Technical Bulletins.

(Applications for copies should be addressed to the Manufacturers Association, Inc., 1413 K Street, NW, Washington, DC 20005.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The portable conveyor shall consist of a conveyor frame, a head end, a foot end, a 24-inch-wide conveyor belt, and an elevating mechanism all mounted on a 2-wheel running gear assembly suitable for towing by trucks and construction equipment. The head end shall include an electric-motor drive to the head pulley. The foot end shall include a concentrating hopper. The conveyor shall operate as specified herein at any angle from 11 degrees to 22 degrees from the horizontal and shall have a minimum rated capacity of 300 tons per hour of bulk material weighing 100 pounds per cubic foot when the conveyor is elevated at an angle of 18 degrees. The nominal length of the conveyor shall be not less than 50 feet between centerlines of the head and tail pulleys. Belt speed shall not be less than 280 feet per minute and not more than 310 feet per minute. The maximum width of the conveyor shall not be more than 10 feet and the overall height not more than 12 feet when the conveyor is in travel position. The gross vehicle weight (GVW) of the conveyor in the travel position shall not exceed 10,000 pounds. The front coupler tow eye load in travel position shall be within the range

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

of 8 to 12 percent of the GVW. The conveyor shall be capable of being towed straight ahead, moved sideways, and rotated around the foot-end ground contact point.

3.2 First article. When specified (see 6.2), a conveyor shall be subjected to first article inspection (see 4.3 and 6.2).

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration and control. The conveyor shall be fabricated from compatible materials, inherently corrosion and deterioration resistant, or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the conveyor may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish, or treatment for use with components and subcomponents, and shall make information available, upon request, to the contracting officer or designated representative.

3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces, and parts incorporated in the conveyor may be newly fabricated from recovered materials to the maximum extent practicable, provided the conveyor produced meets all other requirements of this specification. Used, rebuilt, or remanufactured components, pieces and parts shall not be incorporated in the conveyor.

3.5 Common parts. Maximum practical use shall be made of interchangeable hardware and fastening devices and of a minumum number of types and sizes of screws, bolts, nuts, washers and similar common (standard) parts.

3.6 Discharge height. The conveyor shall be constructed so that when on level ground, the wheels pivoted 90 degrees from the travel position, and the conveyor elevated to an angle of 18 degrees, material shall discharge into a receiving hopper which

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

is 16 feet above the ground. There shall be sufficient clearance between all conveyor components and the hopper so that there will be no interference between components of the conveyor and the hopper while the discharge of material is such that material cannot fall short of the hopper.

3.6.1 Stress limitations. The maximum stress imposed on any structural member shall not exceed 60 percent of the yield point under the following conditions:

a. Operating at rated capacity while elevated at all angles specified herein.
b. Towed over unpaved roads at a speed of 10 miles per hour (mph) while in normal travel position.

3.7 Conveyor frame. The conveyor frame shall include a lattice-type truss of structural steel members securely bolted, riveted, or electric-arc welded into a frame that shall meet the operating and transport conditions specified herein.

3.7.1 Belt retainers. Not less than two belt retainers shall be provided. The retainers shall be equally spaced along, and shall straddle the upward run of the conveyor belt. The retainers shall be adjustable and shall be bolted to the conveyor frame.

3.8 Concentrating hopper. The concentrating hopper shall be mounted by bolting to the foot end of the conveyor and shall be removable. The hopper shall be three sided and skirt boarded, shall have sloping sides to prevent spillage of material and shall be not less than five feet long. The space between the three sides and the conveyor belt shall be provided with adjustable and replaceable rubber flashing mounted under the hopper plates. The hopper plates shall be of steel conforming to ASTM A242 and shall be not less than 0.140 inch thick. The hopper capacity shall be not less than seven cubic feet. The hopper shall be constructed and mounted so that when the conveyor is elevated to an angle of 18 degrees from the horizontal, the maximum height of the skirt boards shall be not more than four feet from the horizontal ground line and shall have sufficient clearance in the center section to receive material from discharge spouts 36 inches above the ground line.

3.9 Chassis. The conveyor frame and elevating mechanism shall be mounted, unsprung, on two swivel-type road-wheel assemblies equipped with two truck-type, single tires and wheels. The chassis of the conveyor shall be suitable for transport on and off road (see 3.17.1) and on site maneuvering of the conveyor.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:07Z
Check the source to verify that this is the currentversion before use.

3.9.1 Wheel assemblies. The two road wheels shall pivot about a vertical axis and shall lock in not less than three positions; (1) a travel position with the wheels parallel to the longitudinal axis of the conveyor; (2) a radial position with the extended centerlines of the spindles meeting over the foot-end ground contact point of the conveyor; and (3) a 90 degree position with wheels in alinement and perpendicular to the longitudinal axis of the conveyor. Positive locking devices shall be provided for each pivot position. Pivoting from the travel position to the radial or the 90 degree position, shall move the ground-contact surfaces of the tires toward the head end of the conveyor. Operation of the conveyor in the radial position shall result in stock piling of material in a circular pattern about the head end, as the conveyor is periodically pivoted about the foot-end ground contact point. Operation of the conveyor in the 90-degree position shall result in stock piling of material in a straight windrow pattern as the conveyor is periodically moved sideways in a direction parallel to the stock pile. In the travel position, the road wheels shall be in correct alinement with the conveyor so that each pair of diagonal measurements from the true center of the tow eye (see 3.13.5) to the outer center of each spindle does not differ in excess of 0.125 inch.

3.9.2 Road-wheel assemblies. Each road-wheel assembly shall include the conveyor mount having a spindle, a foundation brake assembly, a hub and a disc wheel with inflated tire. Spindles shall be of steel, correctly hardened and ground as recommended by the axle manufacturer, and shall be in correct alinement with the mount. Hub assemblies shall be equipped with standardized tapered roller bearings to insure replacement compactibility with the manufacturer's through-axle. The through-axle assembly must have a minimum 23,000-pound- capacity axles. Bearings, cups, and cones shall be all matched in accordance with the bearing and axle manufacturer's recommendations. Hubs shall be of the 10 stud type conforming to SAE J694 having a 11.25 inch bolt circle.

3.9.2.1 Wheels and tires. Wheels and tires shall be in accordance with DOT FMVSS and TRA Year Book. Tires furnished to the Government shall not be more than twelve months old on the date of shipment by the supplier. Disc wheels shall be size 20 by 8 and shall conform to NWRA No. X-4919. Radial and lateral runout shall be within industry standards for commercial truck and bus rims. The wheels shall be equipped with single, tube-type, traction lug, drive wheel type tires, size 11.00 by 20, minimum load range (LR) F (12 PR). The load imposed on each tire, measured at the ground in travel condition, shall not exceed the TRA Year Book recommended rated load and inflation pressure. Valve caps shall be of metal and shall be equipped

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

with elastomer inner seals. Tire clearance in all positions specified herein shall be in accordance with SAE J683. Removable fenders and splash guards shall be furnished in accordance with SAE J682 and TTMA RP No. 41. Fenders and splash guards shall be stowed on the conveyor to prevent damage from aggregates while operating. Tire pressure, per TRA Year Book recommendations, shall be stencilled in one inch high letters above each tire "TP (specify) LBS."

3.9.3 Brake system. The conveyor shall be equipped with a weatherproof straight airbrake system, in accordance with DOT FMVSS and FMCSR. The brake system shall include removable service and emergency intervehicular hoses (see 3.13.5.2) with gladhand couplings on each end, two flexible or rigid gladhands near the foot end, control (service) and supply (emergency) line filters, relay valve, air reservoir, air chambers, foundation brake assemblies on each wheel and other components and plumbing required for a complete airbrake system. All brake system components and plumbing shall be located, installed and protected to prevent damage or malfunction from obstructions and debris when transported, from falling aggregate when operating and to obtain maximum efficiency and ease of maintenance. Service and emergency gladhands shall conform to SAE J318. The gladhands shall be color coded yellow for control (service) on the curbside and red for supply (emergency) on the roadside. A metal dust cover shall be installed on each gladhand to prevent contaminants from entering the opening. The air lines shall be flexible hose type conforming to TMC-ATA RP-305 having reuseable swivel fittings. The air reservoirs shall conform to SAE J10 and shall have air storage capacity recommended for truck-trailers in SAE J813. The reservoir shall be equipped with a drain cock of the 90 degree twist type which allows for drainage into a suitable container and is accessible to personnel from the curb side of the conveyor. Chock blocks in 3.9.5 shall be available for parking and automatic application of the relay valve when air reservoir pressure is low.

3.9.4 Stability. With the conveyor on level ground, the wheels in the towing position, the conveyor elevated to an angle of 18 degrees from the ground line, with no load on the belt or other ballasting and with a vertical load of 600 pounds applied to the head end of the conveyor at the centerline of the head pulley, the down pressure of the foot end against the ground shall be not less than 100 pounds to prevent tip-over.

3.9.5 Chock blocks. Two captive chained chock-blocks as shown on figure 1 installed in cradles, shall be provided. The captive chain shall be hooked on the cradle's lower loop with the excess chain wound in a figure eight manner around the upper ears and,

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the currentversion before use.

when uncoiled from the cradle, shall permit the chocks to be placed before or behind the conveyor tires. The chock blocks shall withstand the conveyor being towed over the chocks without permanent deformation.

3.10 Conveyor belt. The conveyor belt shall be 24-inches in width. The top cover shall be heat resistant and shall be 0.125-inch thick, and the bottom cover shall be 0.06-inch thick with a skim coat between all plies. When specified, the conveyor belt shall continuously handle asphaltic mixes heated to 275 °F without heat damage or excessive wear. The supplier shall provide evidence that the belt conforms to the heat-resistant requirements specified herein.

3.10.1 Belt coupling. The conveyor belt shall be provided with bolted or riveted metal-plate, hinge-type coupling capable of disassembly and reassembly by removing and replacing the hinge pin.

3.10.2 Belt cleaners. An adjustable, replaceable, spring-loaded, single-blade, rubber belt scrapper shall be mounted at the head pulley. The scraper shall cause the scraped material to fall forward and toward the main discharge. The scraper blade shall be not less than one inch thick, shall be split in the center, and shall match the contour of the crown. A plow-type, rubber-blade scraper shall be mounted inside the return run of the belt at the tail pulley and shall be not less than 0.375 inch thick. The scrapers blades shall be neoprene rubber, shall have a tensile strength of not less than 1,200 psi and shall have a durometer hardness of 65 to 75.

3.11 Belt carriers. The conveyor belt shall be carried on impact rolls, troughing rolls, and return rolls, conforming to the Conveyor Equipment Manufacturers Association (CEMA) Standard No. 502. The troughing rolls shall be bolted to the conveyor frame. The first roll ahead of the tail pulley shall be a straight impact roll, except that the support bracket may be modified to suit the application. The first roll shall be mounted under or slightly to the rear of the foot-end concentrating hopper. The next three roll assemblies shall be troughing impact rolls and they shall be spaced at intervals of not more than 1.50 feet. The remaining troughing rolls shall be spaced at intervals of not more than three feet apart. The return rolls shall be spaced not more than nine feet apart.

3.12 Decking. The return run of the conveyor belt shall be protected from spilled material by a self-shedding, curved or peaked, steel sheet decking attached by bolts to the conveyor

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

frame. The decking shall be not less than 0.035 inch in thickness and shall be galvanized with a coating of not less than 1.25 ounces of coating per square foot of surface. The decking shall overhang not less than three inches on each side of the conveyor belt.

3.13 Foot end. The lower foot-end of the conveyor shall be provided with a hopper as specified in 3.8, with two, one inch acme screw takeup adjustments, a steel tail pulley, a dishpan-type skid, shielding to prevent entrance of material and a detachable towing attachment.

3.13.1 Takeup adjustment. To provide belt tension, a takeup adjustment consisting of two one inch acme thread arrangements (one per side) shall be provided. The total takeup shall be not less than 15 inches including not less than three inches of negative takeup.

3.13.2 Tail pulley. The tail pulley shall be of the wing or self-cleaning type and shall be not less than 12 inches in diameter and not less than 26 inches long. The tail shaft shall be mounted on heavy-duty, self-alining, greasable anti-friction bearings having labyrinth seals except that taper-bore bearings are permissible when affixed to the shaft by an adapter incorporating a tapered sleeeve and adjustable locking nut. The tail shaft shall extend not less than six inches to permit the operation of a feed. The shaft extension shall be 2.187 inches in diameter and shall include a 0.50-inch keyway. The keyway shall be protected by a removable safety collar. The pulley shall be crowned with a taper of 0.125-inch per foot and shall be concentric with the shaft within a total indicator reading of 0.100 inch.

3.13.2.1 Taper-type locking device (pulley and shaft). The pulley shall be provided with an inner hub which clamps to the shaft by moving axially along a taper in the outer hub. The mechanical clamping shall be accomplished by the use of a screw member or members providing for mounting and removal of the pulley.

3.13.3 Skid. A dishpan-type skid shall be mounted under the foot end which shall raise the section not more than 6 inches above the ground.

3.13.4 Shielding. The conveyor belt, when passing over the tail pulley, shall be protected by a sheet metal cover attached to the conveyor frame and concentrating hopper. A barrier shall be provided to prevent material passing between the tail pulley

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

and the conveyor belt. The sides of the foot end shall be covered with removable steel sheet.

3.13.5 Towing attachment. A removable towing attachment shall be attached to the foot-end of the conveyor. The tow eye shall be in accordance with SAE J847 and shall have case hardened wear surface. The conveyor shall coupled with equipment in accordance with SAE J749, at 26-inch height, and with trucks in accordance with SAE J849, through 33-inch height, when the conveyor is in the towing position.

3.13.5.1 Safety chains. Two safety chains fitted with safety-type chain hooks on the truck end shall be furnished. The chains shall extend a minimum of 36 inches forward of the center of the tow eye. The chains shall conform to SAE J697.

3.13.5.2 Intervehicular connections. The conveyor shall be furnished with a removeable intervehicular electrical harness and two airbrake lines for connecting the truck electrical and airbrake systems to the conveyor system. The airbrake control (service) line shall be located on the curbside and the supply (emergency) line shall be located on the roadside. All intervehicular connections shall be removable when the conveyor is in operation and provisions shall be made in the toolbox (see 3.28) for storage. All intervehicular connections shall be installed on the conveyor so that they extend forward a minimum of 36 inches toward the truck and extend rearward not less than 20 inches on the towing attachment, when measured from the center of the tow eye. A spring clip shall be installed to hold the plug of the electrical harness to the conveyor with the harness doubled back on the towing attachment. Two dummy couplings (gladhands) shall be installed to hold the airbrake lines with the lines doubled back. Intervehicular connections shall be routed so that dropping of the tail-gates of the dump and cargo trucks will not cause damage.

3.13.6 Vehicular electrical system. The conveyor shall be equipped with a commercial waterproof, 12-volt vehicular electrical system. Except as specified herein, the electrical system shall be in accordance with the following requirements as applicable for this type equipment:

a. DOT Federal Motor Vehicle Safety Standard No. 108.
b. DOT Federal Motor Carrier Safety Regulations.
c. SAE Handbook, Electrical Equipment and Lighting Section.
d. TTMA Recommended Practice RP No. 9 and RP No. 14, and RP No. 40.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

3.13.6.1 Military vehicle electrical system. Unless otherwise specified (see 6.2), the conveyor shall be equipped with a military compatible 24-volt service system to provide towing capability for military design trucks as well as commercial trucks. In addition to the TTMA 7-contact, 12-volt plug the conveyor shall be equipped with the following military intervehicle, 24-volt components:

a. Military 12-Contact Plug - MS75020-1 (truck end).
b. Military Intervehicular Cable - MIL-C-13486/12.
c. Military 12-Contact Plug - MS75020-2 (conveyor end).
d. Military 12-Contact Receptacle - MS75021-1, with spring-loaded cover.

The military plug and cable shall be the same length as the TTMA Plug and cable and both receptacles shall be labeled with identification plates for 24-volts and 12-volts, respectively, negative ground. The military 24-volt intervehicular cable shall be routed to the 12-contact receptacle and then into a weatherproof stud and nut type junction box, equipped with SAE J553 circuit breakers.

3.14 Head end. The upper head end of the conveyor shall consist of a drive pulley, and electric-motor powered driving mechanism, a mechanical hold-back device, and a belt scraper (see 3.10.2).

3.14.1 Drive pulley. The drive pulley shall be of steel not less than 26 inches in length, not less than 16 inches in diameter, crowned, lagged, and mounted on anti-friction bearings. A taper-type locking device (pulley and shaft) as specified in 3.13.2.1 shall be provided. The crown shall be approximately 0.125-inch-per-foot taper to the center of the pulley. The outside surface of the pulley shall be concentric with the shaft within a total indicator reading of 0.060-inch except a total indicator reading of 0.090 inch is permissible in an area immediately adjacent to a longitudinal weld. The drive pulley shall be mounted on heavy-duty, self-aligning, greaseable, anti-friction bearings with labyringth seals, except that tapered-bore bearings are permissible when affixed to the shaft by an adapter incorporating a tapered sleeve and an adjustable locking nut.

3.14.2 Driving mechanism. The driving mechanism shall consist of a reducing-gear arrangement powered by an electric motor as specified in 3.18.1 and shall be driven through multiple V-belts. The reducing gear shall be totally enclosed and shall operate in an oil bath. Bearings shall be heavy-duty, anti-friction type conforming to the standards of the Anti-Friction Bearing Manufacturers Association. Bearings may be retained on the shaft

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

by a bearing-retainer plate, and shims between the retainer plate and housing to provide endwise adjustment. Provisions shall be made for adjusting the belt tension and alinement of the V-belt drive pulleys.

3.14.3 Holdback device. An automatic holdback device of the overrunning clutch type shall be furnished to prevent slippage or reversal of the belt travel when the motor stops.

3.15 Drives.

3.15.1 Chain drives. Chain drives shall be installed with idlers and shall have provision for adjustment and alignement.

3.15.2 V-belt drives. V-belt drives shall be in accordance with RMA IP-20-1977 and shall have provisions for adjustment and alignment.

3.15.3 Gear drives. Gear drives shall be in accordance with AGMA standards. Gear drives shall be totally enclosed and shall run in an oil bath. The enclosures shall conform to 3.20.4. Cast iron gears, when used, shall conform to ASTM A536. The analysis and the heat treatment shall be as recommended by the gear drive supplier. When cast iron gears are provided, the pinion shall be of steel.

3.15.4 Shafting. All shafting shall be either medium high-carbon steel or alloy steel. The shafting shall be turned, ground, and polished.

3.16 Elevating mechanism. The conveyor shall be provided with a mechanism which shall raise and lower the conveyor frame range from 11 degrees through 22 degrees of elevation. The mechanism shall be actuated by hydraulic or mechanical means. Hydraulic rams shall be shielded to prevent damage from falling material or environmental conditions. A positive mechanical lock with a locking pin shall be provided to prevent the conveyor frame from lowering when locked at any set angle.

3.16.1 Hydraulic piston rods. All hydraulic piston rods shall be industrial chromium plated to a thickness of not less than 0.0015-inch to retard corrosion.

3.17 Electric motor and controls. The electrical components shall be in accordance with NEMA Standards. The installation of utility type electrical systems shall conform to the National Electrical Safety Code, ANSI C1.

RP No. 40.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

3.17.1 Electric motor. The electric motor shall be 10-hp, 1,800-rpm, 440-volt, 3-phase, 60 cycle, ball bearing, squirrel-cage-induction class; continuous rating, totally enclosed, fan cooled, design C, in accordance with NEMA MG-1, integral horsepower, class A insulation, temperature rise 55 °C. The motor shall be provided with a mounting bracket. Bearings shall be in accordance with the Anti-Friction Bearing Manufacturers Association and shall be double-seal type packed with silicone grease, as recommended by the motor manufacturer for severe outside service.

3.17.2 Controls and wiring.

3.17.2.1 Motor starter. The motor starter shall be in accordance with NEMA Standards, including ICS, and shall be 3-pole, alternating current, magnetic, nonreversing, across-the-line, and rated for 440-volt, 60 cycle operation. The enclosure shall be watertight, type IV, and dusttight, type V, in accordance with NEMA ICS, and shall be provided with a start-stop push-button in the cover. The starter shall be mounted toward the foot end of the conveyor and shall be accessible to operating personnel standing on the ground when the conveyor is elevated to all operating positions. The push-button shall be labeled "PUSH" and "START-STOP".

3.17.2.2 Power receptacle. The power receptacle shall be of the 4-pole male type, suitable for 20-ampere, 440-volt service. The receptacle shall be equal to and interchangeable with Joy Manufacturing Co. part No. X1697 and shall be provided with a spring-loaded cover. The insert shall be equal to and interchangeable with Joy Manufacturing Co. part No. 441 MIP and shall be provided with a 24-inch pigtail. The receptacle shall be installed adjacent to the motor starter.

3.17.2.3 Internal wiring. Internal wiring shall be installed in NEMA thin wall conduit. A ground wire shall be carried as the fourth wire and shall be grounded to the conveyor to assure an electrical bond between all electrical apparatus and the conveyor on which it is mounted. Branch circuit conductors shall have a current-carrying capacity of not less than 125 percent of the applicable motor running current. Conduit or cables shall be secured to the conveyor chassis by means of clamps and shall be accessible for inspection and repair.

3.17.2.4 Power cable. A 75 foot-long power cable shall be provided. The cable shall conform to MIL-C-3432, type designation CO-04HLF(4/10)0767. The cable shall be provided with

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

a male connector equal to and interchangeable with Joy Manufacturing Co. part No. 441-M on one end and a female connector equal to and interchangeable with Joy Manufacturing Co. part No. 441-F on the other end. The connectors shall be provided with end seals equal to and interchangeable with Joy Manufacturing Co. parts No. 441-MB and No. 441-FB and attached to prevent loss when removed.

3.17.2.5 Cable reel. A manually-operated reel to contain the power cable shall be provided and permanently mounted on the conveyor. The reel shall be of the ratchet type. Provision shall be made to secure the cable on the reel.

3.18 Maintainability. All major assemblies and installed attachments shall be accessible for maintenance and repair utilizing conventional common tools and special tools associated with conveyors of this nature. The replacement and adjustment of components and accessories shall be accomplished with minimum drainage requirements and with minimum disturbance to other components of the conveyor. Ease of maintenance provisions shall incorporate, to the maximum practicable extent, features insuring operating clearances and facilating applicable maintenance and servicing operations. Intricate locking devices and controls with threaded fastenings which can be over-torqued by operators shall be avoided. Covers or plates which must be removed for component adjustment or for component removal shall be equipped with quick-disconnect fastenings.

3.19 Transportability.

3.19.1 Performance characteristics. The conveyor shall meet the transport performance characteristics specified herein when: (1) prepared for transport; (2) when coupled and towed by a crawler tractor; and (3) when coupled and towed by a truck.

3.19.1.1 Highway operation. The conveyor shall operate over smooth, hard-surfaced primary highways at speeds up to 25 mph.

3.19.1.2 Cross-country operation. The conveyor shall operate over unimproved roads and open, rolling, and hilly cross-country terrain at speeds up to 10 mph. The conveyor shall negotiate grades up to 60 percent in mud, sand and snow when towed by a tractor. The conveyor shall ford hard-bottom water crossings to a depth of 20 inches without prior preparation or resulting damage or malfunction.

3.19.1.3 Trailing and turning ability. The conveyor shall trail the towing vehicle without weaving. The conveyor shall follow the towing vehicle without exceeding the DOT FMCSR off-

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:07Z
Check the source to verify that this is the currentversion before use.

tracking requirement. Turns up to 60 degrees, as measured from straight-ahead to the right and to the left, shall not cause damage to or interference between the towing vehicle and the conveyor.

3.19.2 Braking ability. The combined service brakes of the towing and towed vehicle shall control, decelerate, and stop the combination in conformance to DOT FMVSS and FMCSR requirements. When actuated, the emergency breakaway system shall produce emergency brake application in accordance with DOT requirements.

3.19.3 Railroad. The conveyor shall withstand impact forces encountered in rail transport without damage or permanent deformation. The conveyor prepared for rail transportation, shall be within the dimensional limits shown on figure 2. The conveyor may be sectionalized providing the sectionalization and reassembly shall be accomplished in not more than six hours each without cutting or welding.

3.19.4 Air transport. The conveyor, prepared for air transportation shall be within the C-130 aircraft dimensional limits shown on figure 3. The conveyor may be sectionalized providing the sectionalization and reassembly shall be accomplished as specified in 3.19.3.

3.19.5 Tiedown and lifting attachments. When the conveyor is disassembled in accordance with 3.19.3 or 3.19.4, each section requiring removal from the main conveyor assembly shall be provided with lifting and tiedown attachments conforming to 3.20.5.

3.19.6 Safety. The conveyor shall be designed to meet the applicable safety requirements of ANSI B20.1, DOL OSHA 29 CFR, parts 1910 and 1926. All exposed components and systems which are subject to high temperatures, or which are electrically actuated or inherently hazardous, the safety characteristics shall provide correct safeguarding, enclosing and insulating features. All moving parts which are of such nature, or so located as to be a hazard to operating personnel, shall be fully enclosed or guarded. Nonfunctional sharp edges, projecting points and excessive length of fasteners shall be eliminated. An unobstructed space shall be provided on the rear of the conveyor for mounting of an emblem identifying slow-moving vehicles. A mounting bracket socket shall be permanently installed and shall conform to SAE J725 and ASAE R276. An emblem and its mounting blade shall be furnished on each conveyor and shall be in accordance with ASAE R276. For other than travel, the emblem and blade shall be stowed in the toolbox.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

3.19.7 Electromagnetic interference. The electromagnetic interference emission characteristics of the conveyor shall conform to the recommended limits specified in SAE J551.

3.19.8 Noise limits. The noise produced by the conveyor shall be in accordance with MIL-STD-1474 requirements, with the exception of MIL-STD-1474, 5.2, 5.3 and 5.4, when tested in accordance with 4.6.3.8. The provision of MIL-STD-1474, 4.3 and 4.4, shall be provided if and only if MIL-STD-1474, 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85 dB(A) limit is obtained from the procuring activity. Hazard signs shall be in accordance with MIL-STD-1474, 4.3, except the sign will state "HEARING PROTECTION REQUIRED WITHIN (specify) FEET". The sign shall be readable at the distance indicated on the sign.

3.20 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating as specified herein. Lubrication intervals shall be in accordance with SAE J752, as recommended by the manufacturers.

3.20.1 Lubricants. The procedure for the selection of lubricants shall be in accordance with MIL-STD-838, section 5. Lubricants selected shall be in accordance with MIL-HDBK-113, chapter 2. When the specification of the lubricant selected includes a requirement for a Qualified Products List (QPL), the lubricant supplied shall be from a source that is listed on the applicable QPL.

3.20.2 Lubrication fittings. Lubrication fittings shall conform to SAE J534 and shall be of the threaded type. Fittings shall be located in a protected position and shall be accessible to a grease gun. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Where oil holes are applicable, they shall have spring-loaded covers. Panels and plates equipped with hand-operable, quick-disconnect fasteners may be removed to provide accessibility.

3.20.3 Pressure-release device. An automatic pressure-release fitting shall be provided where the use of pressure lubricating equipment could damage grease seals or other parts.

3.20.4 Enclosures with integral reservoir of lubricant. Enclosures such as gear cases and transmission housings which contain a reservoir of lubricants for the lubrication of the parts enclosed shall be equipped with manual fluid level indicators in accordance with SAE J48 and J614. Plugs shall be not less than 0.50-inch pipe size. Each enclosure shall be

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

equipped with a magnetic drain plug. Each enclosure shall be equipped with a means for filling the enclosure with a lubricant and for draining. The drain outlet shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure. Drain outlets shall allow for drainage of lubricants directly into a suitable container.

3.20.5 Lifting and tiedown attachments. The conveyor and each sectionalized component shall be provided with lifting and tiedown attachments in accordance with MIL-STD-209.

3.20.6 Servicing and adjustments. The contractor shall service and adjust each conveyor for correct operation, including at least the following: Adjustment of conveyor machinery, road wheel assemblies, brake system, electrical system, inflation of all tires, and complete lubrication of the conveyor with types and grades of lubricants recommended.

3.21 Fungus and moisture resistance. The electrical circuitry, including all components and connections, shall be protected from the effects of moisture and fungus growth by an overall treatment with varnish conforming to MIL-V-173 or a varnish having one percent of copper-8-quinolinolate (by weight) based on the nonvolatile content of the varnish, with the following exceptions:

a. Components or circuit elements which are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, varnish shall be applied by spray, brush, or a combination of both to give a minimum dry-film thickness of 0.001-inch to component and element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or functioning of the varnish.

3.22 Treatment and painting. The portions of the conveyor normally painted internally and externally shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2), top coat color shall be camouflage green 383 conforming to MIL-C-46168. The conveyor shall then be overcoated in accordance with the Government furnished camouflage patterns with MIL-C-46168 top coat of the color specified in the camouflage patterns except the first article may be camouflage green 383.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

3.23 Identification plates. The conveyor shall be identified in accordance with MIL-STD-130. All plates shall conform to MIL-P-514. Identification plates shall conform to type I, style 1, composition C, grade A, class 1. The transportation data plate and instruction, safety, warning, caution and notice plates shall conform to type III, composition C, grade A, class 1 except as otherwise specified herein. Instruction, safety, warning, caution and notice plates shall be furnished describing any special and important procedure to be followed in operating and servicing the conveyor and its attachments and accessories. All plates shall be securely attached to the conveyor with machine screws, bolts and nuts, or rivets and shall be furnished and mounted by the contractor.

3.24 Vehicle marking. The marking of each conveyor shall be in accordance with MIL-STD-642. The gross vehicle weight of each conveyor and the weight of each sectionalized component shall be marked on the side in such a manner as to be discernible. Lifting and tiedown attachments shall be marked "LIFT HERE" or "TIEDOWN HERE" as applicable.

3.25 Technical publications. Such technical publications as are specified shall be furnished (see 6.2).

3.26 Repair parts and maintenace tools. Such repair parts and maintenance tools as are specified shall be furnished (see 6.2).

3.27 Toolbox. The conveyor shall be equipped with a weathertight toolbox with a padlock hasp for locking. The toolbox shall be of sufficient size to secure and accommodate the special and vehicle tools and on-vehicle-equipment (OWE). The toolbox shall be fabricated of metal or elastomers and shall withstand at least a 300-pound weight over any one square foot of top area. The toolbox shall be equipped with a hinged cover or a side door panel with bottom hinge and stay chains. The cover or door shall open not less than 90 degrees. The opening shall be secured by not less than two heavy-duty, tension-type, hook latches with strikers, and a hasp shall be provided for locking with a padlock having a 0.375-inch shackle. The toolbox shall be provided with holes for drainage of excess moisture.

3.28 Items to be furnished with conveyors. No shipment of conveyors shall be made unless repair parts, technical manual, maintenance tools, operating tools, and accessories are included with the shipment or unless approval for shipment of the conveyors without such items has been received from the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the currentversion before use.

3.29 Government-furnished property. The following property will be furnished by the Government (see 6.6):

Item No.	Description	Identification	Quantity
1	Pattern drawings	Camouflage Patterns	As Required

3.30 Workmanship. The conveyor shall be free from defects such as incomplete welds, rust, cracks and other defects that could impair the operation of the conveyor. Metal use in the fabrication of the conveyor shall be free of kinks and sharp bends. Shearing and shipping shall be done neatly and accurately. Flame cutting of steel may be employed. Burned surfaces of flame-cut steel shall be ground or machined to remove all ash, burrs and rough edges. All bends shall be made with metal dies or fixtures to insure uniformity in size and shape.

3.31 Welders and welding. Before assigning any welder or welding operator welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by any of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

a. AWS Dl.l Structrual Welding Code -Steel.
b. ASME Boiler and Pressure Vessel Code, Section IX, Welding and Brazing Qualifications.

The Government reserves the right to require recertification of any welder or welding operator.

3.31.2 Welding. Welding shall be in accordance with AWS Dl.l. The surfaces of parts to be welded shall be free from rust, scale, paint, grease and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are tested as specified herein. Tack welds shall be of the same required quality as the final weld.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in this contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

facility suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance inspection does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 Examination. The first article shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article shall be tested as specified in 4.4.2 through 4.6.3.6. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each conveyor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Inspection system. Contractor must maintain an inspection system in accordance with MIL-I-45208.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

4.4.3 Tests. Each conveyor shall be tested as specified in 4.6.3.7. Failure of any test shall be cause for rejection.

4.5 Examination procedure.

4.5.1 Examination. The conveyor shall be examined as specified for the following defects:

101. Dimensions or weight not as specified.
102. Assembly not complete or not correct.
103. Parts or components missing.
104. Parts or components do not function.
105. Safety devices or guards missing.
106. Material not as specified.
107. Materials not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.
108. Dissimiliar metals as defined in MIL-STD-889 are not effectively insulated from each other.
109. Contractor does not have documentation available for identification of material, material finishes or treatments.
110. Lubricants, lubrication, fittings and enclosures not as specified.
111. Workmanship not as specified.
112. Treatment and painting not as specified.
113. Identification or other marking, operating and safety instructions, or manuals missing.
114. Conveyor components not as specified.
115. Conveyor components do not function as specified.
116. Conveyor not in accordance with DOT requirements.
117. Belt speed not as specified.
118. Servicing and adjustments not as specified.
119. Toolbox not as specified.
120. Welding not in conformance with codes and certifications.
121. Paint color not as specified.
122. Camouflage patterns not as specified.
123. Parts list and technical manual not as specified.
124. Rebuilt or remanufactured components used.
125. Maximum use of common (standard) parts not as specified.
126. Stress limitations not as specified.
127. Maintainability not as specified.
128. Operating and maintenance tools or accessories missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

4.6 Tests.

4.6.1 Test conditions. Prior to test, lubricate the conveyor with military or compatable oils and greases. Oils shall be those designated for use in the ambient temperature at which the test is being performed.

4.6.2 Performance. Operate the conveyor for eight hours at an angle of 11 degrees, eight hours at an angle of 18 degrees, and eight hours at any angle in the range of 11 to 18 degrees, delivering a minimum of 300 tons per hour of the material as specified in 3.1. Operate the conveyor for eight hours at an angle of 22 degrees with material as specified in 3.1 at maximum possible loading. Record height of discharge when angled at 18 degrees. Record on the test report the tons per hour, screen analysis and moisture condition of the material. Feed the bulk material to the receiving hopper from a drop height of not less than 18 inches above the belt. Measure and record the maximum noise level of the conveyor and compare with OSHA requirements for an eight hour shift. Demonstrate methods of windrowing and stock-piling. Nonconformance to 3.1, 3.5, 3.6, 3.8, or 3.9.1, or damage to or permanent deformation of components shall constitute failure of this test.

4.6.3 Transportability tests.

4.6.3.1 Mobility. Tow the conveyor as specified herein for a total distance of 50 miles. During all truck towed tests, the conveyor lights shall be illuminated and turn signals shall be operated on turns. Perform the following:

a. Before any highway and cross-country tests are conducted, measure and record all critical mounting points on the conveyor. After all highway and cross-country tests are completed, check and record the measurement of critical mounting points and perform inspection of critical welds. Also, determine conveyor compliance with the 3.6.1 stress limitations. Load, moment and shear diagrams prepared by the contractor are an acceptable method of determination.
b. Tow the conveyor a distance of 25 miles at speeds up to 25 mph over highways.
c. Tow the conveyor a distance of 20 miles, 10 miles of trails and 10 miles of rough cross-country terrain, at safe speeds up to 10mph.
d. Tow the conveyor through hard-bottom creek bed type water up to 20 inches deep.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

e. Measure and record the deviation or off tracking of the conveyor with respect to the prime mover, when the conveyor is towed straight ahead on a level paved surface.
f. Jack-knife the conveyor at angles up to 60 degrees both to the left and to the right.
g. Perform brake system tests in accordance with DOT procedures, and as follows:

1. With the conveyor stopped, remove the chock blocks and place them, first to prevent the conveyor from rolling forward and then repeat to prevent the conveyor from rolling rearward. Do not unsnap the captive chain from the lower cradle loop. Finally, tow the conveyor over both chock blocks and inspect for damage.
2. Test the brake system in accordance with TTMA Recommended Practice No. 12.

Failure to complete the test; inability to tow, stop or function as specified herein; change in critical mounting point dimensions or evidence of any weld being defective, or nonconformance to 3.7, 3.9, 3.13.5, or 3.13.6 shall constitute failure of this test.

4.6.3.2 Railroad and air-transport. Prepare the conveyor for railroad and for air transport, including sectionalizing, as required, and reassembling the conveyor. Nonconformance to 3.19.3 and 3.19.4 shall constitute failure of these tests. The test for the lifting and tiedown attachments on individual sectionalized components specified in 4.6.3.4 and 4.6.3.5 may be accomplished in conjunction with this test.

4.6.3.3 Electromagnetic compatibility. The first article model shall be tested to determine conformance to 3.19. The contractor shall furnish the contracting officer the test report. Disapproval of the report shall constitute failure of this test. Upon approval of the reports by the contracting officer and provided all other requirements of the specification are met, the first article model shall be used as a model for all production conveyors. Disapproval of the report shall constitute failure of this test.

4.6.3.4 Lifting and tiedown attachments. Lifting and tiedown attachments shall be statically tested for compliance with MIL-STD-209 strength requirements.

4.6.3.5 Tiedown attachments (dynamic). When specified (see 6.2), anchor each section of each unit independently, as sectionalized for rail transport, to a flatcar using only the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

tiedown attachments. Use no blocking. Hump the flatcar at a speed of seven miles per hour against five box cars with their brakes set by air. Repeat the test with the opposite end of the section in the direction of the five cars. Any permanent deformation or breakage of the tiedown attachments or parts of the section shall constitute failure of this test.

4.6.3.6 Stability. Place the conveyor on level ground with the wheels in the towing position. Elevate the conveyor to an angle of 18 degrees from the ground line and place a weighing scale under the foot end. With no load on the belt or other ballasting, apply a vertical load of 600 pounds to the elevated head-end of the conveyor at the centerline of the head-end pulley. Observe any tendency of the foot-end to leave contact with the ground and measure the down pressure of the foot-end. Nonconformance to 3.9.4 shall constitute failure of this test.

4.6.3.7 Run-in. Operate each conveyor for a period of one hour without handling material, and tow for a distance of not less than five miles. Any operational difficulties, breakage, or permanent deformation shall constitute failure of this test.

4.6.3.8 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 7. As a minimum, noise levels shall be measured when equipment is operating under full load. MIL-STD-1474, 5.1.2.1.4 contours shall be taken at not fewer than 12 equal (horizontal) arc increments, one increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as dB(A) level. Failure to comply with MIL-STD-1474 provisions shall constitute failure of this test.

4.7 Inspection of packaging.

4.7.1 First article pack inspection.

4.7.1.1 Examination. The first article pack shall be examined for the defects specified in 4.7.2.3. Presence of one or more defects shall be cause for rejection.

4.7.1.2 Tests. When specified (see 4.6.3.2 and 6.2), the first article pack of crated conveyors for level A shall be subjected to the railroad-car test as specified for guided-impact in accordance with MIL-STD-1186, appendix A. The car shall strike a string of five empty cars with draft gear extended and the brakes set, at a speed of not less than eight miles per hour. At the conclusion of the first article pack test, the pack shall be examined. Any shifting of contents, loosening or breaking of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

holdowns, ties, stays, blocking or bracing, or any visual damage to the conveyor constitute failure of the first article pack and shall be cause for rejection.

4.7.2 Quality conformance inspection of pack.

4.7.2.1 Unit of product. For the purpose of inspection, a completely processed conveyor prepared for shipment shall be considered a unit of product.

4.7.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.7.2.3 Examination. Samples selected in accordance with 4.7.2.2 shall be examined for the following defects. AQL shall be 2.5-percent defective.

129.	Materials, methods, or containers not as specified for level A or B. Each incorrect material, method, or container shall constitute one defect.	
130.	Sectionalization and disassembly not as specified for level A or B.	
131.	Components not matchmarked to facilitate reassembly for level A or B.	
132.	Matchmarking tags not attached for level A or B.	
133.	Cloth matchmarked tags not waterproofed for level A.	
134.	Unpainted exterior machined surfaces not coated with preservative for level A or B.	
135.	Exposed exterior machined surfaces not coated with preservative, wrapped or covered with barrier material and barrier material not secured as specified for level A or B.	
136.	Conveyor belt not removed, compactly rolled, and secured as specified for level A or B.	
137.	Belt fasteners not coated with varnish for level A.	
138.	Drive belts not removed or released from tension for level A or B.	
139.	Unpainted pulley grooves not coated with primer for level A.	
140.	Gears not preserved as specified for level A or B.	
141.	Drive chains not preserved as specified for level A or B.	
142.	Hydraulic elevating mechanism not preserved as specified for level A or B.	
143.	Openings into electrical components not sealed as specified for level A.	
144.	Power cable not wound on cable reel and secured for level A or B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

145. Tires on removed wheels not inflated to two-thirds pressure value for level A.
146. Wheel nuts and threaded surfaces of the studs not coated with preservative and the nuts not replaced when wheels are removed for level A.
147. Tires on unremoved wheels not inflated to 10 pounds above pressure value for level A.
148. Maintenance tools not preserved and packaged in accordance with the referenced document for level A of B.
149. Toolbox lid not closed and secured for level A or B.
150. Consolidation not as specified for level A or B.
151. Components not secured to the basic unit as specified for level A.
152. Blocking, bracing and anchoring of crated conveyors not in accordance with the referenced documents for level A.
153. Depreservation guide not prepared, placed in a waterproof envelope and secured to the conveyor.
154. Markings missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination and test within the time frame specified (see 6.2), to prove, prior to starting production preservation and packing, that the applied preservation, packing and marking comply with the packaging requirements of this specification (see 6.4). Examination and tests shall be those specified herein.

5.2 Preservation. Preservation shall be level A, B, or commercial, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Sectionalization and disassembly. The conveyor shall be sectionalized to meet the applicable requirements of 3.19.3 or 3.19.4. In addition, components of the conveyor and sections vulnerable to damage, pilferage, or loss and protruding parts that increase cubeage and that can be removed and reassembled without special tools shall be removed. Removed bolts, nuts, pins and washers shall be replaced in one of the mating parts and secured to prevent their loss. Removed keys shall be secured in the keyway of the pulley or shaft for which intended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

5.2.1.2 Matchmarking. To facilitate reassembly, components and parts removed from the conveyor and the sections shall be matchmarked. Large parts shall be matchmarked by stenciled letters or numerals with lusterless white enamel over-coated with varnish conforming to TT-V-121 or with paint conforming to MIL-P-13983. Small parts shall have matchmarking information on cloth tags conforming to UU-T-81, type A, or on metal tags attached to mating parts. The cloth tags shall be waterproofed in accordance with MIL-STD-129. The tags shall be securely attached to the parts.

5.2.1.3 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed and shall be applied in accordance with MIL-P-116.

5.2.1.4 Unprotected surfaces.

5.2.1.4.1 Unfinished surfaces. Unpainted exterior metal surfaces of items, components, parts and assemblies, such as bolts, nuts, washers, rools, sprockets, shafting takeup adjusting rods, springs, chock blocks, safety chains, coupling pins, towing hooks and any other exterior metal surface requiring a contact preservative in accordance with MIL-P-116 not specified herein, shall be coated with type P-1 preservative.

5.2.1.4.2 Machined surfaces. Exposed exterior machined surfaces shall be coated with type P-6 preservative. The coated surfaces shall be wrapped or covered with barrier material conforming to MIL-B-121, type I, grade A, class 2 and secured in place with tape conforming to MIL-T-22085, type II.

5.2.1.5 Conveyor belt. The conveyor belt shall be removed. Belt fasteners shall be coated with varnish conforming to TT-V-121. The belt shall be compactly rolled, and the roll shall be secured with strapping conforming to QQ-S-781, type I, class B, size as applicable. The strapping shall be placed around the roll and the straps shall be tensioned so as not to damage the belt.

5.2.1.6 Drive belts and pulleys. Belts shall be removed or released from tension. Unpainted pulley grooves shall be coated with primer conforming to TT-P-664. Removed belts shall be preserved in accordance with MIL-P-116, method IC-1.

5.2.1.7 Drive shafts and universal joints. Unpainted exposed metal surfaces of drive shafts and universal joints shall be coated with type P-1 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

5.2.1.8 Gears.

5.2.1.8.1 Exposed gears. Exposed gears shall be coated with type P-1 preservative.

5.2.1.8.2 Enclosed gears. Gear housings shall be filled to the operating level with the operational lubricant and the gears shall be actuated to assure coating of all interior parts and surfaces with the lubricant.

5.2.1.9 Drive chains.

5.2.1.9.1 Exposed chains. Exposed drive chains shall be coated with enough type P-3 preservative to assure penetration of the preservative to the inner surfaces of the rollers, pins and bushings. The excess preservative shall be drained and the chain shall be recoated with type P-1 preservative. Removed chains shall be coiled and the coil shall be secured with soft annealed wire and wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2 and secured with tape conforming to MIL-T-22085, type II. Sprockets and other unprotected surfaces of the drives shall be coated with type P-1 preservative.

5.2.1.9.2 Enclosed chains. Enclosed chains and chain housing shall be preserved as specified in 5.2.1.8.2 for enclosed gears.

5.2.1.10 Elevating mechanism.

5.2.1.10.1 Hydraulic. The hydraulic fluid supply tanks shall be filled to operating level with approved hydraulic fluid. The rams shall be fully retracted into the cylinders. Any exposed portion of the rams shall be coated with type P-6 preservative and wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2, extending the wrap approximately two inches on the ram cylinder. The wrap shall be secured in place with tape conforming to MIL-T-22085, type II. The control valve shall be closed. Any other metal surface of component and parts of the system requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative.

5.2.1.10.2 Mechanical. The wire rope shall be coated with type P-1 preservative. Other components of the mechanical elevating mechanism shall be preserved as specified herein for similar components.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

5.2.1.11 Electrical components.

5.2.1.11.1 Openings. Openings into the motor, starter, switches, controls, junction boxes, lamps, ends of the intervehicular cable and the power cable, shall be sealed with tape conforming to MIL-T-22085, type II.

5.2.1.11.2 Power cable and reel. Unpainted exterior metal surfaces of the cable reel shall be coated with type P-1 preservative. The power cable shall be wound on the reel and secured.

5.2.1.12 Wheels and tires. When wheels are removed, the tires shall be inflated to two-thirds of the specified operating pressure. The wheel nuts shall be replaced on the studs and the exposed threaded surfaces shall be coated with type P-1 preservative. When wheels are not removed, the tires shall be inflated to 10 pounds above the specified operating pressure.

5.2.1.13 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts, and the repair parts shall be placed in the toolbox if space permits.

5.2.1.14 Maintenance tools. Maintenance tools shall be preserved in accordance with the level A requirements of PPP-P-40, and placed in the toolbox, if space permits.

5.2.1.15 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1, and placed in the toolbox.

5.2.1.16 Toolbox. The toolbox shall be closed and secured.

5.2.1.17 Consolidation. Components that cannot be placed in the toolbox, secured to the conveyor, or to the sections, shall be consolidated in close-fitting boxes conforming to PPP-B-601, overseas type, style optional, or PPP-B-621, class 2, style optional. Strapping shall not be required.

5.2.2 Level B. Each complete conveyor shall be preserved as specified for level A with the following exceptions.

5.2.2.1 Matchmarking. Cloth matchmarking tags shall not require waterproofing.

5.2.2.2 Conveyor belt fasteners. Belt fasteners shall not be required to be coated with varnish.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the currentversion before use.

5.2.2.3 Drive belts. Drive belts shall be removed or released from tension. Removed belts shall be secured in a protected location near the pulley for which intended.

5.2.2.4 Exposed chains. Exposed drive chains shall be preserved as specified in 5.2.1.9.1 except only type P-3 preservative shall be applied.

5.2.2.5 Electrical component openings. Openings into electrical components specified in 5.2.1.11.1 shall not require sealing with tape.

5.2.2.6 Consolidation. Consolidation shall be as specified in 5.2.1.17, except boxes shall be domestic type or class, as applicable.

5.2.3 Commercial. Commercial preservation shall be in accordance with ASTM D3951.

5.3 Packing. Packing shall be level A, or commercial, as specified (see 6.2).

5.3.1 Level A. Unless otherwise specified, each conveyor shall be prepared for unboxed (mobile) shipment. Components or sections shall be securely fastened to the basic unit so as not to interfere with lifting the conveyor, or with its mobility. The securing shall be done by zinc-coated steel strapping conforming to QQ-S-781 type and size as applicable, or with bolts as required. When specified (see 6.2), each complete conveyor shall be packed in a crate conforming to MIL-C-3774, type I, style A. Blocking, bracing and anchoring shall be in accordance with the appendix to the crate specification and with MIL-STD-1186.

5.3.2 Commercial. Commercial preservation shall be in accordance with ASTM D3951.

5.4 Depreservation guide. A depreservation guide shall be prepared, placed in a waterproof envelope marked "Depreservation Guide", and secured in a conspicuous location on the conveyor. Unless otherwise specified (see 6.2), DA Form 2258, "Depreservation Guide for Vehicles and Equipment" shall be used.

5.5 Marking. Marking for military levels of protection shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with ASTM D3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The conveyor covered by this specification is intended for use in handling material from quarries and gravel pits as required for military construction.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Time frame required for submission of the first article model (see 3.2).
c. When a belt for handling hot asphaltic mixes is required (see 3.10).
d. When the 24-volt electrical system for military truck compatability is not required (see 3.13.6.1).
e. Technical publications required (see 3.25).
f. Applicable list of repair parts and maintenance tools (see 3.26).
g. Time interval for submission of electromagnetic compatibility reports (see 4.6.3.3 and 6.4).
h. When dynamic railroad humping testing of the tiedown attachments and first article pack is required (see 4.6.3.5 and 4.7.1.2).
i. Time frame required for submission of first article pack (see 5.1).
j. Degree of preservation and degree of packing required (see 5.2 and 5.3).
k. When conveyors are to be crated (see 5.3.1).
l. When other than DA Form 2258 is to be used as the depreservation guide (see 5.4).
m. Time frame when camouflage pattern data (see 3.22) is required.

6.3 First article . When first article inspection is required, the item should be a first article model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article test results and disposition of the first article.

6.4 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, pack and mark the conveyors in accordance with this specification (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

6.5 Lubricants. MIL-STD-838 Lubrication of Military Equipment, prescribes the policy for using specification-type products wherever possible and provides specific requirements for potential use of non-standard proprietatry products. MIL-STD-838 is implemented by MIL-HDBK-113 Guide for the Selection of Lubricants, Fluids, Preservatives and Speciality Products for Use in Ground Equipment Systems. The contracting officer should note that unless otherwise authorized by the US Army Belvoir Research, Development and Engineering Center (ATTN: STRBE-VF), Fort Belvoir, VA 22060-5606, lubricants, fluids, and greases for ground equipment systems must be restricted to those listed under MIL-HDBK-113, chapter 2.

6.6 Government-furnished property. The contracting officer should arrange to furnished item listed in 3.29.

6.7 Subject term (key word) listing.

Conveyor, belt
Conveyor, electric-motor-driven
Conveyor, elevating
Conveyor, portable

6.8 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Preparing Activity:
Army - ME

Project 3910-A002

Review activity:
Army - AT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

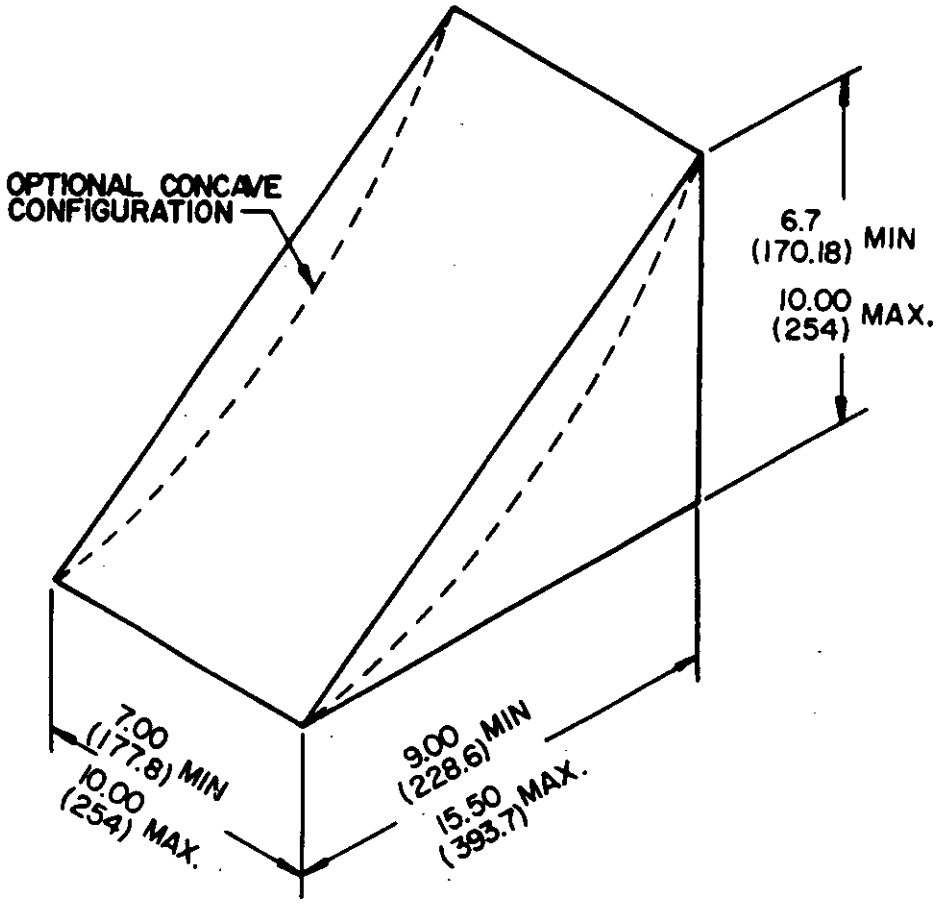

CHOCK MATERIAL NOTE

1. ALUMINIUM
2. SEMI-RIGID ELASTOMER
3. MAXIMUM CHOCK WEIGHT - 11.5 LB.


CAPTIVE FASTENER ASSEMBLY DETAILS

1. SNAP HOOK FOR CRADLE OR EYE.
2. FASTENER LINE TENSILE STRENGTH MINIMUM OF 1,400 LB.
3. PLATE FERROUS COMPONENTS TO RESIST CORROSION.
4. LENGTH OF CAPTIVE FASTENER ASSEMBLY SHALL REACH BETWEEN CRADLE OR HANGER AND EMPLACED CHOCK BLOCK AT EXTREME LOCATIONS AHEAD OF AND BEHIND ROAD WHEELS.
5. DIMENSIONS SHOWN: INCHES (MILLIMETERS)

FIGURE 1. Chock block assembly.

X 6030


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

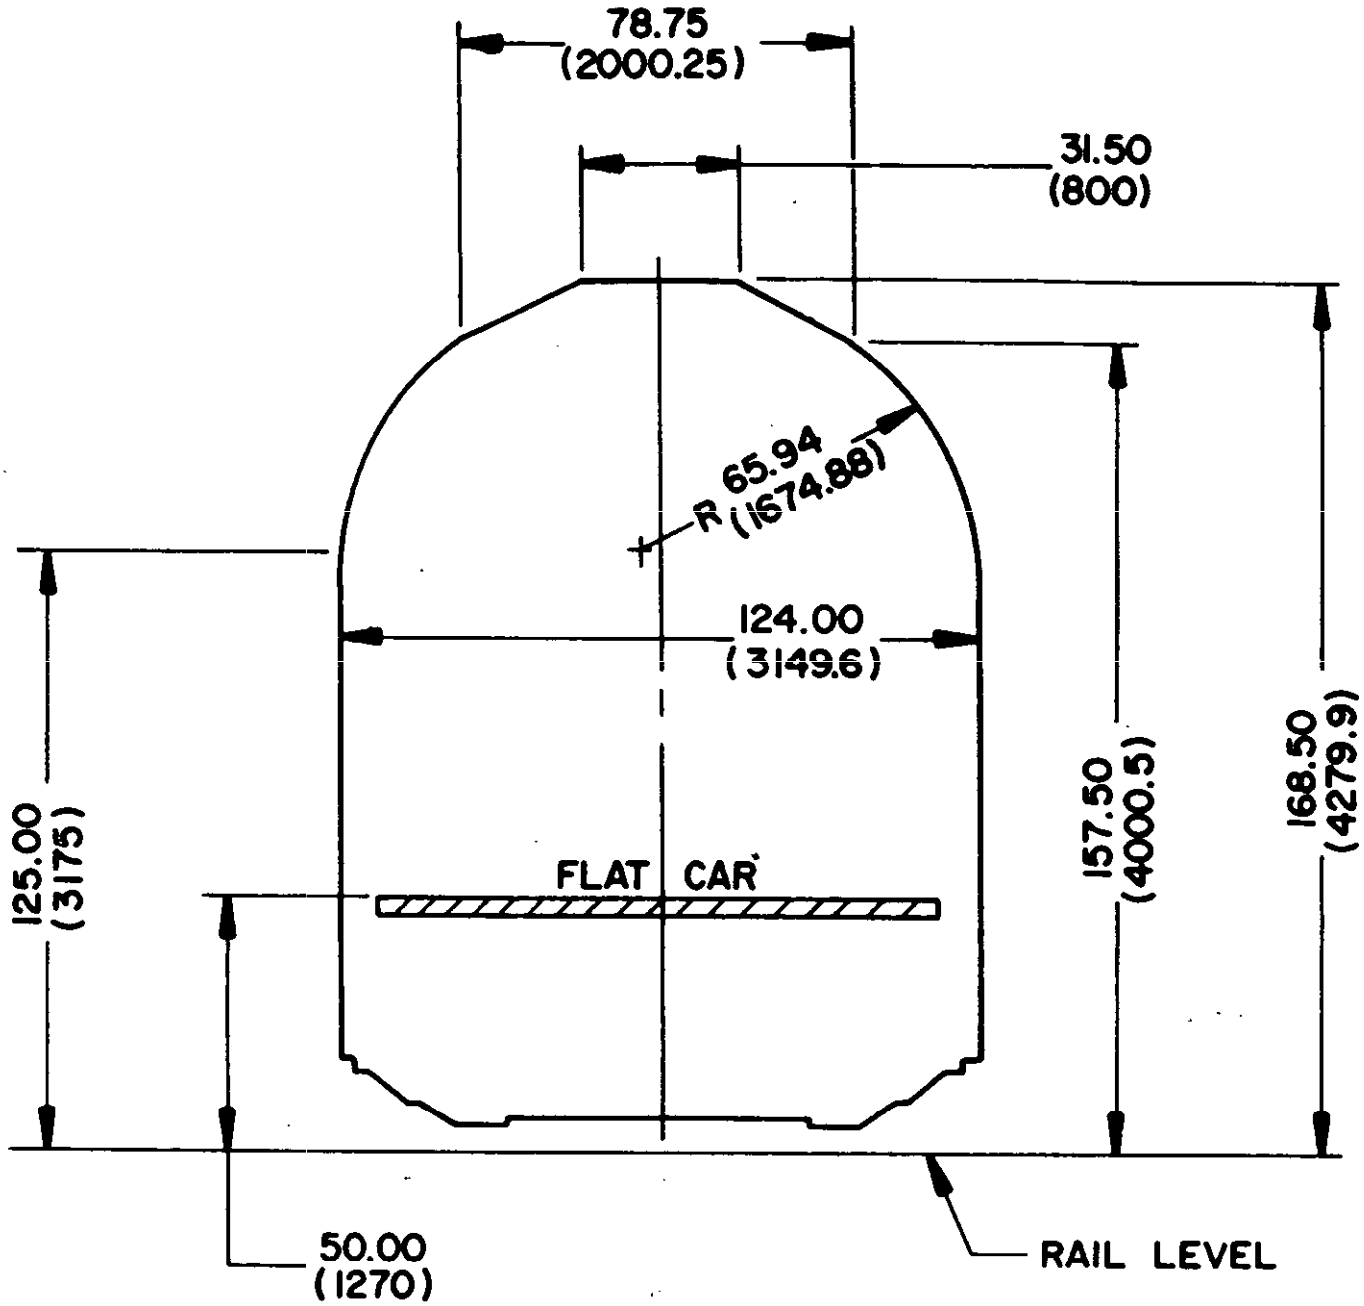



NOTE: DIMENSIONS SHOWN: INCHES (MILLIMETERS)

FIGURE 2. Passe-partout International (PPI) gauge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

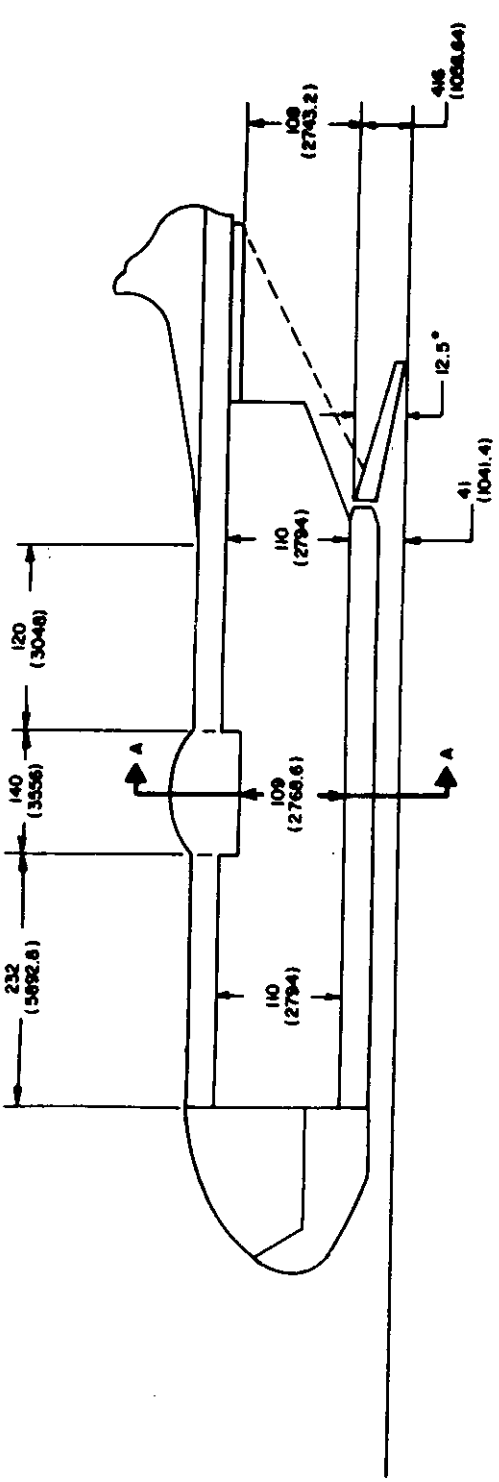

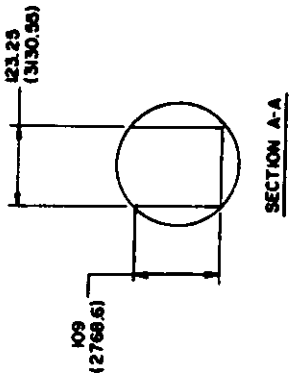

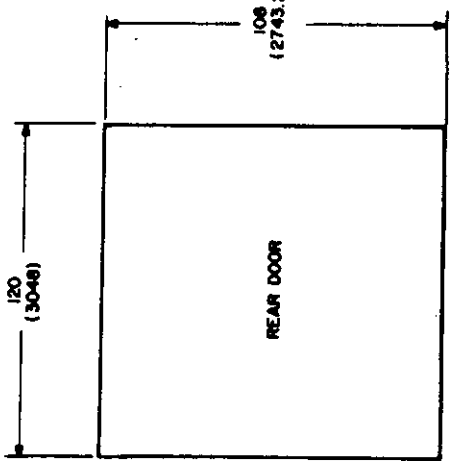

NOTE: UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).

FIGURE 3. Cargo compartment profile (C-130).

X-195C

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir RDE Center
STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52126D(ME)	MIL-C-52126D(ME) Conveyor, Belt, Portable, Wheel-Mounted, Electric-Motor-Driven, 50-Foot

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.