MIL-C-52425B
22 July 1987
SUPERSEDING
MIL-C-52425A(ME)
11 December 1978

MILITARY SPECIFICATION

CHESTS, ARMY STEVEDORING EQUIPMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the materials and technical data required to fabricate various types of stevedoring chests.

1.2 Classification. Chests shall be of the following types as specified (see 6.2):

Type I	- Chest, cleaning cargo set.
Type II	- Chest, coopering and shoring cargo set.
Type III	- Chest, drums cargo set.
Type IV	- Chest, general hatch cargo set.
Type V	- Chest, heavy lift cargo set.
Type VI	- Chest, light set.
Type VII	- Chest, plate handling cargo.
Type VIII	- Chest, riggers cargo set.
Type IX	- Chest, timber cargo set.
Type X	- Chest, vehicle cargo set.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3990
6230
7920

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

FF-B-584	- Bolt, Finned Neck, Key Head, Machine, Ribbed Neck, Square Neck, Tee Head.
FF-N-105	- Nail, Brads, Staples and Spikes, Wire, Cut and Wrought.
FF-N-836	- Nut, Square, Hexagon, Cap, Slotted, Castellated, Clinch, Knurled and Welding.
FF-S-107	- Screw, Tapping and Drive.
FF-S-111	- Screw Wood.
FF-W-84	- Washer, Lock (Spring).
FF-W-92	- Washer, Metal, Flat (Plain).
NN-P-530	- Plywood, Flat Panel.
TT-E-489	- Enamel, Alkyd, Gloss (For Exterior and Interior Surfaces).

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-L-3150	- Lubricating Oil, Preservative, Medium.
MIL-P-19550	- Preservative Treatment, Plywood.
MIL-W-52574	- Welding Process and Welding Procedure Requirements for Manufacture of Equipment Utilizing Steels.

FEDERAL

FED-STD-No-595	- Color.

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-731	- Quality of Wood Members For Containers and Pallets.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A242 - High Strength Low Alloy Structural Steel.
A570 - Hot-Rolled Carbon Steel Sheet and Strip, Structural Quality.
D2016 - Standard Test Methods for Moisture Content of Wood.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specifications sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. Chests shall be as shown in figures 1 through 37 and as specified herein.

3.2 First article. Unless otherwise specified, (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of chests from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish chests conforming to this specification.

3.3 Material. Material shall be as specified herein and as shown on the applicable figures. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Lumber. Lumber quality shall conform to the appropriate structural classes of MIL-STD-731 except that lumber shall be square edged and surfaced on four sides. It shall be entirely free of post beetle infestation and no piece shall contain any defect which will materially weaken the strength of the piece or prevent its correct fastening.

3.3.1.1 Hardwood. Lumber for skids, drawer center guides, and flooring shall be selected from group III or group IV woods in accordance with MIL-STD-731.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.3.1.2 Softwood. Lumber for framing members, face boards, tops, and side and rear pieces of drawers shall be selected from group I or group II woods in accordance with MIL-STD-731.

3.3.1.3 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the chest may be newly fabricated from recovered materials to the maximum extent practicable, provided the chest produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the chest.

3.3.2 Plywood. Plywood shall conform to NN-P-530, group B (PS-1, grade A-C, exterior type, 5-ply). Thickness shall be as specified on the applicable figures.

3.3.3 Hardware. All hardware items shall be of steel. The size, style, shape, and positions on chests shall be as shown on the applicable figures.

3.3.4 Nails. Nails shall conform to FF-N-105, type II. The style, size, finish, and location shall be as shown in table I.

TABLE I. Nails.

Location	Style	Size	Finish
Flooring and Framing Members	8	16d	cement coated
Exterior sheathing	4	7d	cement coated
Partitions, cleats and nailing strips	4	6d	cement coated
Sheet metal shields	20	.135 in. dia. x 3/4 in. long	zinc coated
Wear skids	18	.162 in. dia. x 3-1/2 in. long	bright

3.3.5 Screws. Wood screws shall be flat head, steel, conforming to FF-S-111, type I, of the maximum diameter accommodated by the hardware. Screws for fastening hardware to doors shall be maximum length permitted by the thickness of the wood at each location. Screws for securing corner braces shall be 1-1/2 inches long. Screws for fastening hinges to framing members shall not be less than 2-1/2 inches long.

3.3.6 Bolts and nuts. Bolts shall conform to FF-B-584 and nuts shall conform to FF-N-836. The type, size, and length shall be as shown on the applicable figures.

3.3.7 Washers. Washers shall conform to FF-W-84 or FF-W-92 as applicable. Sizes as required. A flat washer shall be placed under the head, and a lock-washer and a flat washer under the nut of each bolt as shown on the applicable figures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.3.8 Steel.

3.3.8.1 Sheet steel. Sheet steel used in fabrication of sling shields, roof edges, corner braces, reel drums, and lid edges shall be in accordance with ASTM A570, grade optional and shall be of sizes, shapes, and thicknesses indicated on the applicable figures for the type of chest specified.

3.3.8.2 Bar stock. Steel bars used in fabrication of lid and door hooks, shovel supports, plates, and leveling legs shall be in accordance with ASTM A242 and shall be of the sizes and shapes indicated on the applicable figures for the type of chest specified. Installation shall be as shown on applicable figures for the type of chest specified.

3.4 Construction. All framing members, sheathing, shelves, partitions, and flooring shall be closely fitted and securely nailed to provide the maximum bracing obtainable from these members. Doors are not intended to provide this bracing.

3.4.1 Nailing. All nails shall be driven flush. Nails which fasten sheathing to framing members or battens shall be spaced no more than 4 inches apart. Nails fastening cleats to plywood shall be located for driving into framing members. Pallet nails used for securing wear skids shall be staggered to prevent splitting of the lumber or interfering with previously nailed or bolted components.

3.4.2 Piecing of plywood. No piecing shall be permitted in outside sheathing, doors, or shelves. The central longitudinal partition shall be made of no more than two pieces. Interior sheathing may be pieced if joints are made over framing members.

3.4.3 Cleats. Cleats (1- x 2-inch size) shall be provided to position and secure the partitions and to support the shelving. Cleats are required on one side only of partitions and underneath shelving and shall extend the full length and width of the partitions and shelving. Cleats split by nailing shall be replaced.

3.4.4 Welded joints. Welded joints shall be in accordance with MIL-W-52574.

3.4.5 Dimensions. Dimensions shall be as indicated on applicable figures and shall not have an accumulative tolerance of more than plus or minus 1/4 inch overall.

3.5 Treatment and painting.

3.5.1 Treatment of plywood. All plywood shall be treated and dried in accordance with MIL-P-19550.

3.5.2 Treatment of lumber. All lumber shall be treated in accordance with MIL-T-704, except that pentachlorophenol preservative shall not be used.

3.5.3 Cleaning and painting. All exterior and interior surfaces, including metal and hardware, shall be cleaned and painted in accordance with MIL-T-704, type A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.5.4 Slinging marks. One slinging mark shall be stenciled on each lower outside corner as shown on the applicable figures. Letters shall be 3/4 inch high of enamel conforming to TT-E-489, white, color No. 17875 of FED-STD-595.

3.5.5 Lubrication. All surfaces requiring lubrication shall be lubricated, prior to delivery, with oil conforming to MIL-L-3150.

3.6 Identification marking. Chests shall be identified in accordance with MIL-STD-130. The marking shall be applied to the chests on an identification plate 6 inches long by 3-1/2 inches wide, conforming to MIL-P-514, type III, composition A.

3.6.1 Chest marking. Each chest shall be labeled on one door of each side in two-inch high letters, with words to indicate contents. Hinged lids shall be labeled.

3.7 Type I chest, cleaning cargo set. Type I chest shall be as shown on figures 1 through 3 and as specified herein.

3.8 Type II chest, coopering and shoring cargo set. Type II chest shall be as shown on figures 4 through 10 and as specified herein.

3.9 Type III chest, drums cargo set. Type III chest shall be as shown on figures 11 through 13 and as specified herein.

3.10 Type IV chest, general hatch cargo set. Type IV chest shall be as shown on figures 14 through 20 and as specified herein.

3.10.1 Reels and reel supports. Reels and reel supports shall be of welded and bolted construction and shall be fabricated as shown in figure 20. Steel forms, plates, and sheets shall conform to sizes and shapes indicated on the applicable figures and shall be cut to meet dimensional requirements without piecing. Reel discs shall be accurately alined to insure that the completed reel will rotate freely.

3.10.2 Structural steel. Structural steel used in the fabrication of the reels and reel supports shall conform to ASTM A242 and shall be of the sizes and shapes indicated on figures 16 through 20.

3.11 Type V chest, heavy lift cargo set. Type V chest shall be as shown on figures 21 through 25 and as specified herein.

3.11.1 Screws. Screws fastening sheet metal to plywood discs shall conform to FF-S-107, type A.

3.11.2 Reel and reel support. Reel and reel support shall be as specified in 3.10.1, except that they shall be fabricated as shown on figure 23.

3.11.3 Structural steel. Structural steel shall be as specified in 3.10.2, except that sizes and shapes shall be as indicated on figures 22 through 25.

3.12 Type VI chest, light set. Type VI chest shall be as shown on figures 26 and 27 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.13 Type VII chest, plate handling set. Type VII chest shall be as shown on figures 28 and 29 and as specified herein.

3.14 Type VIII chest, riggers cargo set. Type VIII chest shall be as shown on figures 30 through 33 and as specified herein.

3.14.1 Nailing hardwood top. The hardwood top shown on figure 32 may be drilled for nailing.

3.15 Type IX chest, timber cargo set. Type IX chest shall be as shown on figures 34 and 35 and as specified herein.

3.16 Type X chest, vehicle cargo set. Type X chest shall be as shown on figures 36 and 37 and as specified herein.

3.17 Workmanship. The completed chests shall be structurally sound and free from wood containing machine gouges or splinters, sheet metal that is broken or fractured and other defects which could affect the serviceability of the chest. Metal components shall be free of corrosion, sharp, or ragged edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 Examination. The first article chest shall be examined as specified in 4.5. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the currentversion before use.

4.3.2 Tests. The first article chest shall be tested as specified in 4.6.1. Failure to pass any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each chest shall be examined as specified in 4.5. AQL shall be 1.0 percent defective for major defects and 6.5 percent defective for minor defects.

4.4.2 Tests. Each chest shall be tested as specified in 4.6.1. AQL shall be 1.0 percent defective.

4.5 Examination. The chests shall be examined for the following defects:

Major

101. Lumber quality and group not as specified.
102. Dimensions not as shown on the figures.
103. Component parts missing or not as specified.
104. Component misalined or in the wrong location.
105. Hardware not as shown on the figures, missing, or improperly fastened.
106. Nails not as specified or not driven flush with surface.
107. Framing members insecurely nailed or improperly joined.
108. Sheet metal broken or cracked.
109. Plywood not as specified.
110. Nuts, bolts, washers or screws missing, not properly seated or not as specified.
111. Preservation of lumber or plywood not as specified.
112. Bar stock not as specified.
113. Welded joints not as specified.
114. Sling marks not as specified.
115. Lubrication not as specified.
116. Marking not as specified or illegible.
117. Corrosion on metal components.
118. Sheet metal edges protruding or having sliver, ragged, or chipped edges.
119. Treatment and painting not as specified.
120. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the chest.

4.6 Test.

4.6.1 Moisture content. Lumber and plywood shall be tested for moisture content in accordance with ASTM D2016. Nonconformance to lumber quality requirements specified in 3.3.1 shall constitute failure of this test.

4.7 Inspection of packaging. The packaging shall be examined to assure that chest doors are adequately secured to prevent opening during shipment and handling and that marking is complete, correct, and legible.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Closure. The hasps of the chests shall be secured by wiring or by any other means that will prevent the chest doors from opening during shipment and handling.

5.2 Marking. Marking of chests for shipment and storage shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Chests are intended to provide adequate housing and easy transportability for self-contained units of basic stevedoring equipment normally required to load or discharge and piece of general cargo from the holds of ships.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of chest required (see 1.2).
(c) Time frame required for submission of the first article chest. (see 3.2).

6.3 First article. When a first article inspection is required, the items should be a first produced model. The first article should consist of 1 or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.3.1 First article chest. Any changes or deviations of production chests from the approved first article chest during production will be subject to the approval of the contracting officer. Approval of the first article chest will not relieve the contractor of his obligation to furnish chests conforming to this specification.

6.4 Subject term (key word) listing.

Chests
Stevedore equipment
Stevedore, cleaning cargo set
Stevedore, coopering and shoring cargo set
Stevedore, drums, cargo set
Stevedore, general hatch cargo set
Stevedore, heavy lift cargo set
Stevedore, light set
Stevedore, plate handling set
Stevedore, riggers cargo set
Stevedore, timber cargo set
Stevedore, vehicle cargo set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - GS
Army - AT

Project 3990-0198

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

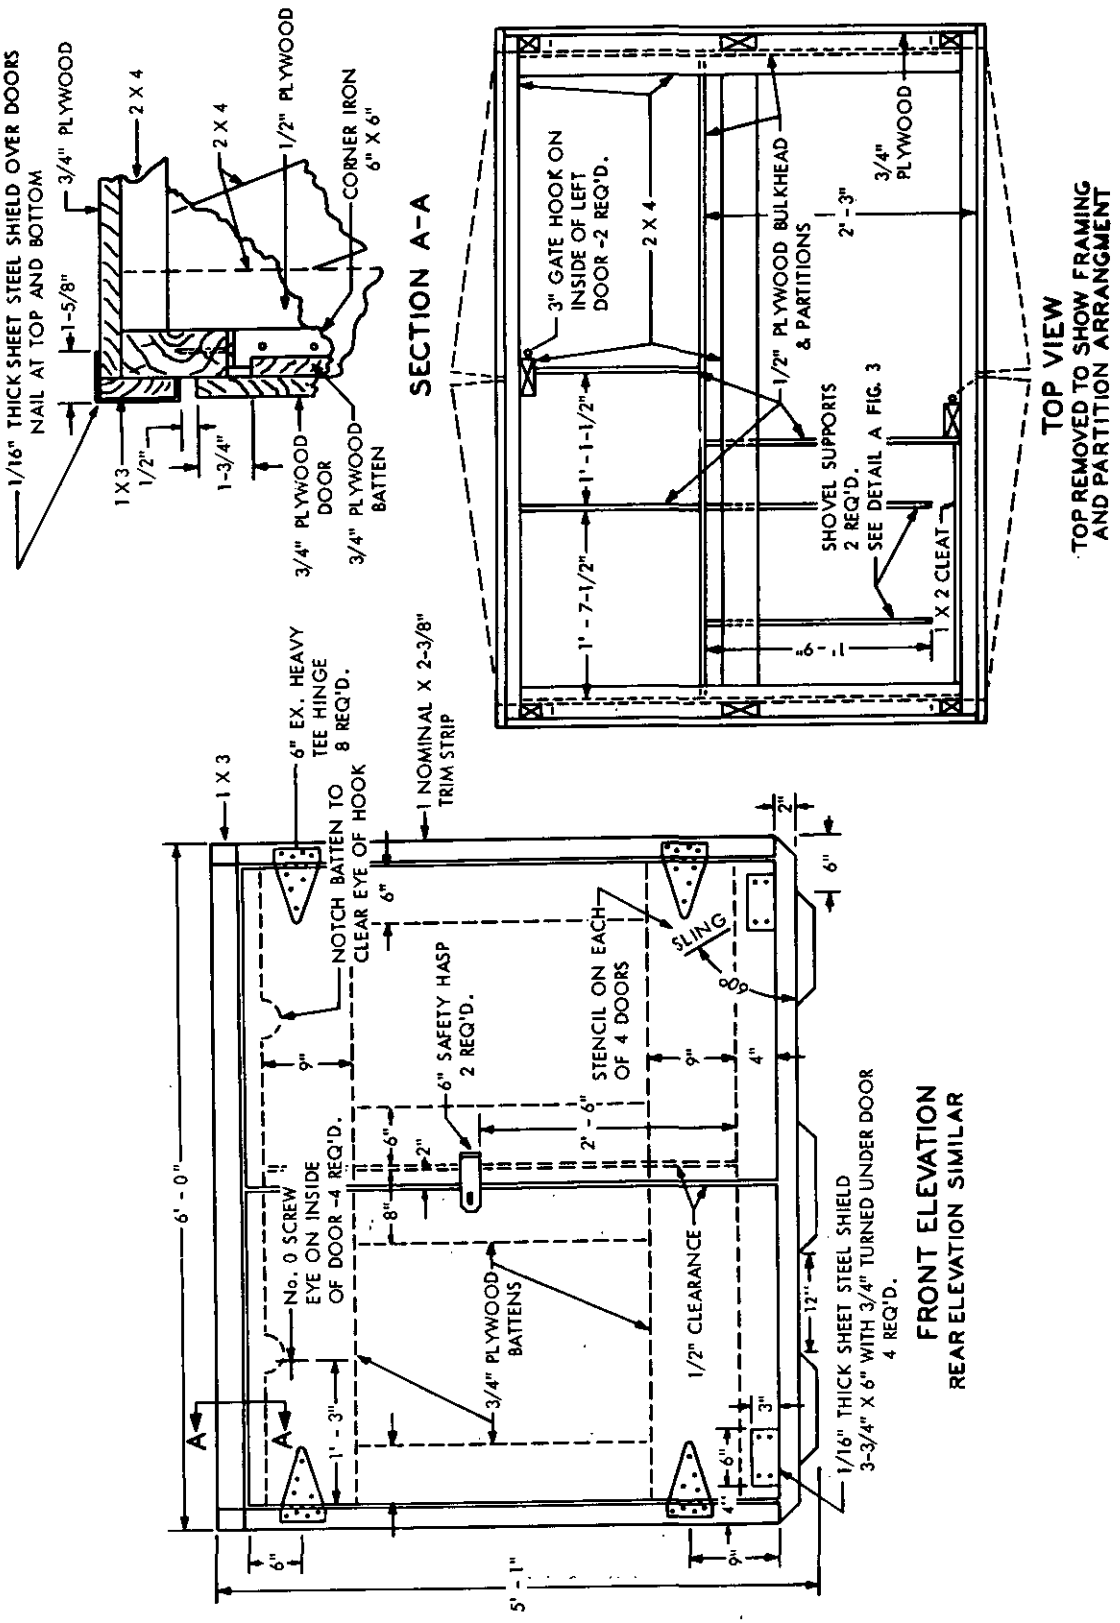

X-2509

FIG. 1 - Type I: Chest, Cleaning Cargo Set

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:08Z
Check the source to verify that this is the current version before use.

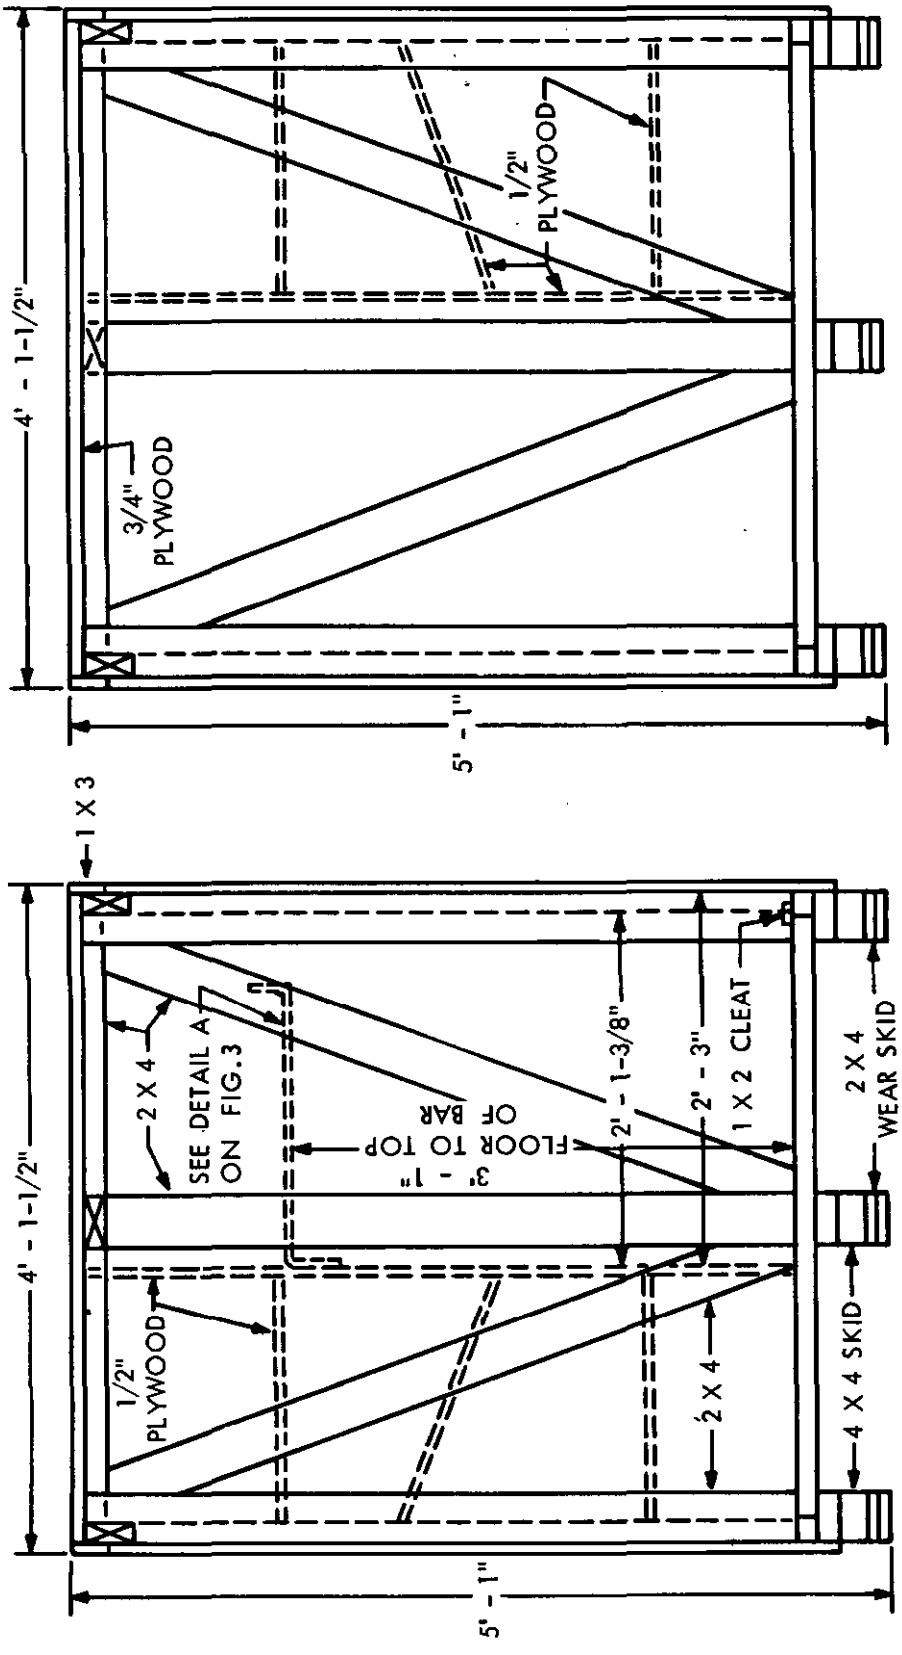


FIG. 2 - Type I: Chest, Cleaning Cargo Set

X-2510

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

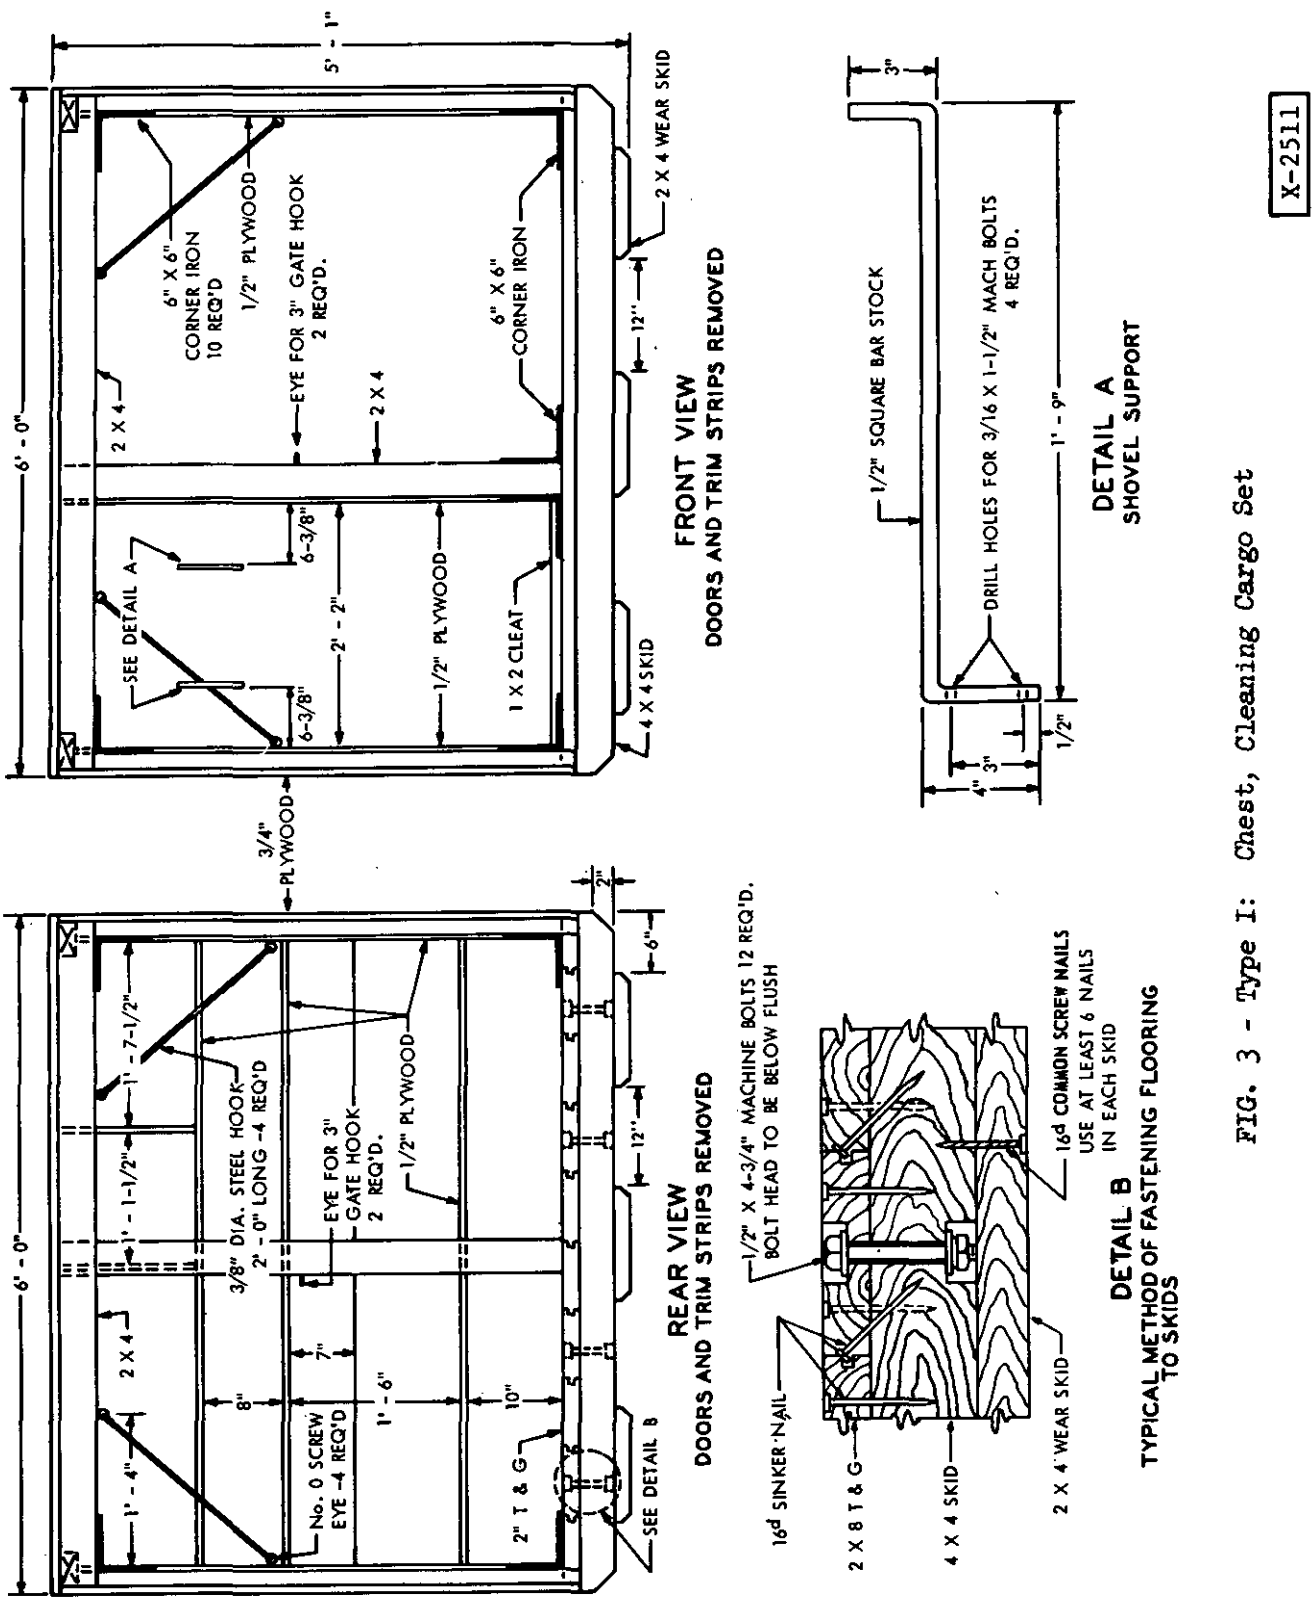


FIG. 3 - Type I: Chest, Cleaning Cargo Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.


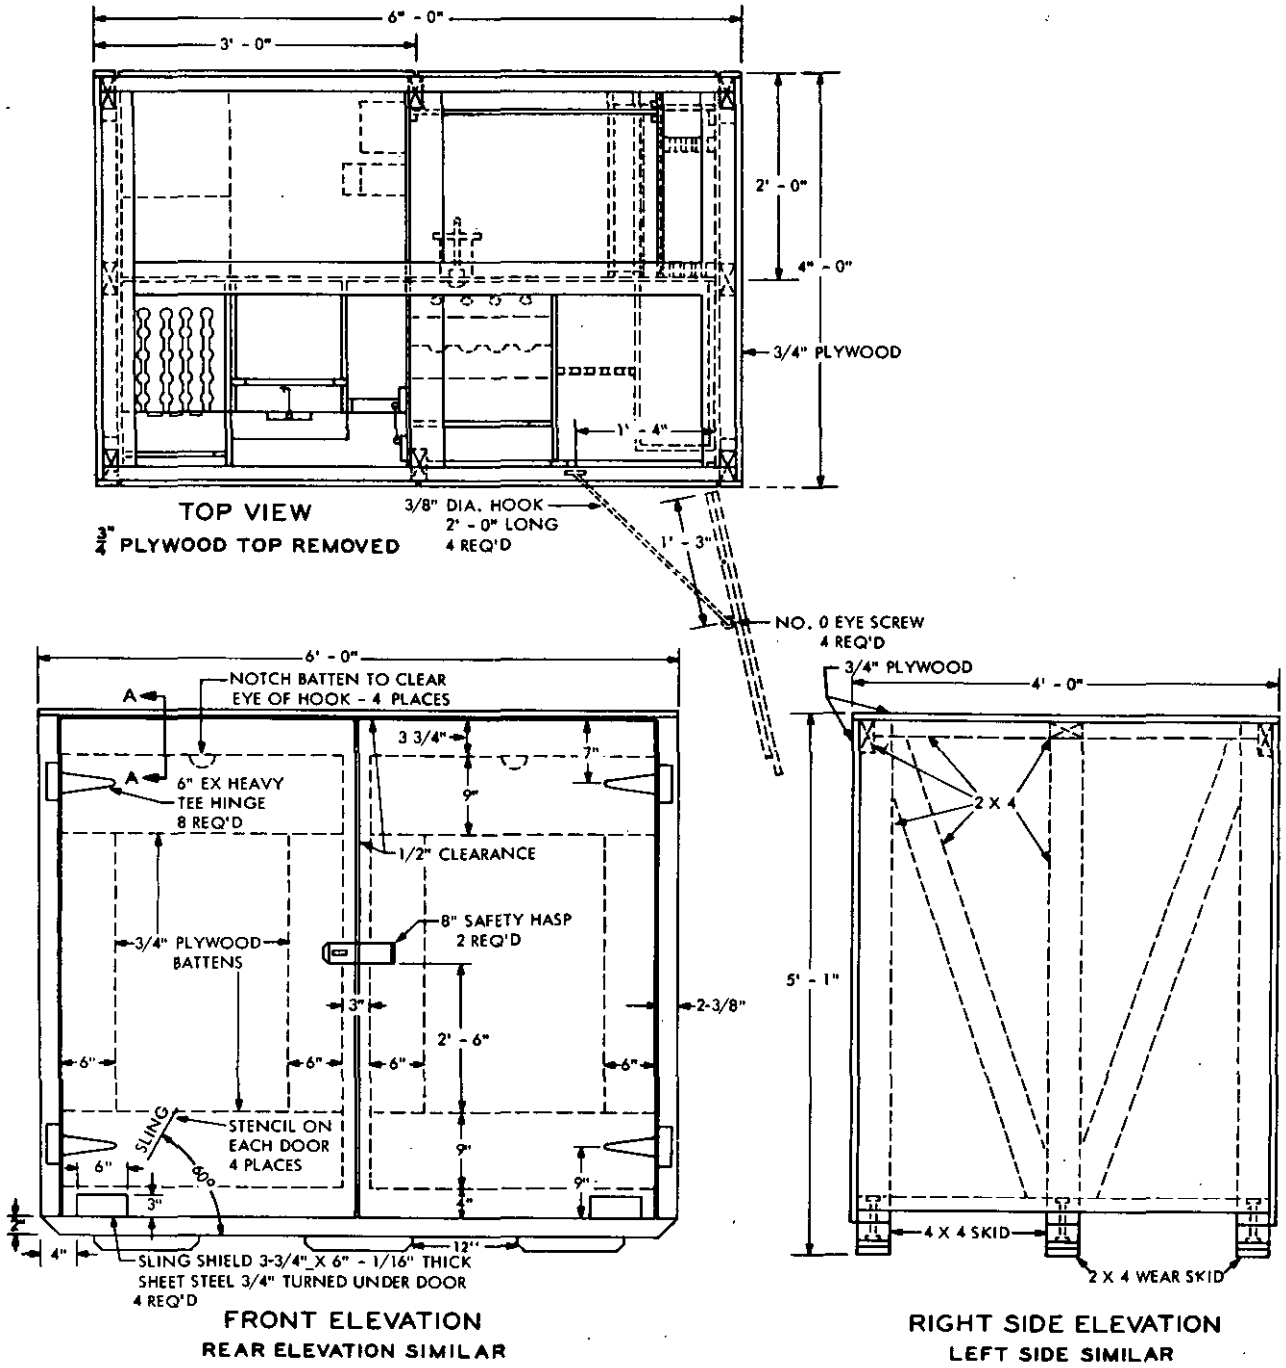


FIG. 4 - Type II: Chest, Coopering & Shoring Cargo Set

X-2512


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

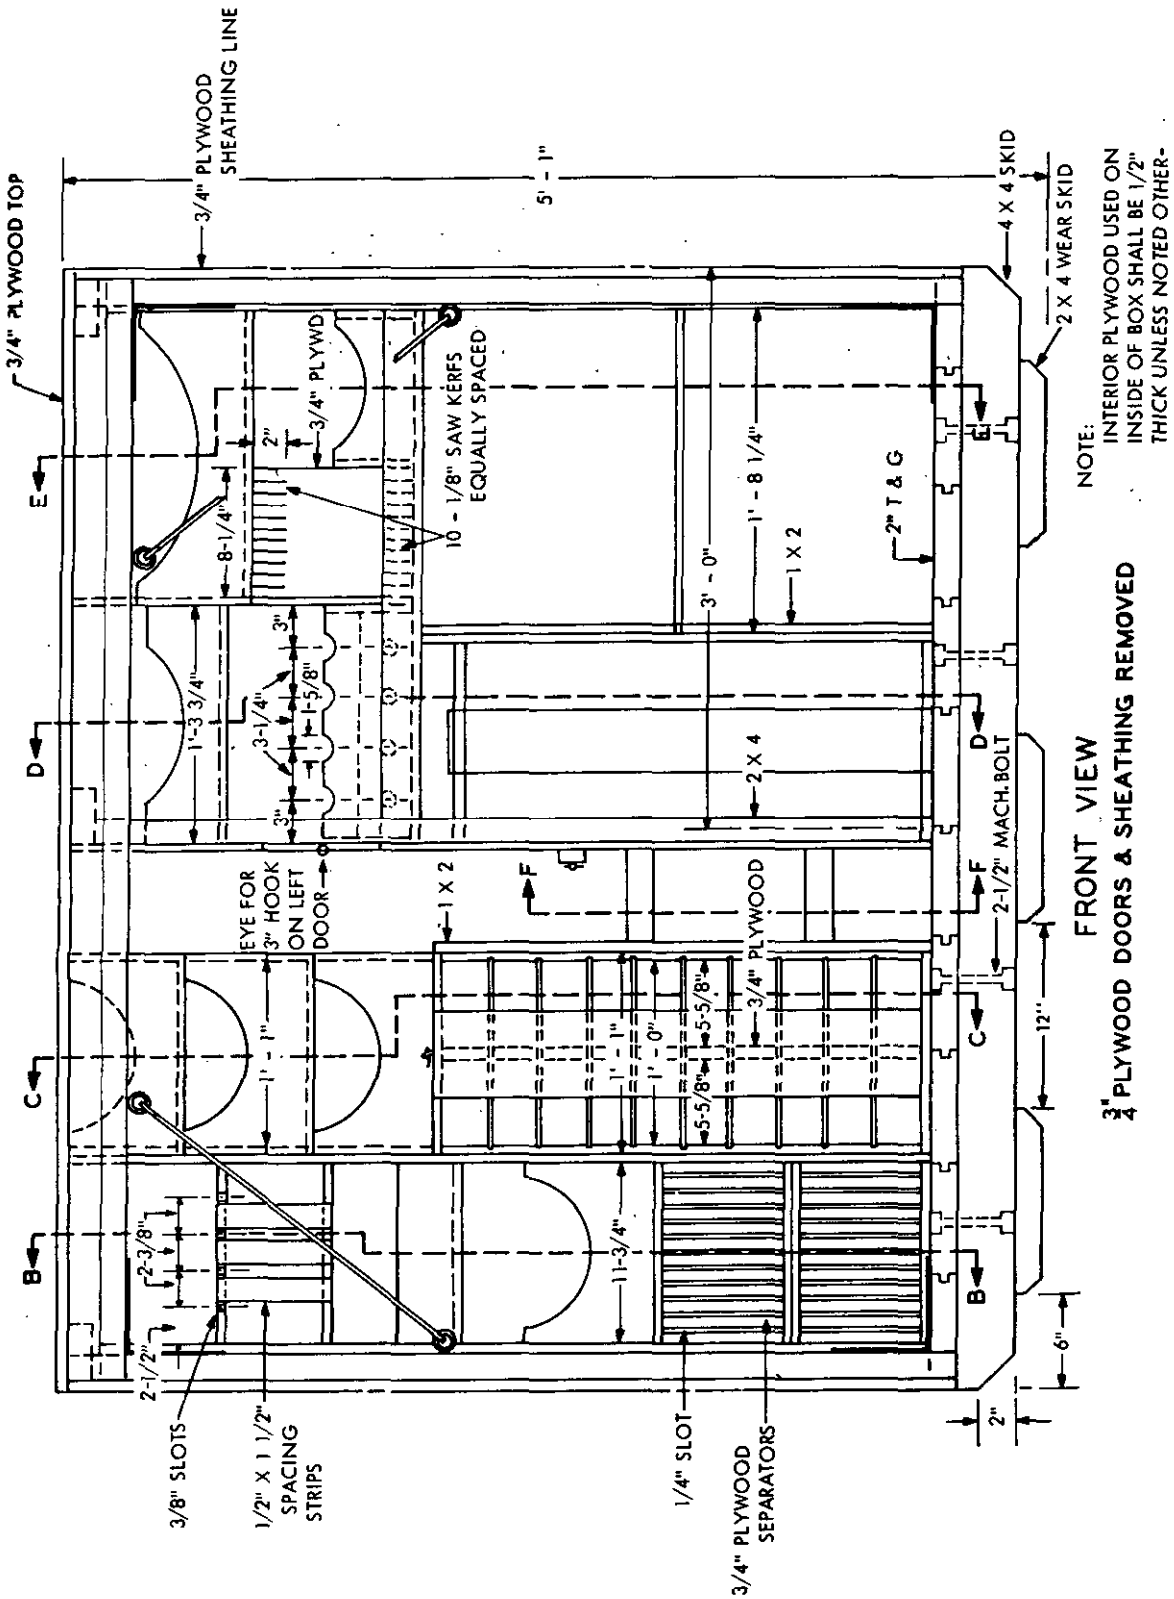

X-2513

FIG. 5 - Type II: Chest, Coopering & Shoring Cargo Set


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

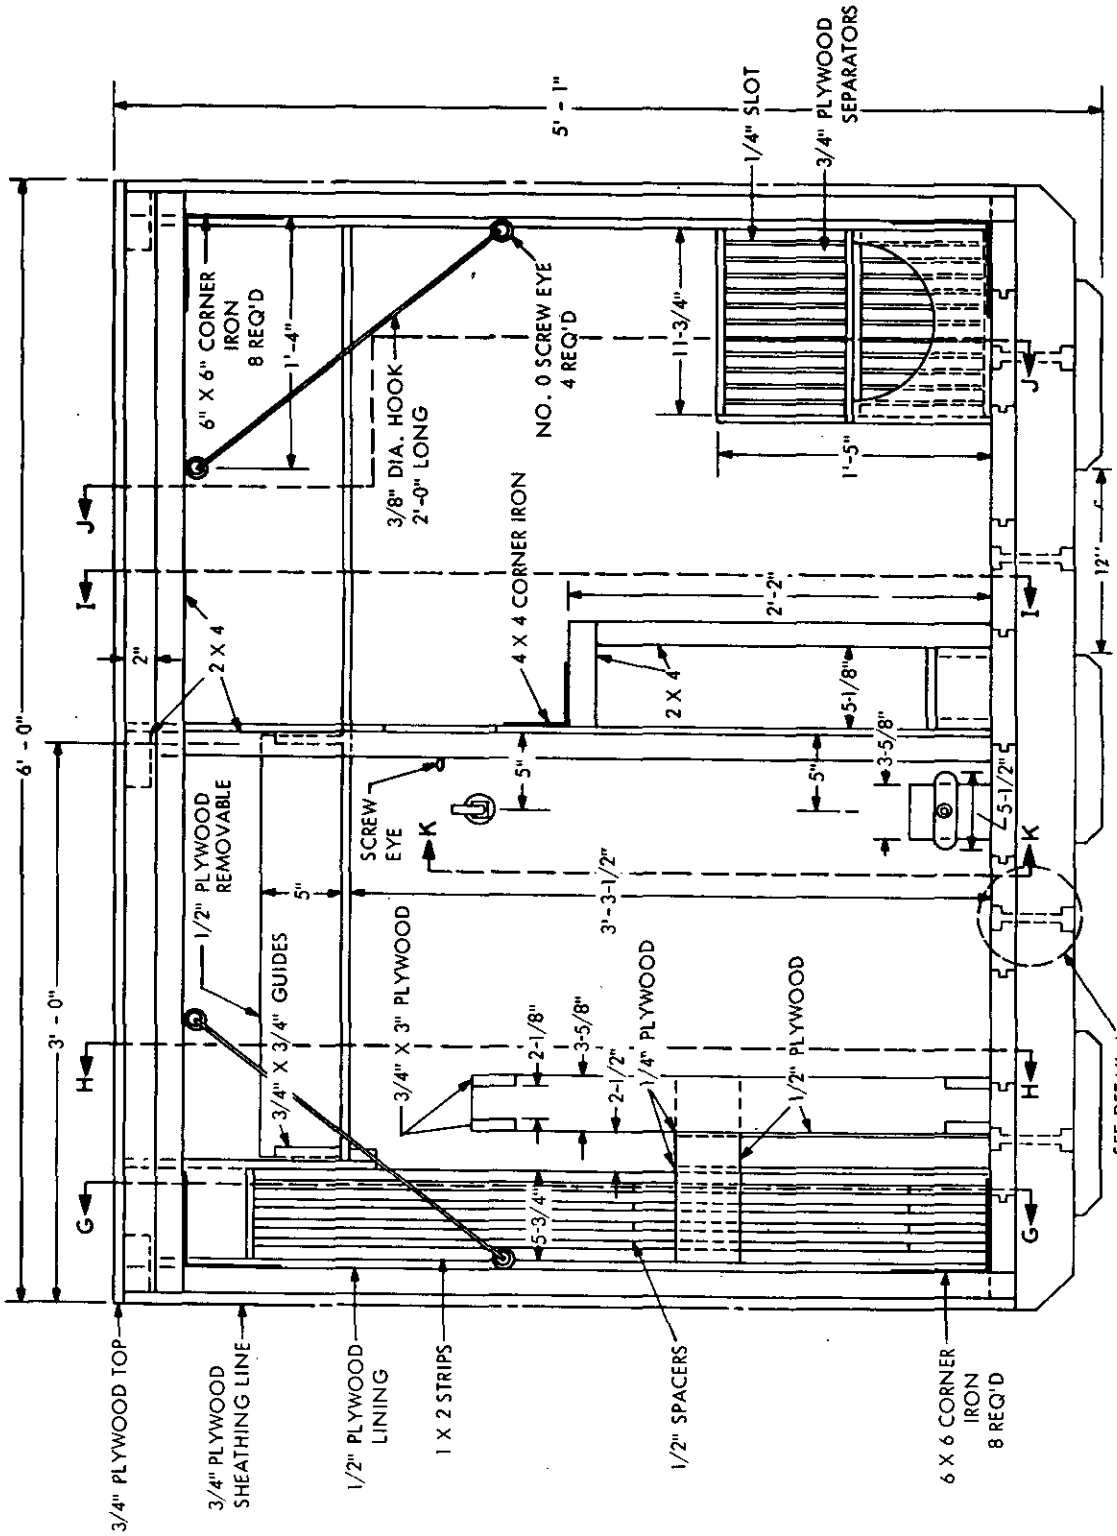

X-2514

FIG. 6 - Type II: Chest, Coopering & Shoring Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

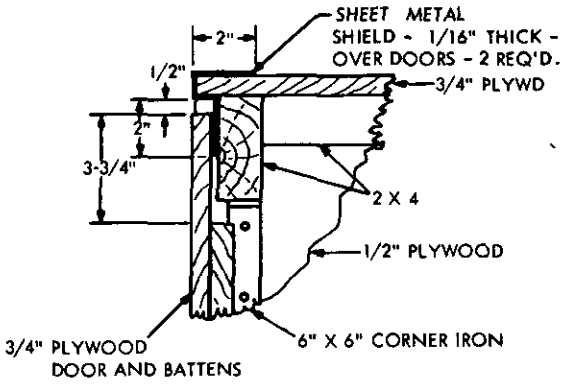

SECTION A-A


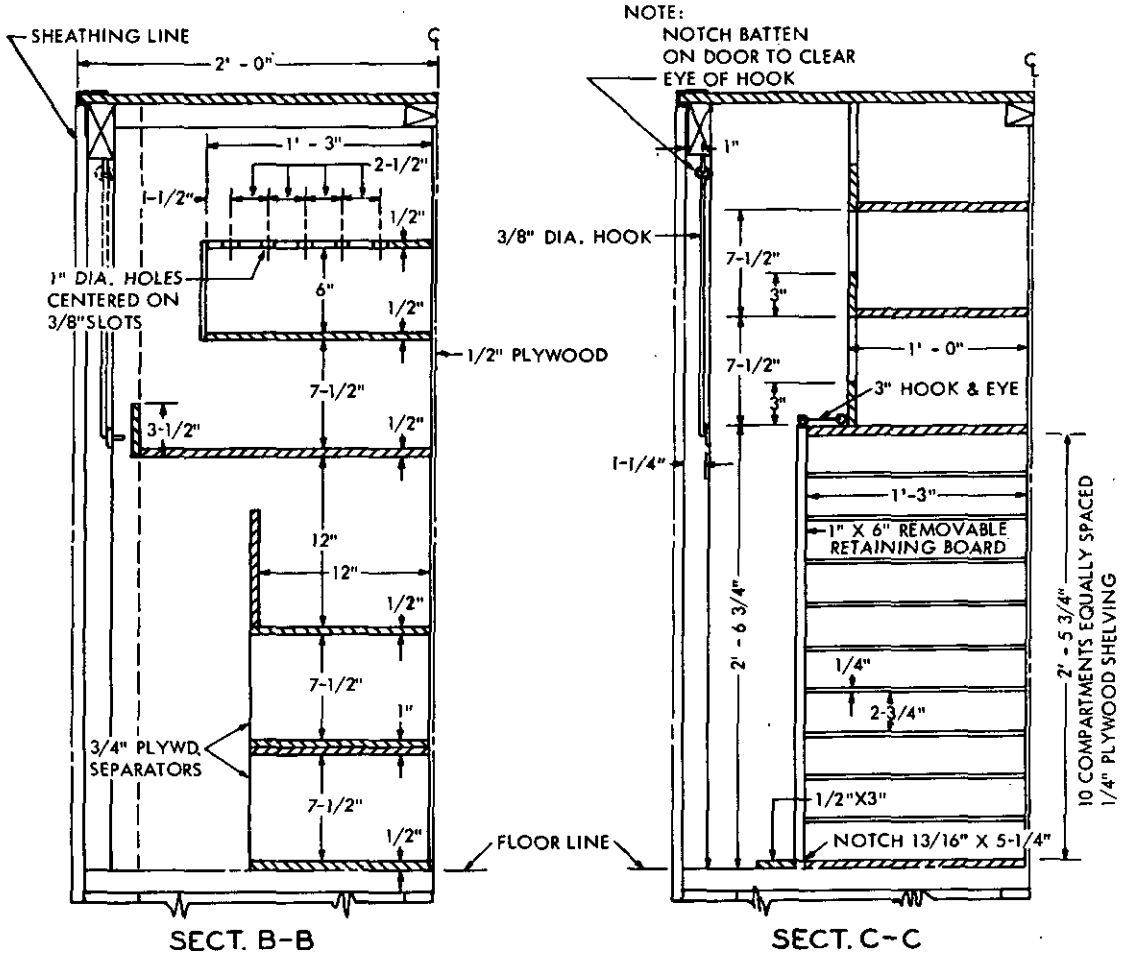


FIG. 7 - Type II: Chest, Coopering & Shoring Cargo Set


X-2515

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.


NOTE:
INTERIOR PLYWOOD USED ON INSIDE OF BOX SHALL BE 1/2" THICK UNLESS NOTED OTHERWISE ON THE FIGURE

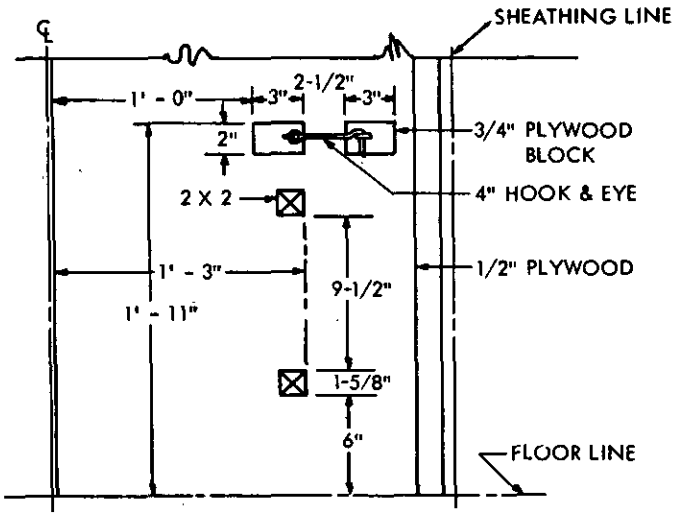

SECT. F-F

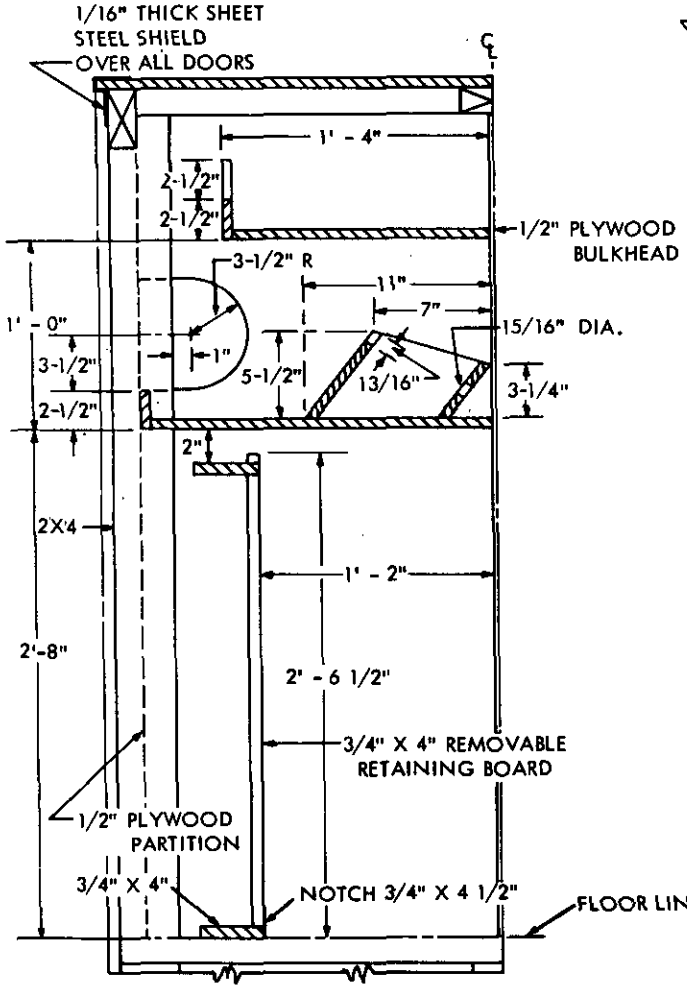

SECT. D-D

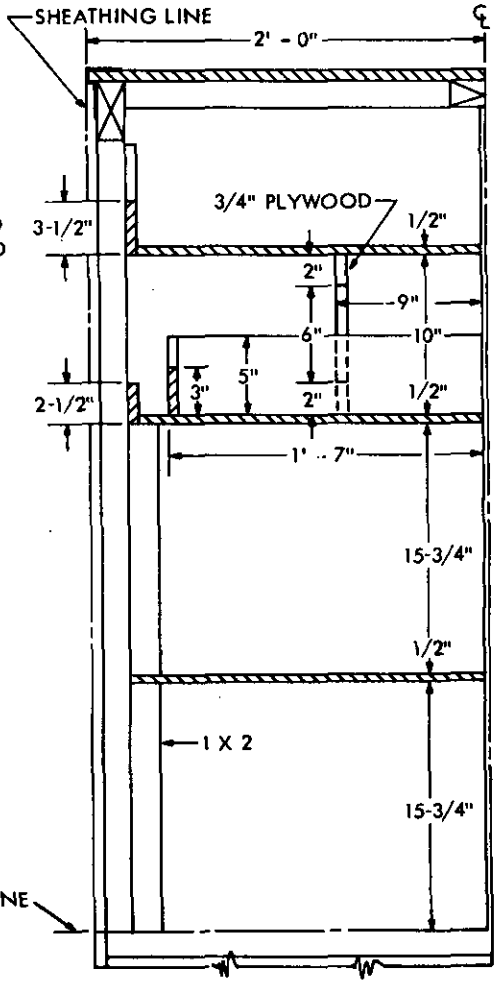


SECT. E-E

FIG. 8 - Type II: Chest, Coopering & Shoring Cargo Set

X-2516

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.

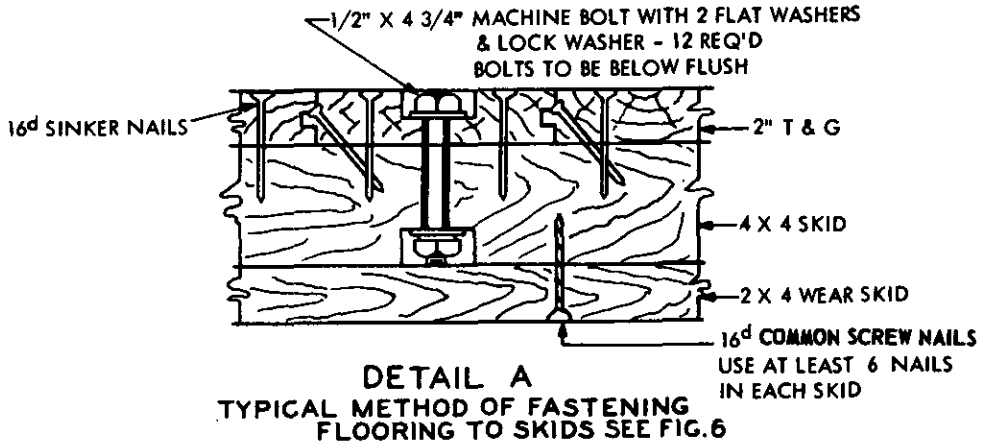

DETAIL A
TYPICAL METHOD OF FASTENING FLOORING TO SKIDS SEE FIG.6

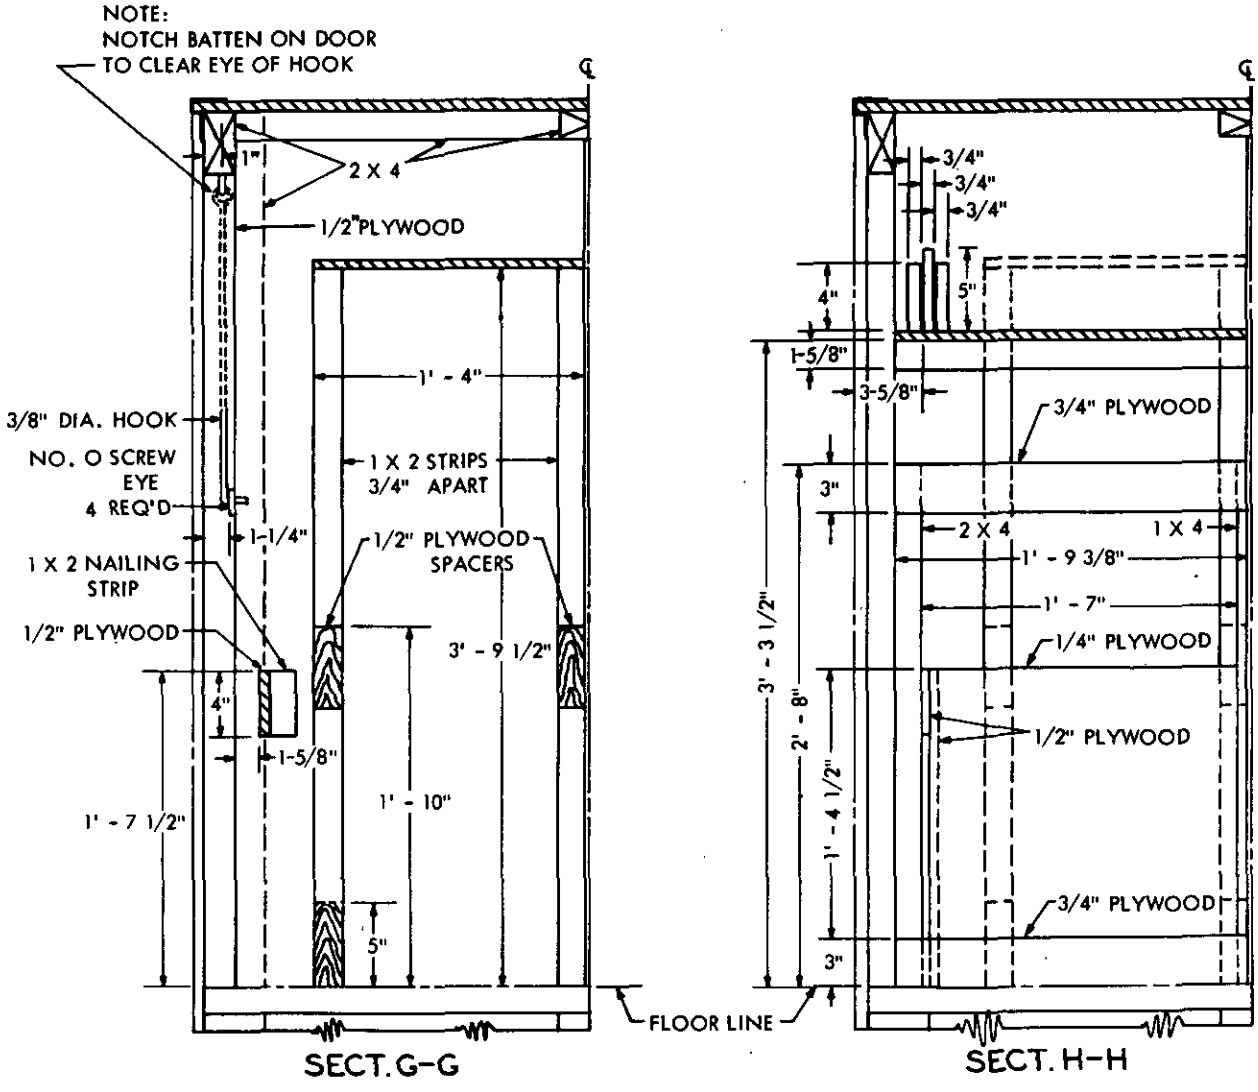


FIG. 9 - Type II: Chest, Coopering & Shoring Cargo Set

X-2517

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.

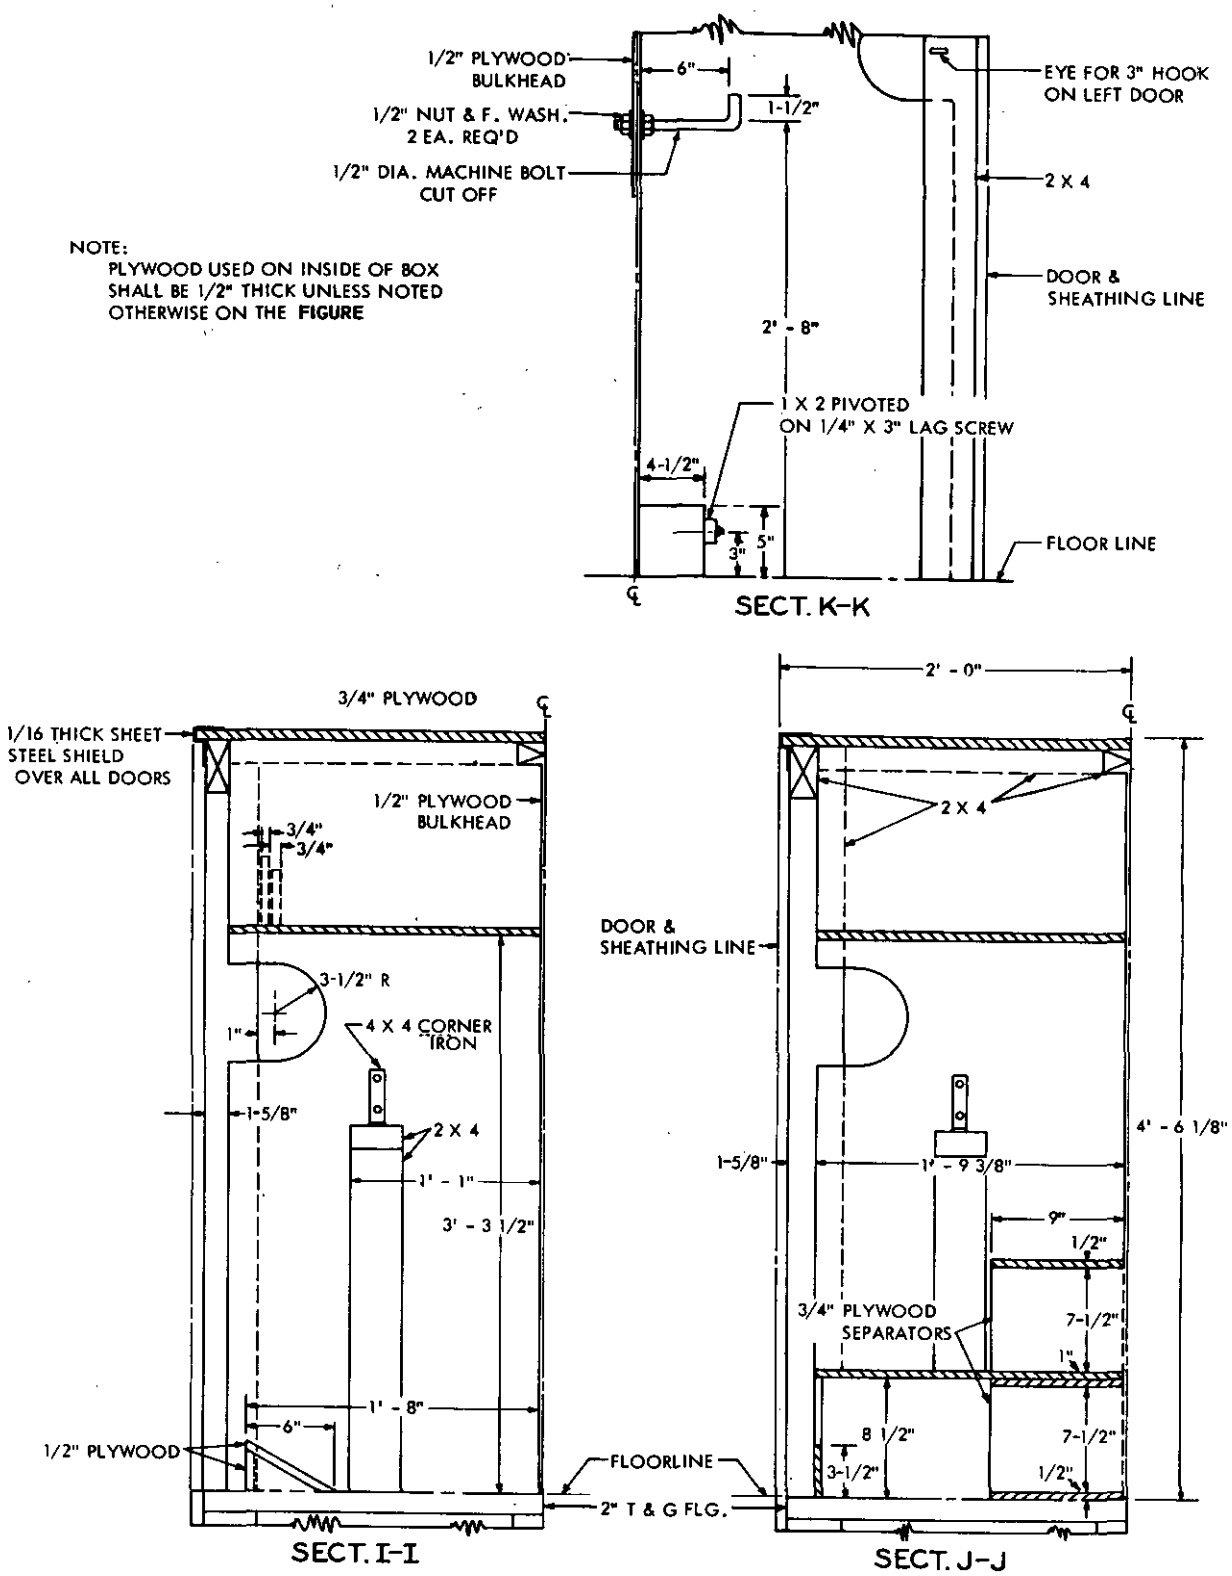
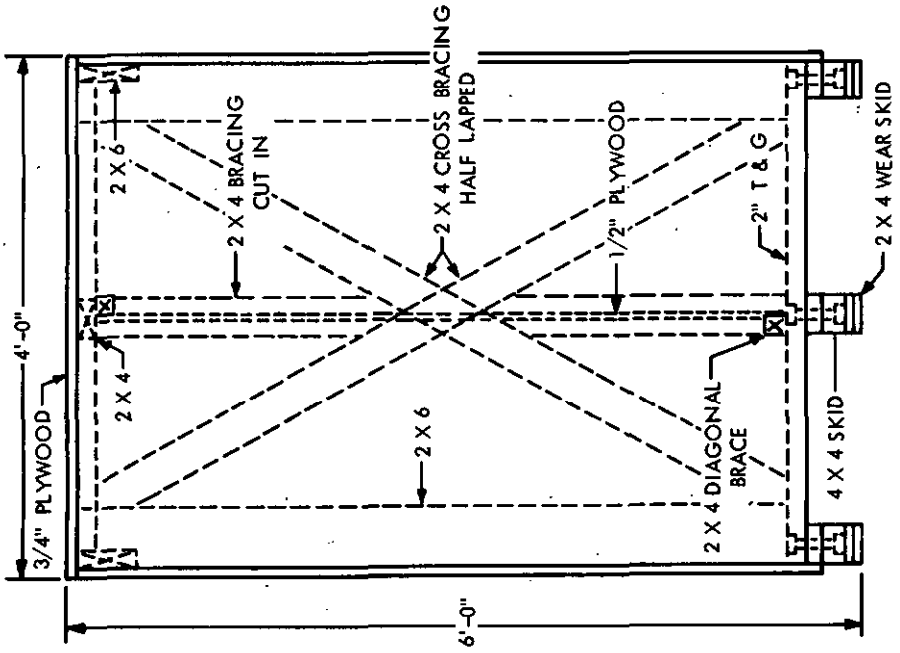


FIG. 10 - Type II: Chest, Coopering & Shoring **Cargo Set**

X-2518

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.




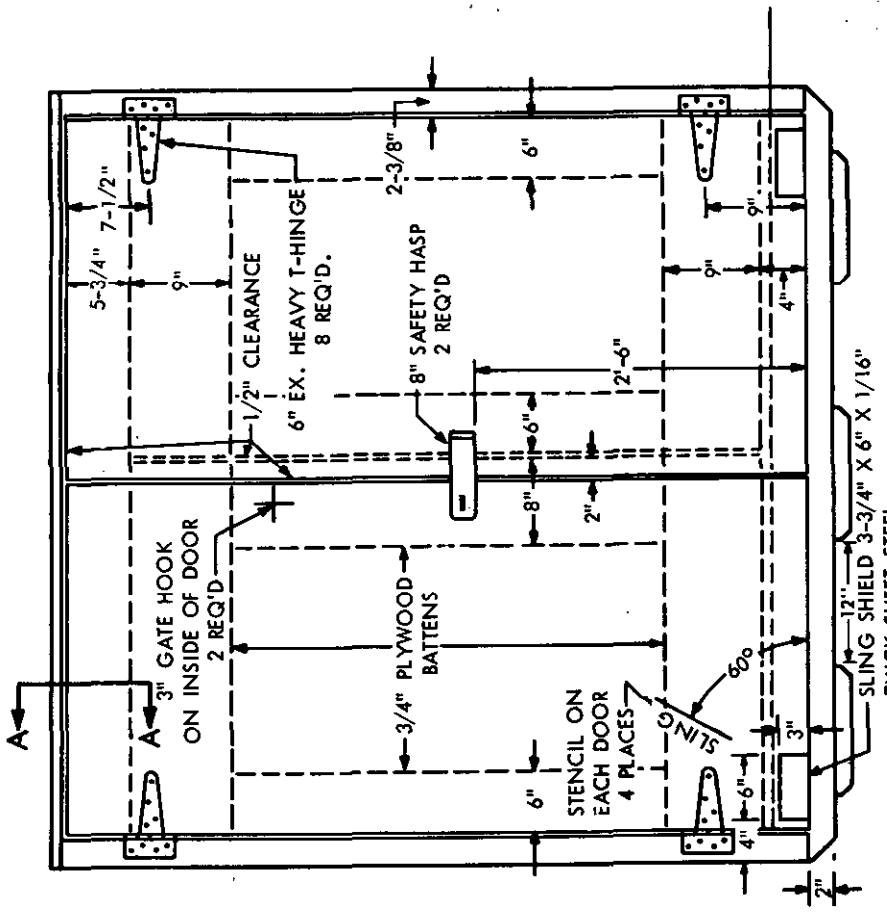


FIG. 11 - Type III: Chest, Drums Cargo Set

X-2519

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

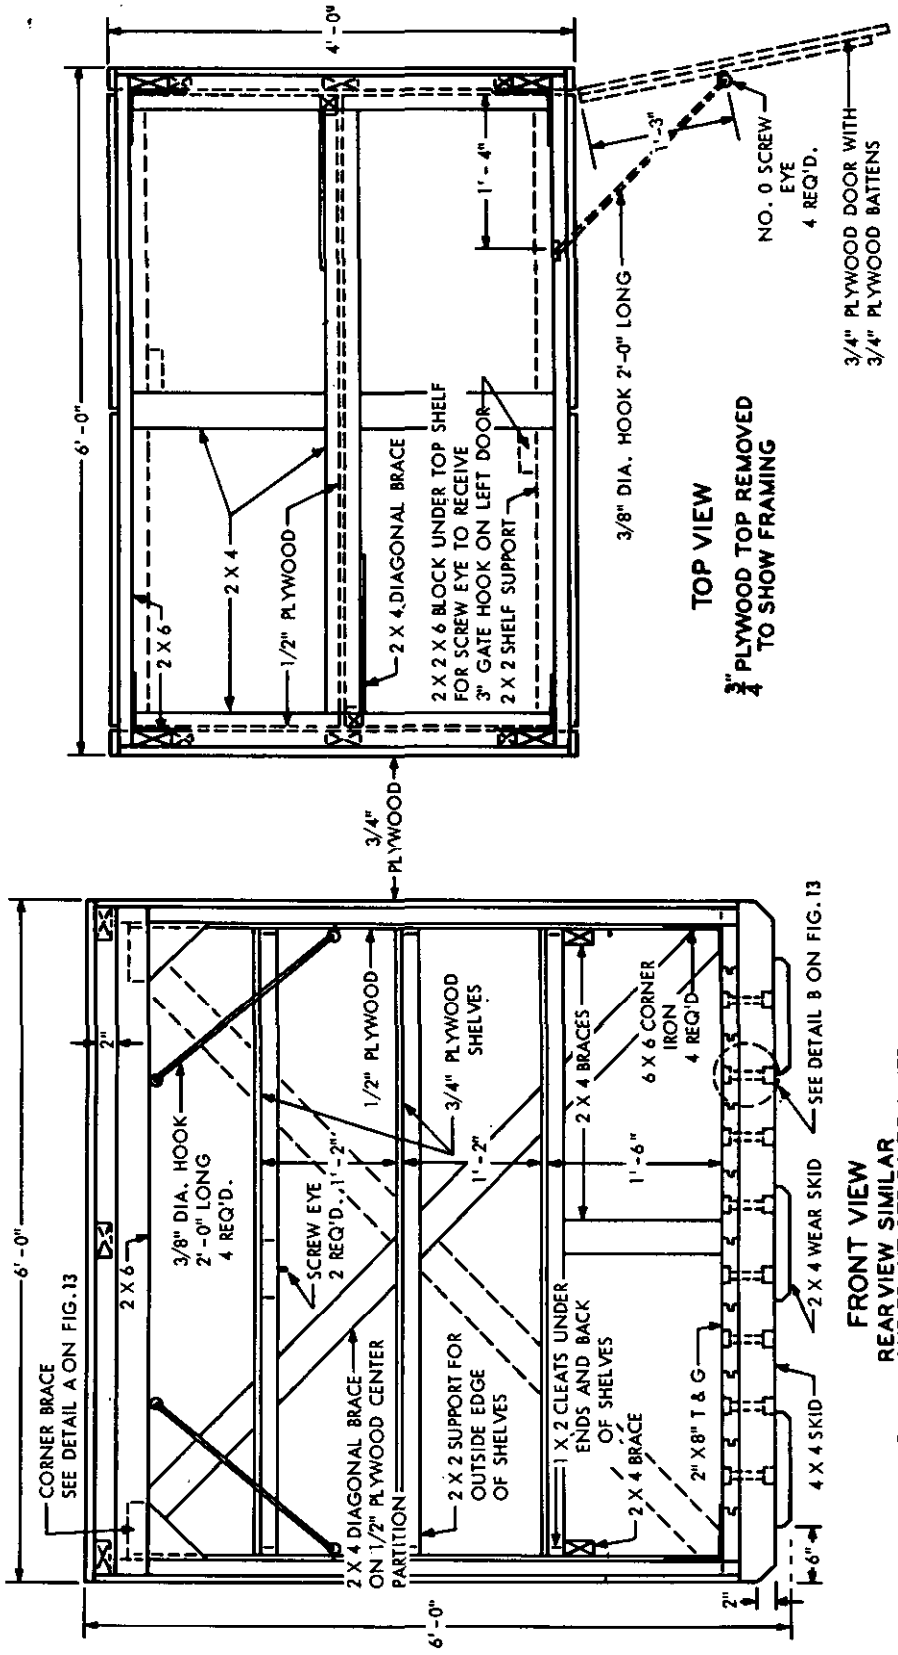

X-2520

FIG. 12 - Type III: Chest, Drums Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.


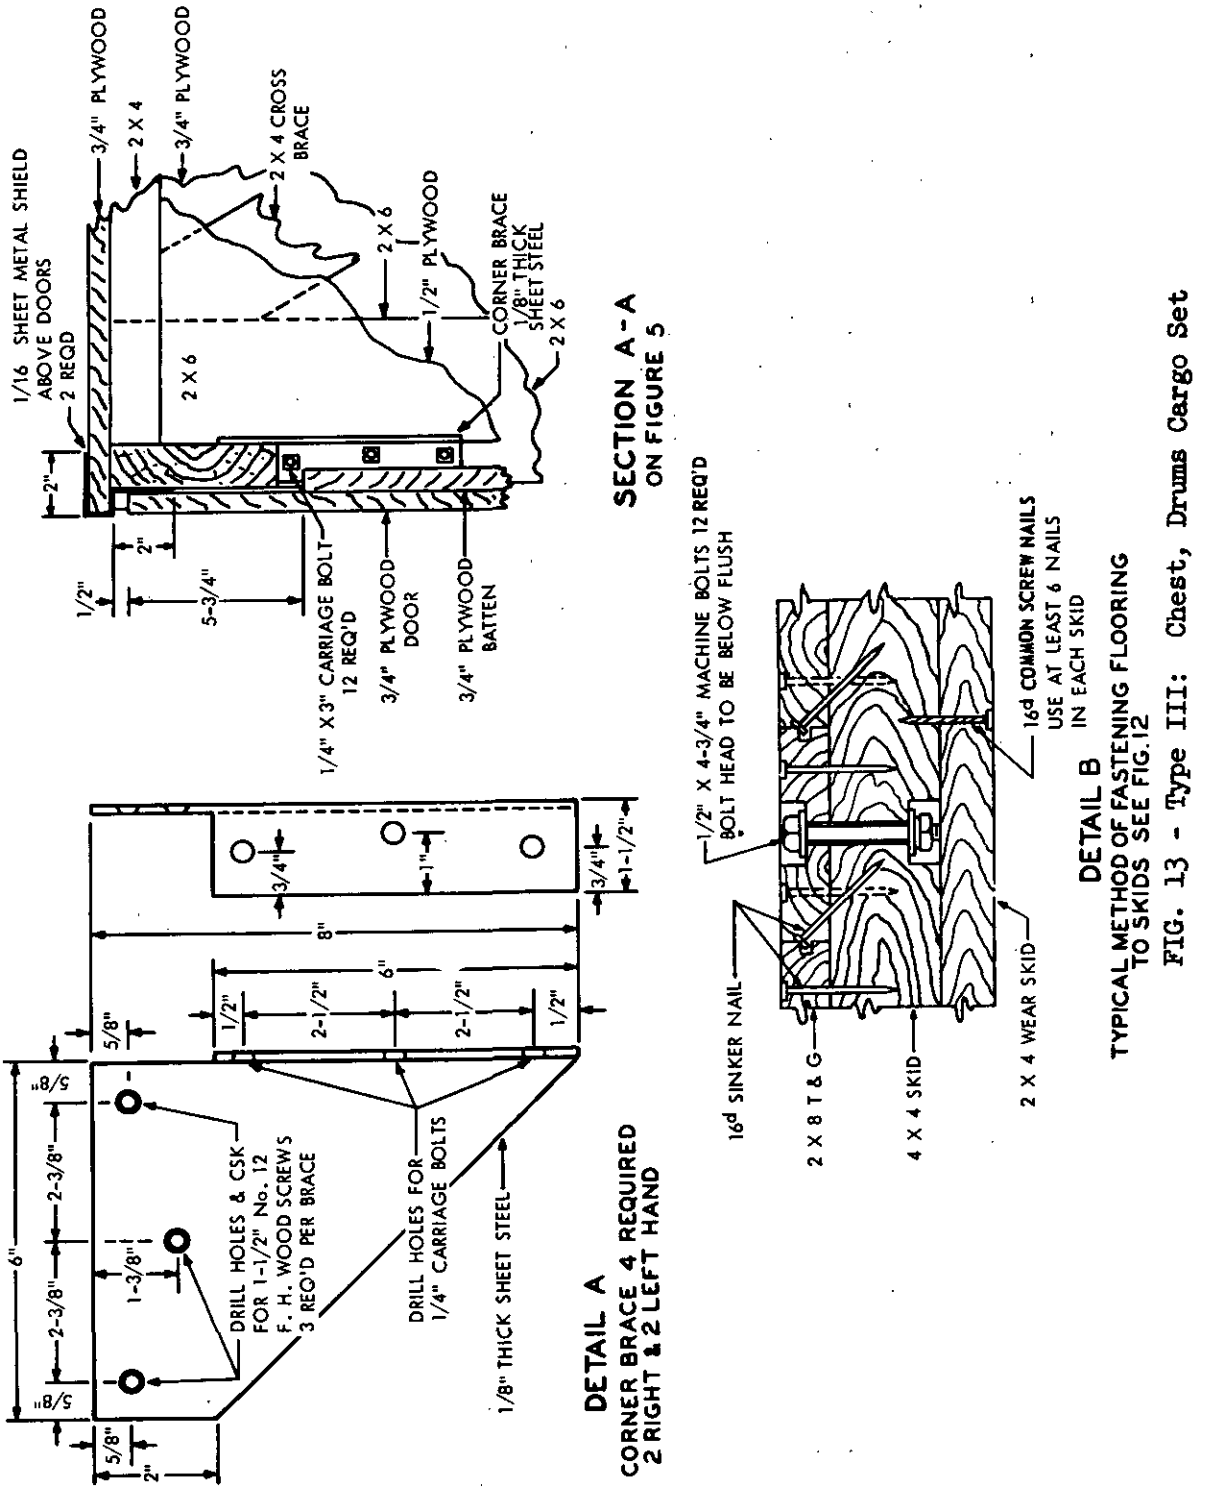



FIG. 13 - Type III: Chest, Drums Cargo Set

X-2521

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

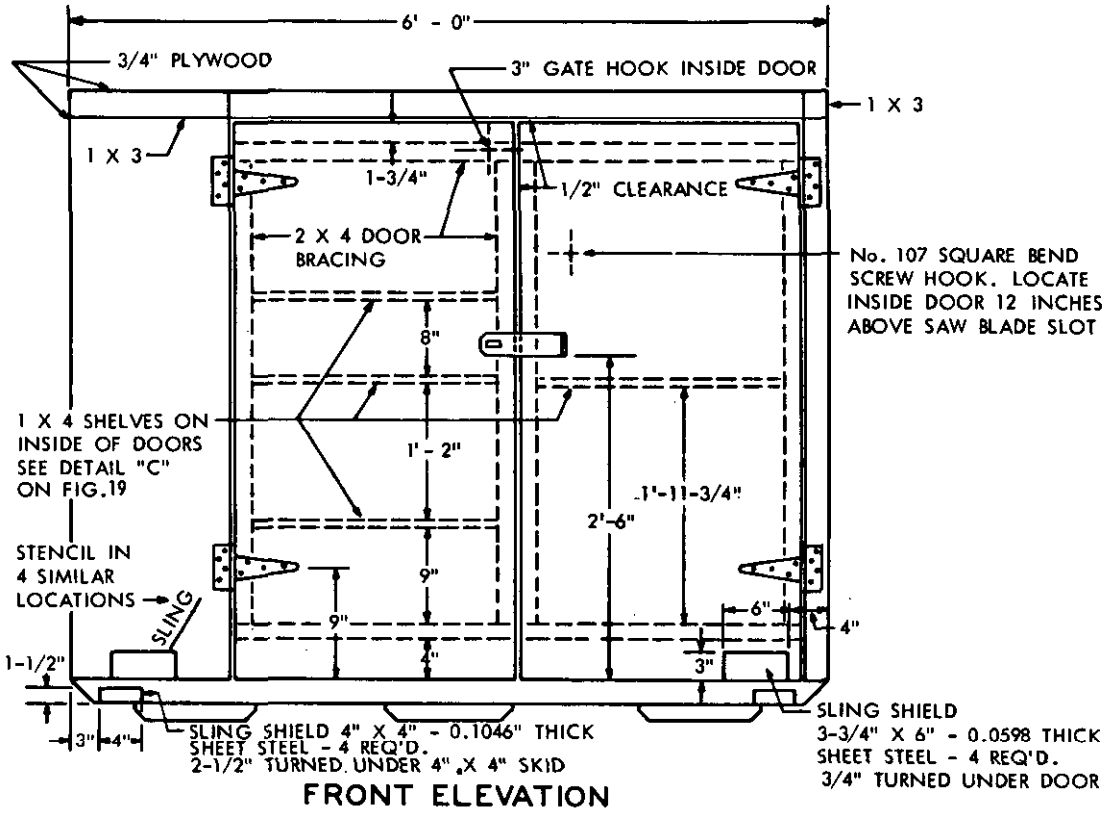

FRONT ELEVATION

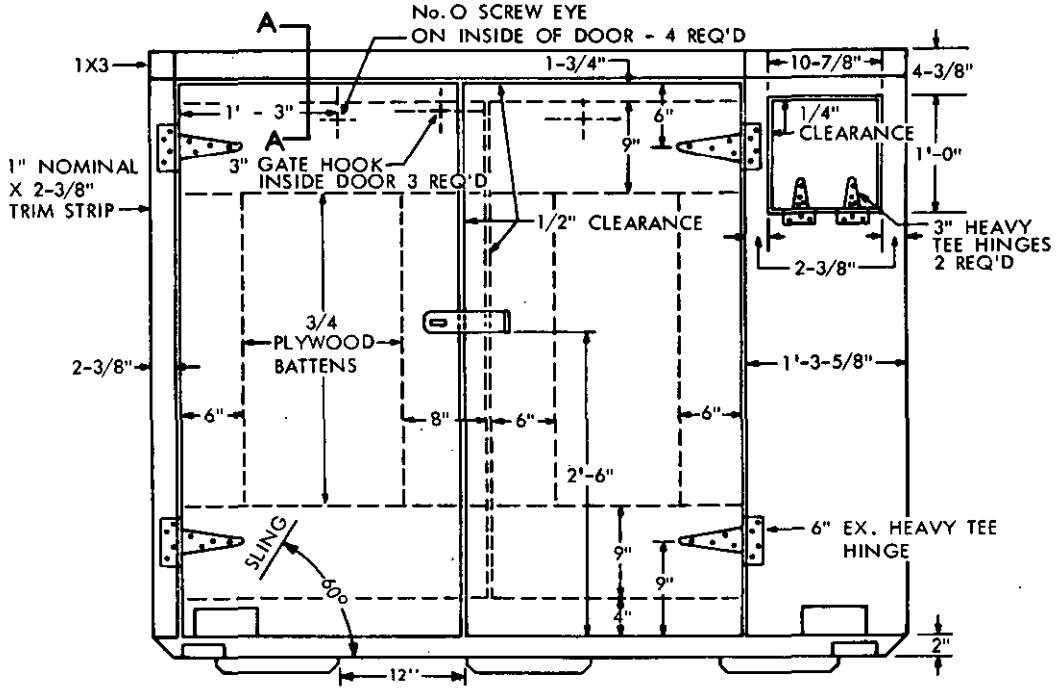


REAR ELEVATION


FIG. 14 - Type IV: Chest, General Hatch Cargo Set

X-2522

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the currentversion before use.

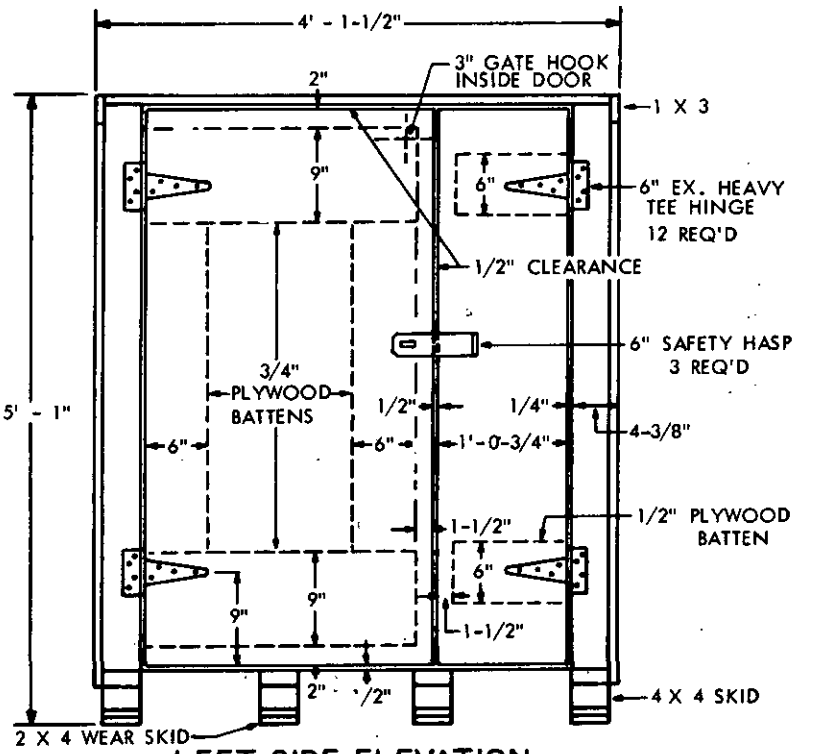

LEFT SIDE ELEVATION

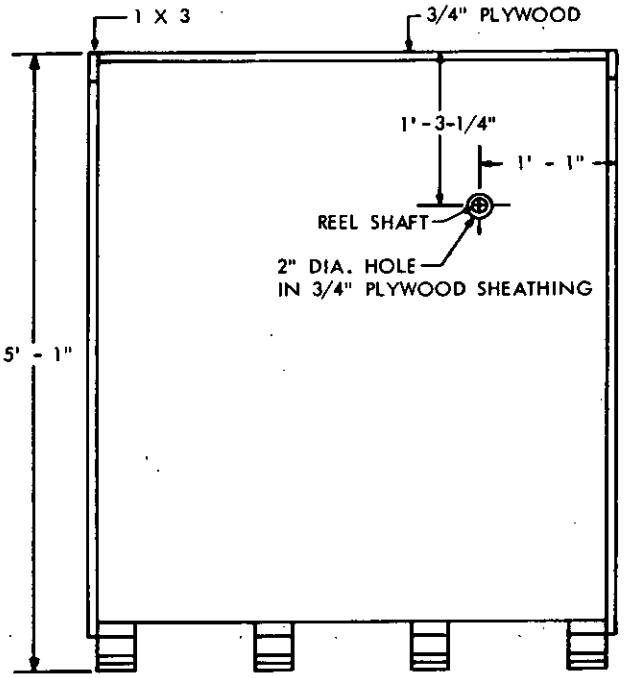


RIGHT SIDE ELEVATION


FIG. 15 - Type IV: Chest, General Hatch Cargo Set

X-2523

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

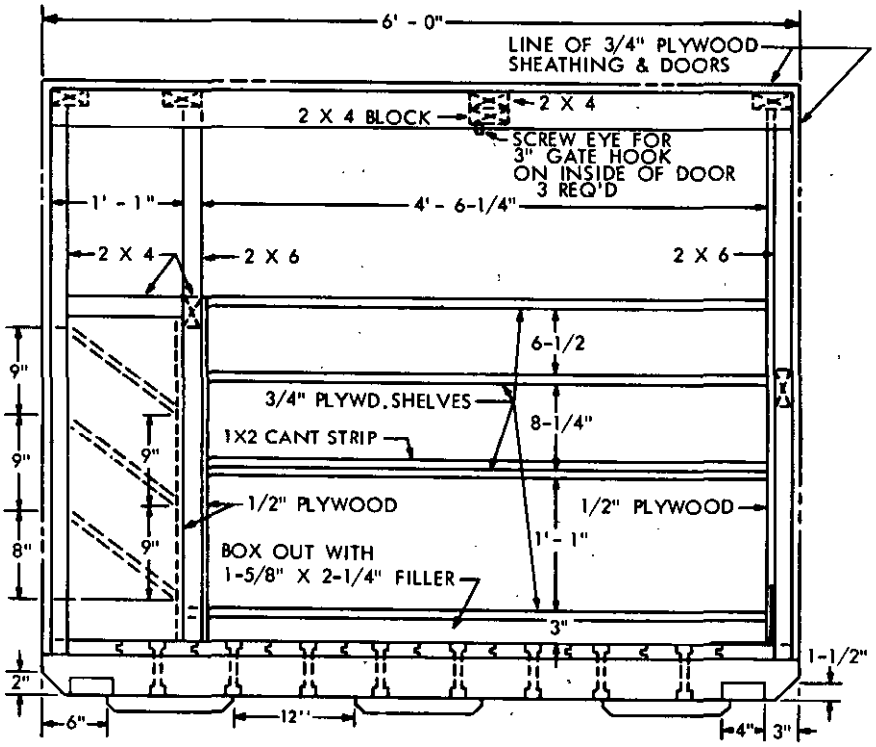

FRONT VIEW
DOORS AND SHEATHING REMOVED

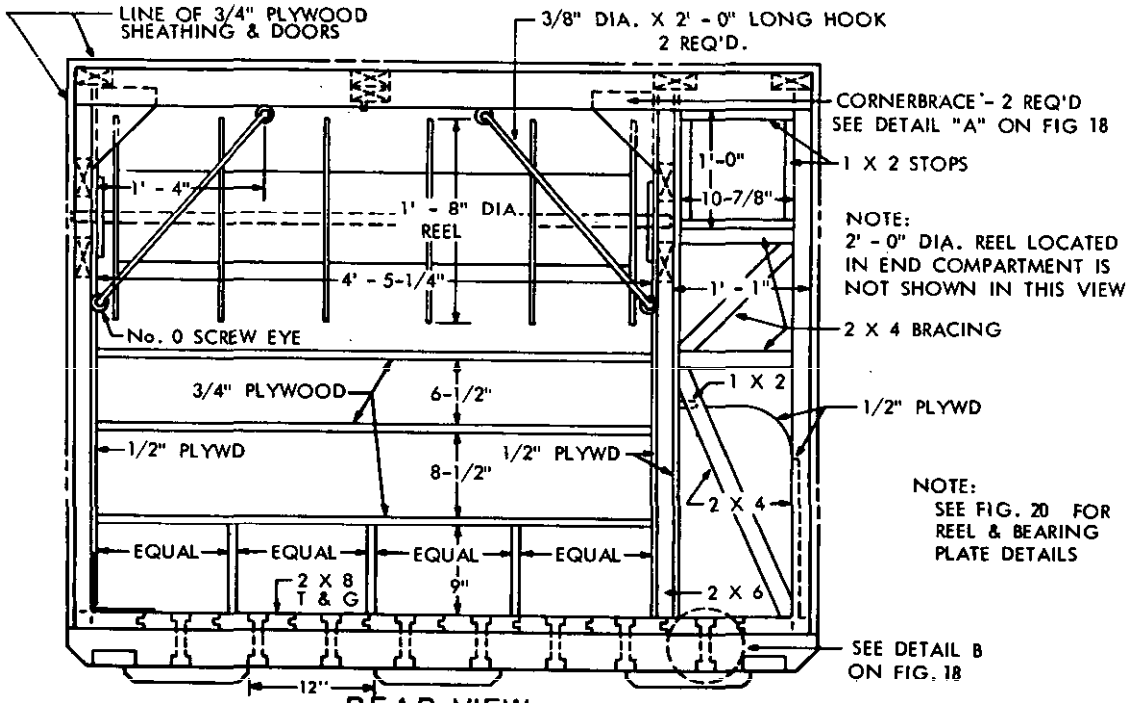


REAR VIEW
DOORS AND SHEATHING REMOVED


FIG. 16 - Type IV: Chest, General Hatch Cargo Set

X-2524

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

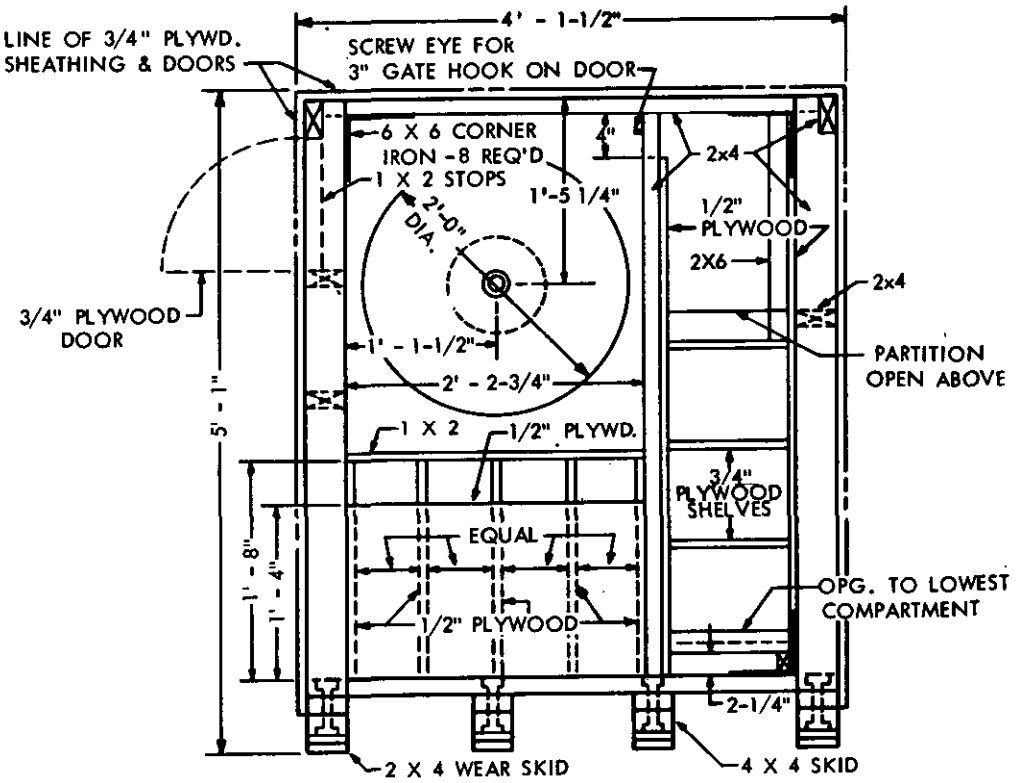

LEFT SIDE
DOORS AND SHEATHING REMOVED

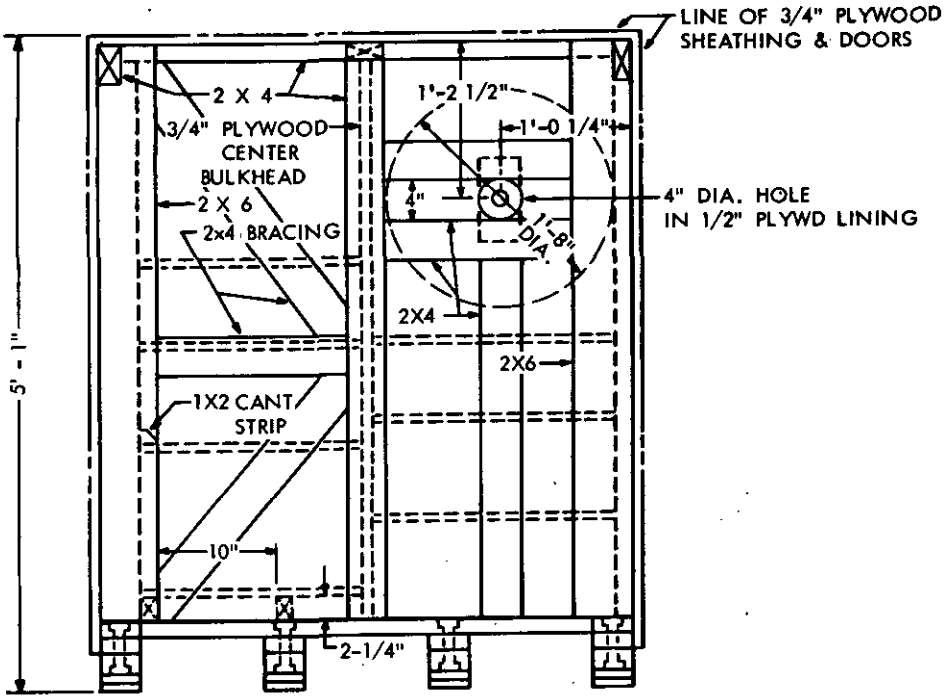

RIGHT SIDE
DOORS AND SHEATHING REMOVED

FIG. 17 - Type IV: Chest, General Hatch Cargo Set

X-2525

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.

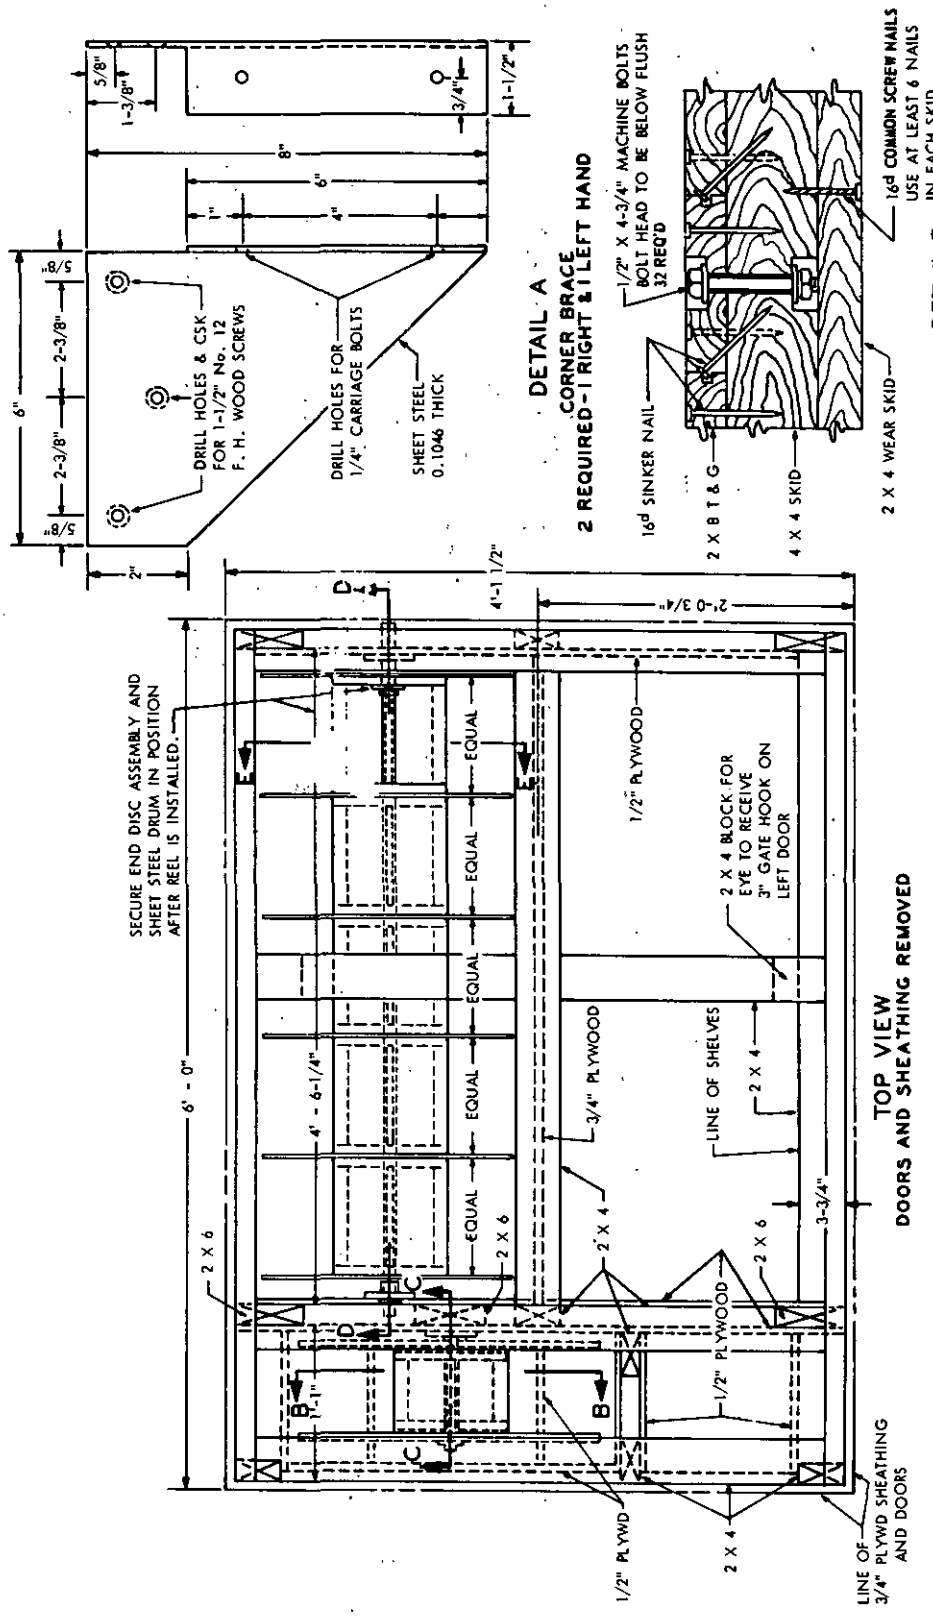


FIG. 18 - Type IV: Chest, General Hatch Cargo Set

X-2526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

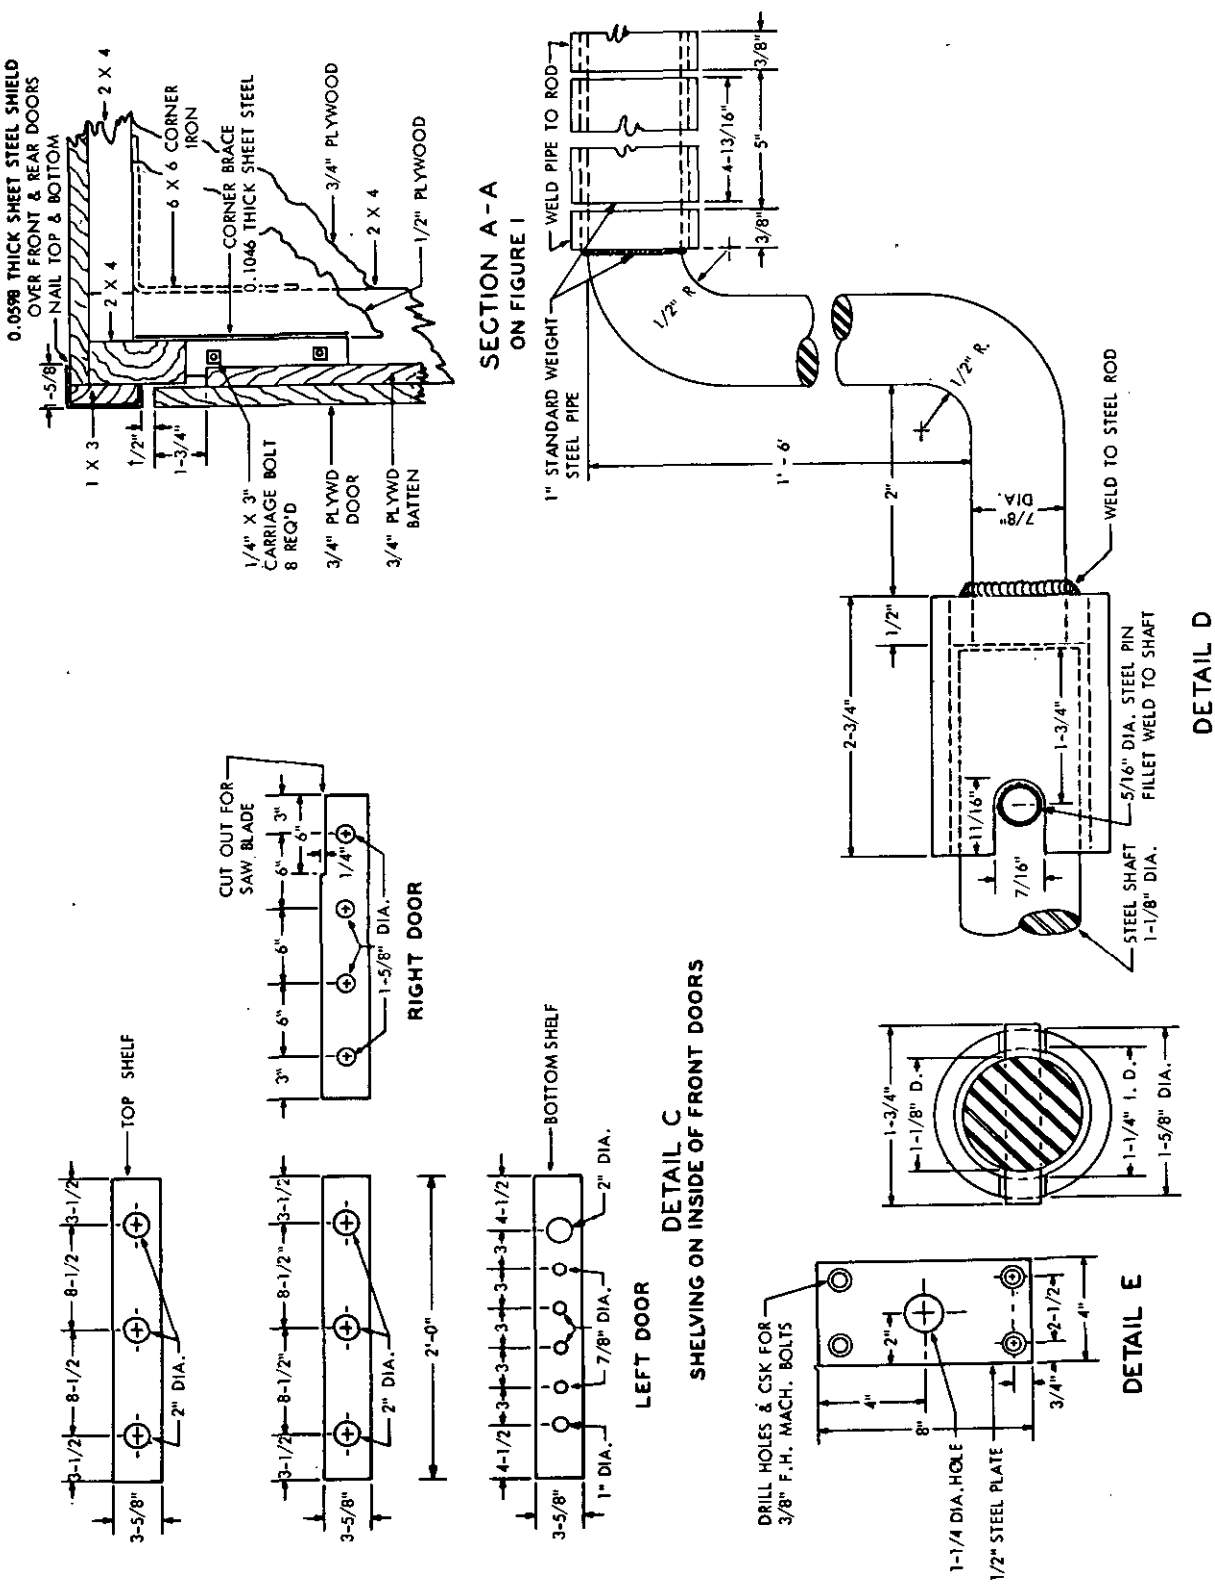


FIG. 19 - Type IV: Chest, General Hatch Cargo Set

X-2527

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

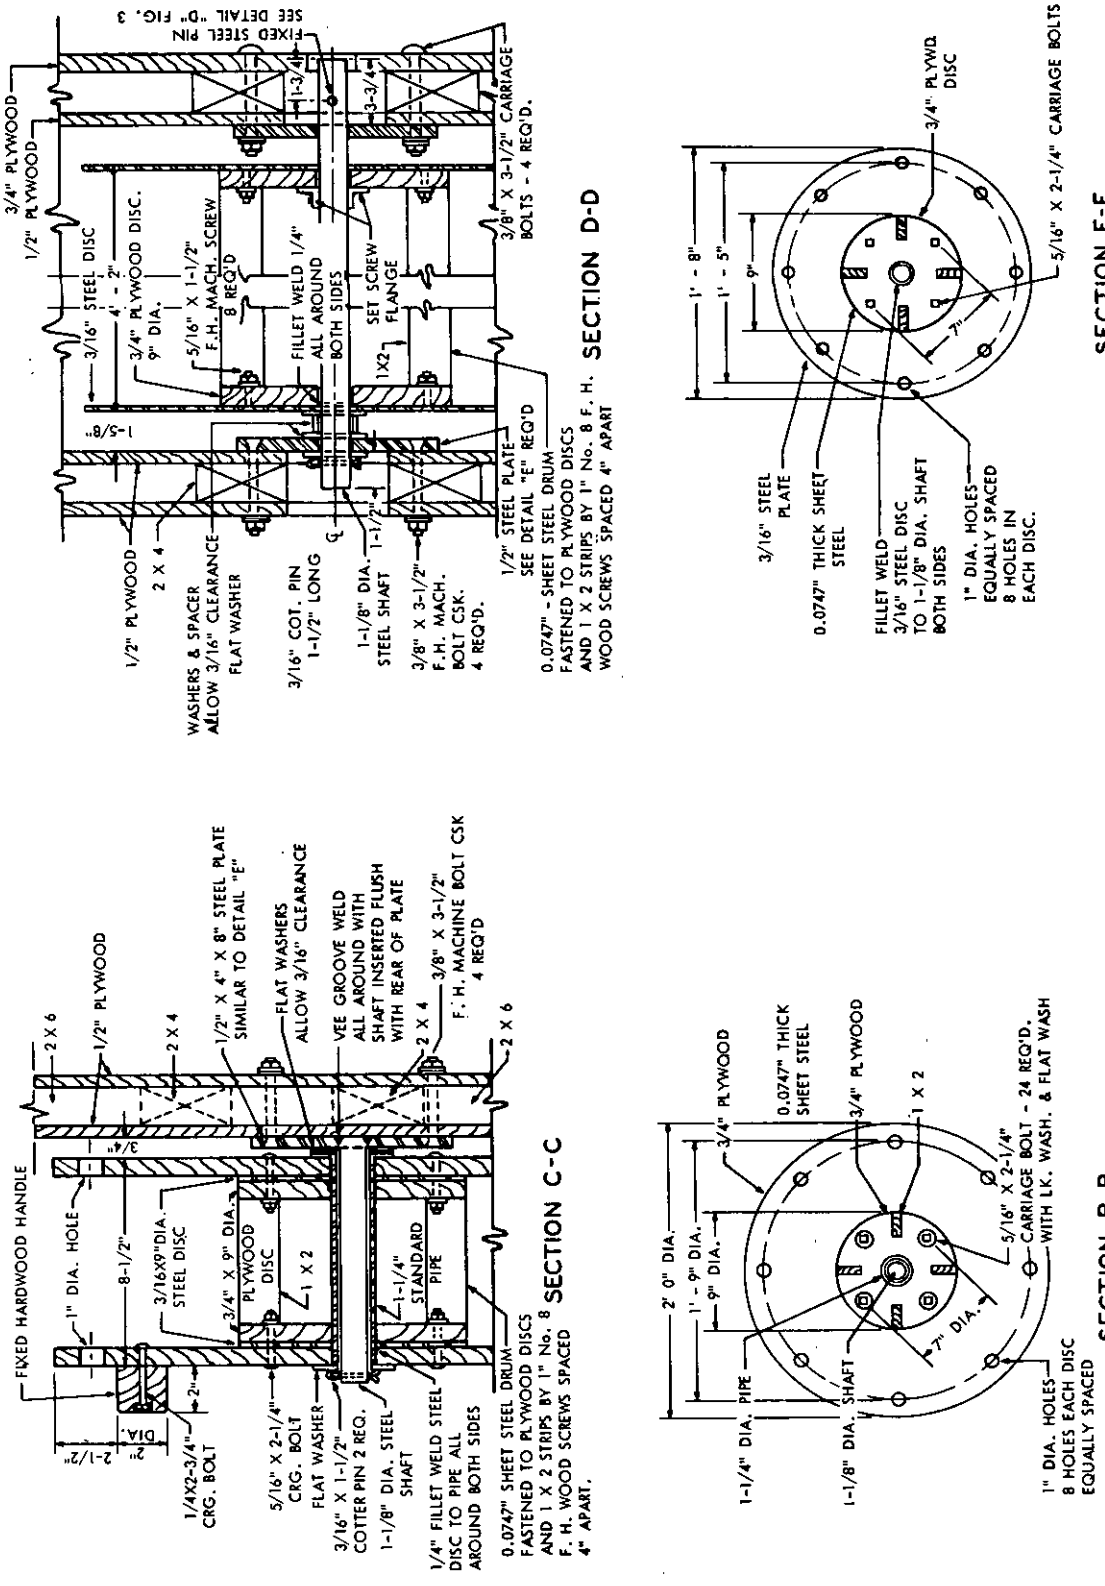


FIG. 20 - Type IV: Chest, General Hatch Cargo Set

X-2528

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the currentversion before use.


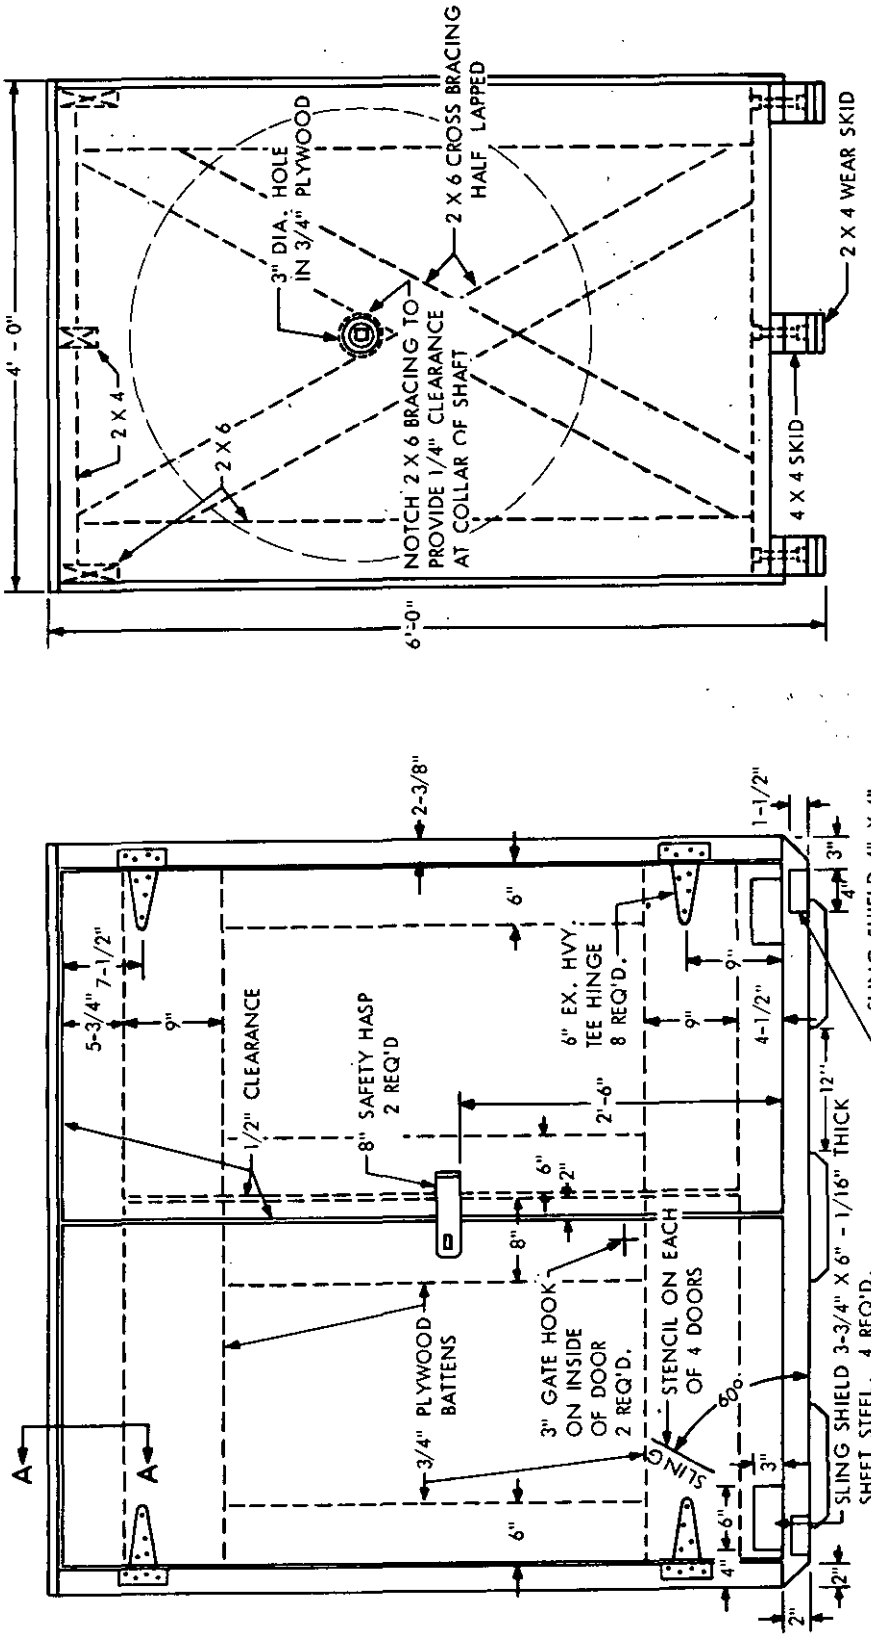


FIG. 21 - Type V: Chest, Heavy Lift Cargo Set


Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.

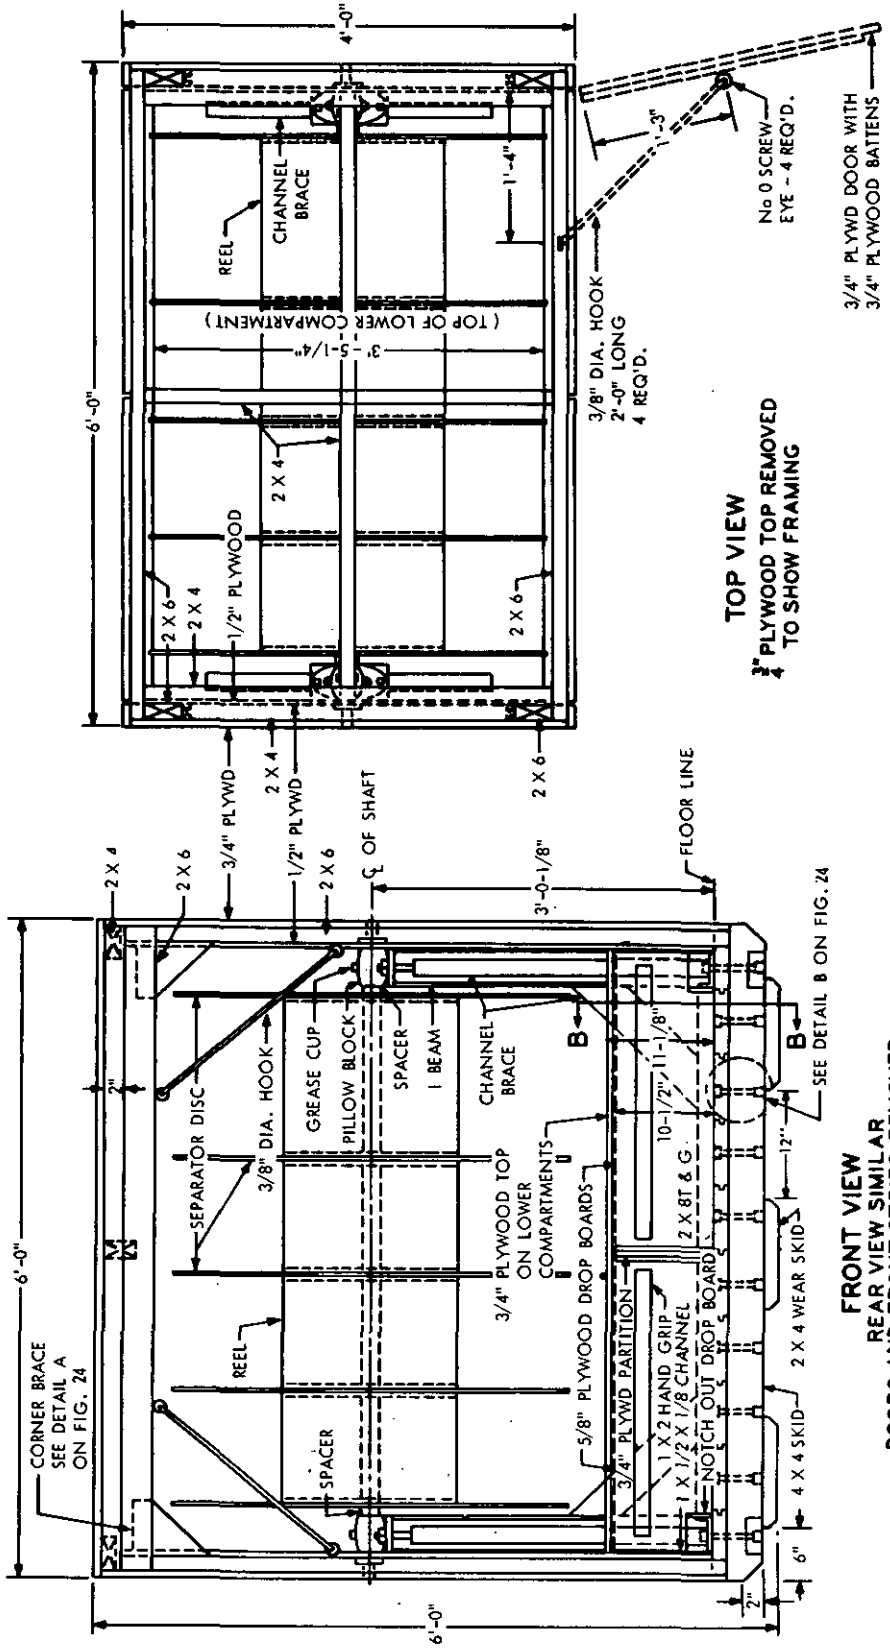

X-2530

FIG. 22 - Type V: Chest, Heavy Lift Cargo Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

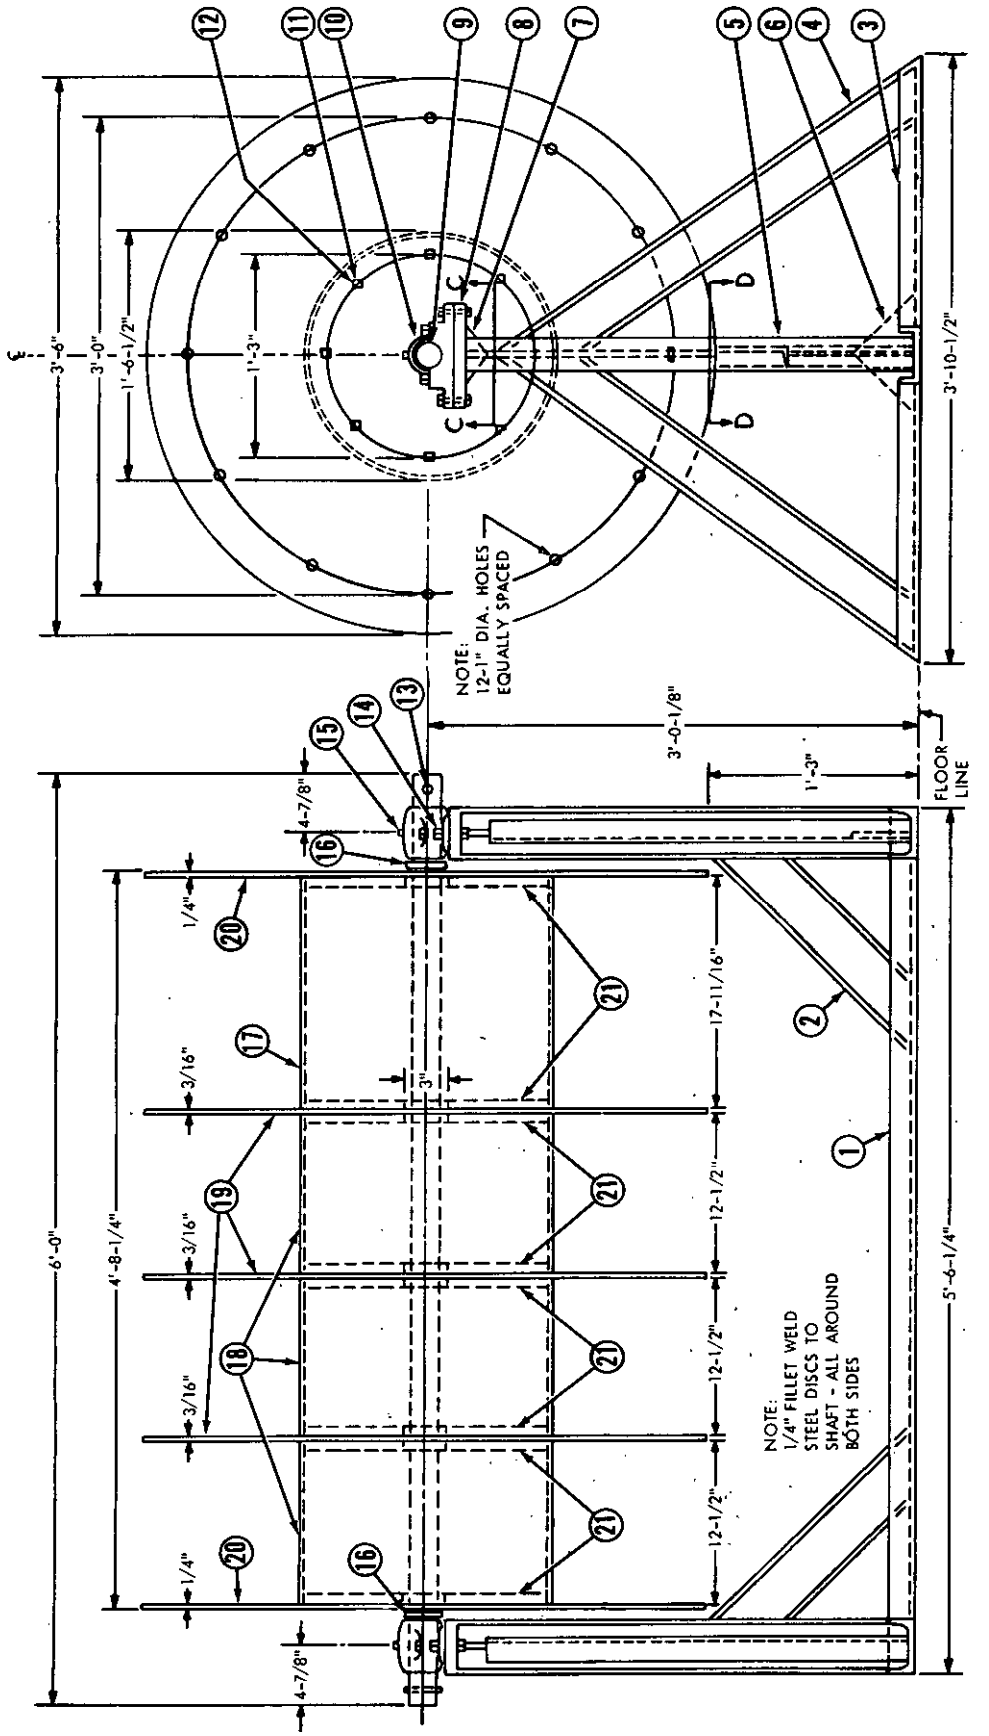

REEL & REEL SUPPORT - BILL OF MATERIALS

ITEM No.	DESCRIPTION	QUAN. REQ'D.
1	STEEL CHANNEL - 4" @ 5.4# X 5' - 6-1/4" LONG	1
2	STEEL CHANNEL - 4" @ 5.4# X 1' - 9-3/16" LONG	2
3	STEEL CHANNEL - 4" @ 5.4# X 1' - 9-1/4" LONG	4
4	STEEL CHANNEL - 4" @ 5.4# X 3' - 3-1/2" LONG	4
5	STEEL I BEAM - 4" @ 9.5# X 2' - 9-9/16" LONG	2
6	GUSSET PLATE 1/4" X 5" X 5"	4
7	GUSSET PLATE 1/4" X 2" X 2"	4

ITEM No.	DESCRIPTION	QUAN. REQ'D.
8	STEEL PLATE 3/4" X 4" X 8-1/4"	2
9	STEEL SHAFT 2" DIA. X 6' - 0"	1
10	PILLOW BLOCK - LINK BELT No. 1231 - or eq.	2
11	MACHINE BOLT 1/4" X 1-1/2" WITH FLAT WASH.	16
12	MACH. BOLT 1/4" X 2-1/4" WITH FLAT WASH.	24
13	STEEL PIN 1/2" DIA. X 2-3/4"	2
14	MACH. BOLT 1/2" X 2"	4

ITEM No.	DESCRIPTION	QUAN. REQ'D.
15	GREASE CUP - 3/8" PIPE THREAD	2
16	STEEL SPACER 2-1/16" I.D. X 3" O.D. X 3/4" L.	2
17	SHEET STEEL DRUM - 0.0747" X 17-11/16" X 60"	1
18	SHEET STEEL DRUM - 0.0747" X 12-1/2" X 60"	3
19	STEEL DISC 3/16" X 42" DIA.	3
20	STEEL DISC 1/4" X 42" DIA.	2
21	PLYWOOD DISC 3/4" X 18-1/2" DIA.	8
22	CRANK - SEE FIG 24	2

X-2531

FIG. 23 - Type V: Chest, Heavy Lift Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.


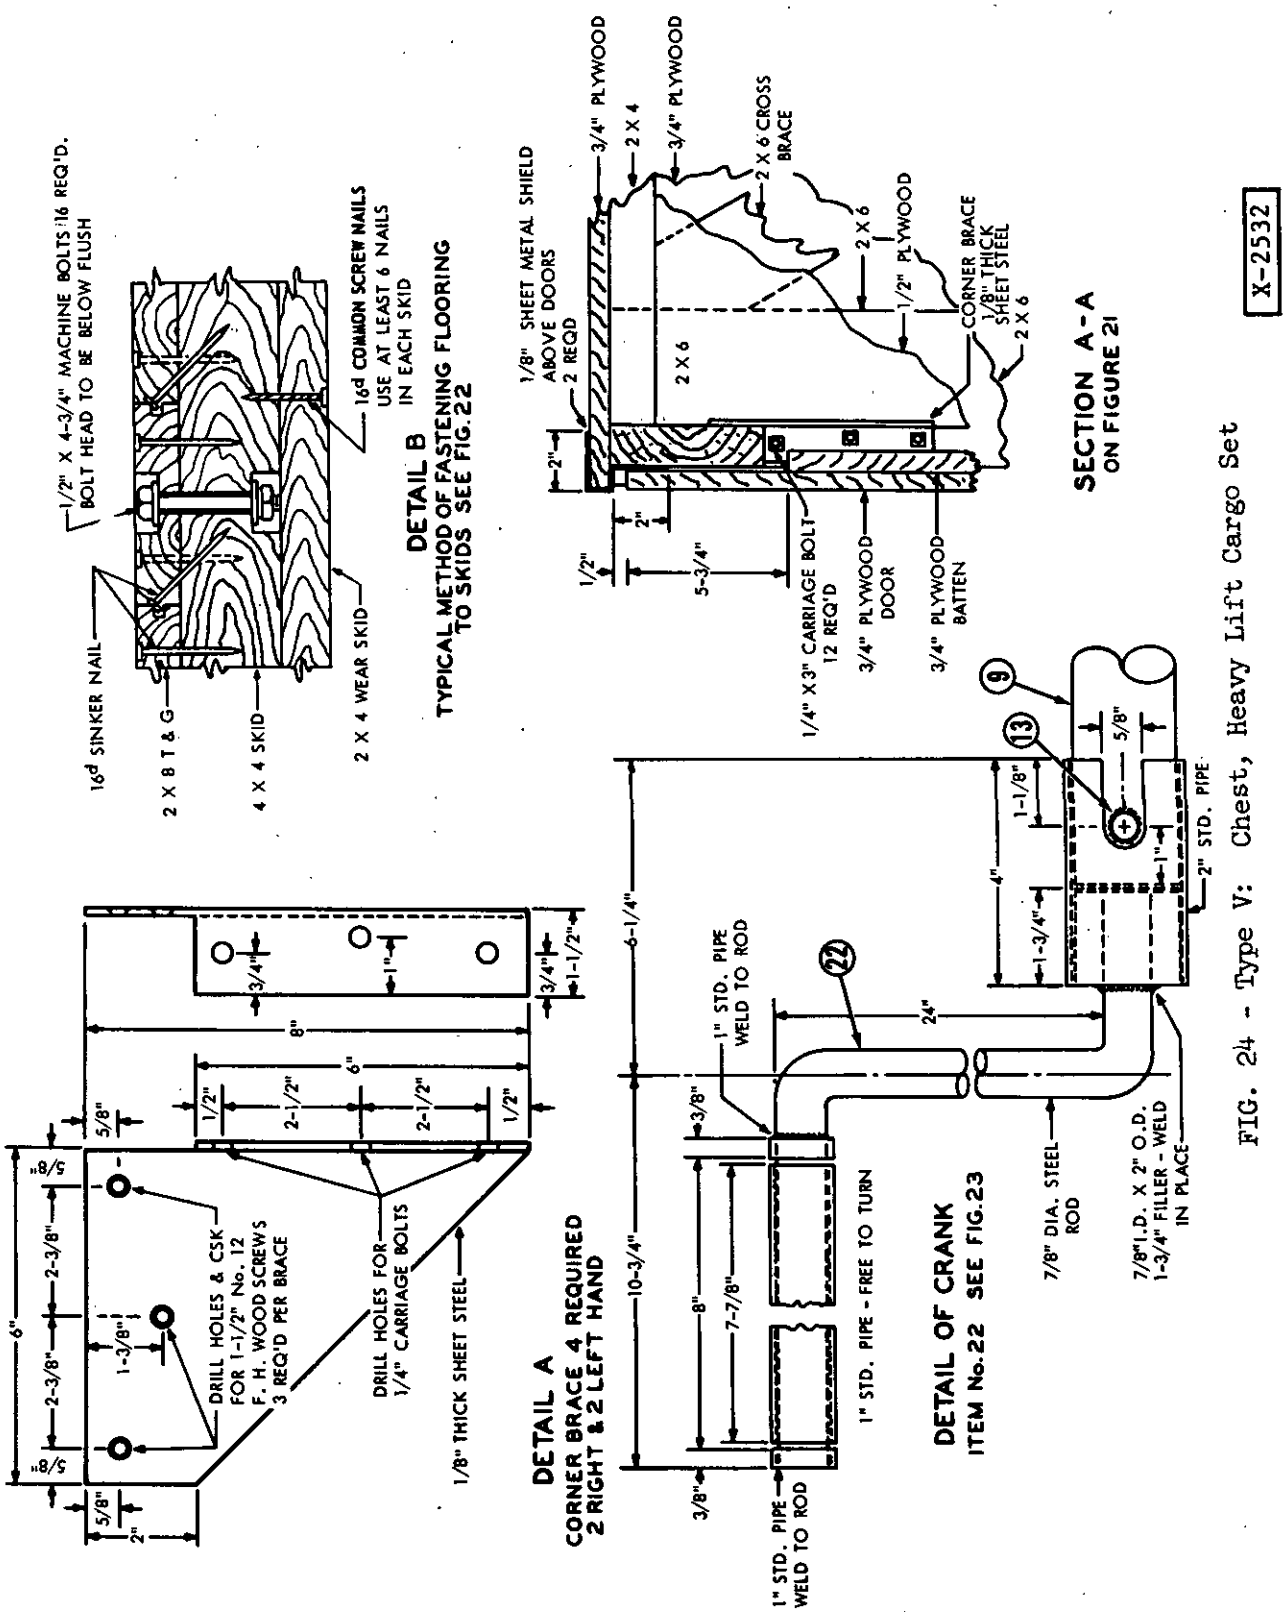


FIG. 24 - Type V: Chest, Heavy Lift Cargo Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

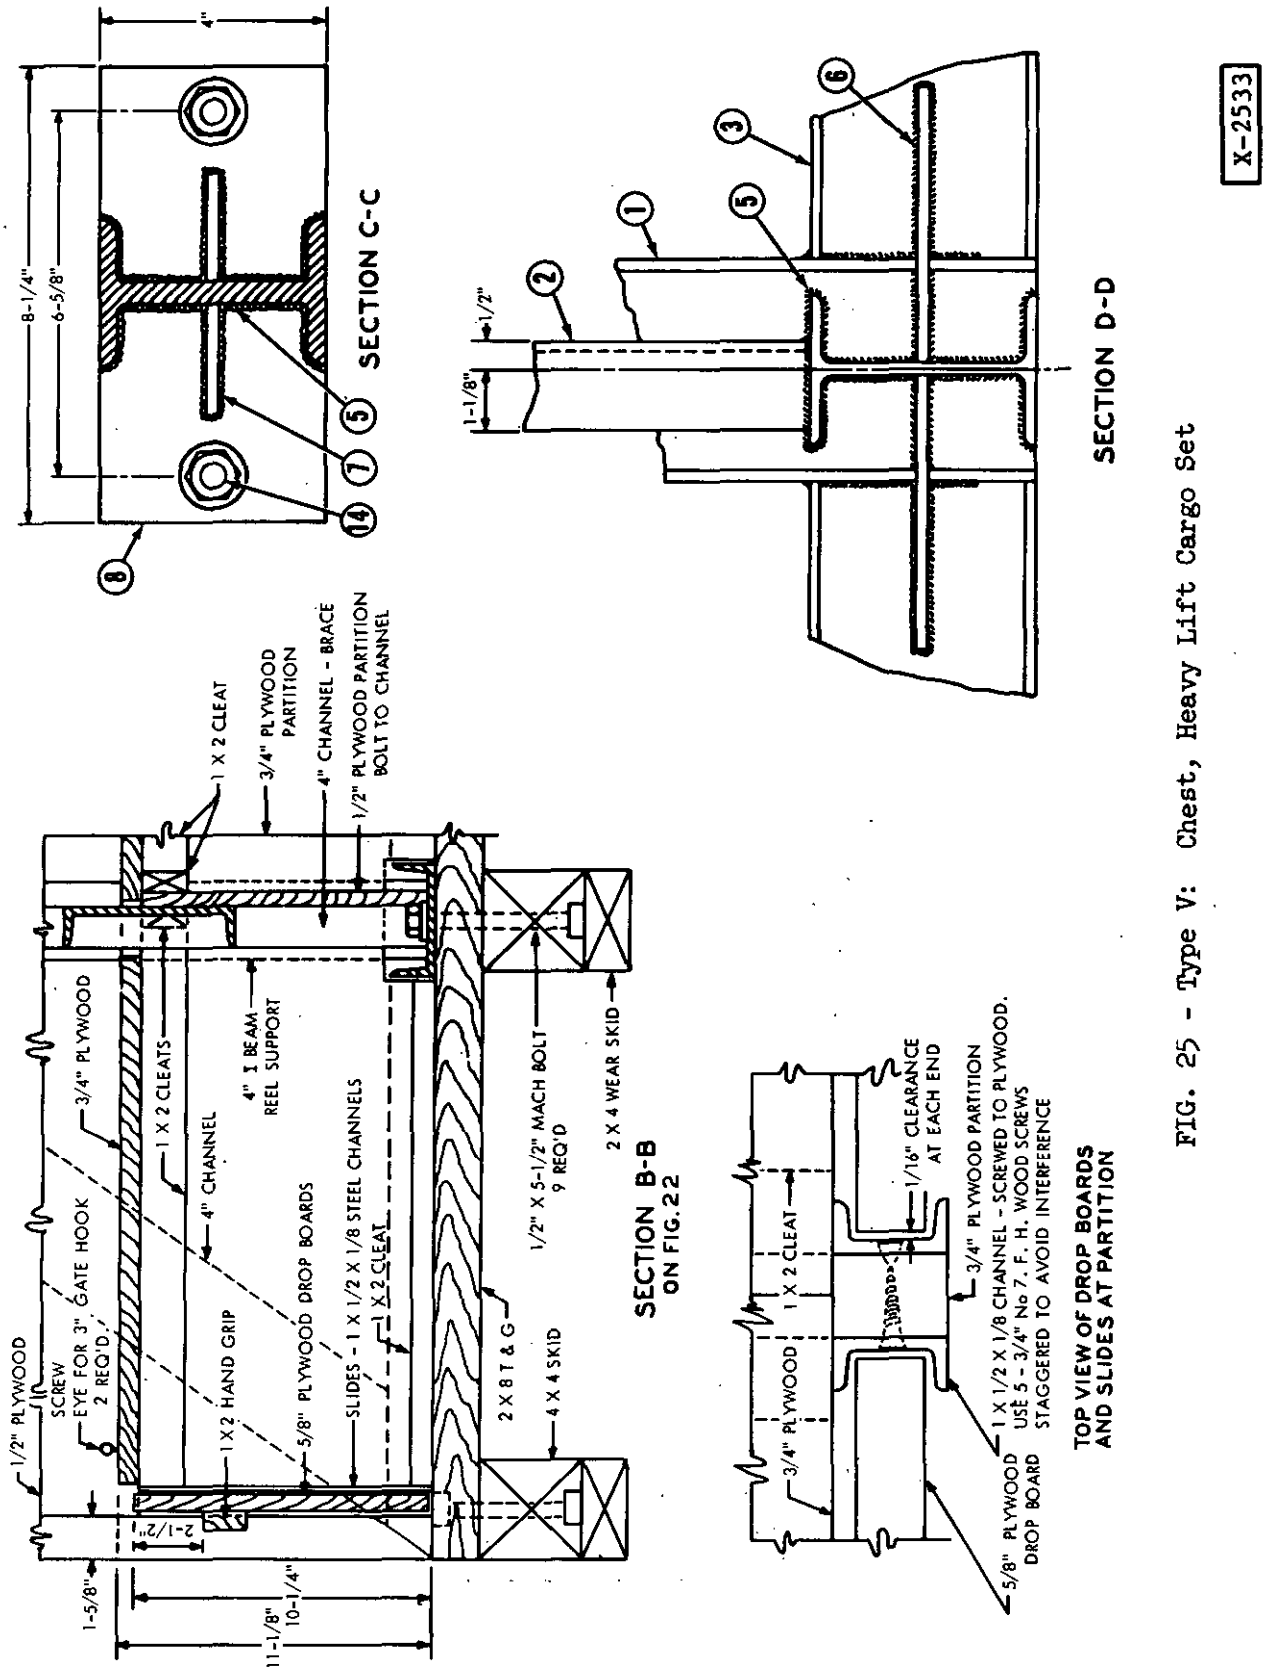

X-2533

FIG. 25 - Type V: Chest, Heavy Lift Cargo Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.


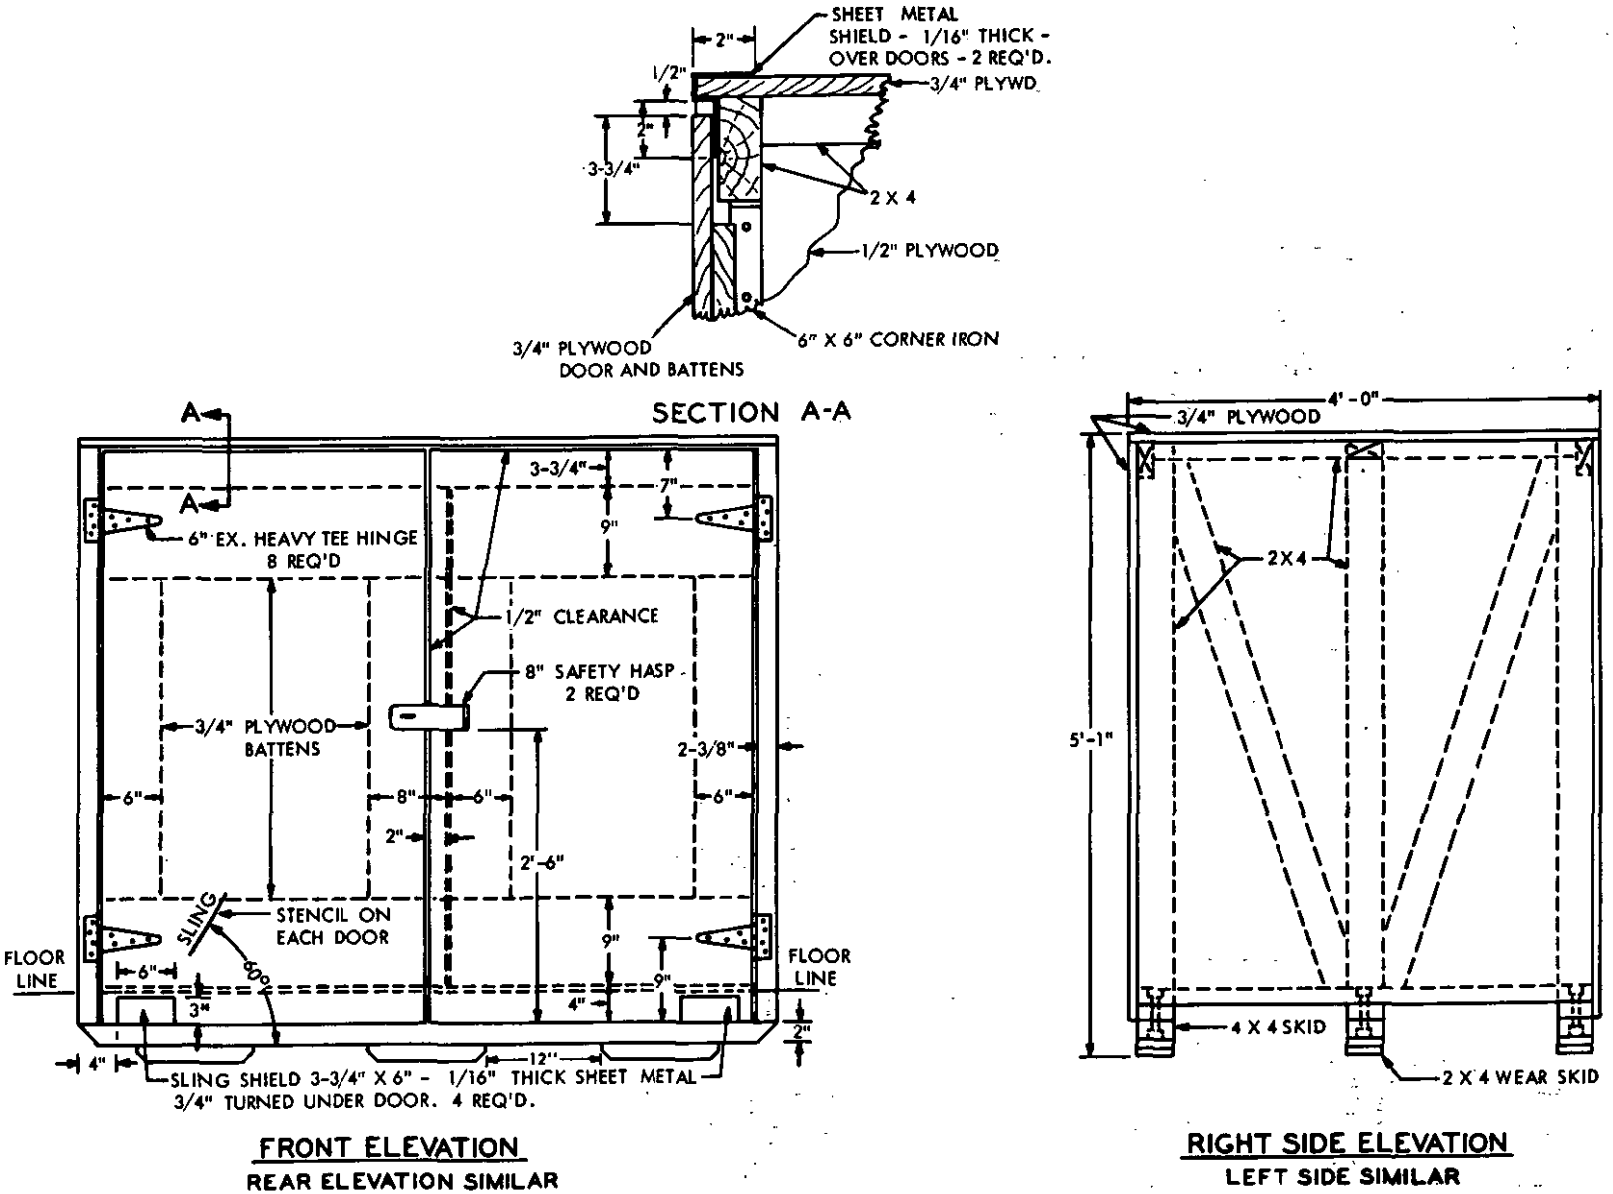


FIG. 26 - Type VI: Chest, Light Set

X-2534

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:08Z
Check the source to verify that this is the current version before use.

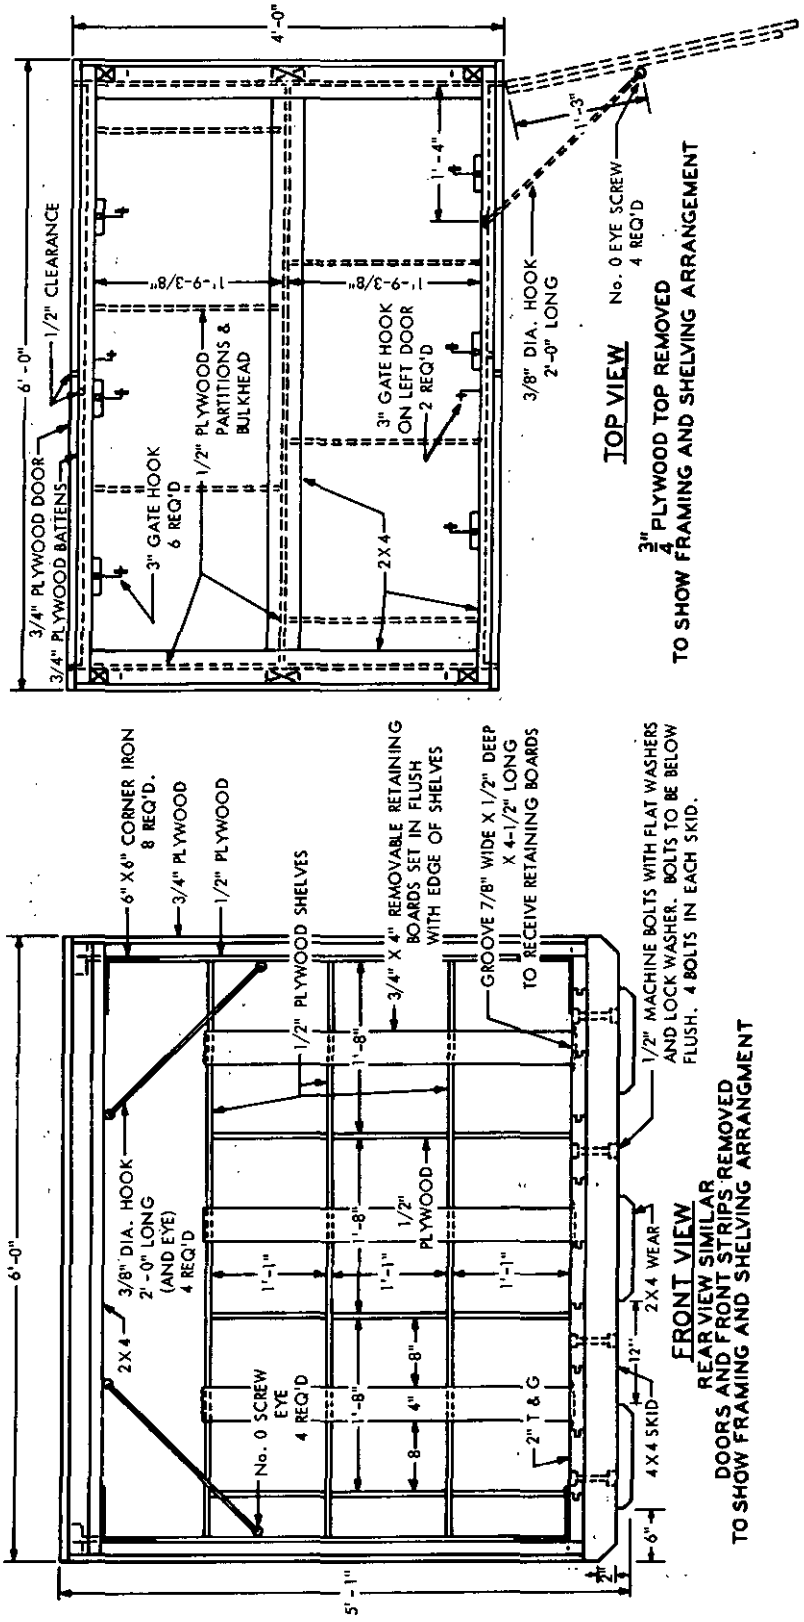

X-2535

FIG. 27 - Type VI: Chest, Light Set

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the currentversion before use.

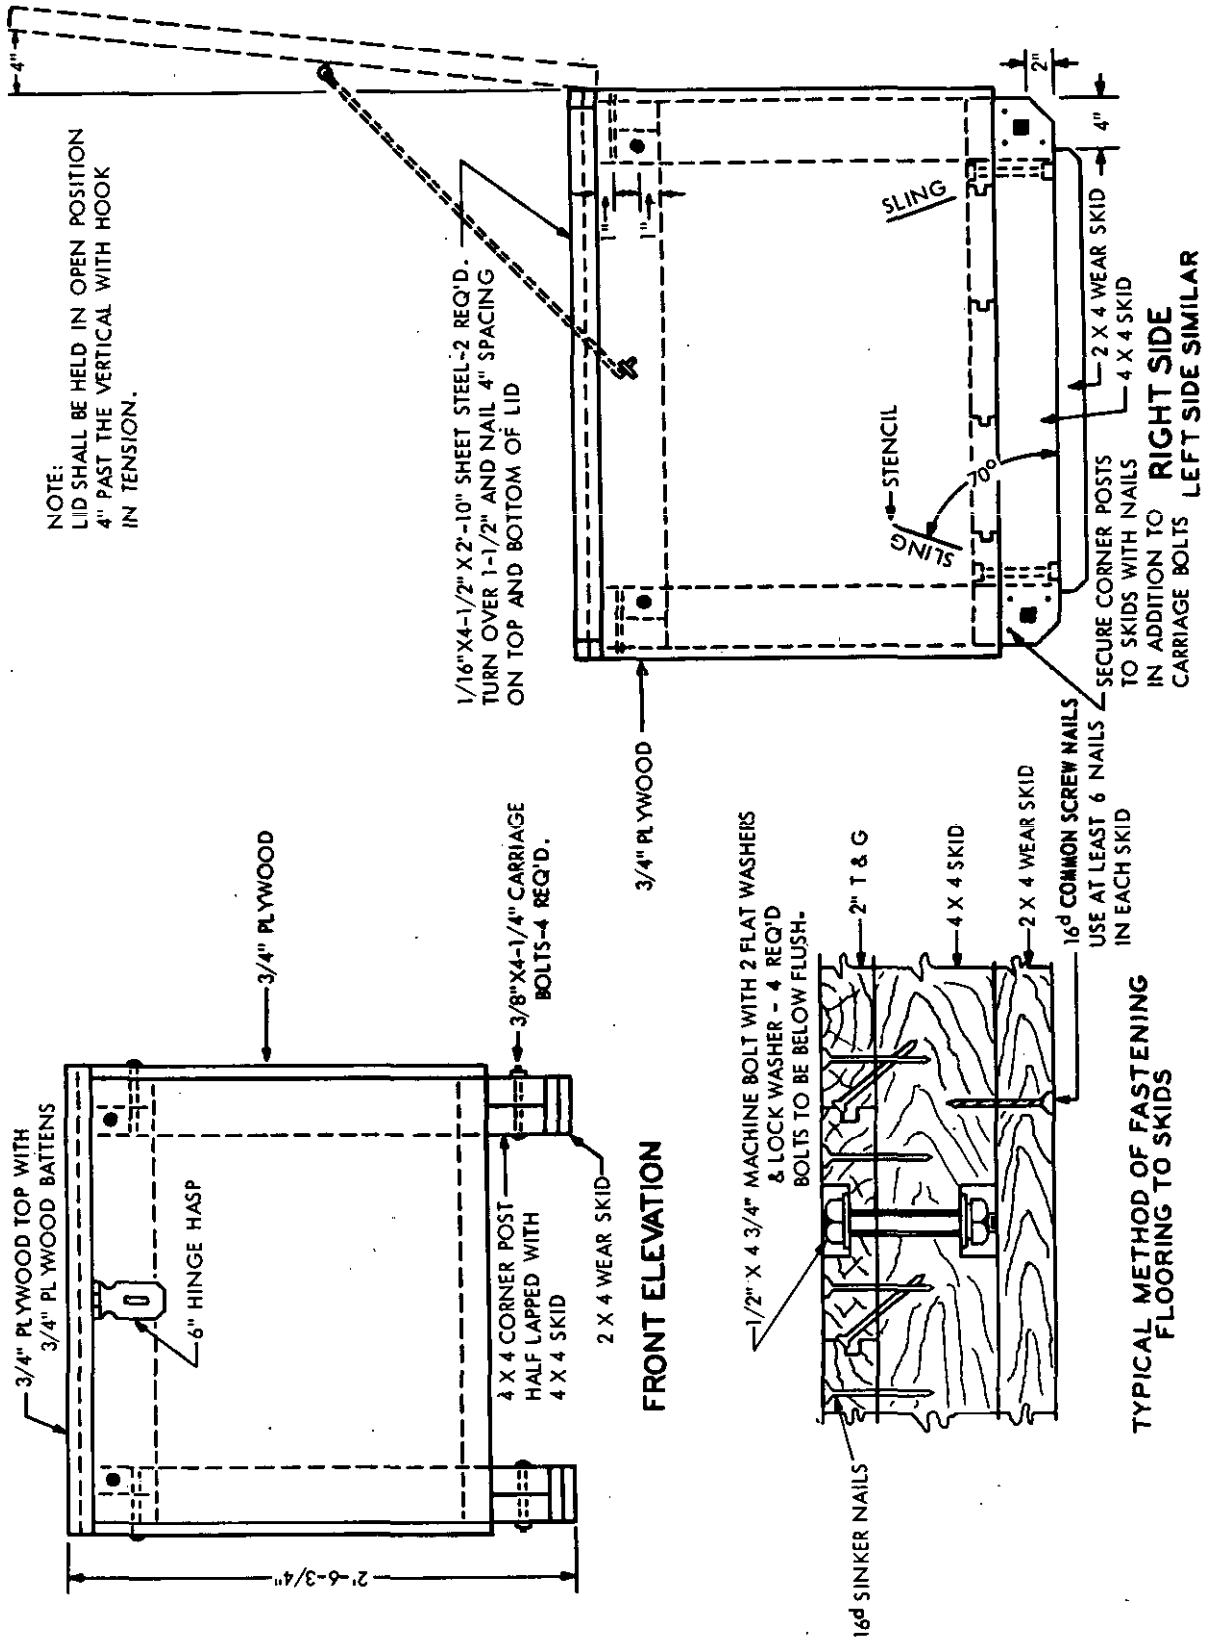


FIG. 28 - Type VII: Chest, Plate Handling Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

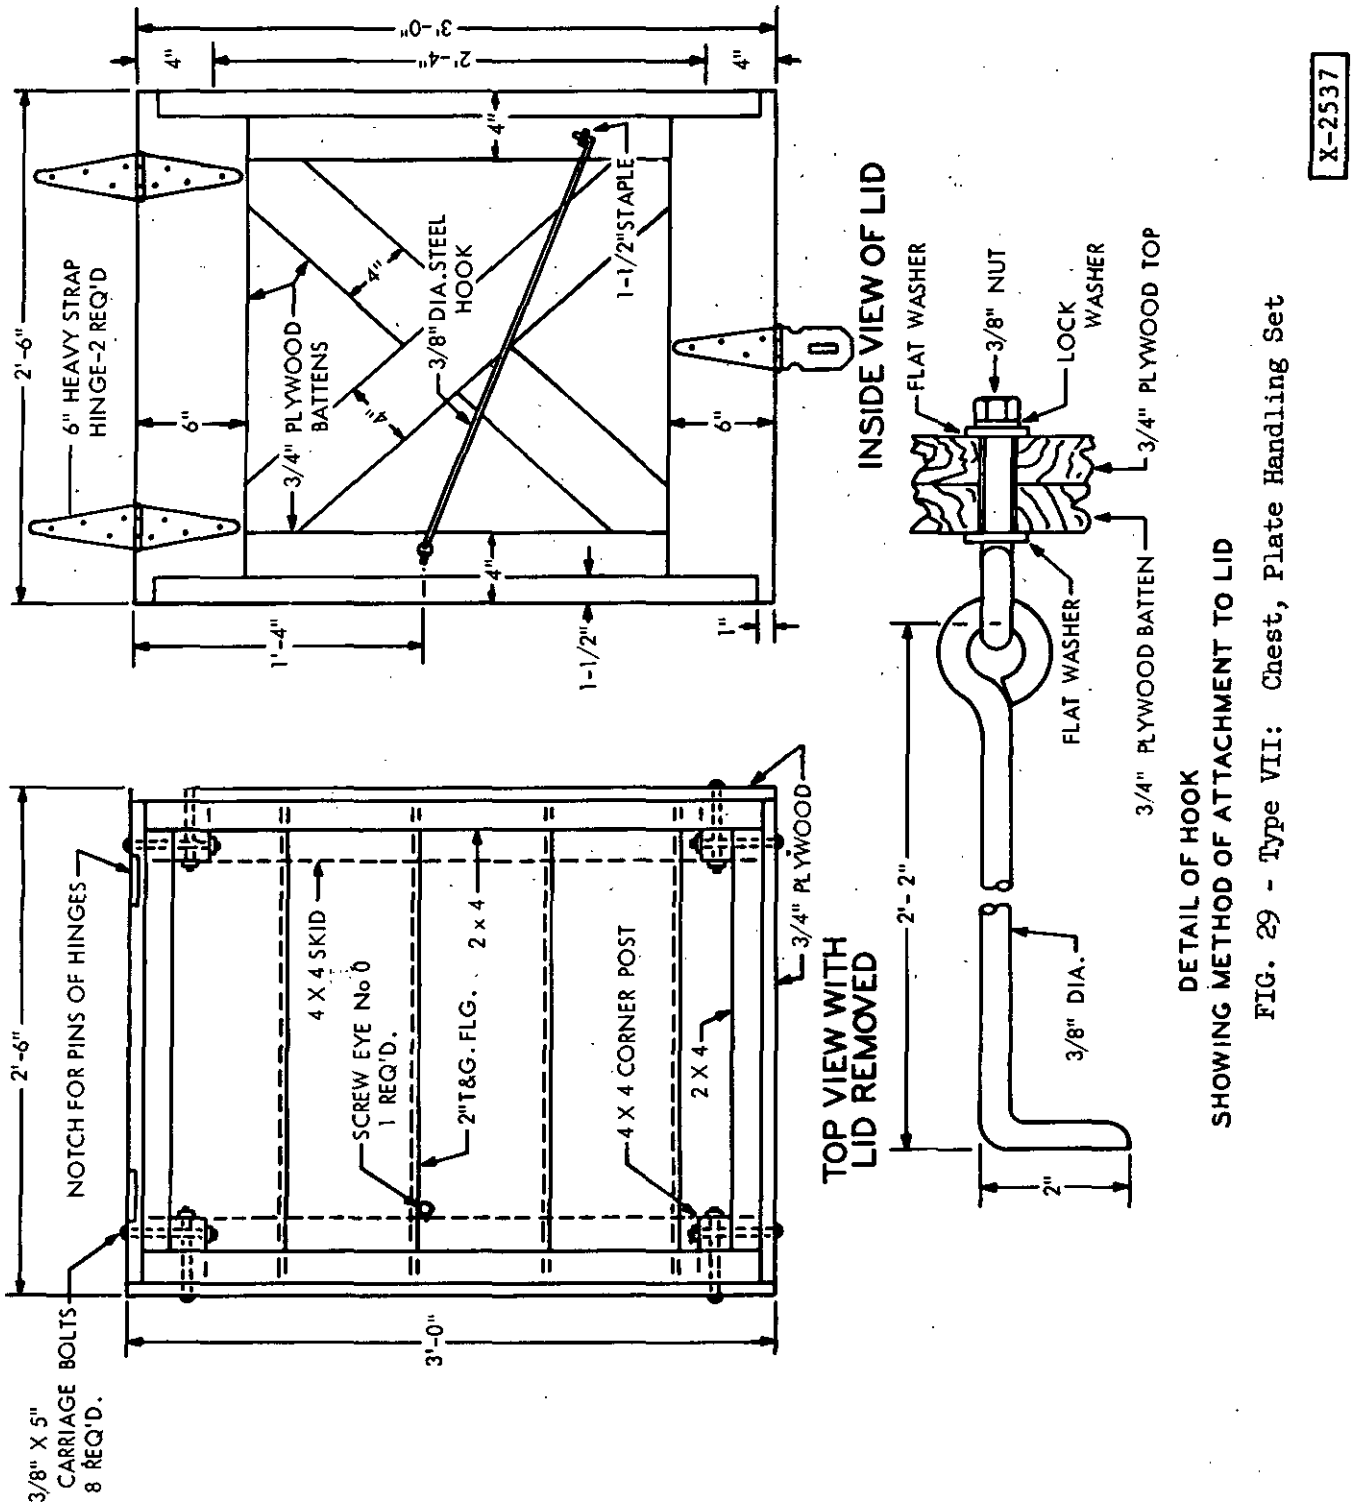
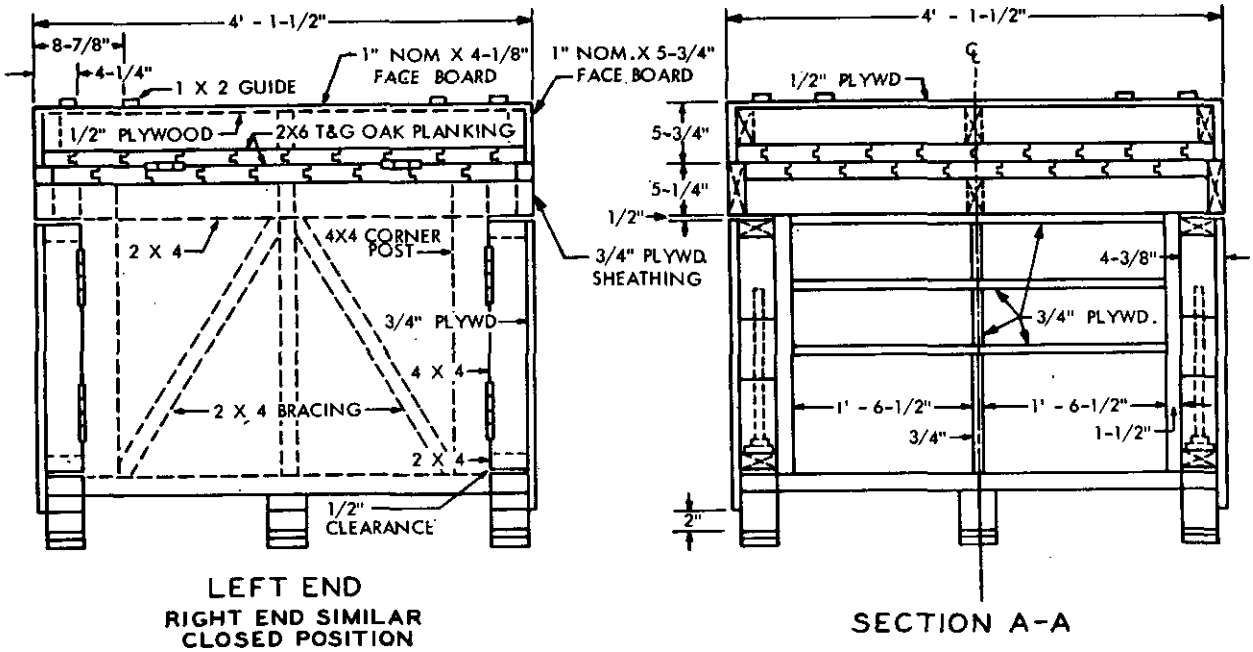


FIG. 29 - Type VII: Chest, Plate Handling Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.



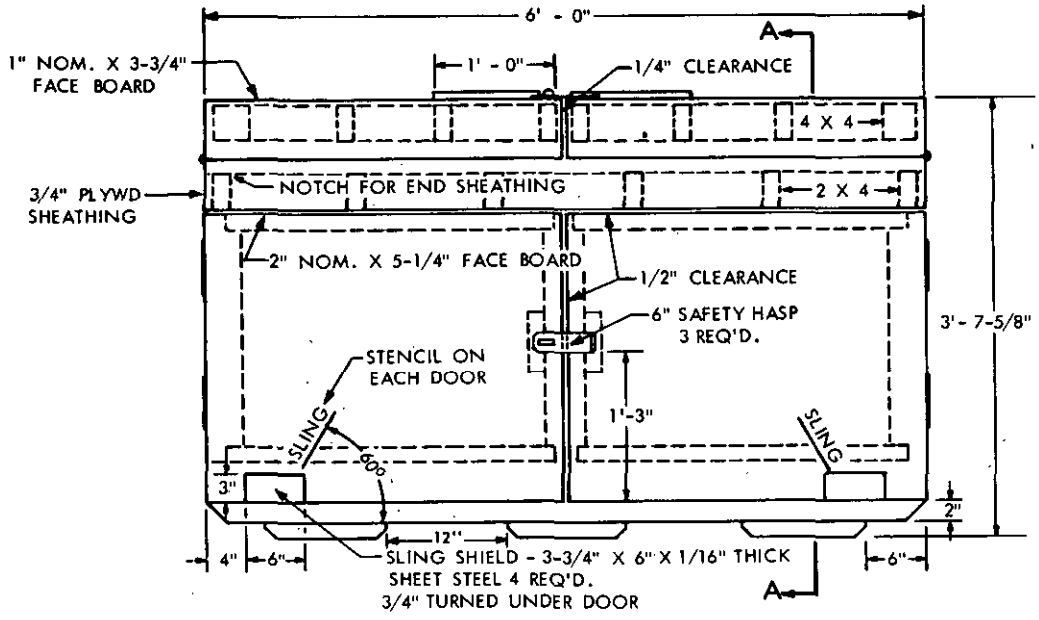


FIG. 30 - Type VIII: *Chest, Riggers Cargo Set*

X-2538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.


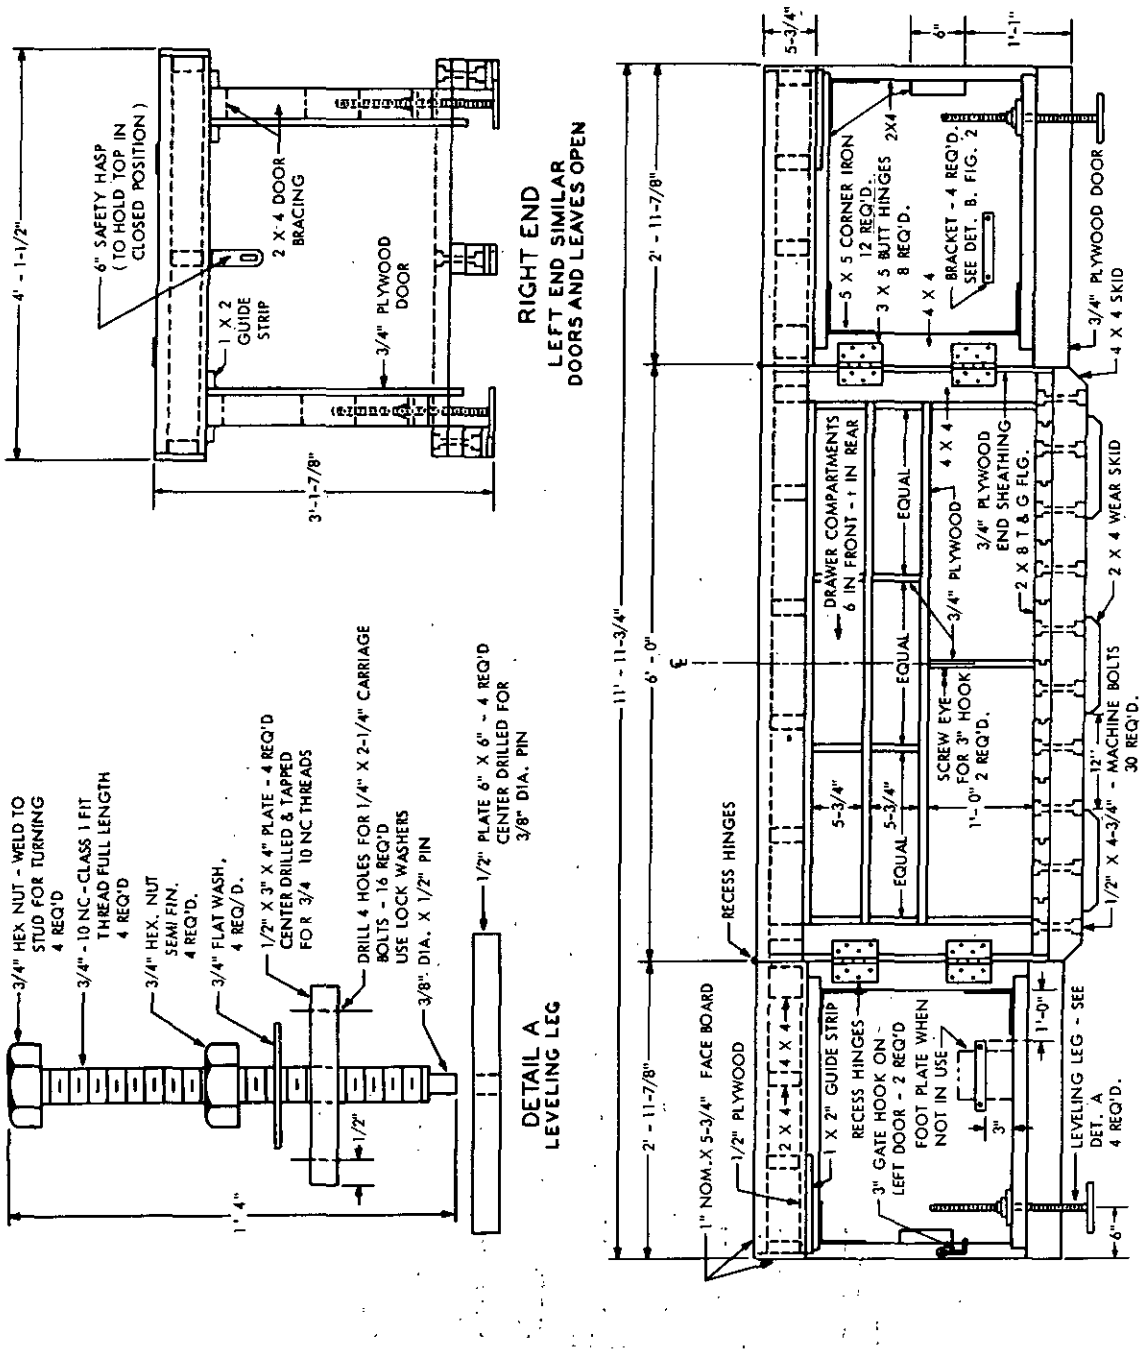


FIG. 31 - Type VIII: Chest, Riggers Cargo Set

X-2539

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

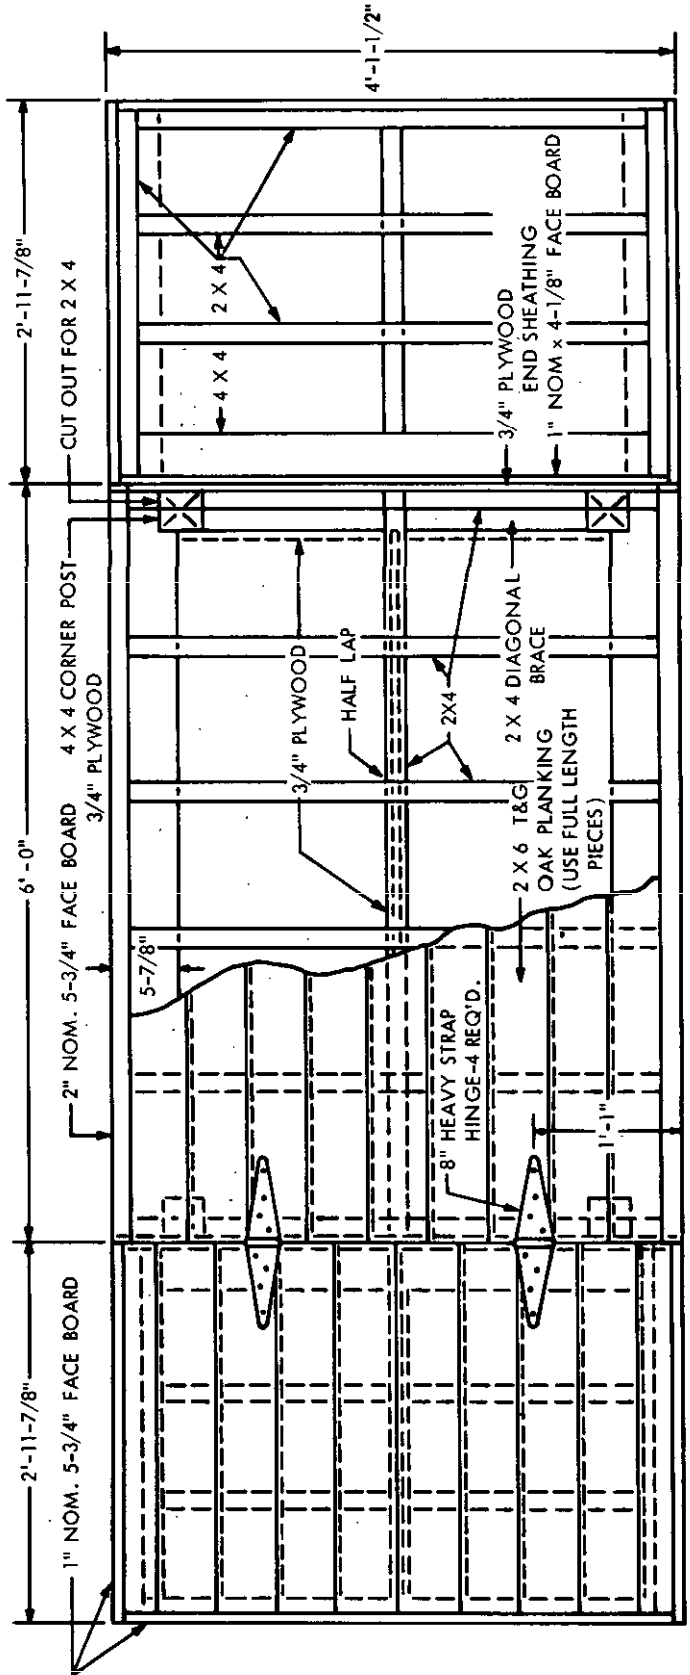

TOP VIEW
SHOWING LEAVES EXTENDED IN OPEN POSITION

X-2540

FIG. 32 - Type VIII: Chest, Riggers Cargo Set

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

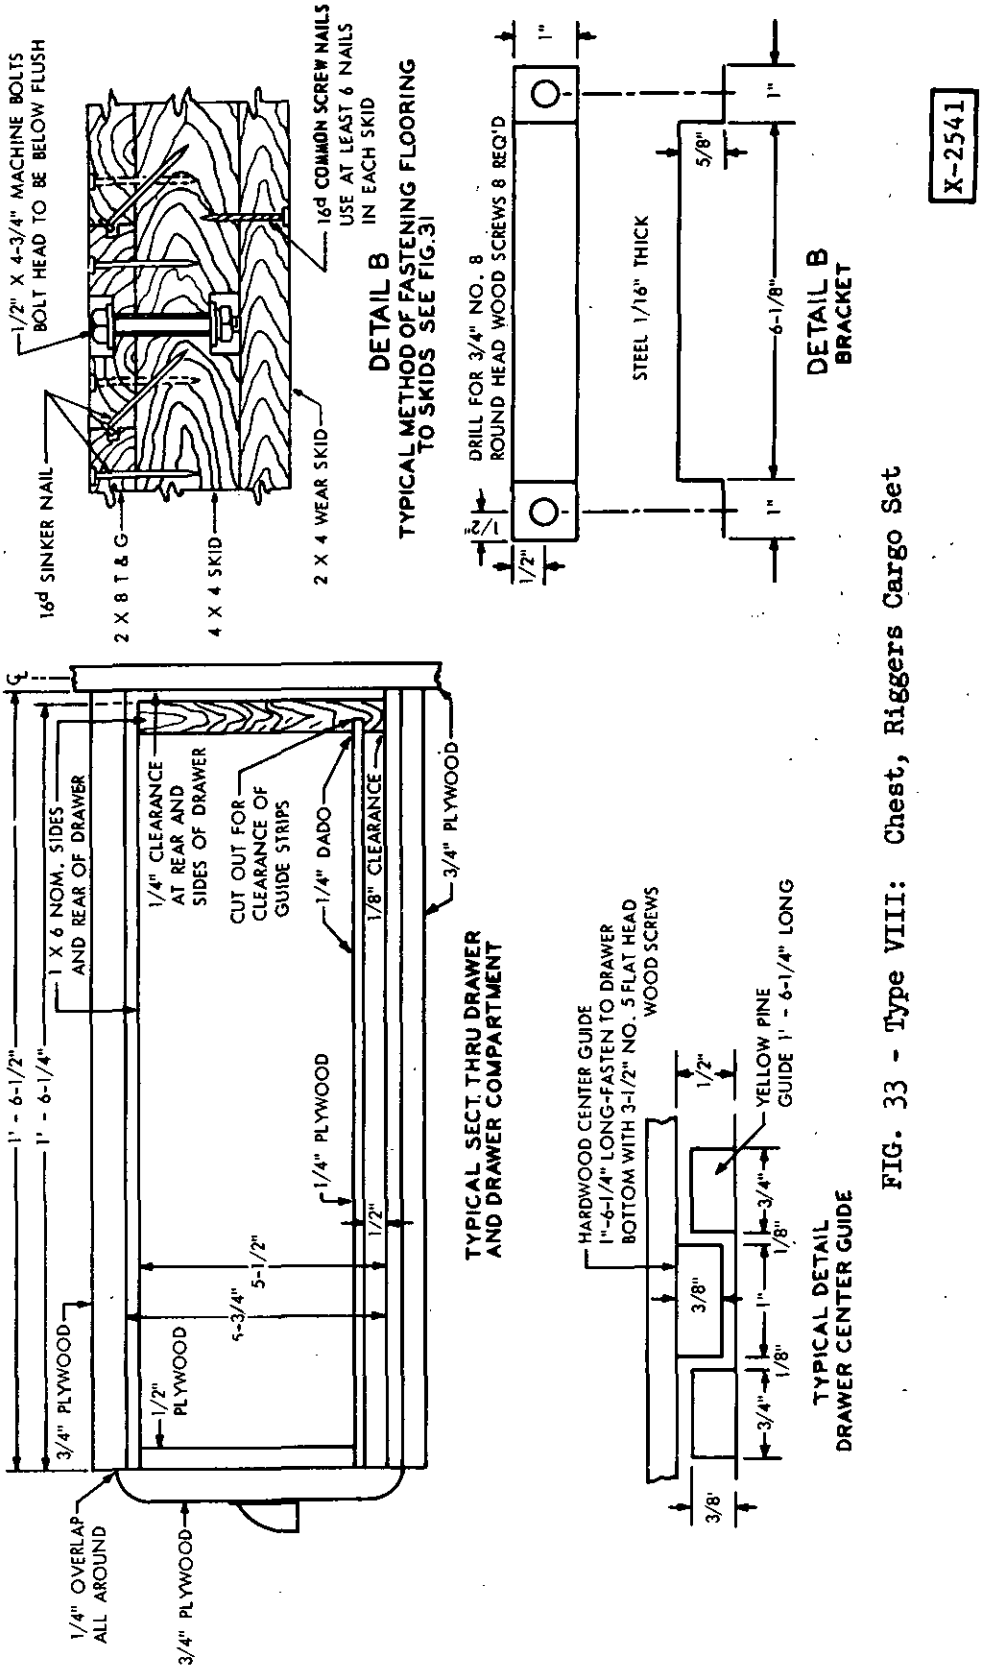


FIG. 33 - Type VIII: Chest, Riggers Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.


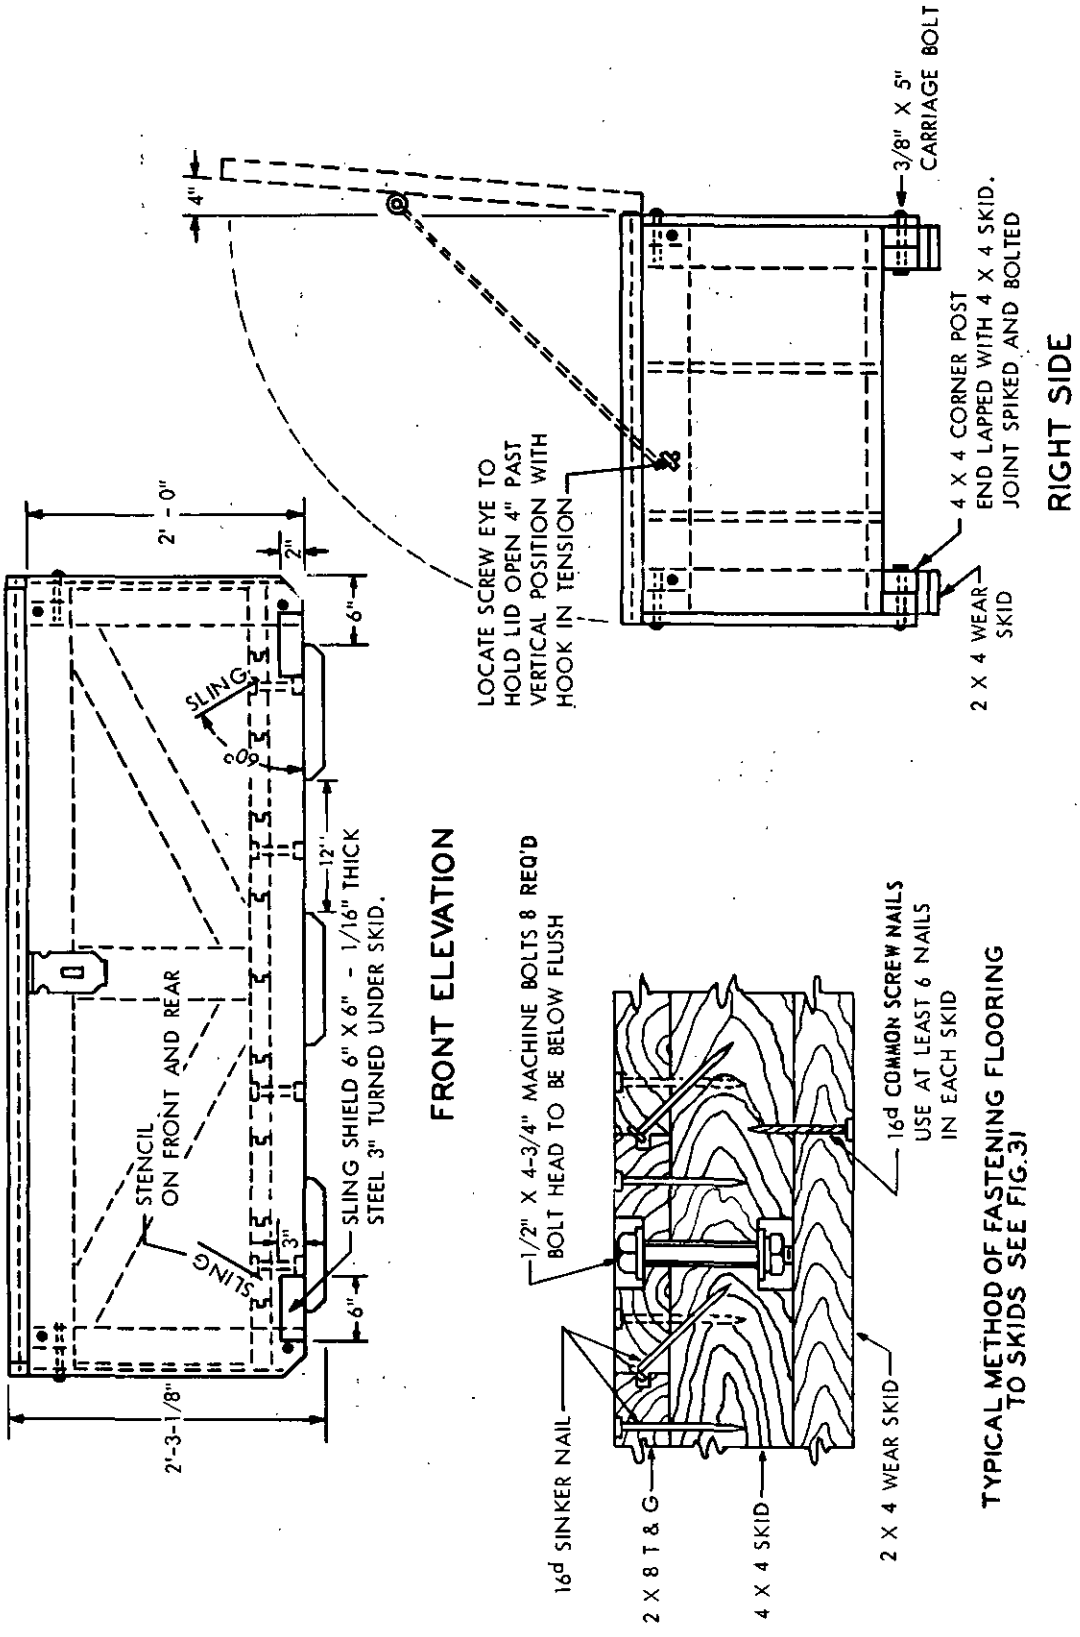


FIG. 34 - Type IX: Chest, Timber Cargo Set


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

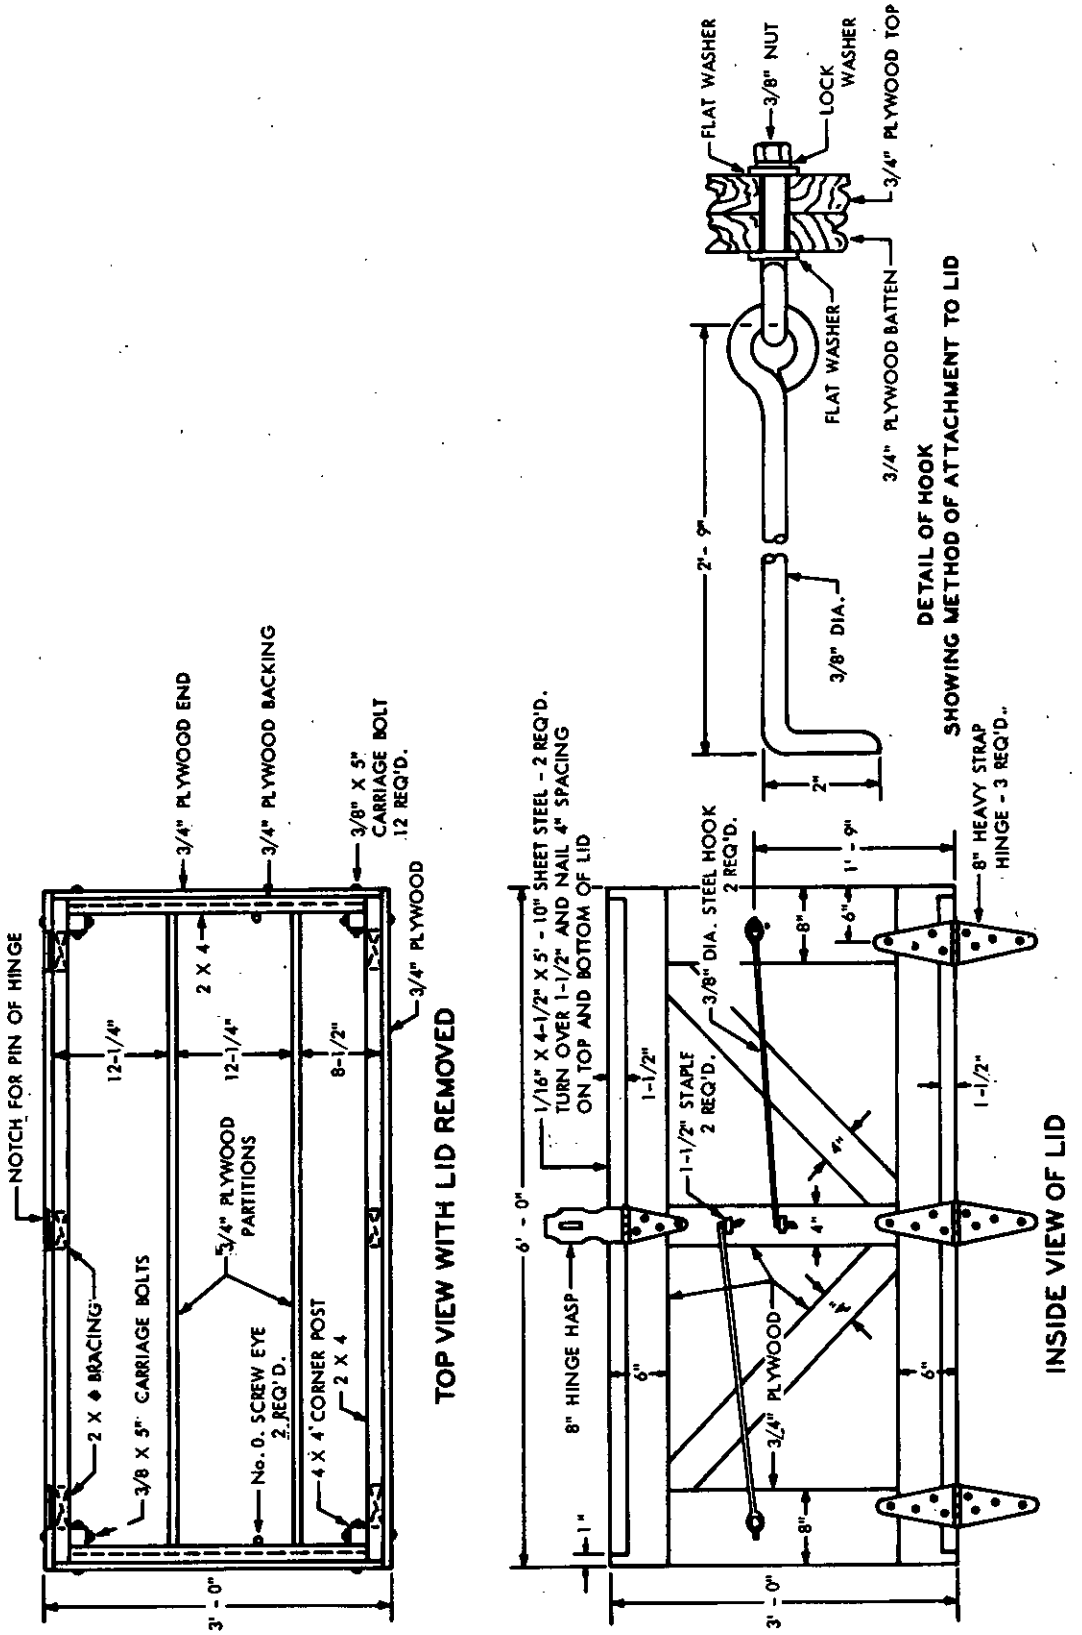

X-2543

FIG. 35 - Type IX: Chest, Timber Cargo Set


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

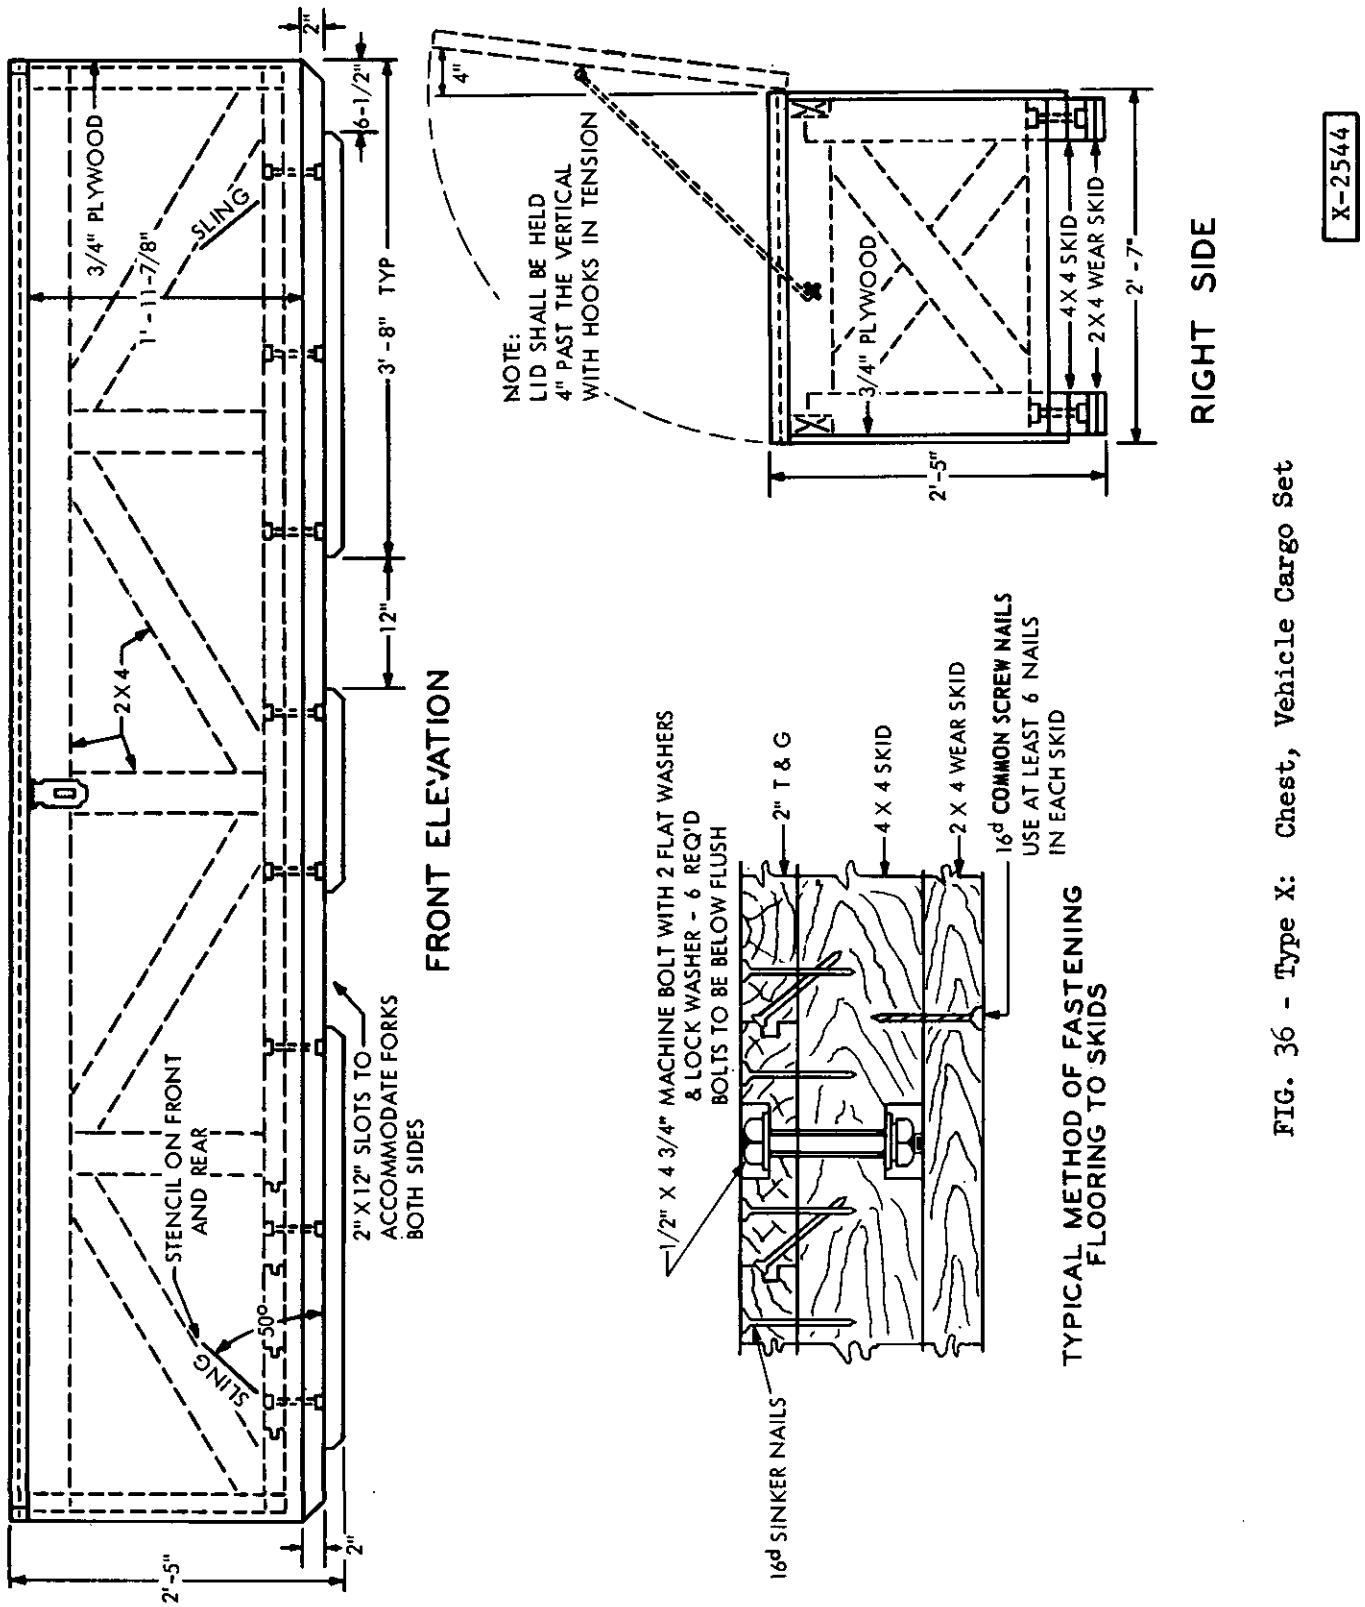

X-2544

FIG. 36 - Type X: Chest, Vehicle Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the currentversion before use.

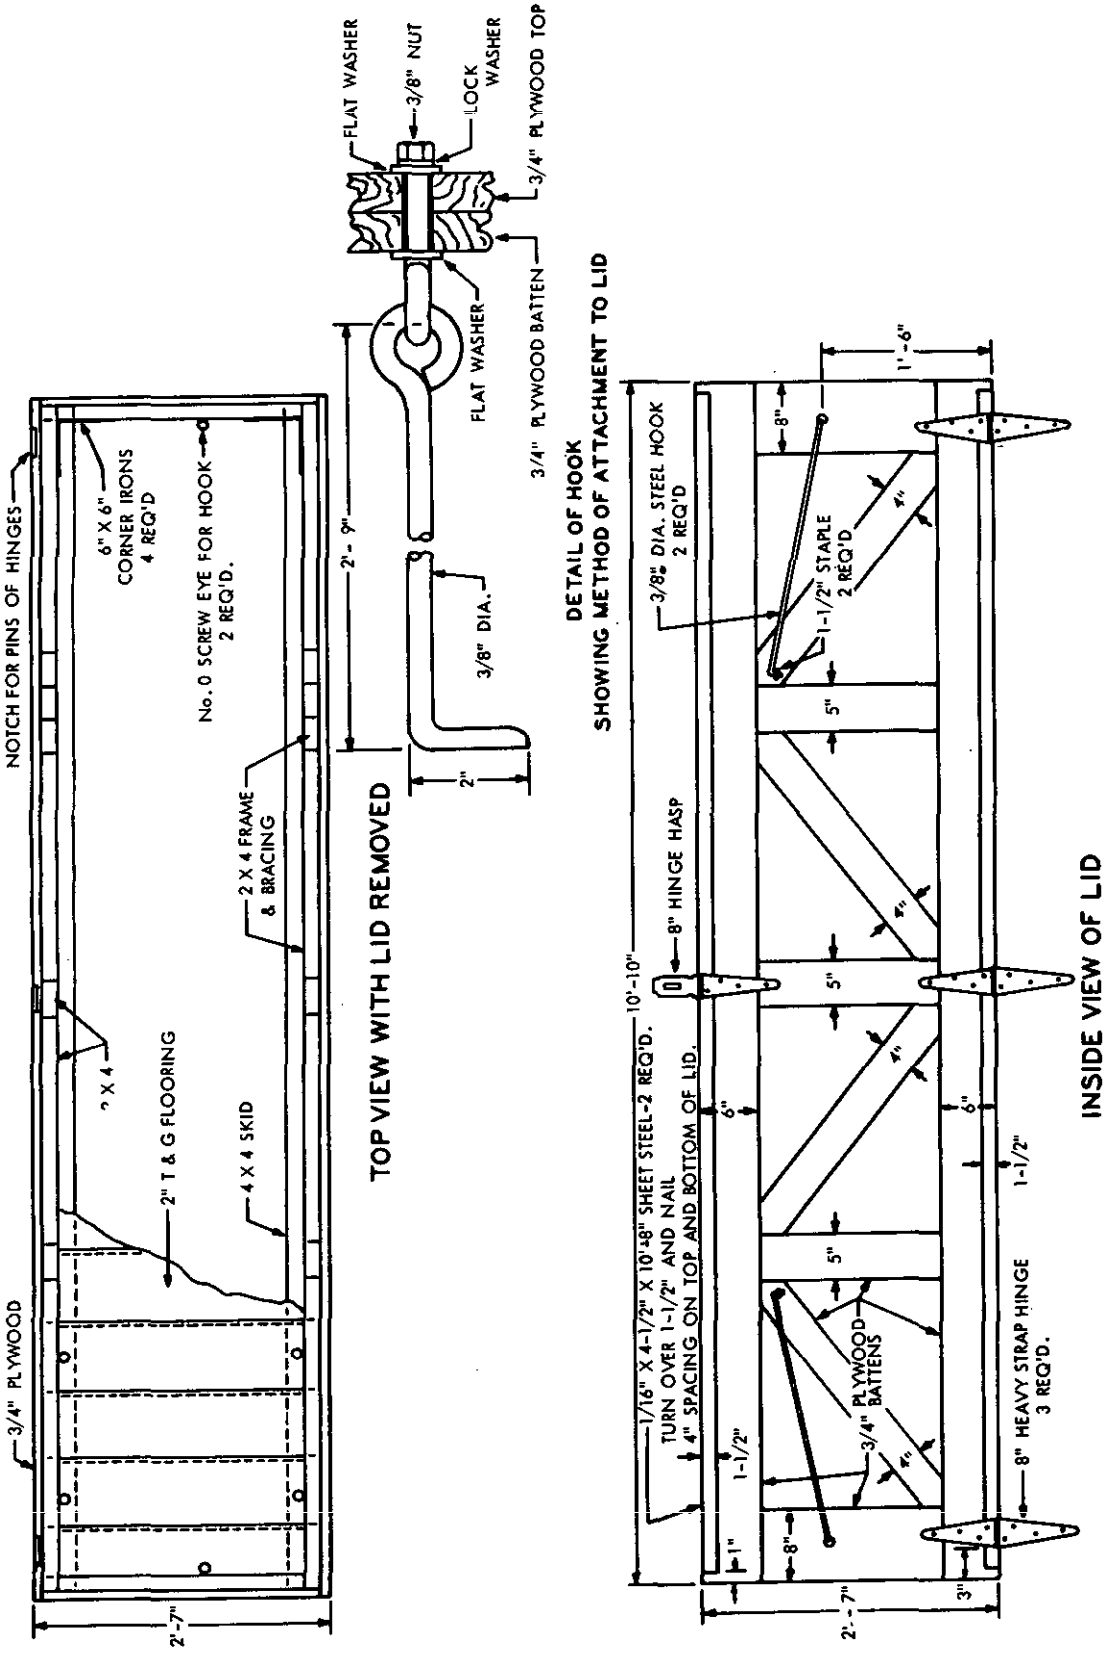

X-2545

FIG. 37 - Type X: Chest, Vehicle Cargo Set

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir RDE Center
STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52425B	Chests, Army Stevedoring Equipment

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.