MIL-F-51465A(EA)
21 January 1987
SUPERSEDING
MIL-F-51465(EA)
14 April 1980

MILITARY SPECIFICATION

FUZE, FLOATING SMOKE POT, M207A1

This specification is approved for use by U.S. Army Chemical Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of fuze.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification For.

: Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed: to: Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-SPT-S, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. :

AMSC N/A FSC 1330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-331	-	Fuze and Fuze Components, Environmental and Performance Tests For.
MIL-STD-1167	-	Ammunition Data Cards.
MIL-STD-1168	-	Lot Numbering of Ammunition.
MIL-STD-1234	-	Pyrotechnic, Sampling, Inspection and Testing.

2.1.2 Other Government documents and drawings. The following other Government documents and drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS AND TECHNICAL DATA PACKAGE LIST (TDPL)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

TDPL 36-7-36	-	Fuze, Floating Smoke Pot, M207A1.
36-3-131	-	Packing Fuze (200 Fuzes Per Box).
13-10-37	-	Marking Diagram Shipping Container for Fuze Hand Grenade M201A1, M207A1, M210, M201A1 (MOD).
36-3-128	-	Pot Packaging Fuze Assembly and Bill of Material (10 Fuzes Per Container).

(Copies of specifications, standards, drawings, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the non-Government documents which is current on the date of the solicitaiton.

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI)

T-403	-	Bursting Strength of Paper.
T-410	-	Weight Per Unit Area (Basic Weight of Substance of Paper and Paper Board).
T-431	-	Ink Absorbent Blotting Paper.
T-401	-	Fiber Analysis of Paper and Paperboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, 360 Lexington Avenue, New York, NY 10017.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services).

CODE OF FEDERAL REGULATIONS

49 CFR 171 to 179 - Department of Transportation Hazardous Materials Regulations.

(The Department of Transportation regulations are a part of the Code of Federal Regulations available from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402. Orders for the above publications should cited "49 CFR 171 to 179.")

2.2.1 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawing TDPL 36-7-36 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the fuze shall conform to the specifications and drawings listed in 3.1.1 and on subsidiary drawings.

3.1.2.1 Moisture. The moisture and volatile content of pyrotechnic mixture shall be 1.0 percent maximum as determined by one of the procedures indicated in 4.4.5.1 immediately prior to being loaded in the cartridge case.

3.2 Filling and assembly. The cartridge case shall be filled and the fuze shall be assembled in accordance with the applicable drawing (see 6.3).

3.3 Functioning. Prior to being tested in accordance with 4.4.5.2, the fuze shall be subjected to test 108 of MIL-STD-331, except that no dye need be added to the water and the fuze shall not be disassembled. At the end of the test period, and within one hour after being removed from the water, the fuze shall be dried, functioned, and indicate the required delay time between 0.7 and 2.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

seconds. The fuze shall ignite and eject a flash to a distance of 6-1/8 ± 1/8 inch and produce the results as shown in figure 1. Safety pin pull requirements shall conform to Drawing 36-7-36. Any malfunction (mechanical or pyrotechnic failure) shall indicate duds.

3.4 Preproduction. Prior to the start of regular production, a preproduction lot of fuzes shall be produced in accordance with this specification for examination and tests (see 4.3).

3.5 Workmanship. The fuze and components shall be free from contamination (foreign matter) and damage such as dents, cracks or deformation which could impair its intended use.

4. QUALITY ASSURANCE PROVISIONS


4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Ammunition data cards shall be supplied for each lot of fuzes in accordance with the requirements of MIL-STD-1167.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Objective evidence. The contractor shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.1.3 Government responsibility. Unless otherwise specified, the Government will be responsible for preproduction inspection. Preproduction sample (4.3) shall be forwarded to the design agency or laboratory designated by the contracting officer (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

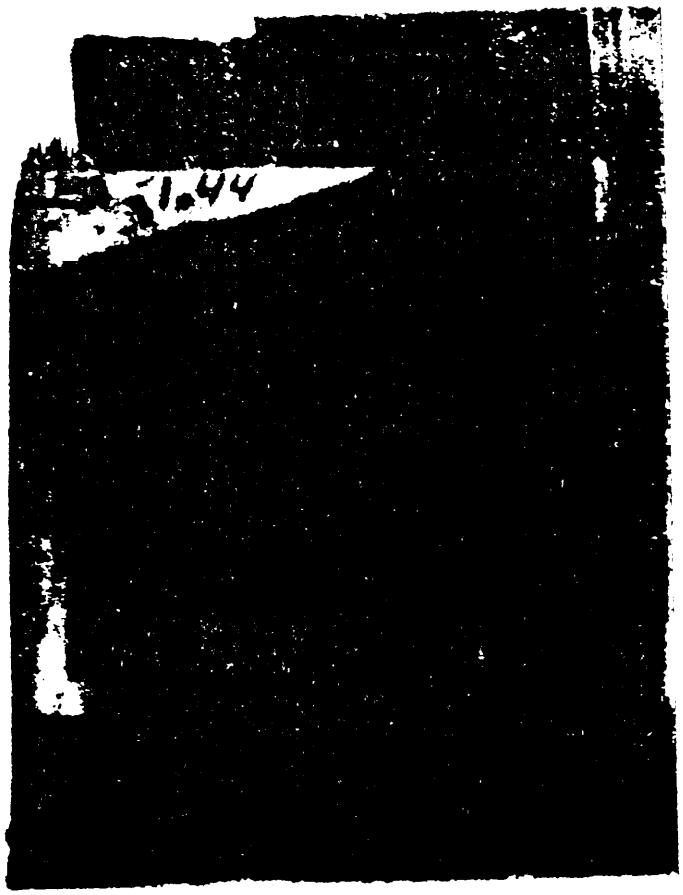

The above picture represents a test card showing a typical flash ejection pattern caused by the functioning of an ignition charge from M207A1 Fuze. On the actual card, the overall gray to black discoloration shall be evidence of the fuze meeting the flash ejection distance requirement.

FIGURE 1. Flash characteristics

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections.

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection.

4.3.1 Lot. A preproduction lot of 1201 fuzes or production during one 8-hour shift, whichever is greater, shall be produced using the same methods, materials, equipment and processes as will be used during regular production.

4.3.2 Sampling. The contractor shall submit a preproduction sample as indicated below:

Component	Drawing	Quantity
Fuze	36-7-36	250
Body	13-10-57	5 ea (per mold cavity)
Case	13-10-54	25
Cartridge, Delay	13-10-56	25
Lever	36-7-17	25
Spring	13-10-8	25
Point, Striker	13-10-15	25
Striker Assembly	13-10-13	25
Ring, Pull	13-10-9	25
Pin, Hinge	13-10-10	25

4.3.3 Inspection procedure.

4.3.3.1 For examination and nondestructive tests. Samples shall be inspected in accordance with table I, sheet 1 of 2.

4.3.3.2 For destructive test. Samples shall be tested in accordance with table I, sheet 2 of 2.

4.3.4 Acceptance/rejection criteria. The preproduction lot shall meet the examinations and tests specified in this specification to be acceptable. The contractor shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. Each lot shall be identified and controlled in accordance with MIL-STD-1168 and shall consist of the fuzes of one interfix number produced on one production line utilizing the same process. However, no more than one lot of primers or one lot of ignition train elements shall be represented in any one lot of assembled fuzes. A lot of ignition train elements is defined as a lot in which the chemical components of each element (i.e., first fire, delay train, and ignition mixture) shall have been procured from one source.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

TABLE I. Preproduction inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
	Fuze, Floating Smoke Pot, M207A1				36-7-36
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	*EXAMINATIONS				
	Fuze - 36-7-36	125	100%	3	4.4.3.1.10 (sht 1)
	Body - 13-10-57	5 ea mold cavity	100%	3	4.4.3.1.1
	Case - 13-10-54	25	100%	3	4.4.3.1.2
	Cartridge - 13-10-56	25	100%	3	4.4.3.1.3
	Lever - 36-7-17	25	100%	3	4.4.3.1.4
	Spring - C10-13-8	25	100%	3	4.4.3.1.5
	Point, Striker - 13-10-15	25	100%	3	4.4.3.1.6
	Striker Assembly - 13-10-13	25	100%	3	4.4.3.1.7
	Ring, Pull - 13-10-9	25	100%	3	4.4.3.1.8
	Pin, Hinge - 13-10-10	25	100%	3	4.4.3.1.9

NOTES:

*EXAMINATIONS. See paragraphs indicated for requirements.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

TABLE I. Preproduction inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
	Fuze, Floating Smoke Pot, M207A1				36-7-36
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	*DESTRUCTIVE TESTS				
	FUNCTION	125			
	Flash ejection distance incorrect		0.40%	3.3	4.4.5.2 Q149 Tester/Visual
	Delay time incorrect		0.40%	3.3	4.4.5.2 Q149 Tester
	Fuze fails to function (DUD)*		0.40%	3.3	4.4.5.2 Q149 Tester
	Safety pin withdrawal incorrect		0.40%	3.3	Q149 Tester 4.4.5.2

NOTES:

*DUD - A fuze that malfunctions due to any mechanical or pyrotechnic failure.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling.

4.4.2.1 For examination and nondestructive tests. Sampling shall be conducted in accordance with MIL-STD-105, inspection level II.

4.4.2.2 For destructive tests. Sampling shall be conducted in accordance with MIL-STD-105, inspection level S-4.

4.4.3 Inspection procedure.

4.4.3.1 For examination and nondestructive tests. Sample fuzes shall be examined in accordance with the classification of defects, 4.4.3.1.1 through 4.4.3.1.10 sheet 1 of 2 and with MIL-STD-105.

4.4.3.2 For destructive tests. Sample fuzes shall be tested in accordance with the classification of defects, 4.4.3.1.10, sheet 2 of 2 and with MIL-STD-105.

4.4.3.3 Critical defects. An analysis of critical defect material handling shall be made in accordance with MIL-A-48078.

4.4.3.4 Process control document for adhesives, sealants or lubricants. A process control document shall be made in accordance with MIL-A-48078 for the sealant (varnish) used on Drawings 13-10-56 and 36-7-36.

4.4.4 Inspection equipment. Where special inspection equipment is required to perform the examination and tests prescribed, the contractor shall submit for approval, inspection equipment design in accordance with the terms of the contract (see 6.2).

4.4.5 Tests.

4.4.5.1 Moisture. The determination of moisture and volatiles shall be conducted in accordance with method 101.1.1, 102.1.1, or 102.2.1 of MIL-STD-1234.

4.4.5.2 Functioning. Within the required time according to the specified requirement (see 3.3), the fuze shall be functioned with the Q149 fuze tester and be evaluated accordingly. Blotting paper used in the Q149 fuze tests shall conform to the requirement specified in 4.4.5.2(a).

(a) Blotting paper. Blotting paper shall conform to US Government Printing Office lot 254, property number 1150, 25 percent white blotting, shall be used with the tester. The required characteristics of this blotting paper and their Technical Association of the Pulp and Paper Industry (TAPPI) test methods are as follows:

(1) Stock. Not less than 25 percent cotton or linen fibers; the remainder free from unbleached or ground wood pulp. Use method T-401. No fluorescent (optical) brighteners shall be added to the pulp or paper during

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:06Z
Check the source to verify that this is the currentversion before use.

QUALITY CONFORMANCE INSPECTION

PARAGRAPH	TITLE		DRAWING NUMBER
4.4.3.1.1	Body, Fuze	SHEET 1 OF 1	13-10-57
			NEXT HIGHER ASSEMBLY 36-7-36

EXAMINATION OR TEST

Tool control - Dimensionally examine 5 each fuze bodies from each mold cavity for conformance to all dimensions on Dwg 13-10-57 (100%) to qualify the mold cavity. To maintain mold cavity qualification, one fuze body from each mold cavity shall be examined 100% for conformance to Dwg 13-10-57 for each week's production or when a mold cavity is repaired or changed. In the event a mold is found defective, all fuze bodies from the defective mold cavity produced since the last acceptable fuze body examination shall be sampled using MIL-STD-105, AQL 0.40%. If the quantity is rejected, the bodies shall be screened and defective fuze bodies removed prior to using for production. Each cavity shall be identified by a number.

NOTE: All castings with machine/drilled holes/surfaces shall be lotted and examined in accordance with MIL-STD-105, AQL 0.65% for conformance to Dwg requirements (13-10-57).

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 13-10-54
4.4.3.1.2	Case				NEXT HIGHER ASSEMBLY 13-10-56
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	Length incorrect		0.40%	3.1	Gage/SMI
102	Minor O.D. incorrect (0.292)		0.40%	3.1	Gage/SMI
103	Major O.D. incorrect (0.325)		0.40%	3.1	Gage/SMI
104	Minor I.D. incorrect (0.223)		0.40%	3.1	Gage/SMI
105	Major I.D. incorrect (0.280)		0.40%	3.1	Gage/SMI
106	Bottom thickness incorrect		0.40%	3.1	Gage/SMI
Minor:					
201	0.160 dimension incorrect		0.65%	3.1	SMI
202	0.06 dimension incorrect		0.65%	3.1	SMI
203	20 degree angle incorrect		0.65%	3.1	SMI
204	Material hardness, after forming incorrect		-	-	Certification

NOTES: SMI - Standard measuring instrument.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.3.1.3	Cartridge, Delay				13-10-56
					NEXT HIGHER ASSEMBLY 36-7-36
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	Length incorrect		0.40%	3.1	Gage/SMI
102	0.294 diameter incorrect		0.40%	3.1	Gage/SMI
103	0.330 diameter incorrect		0.40%	3.1	Gage/SMI
104	0.165 diameter incorrect		0.40%	3.1	Gage/SMI
105	Varnish missing		0.40%	3.1	Gage/SMI
106	Component missing or incorrect		0.40%	3.1	Visual
107	Moisture content of pyrotechnic mix exceeds 1.0% (See MIL-STD-1234 and 4.4.5.1)		100%	3.1.2.1	4.4.5.1
108	Workmanship		0.65%	3.6	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.3.1.4	Lever		36-7-17
			NEXT HIGHER ASSEMBLY 36-7-36

EXAMINATION OR TEST

Tool control - Dimensionally examine 5 each levers produced by the tooling for conformance to all dimensions on Dwg 36-7-17 to qualify the tooling. To maintain tool qualification, one lever shall be examined 100% for conformance to Dwg 36-7-17 for each week's production or when the tooling is adjusted, repaired or changed. In the event a defective lever is found, all levers produced since the last acceptable lever was inspected shall be lotted and sampled using MIL-STD-105, AQL 0.40%. If the lot is rejected, the lot shall be screened and rejected levers removed prior to using for production. Each die shall be identified by a number. Five randomly selected levers from each week's production or 5 levers from each 30,000 unit production interval shall meet the salt spray requirements of note 2 - salt spray concentration 5%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 10-13-8
4.4.3.1.5	Spring				NEXT HIGHER ASSEMBLY 36-7-36
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	Outside diameter incorrect	a	0.40%	3.1	Gage/SMI
102	Inside diameter incorrect	a	0.40%	3.1	Gage/SMI
103	0.38 dimension incorrect	a	0.40%	3.1	Gage/SMI
104	One half overall length dimension incorrect	a	0.40%	3.1	Gage/SMI
105	0.32 dimension incorrect	a	0.40%	3.1	Gage/SMI
106	Required values not met		0.40%	3.1	Test equipment
107	*Salt spray requirement not met	5/lot	100%		
	*5% salt concentration.				

NOTES:

(a) Sample size per MIL-STD-105, inspection level I.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.3.1.6	Point, Striker				13-10-15
					NEXT HIGHER ASSEMBLY
					13-10-13
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	0.053 Rad spher incorrect	a	0.40%	3.1	SMI/Gage
102	0.079 Dia incorrect	a	0.40%	3.1	SMI/Gage
103	0.08 dimension icorrect	a	0.40%	3.1	SMI/Gage
104	0.22 dimension incorrect	a	0.40%	3.1	SMI/Gage
105	Concentricity incorrect	a	0.40%	3.1	SMI/Gage

NOTES:

(a) Sample size per MIL-STD-105, inspection level 1.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.3.1.7	Striker, Assembly				13-10-13
					NEXT HIGHER ASSEMBLY
					36-7-36
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	0.440 dimension incorrect	a	0.40%	3.1	SMI/Gage
102	0.027 dimension over max	a	0.40%	3.1	SMI/Gage
103	*Salt spray requirement not met	5/lot	100%		
	*5% salt concentration.				

NOTES:

(a) Sample size per MIL-STD-105, inspection level 1.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.3.1.8	Ring, Pull				13-10-9
					NEXT HIGHER ASSEMBLY
					36-7-36
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	1.25 diameter incorrect	a	0.65%	3.1	SMI
102	Number of coils incorrect	a	0.65%	3.1	Visual
103	*Salt spray requirement not met	5/lot	100%		
	*5% salt concentration				
	SMI - Standard measuring instrument.				

NOTES:

(a) Sample size per MIL-STD-105, inspection level I.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.3.1.9	Pin, Hinge				13-10-10
					NEXT HIGHER ASSEMBLY
					36-7-36
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101	Length incorrect	a	0.65%	3.1	SMI/Gage
102	Diameter incorrect	a	0.65%	3.1	SMI/Gage
103	*Salt spray requirement not met	5/lot	100%		
	*5% salt concentration				

NOTES:

(a) Sample size per MIL-STD-105, inspection level I.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.3.1.10	Fuze, Floating, Smoke Pot, M207A1		36-7-36
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1	Safety pin not spread		100%	3.3	Visual
Major:					
101	Stake missing or incorrect		0.65%	3.1	Visual
102	Varnish missing or incorrect		0.65%	3.1	Visual
103	Paint missing		0.65%	3.1	Visual
104	Component missing or incorrect		0.65%	3.1	Visual
105	Marking missing or incorrect		0.65%	3.1	Visual
106	Workmanship		1.0%	3.6	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:06Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.3.1.10	Fuze, Floating, Smoke Pot, M207A1				36-7-36
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	DESTRUCTIVE TEST				
	FUNCTION TEST				
101	Flash ejection distance incorrect		0.65%	3.3	4.4.5.2 Q149 Tester
102	Delay time incorrect		0.40%	3.3	4.4.5.2 Q149 Tester
103	Fuze fails to function (Dud)*		0.40%	3.3	4.4.5.2 Q149 Tester
104	Safety pin withdrawal incorrect		0.40%	3.3	4.4.5.2 Q149 Tester

NOTES:

*DUD - A fuze that malfunctions due to any mechanical or pyrotechnic failure.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

manufacture. Fluorescene, due to residual white water, broke, or natural fibers is permissible; provided the increase in reflectance, measured with and without the ultraviolet component of a light source of 3100° Kelvin in combination with a C.I.E. (International Commission on Illumination) Z (blue) filter, does not exceed 2.0 percent.

(2) Weight. 1,000 19 inch x 24 inch sheets - 160 ± 0.1 pounds use method T-410.

(3) Bursting strength. Average not less than - 18 points use method T-403.

(4) Absorption (1 ml standard ink). Shall not exceed - 25 seconds. Use method T-431.

(5) Color, finish, and cleanliness. Paper shall conform to the standard sample as adopted by the Joint Committee on Printing, Congress of the United States, and shall have a non-gloss coarse finish, that is capable of registering burn marks to witness hot particles expelled from the fuze.

4.5 Methods of inspection.

4.5.1 Materials, components, and processes. Compliance with all requirements of section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that the components (parts, subassemblies, and materials) have been inspected and found to comply with their respective drawings and specification requirements, and that all specified manufacturing processes have been followed.

4.5.1.1 Inspection. The visual and mechanical inspections and tests shall verify compliance with the requirements of section 3 and 5 of this specification in accordance with 4.4.2 and 4.4.3 herein.

5. PACKAGING

5.1 Unit packing, level A. Ten fuzes shall be unit packed together in accordance with Drawing 36-3-128.

5.2 Packing. Fuzes shall be packed level A or for interplant shipment as specified (see 6.2).

5.2.1 Level A. Twenty cans of 10 fuzes each, unit packed as specified in 5.1, shall be packed together as specified on Drawing 36-3-131.

5.2.2 Interplant shipment. A quantity of fuzes as specified (see 6.2) shall be prepared for shipment in containers which comply with 49 CFR 171 to 179.

5.3 Marking.

5.3.1 Level A. Unit packs shall be marked in accordance with MIL-STD-129. Shipping containers shall be marked in accordance with Drawing 13-10-37.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:06Z
Check the source to verify that this is the currentversion before use.

5.3.2 Interplant shipment. Unit packs and exterior shipping containers shall be marked in accordance with the appropriate ammunition marking requirements of MIL-STD-129 and in accordance with 49 CFR 171 to 179.

6. NOTES

6.1 Intended use. The M207A1 fuze ignites smoke pots.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Level of packing required (see 5.2).
(c) Quantity required for interplant shipment (see 5.2.2).
(d) Preproduction:

(1) Time allowed for contractor's submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether or not to proceed with production.

(e) Name and address of facility evaluating inspection equipment designs.

6.3 Precaution. This specification covers assembling, sampling, inspections and testing of chemical, toxic, or explosive materials which are potentially hazardous to personnel. Precaution should be taken to prevent all mishaps such as fires or explosions incident to the preparation of the pyrotechnic mixtures while assembling the fuzes. Accordingly, it is emphasized that all applicable safety rules, regulations, and procedures must be followed in handling and processing these materials.

6.4 Interplant shipment. Material which will not enter the military supply system. Typical are shipments of component parts from a vendor to a prime contractor, a sub-contractor or a contractor to a military arsenal or plant.

6.5 Subject term (key word) listing.

Fuze inspection
Fuze testing
Smoke pot fuze

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 1330-A301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

STRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in bmitting comments and suggestions for improvements. All users of military standardization documents are invited to provide ggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and ailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was o rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the oblems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an knowledgement will be mailed to you within 30 days to let you know that your comments were received and are being nsidered.

OTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ecification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

FFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Chemical Research, Development
and Engineering Center
ATTN: SMCCR-SPT-S
Aberdeen Proving Ground, MD 21010-5423

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-51465A(EA)	FUZE, FLOATING SMOKE POT, M207A1

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-26T04:06Z
Check the source to verify that this is the current version before use.