INCH-POUND

MIL-R-52255D
20 December 1988
SUPERSEDING
MIL-R-52255C
30 September 1980
MIL-R-22368D
7 May 1980

MILITARY SPECIFICATION

REPAIR KIT AND REPAIR KIT COMPONENTS, FOR COLLAPSIBLE FABRIC TANKS, DRUMS, AND BOATS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers repair kits and repair kit components required for field-type repairs to seal holes in collapsible fabric tanks, drums, and boats (see 6.1).

1.2 Classification. The repair kits should be of the following types, or as specified (see 6.2).

Type I - For repairs up to 0.375 inch (9.5 mm).
Type II - For repairs up to 6 inches (152.4 mm).
Type III - For repairs up to 7.50 inches (190.5 mm).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5430
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-535	- Plastic Sheet (Sheeting): Plastic Strip: Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.
V-T-285	- Thread, Polyester.
FF-R-556	- Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Flat Washer (Burr) and Cap; Rivet; General Purpose.
KK-L-271	- Leather, Cattlehide, Strap, Vegetable Tanned.
MM-L-736	- Lumber; Hardwood.
QQ-A-250	- Aluminum and Aluminum Alloy Plate and Sheet, General Specification For.
QQ-A-250/8	- Aluminum Alloy, 5052, Plate and Sheet.
QQ-B-654	- Brazing Alloys, Silver.
QQ-P-416	- Plating, Cadmium (Electrodeposited).
QQ-S-700	- Steel Sheet and Strip, Medium and High Carbon.
QQ-S-781	- Strapping, Steel, and Seals.
TT-C-490	- Cleaning Methods for Ferrous Surfaces and Pretreatments for Organic Coatings.
TT-E-485	- Enamel, Semi-Gloss, Rust-Inhibiting.
UU-P-121	- Paper, Bond and Writing: White and Colored.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered.
CCC-D-950	- Dyeing and Aftertreating Process for Cotton Cloths.
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use).
GGG-P-471	- Pliers: Pliers, Slip Joint.
GGG-T-558	- Tool Box, Portable, General Specification For.
GGG-T-558/1	- Tool Box, Portable (Universal Type).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-P-149	- Plastic Coating Compound, Strippable (Hot Dipping).
MIL-V-173	- Varnish, Moisture-and-Fungus Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-F-495	- Finish, Chemical, Black, for Copper Alloys.
MIL-S-7952	- Steel, Sheet and Strip, Uncoated, Carbon (1020 and 1025) (Aircraft Quality).
MIL-F-10884	- Fasteners, Snap.
DOD-P-16232	- Phosphate Coating, Heavy, Manganese or Zinc Base (for Ferrous Metals).
MIL-P-17802	- Padlocks and Padlock Sets, Low Security, Key Operated, Regular (Open) Shackle.
MIL-D-23119	- Drums, Fabric, Collapsible, Liquid Fuel, Cylindrical, 500-Gallon Capacity.
MIL-H-43048	- Hood, Flexible, Gasoline Resistant, Protective.
MIL-T-43566	- Tape, Textile, Cotton or Polyester, General Purpose, Natural or in Colors.

STANDARDS

FEDERAL

FED-STD-H28	- Screw-Thread Standards for Federal Services.
FED-STD-H28/2	- Screw-Thread Standards for Federal Services Section 2 Unified Inch Screw Threads-UN and UNR Thread Forms.
FED-STD-751	- Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing, with Appropriate Test Methods.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MS16535	- Rivet-Tubular, Oval Head.
MS35218	- Screw, Machine, Pan Head, Cross-Recessed, Aluminum Alloy, UNC-2A.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those in effect on the date of the solicitation.

FOOD AND DRUG ADMINISTRATION (FDA)

Code of Federal Regulations, Title 21, Chapter 1, Part 177.

(The code of Federal Regulations [CFR] and the Federal Register [FR] are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal Agency responsible for issuance thereof.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 519	-	Seamless Carbon and Alloy Steel Mechanical Tubing.
ASTM B 221	-	Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.
ASTM D 2000	-	Rubber Products in Automotive Applications.
ASTM E 18	-	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test Methods for.
ASTM E 112	-	Standard Methods for Determining the Average Grain Size.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

THE COLOR ASSOCIATION OF THE UNITED STATES (CA)

Department of Defense Standard Shades for Sewing Threads 1968.

(Application for copies should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)

NATIONAL SANITATION FOUNDATION (NSF)

NSF Standard 14 - Official Plastics Listing

(Application for copies should be addressed to National Sanitation Foundation, 3475 Plymounth Rd, P.O. Box 1468, Ann Arbor, Michigan 48106.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J492 - Rivets and Riveting.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. Repair kits and repair kit components shall be as shown on figures 1 through 13 or as specified herein. Components of the repair kits may be specified separately when the complete kit is not required (see 6.2).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The repair kit shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the repari kit may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the repair kit contracting officer or designated representative.

3.3.1.3 Materials medical standards. The repair components shall contain no materials or substances which, when used to repair a drinking water tank or drum, might leach out or disintegrate and cause the water to be non-drinkable. The materials of the repair kit components shall have no adverse effect on personnel when those components are used for their intended purpose. Elastomeric repair

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

ured. The dimensional change shall be expressed between the bench marks meas

kit components shall conform to the Code of Federal Regulations, Food and Drugs, Title 21, Chapter 1, Parts 177 and 182, less sections 177.1020 through 177.1050 and 177.1480; or be tested and listed as approved for use with drinking water by the National Sanitation Foundation under Standard 14.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the repair kit may be newly fabricated from recovered materials to the maximum extent practicable, provided the repair kit produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the repair kits.

3.4 Type I - for repairs up to 0.375 inch (9.53 mm). The repair kit shall consist of the following components in the quantities shown and shall be assembled as shown on figure 7:

Component	Quantity
Pouch	1
Hood, protective	1
Pliers, lineman's	1
Patch, mechanical, 0.75 inch (19.05 mm)	6
Plug, wood, 0.625 inch	3
Rotary cutter, wrench and insert tool	1
Instructions	1

3.4.1 Pouch. The pouch shall be made of cotton duck cloth, cotton tape, polyester thread, and fabricated as shown on figure 1.

3.4.1.1 Cloth. The cotton duck shall conform to CCC-C-419, type I, hard texture number 10 before finishing. The cloth shall be treated to conform to CCC-D-950, type I, class B, and dyed olive drab 7.

3.4.1.2 Tape. The cotton tape shall conform to MIL-T-43566, type I, class 4, in 0.75 inch (19.53 mm), 1 inch (25.4 mm), and 1.50 inch (38.1 mm) widths and dyed olive drab 7.

3.4.1.3 Thread. The polyester thread shall conform to V-T-285, type I, class 1, subclass B, size FF and dyed olive drab S-1 (CA 66022). The thread shall show colorfastness to chlorine bleaching.

3.4.1.4 Snap fasteners. The snap fasteners shall conform to MIL-F-10884, style 2A, button size 2, eyelet size 2, finish 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

3.4.1.5 Stitching. The stitching shall conform to FED-STD-751, as follows:

Stitching protective plastic instruction sheet	-	Type 301, 4 to 5 stitches per inch
For all other stitching	-	Type 301, 6 to 8 stitches per inch

Thread breaks in stitching shall be overstitched not less than 1 inch (25.4 mm) at each break. Stitching shall be overstitched not less than 1 inch (25.4 mm) at the ends, except where ends are turned under in a hem or held down by other stitching. All ends of overstitching shall terminate not less than 1 inch (25.4 mm) from the specified stitch lines. Thread tension shall be maintained so there will not be any loose stitching. If a hole is punched to stitch the male or female part of the fastener to the pouch, the hole shall be smaller than the outside diameter of the fastener tube so the tube must be forced through the hole.

3.4.2 Hood. The protective hood shall conform to MIL-H-43048.

3.4.3 Pliers. The lineman's pliers shall conform to GGG-P-471, type IX, class I, style A, 8-inch (203 mm) nominal size.

3.4.4 Patch. The 0.75-inch (19.05 mm) mechanical patch shall consist of a plug, gasket, and locking disk. The patch shall be assembled as shown on figure 4.

3.4.4.1 Plug assembly. The plug shall be formed, conductive, synthetic rubber conforming to ASTM D 2000, 2BG415E61F17L14, vulcanized to a machine screw conforming to MS35218-62. The screw shall show no distortion after vulcanization of the rubber to the screw. The rubber shall not separate from the screw when tested as specified in 4.5.2.1.1.

3.4.4.2 Gasket. The gasket shall conform to ASTM D 2000, 2BG515E61F17L14.

3.4.4.3 Locking disk. The locking disk shall be aluminum alloy conforming to ASTM B 221, composition 6061-T4 or T6.

3.4.5 Wood plugs. When specified, the 0.62-inch, nominal-size wood plug shall be as shown on figure 3. The plug shall be made of white pine and be free of checks, knots, splits, or shakes.

3.4.6 Rotary cutter, wrench, and insert tool. The rotary cutter, wrench, and insert tool, as shown on figure 2 shall be of seamless carbon or alloy steel tubing conforming to ASTM A 519, grade optional. The wrench and insert tool shall be silver brazed to the cutter section. The insert shall be silver brazed into one end of the wrench tubing. The silver brazing alloy shall conform to QQ-B-654, grade V. The opposite end of the wrench tubing shall be swaged in a manner to drive the locking disk. The cutting edge shall be hardened to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

Rockwell C 55-57 and ground, turned, or honed. The cutting edge shall be tested for hardness, as specified in 4.5.2.1.2.1, and shall show no distortion after testing, as specified in 4.5.2.1.2.2. The rotary cutter and insert tool shall be zinc plated conforming to QQ-P-416, type II, class 2.

3.4.7 Instructions. Instructions shall be as shown on figure 6. The instruction sheet shall be printed and conform to the labeling requirements of MIL-STD-1472, 5.5.5 on paper conforming to UU-P-121, type IV and shall be heat laminated between two sheets of vinyl plastic. The plastic film shall be not less than 0.020-inch (.51-mm) thick conforming to L-P-535, composition A, type I, class 3. The finished instruction sheet shall be not less than 4 by 5 inches (101.6 by 127 mm) and shall be sewn into the pouch as shown on figure 7.

3.5 Type II - for repairs up to 6 inches (152.4 mm). The repair kit shall consist of the following components and quantities shown and shall be assembled as shown on figure 11:

Component	Quantity
Container	1
Hood, protective	1
Knife and sheath	1
Type 1 repair kit (complete kit, including instructions)	1
Plugs, wood 1.50 and 2-inch	2 each size
Patch, mechanical 2-inch (50.8 mm)	2
Clamp, repair, sealing, 3-inch (76.2 mm)	2
Clamp, repair, sealing, 5-inch (127 mm)	2
Clamp, repair, sealing, 7.50-inch (190.5 mm)	2
Instructions	1

3.5.1 Container. The container shall conform to GGG-T-558 and GGG-T-558/1, type I, class 2. The container shall be furnished without tote tray and shall be modified with spring steel clip on the inside of the lid as shown on figure 10.

3.5.1.1 Clips. The spring clips shall be blued spring steel as shown on figure 10.

3.5.1.2 Rivets. The rivets for attaching spring clips to the box cover shall conform to FF-R-556, type IV, grade E, size 3.

3.5.1.3 Lock. When specified (see 6.2), the container shall be equipped with lock and keys conforming to MIL-P-17802, grade II, style A, class 1, type A, size 1.50 inch (38.1 mm).

3.5.1.4 Surface preparation. The interior and exterior surfaces of the container shall be prepared for painting conforming with any method outlined in TT-C-490.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

3.5.1.5 Enameling. After the surfaces have been prepared as specified in 3.5.1.4, the interior and exterior surfaces shall be coated with enamel conforming to TT-E-485, composition L, color as specified (see 6.2).

3.5.2 Hood. The protective hood shall conform to MIL-H-43048.

3.5.3 Knife and sheath.

3.5.3.1 Knife blade and tang. The blade shall be the through tang type constructed as shown on figure 8. The steel for the blade and tang shall conform to QQ-S-700, UNS No. G10950. The steel shall be free from nonmetallic impurities and shall have a fracture grain size no. 7 when tested as specified in 4.5.2.1.3.1. The finished blade shall be tempered to a hardness of Rockwell C 55-57 and shall show no permanent deformation or breakage when tested as specified in 4.5.2.1.3.3. The blade shall be ground and sharpened on both edges as shown on figure 8.

3.5.3.1.1 Hand guard. The hand guard shall be steel conforming to MIL-S-7952, grade 1020.

3.5.3.1.2 Handle. The handle shall be laminated birch, rotary cut in thin layers and vacuum-impregnated with phenol formaldehyde resins to produce a hard, polished finish. The handle shall be riveted to the tang with rivets conforming to FF-R-556, type XV, grade A 0.156-inch (3.96 mm) diameter by 0.812 inch (20.62 mm) long.

3.5.3.1.3 Finish. All ferrous metal parts shall be coated conforming to DOD-P-16232, type Z, class 2.

3.5.3.1.4 Marking. The initials "US" in characters not less than 0.125 inch (3.18 mm) high and trade name or trademark of the manufacturer shall be indented on the blade as shown on figure 8.

3.5.3.2 Sheath. The sheath shall be made of leather conforming to KK-L-271, type I, class 1 and as shown on figure 8. Rivets for the sheath assembly shall conform to FF-R-556, type I, class 1, grade A, and shall be black finished conforming to MIL-F-495. The rivets shall be on line 0.250 inch (6.35 mm) from the edge as shown on figure 8. All rivets and fasteners shall be securely set without cutting either leather or stitching. The lockstitch shall conform to FED-STD-751, type 301, with 5 to 7 stitches per inch. There shall be no loose stitching. The sheath shall be trimmed to eliminate all loose thread ends and rough edges. All thread ends shall be securely tied. The thread for stitching of the sheath shall be as specified in 3.4.1.3.

3.5.4 Type I repair kit. The type I repair kit shall be as specified in 3.4.

3.5.5 Wood plugs. When specified, the plugs shall be as specified in 3.4.5, 1.50- and 2-inch nominal sizes as shown on figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

3.5.6 Patch. The 2-inch (50.8 mm) mechanical patch shall consist of a plug, gasket, and locking disk. The patch shall be as shown on figure 5.

3.5.6.1 Plug assembly. The plug shall be formed from a conductive synthetic rubber conforming to ASTM D 2000, 2BG415E61F17L14, vulcanized to a machine screw conforming to MS35218-77. The screw shall show no distortion after vulcanization of the rubber to the screw. The rubber shall not separate from the screw when tested as specified in 4.5.2.1.4.

3.5.6.2 Gasket. The gasket shall be as specified in 3.4.4.2.

3.5.6.3 Locking disk. The locking disk shall be as specified in 3.4.4.3.

3.5.7 Clamps. The repair sealing clamps shall be as shown on figure 12. The bottom cup assembly, consisting of the bottom cup, hinge, stud, and rivet, shall withstand a tensile load of not less than 200 pounds (lb) when tested as specified in 4.5.2.1.5. The gasket shall be compounded using only nonmigrating plasticizers and shall have a hardness of not more than 55 Shore A.

3.5.7.1 Identification marking of clamps. The National Stock Number for each clamp (see 6.6) shall be cut permanently on the external surface of the bottom cup in letters not less than 0.125 inch (3.18 mm) high.

3.5.8 Instructions. The instructions and list of components shall be as shown on figure 9. The instruction sheet shall be printed or typed (capital letters) on paper conforming to UU-P-121, type IV. The sheet shall be not less than 10.50 by 6.25 inches (266.7 by 158.75 mm) and heat laminated between two sheets of vinyl plastic. The plastic sheets shall be not less than 0.020 inch (.51 mm) thick and shall conform to L-P-535, composition A, type I, class 3. The finished plastic instruction sheet shall be not less than 6.75 inches by 11 inches (171.45 by 279.4 mm) with rounded corners.

3.6 Type III - for repairs up to 7.5 inches (190.5 mm). The repair kit shall consist of the following components and quantities shown. Components of the repair kit may be specified separately (see 6.2) when the complete kit is not required.

Component	Quantity
Clamp, repair, sealing, 3-inch (76.2 mm)	4
Clamp, repair, sealing, 5-inch (127 mm)	2
Clamp, repair, sealing, 7.50 inch (190.5 mm)	2
Plug, wood, tapered, threaded, 3-inch	2
Plug, wood, tapered, threaded, 5-inch	2
Instructions	2

3.6.1 Clamps. The repair sealing clamps shall be as specified in 3.5.7.

3.6.1.1 Identification marking of clamps. The identification marking of clamps shall be as specified in 3.5.7.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:07Z
Check the source to verify that this is the current version before use.

3.6.2 Wood plugs. When specified, the 3-inch and 5-inch nominal-size wood plugs shall be as shown on figure 13. The plugs shall be machined from kiln dried, hardwood lumber and shall be free from knots, splits, and shakes.

3.6.3 Instructions. Instructions shall be as shown on figure 6. The instruction sheet shall be printed or typed (capital letters) on paper conforming to UU-P-121, type IV and shall be heat laminated between two sheets of vinyl plastic. The plastic film shall be not less than 0.020 inch (.51 mm) thick conforming to L-P-535, composition A, type I, class 3. The finished instruction sheet shall be not less than 4 by 5 inches (101.6 by 127 mm), and shall have rounded corners.

3.7 Identification marking.

3.7.1 Type I kit. The location and size of the identification marking shall be as shown on figure 7. The marking shall conform to DDD-L-20, type IV, class 5. The letters "US" shall conform to DDD-L-20, type IV, class 9, except that the fastness of the marking shall be as specified for class 5 marking.

3.7.2 Type II kit. The type II kit container shall conform to MIL-STD-130.

3.8 Workmanship.

3.8.1 Type I kit pouch. The pouch shall be neatly sewn with no spots, tears, or discolorations and the components shall fit snugly, permitting ease of insertion and removal.

3.8.2 Type II kit container. The container and components shall be smooth and clean with no sharp edges or excess material. The knife blade shall be smooth and free from scars, checks, pipes, scale, and pits.

3.8.3 Welding. The aluminum surfaces of parts to be welded shall be free from scale, paint, grease, oxide film, and other foreign matter. The welding shall be done by the inert gas, shielded-arc method. Welds may be ground, filed, buffed, or chipped but shall not be hammered. The welds shall be free from discontinuities such as base metal cracks adjacent to or behind welds, cracks in weld metal, undercutting of base metal, lack of fusion with parent metal or between parts, lack of penetration, lack of prescribed fit, or spatter.

3.8.4 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, be in full contact with the surface of the member, and shall conform to SAE J492.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality assurance program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested to conform to referenced specifications and standards as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in 4.5.1. The presence of one or more defects shall be cause for rejection.

4.3.2 First article tests. The first article shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall conform to MIL-STD-105.

4.4.2 Examination. Samples selected conforming to 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 1.0 percent defective for major defects and 1.0 percent defective for minor defects.

4.4.3 Tests. Samples selected conforming to 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 1.0 percent defective.

4.5 Inspection procedure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

4.5.1 Examination. The repair kits shall be examined as specified for the following defects:

Major	Defect	Requirement paragraph
101.	Materials not as specified.	3.3
102.	Materials not resistant to corrosion and deterioration or treated to be made resistant to corrosion and deterioration.	3.3.1
103.	Dissimilar metals not conforming to MIL-STD-889.	3.3.1.1
104.	Material and material finish or treatment information not available.	3.3.1.2
105.	Used, rebuilt, or remanufactured components, pieces or parts are not incorporated in the repair kits.	3.3.2
106.	Type I components missing or not as specified.	3.4, 3.5.4
107.	Pouch not as specified.	3.4.1
108.	Cloth not as specified.	3.4.1.1
109.	Tape not as specified.	3.4.1.2
110.	Thread not as specified.	3.4.1.3
111.	Snap fasteners not as specified.	3.4.1.4
112.	Hood not as specified.	3.4.2, 3.5.2
113.	Pliers not as specified.	3.4.3
114.	Patch not as specified.	3.4.4
115.	Gasket not as specified.	3.4.4.2, 3.5.6.2
116.	Locking disk not as specified.	3.4.4.3, 3.5.6.3
117.	Wood plugs not as specified.	3.4.5, 3.5.5, 3.6.2
118.	Type II components missing or not as specified.	3.5
119.	Container not as specified.	3.5.1
120.	Clips not as specified.	3.5.1.1
121.	Lock not as specified.	3.5.1.3
122.	Hand guard not as specified.	3.5.3.1.1
123.	Handle not as specified.	3.5.3.1.2
124.	Finish not as specified.	3.5.3.1.3
125.	Sheath not as specified.	3.5.3.2
126.	Patch not as specified.	3.5.6
127.	Identification marking of clamps not as specified.	3.5.7.1, 3.6.1.1
128.	Type III components missing or not as specified.	3.6
129.	Workmanship not as specified.	3.8
130.	Type I kit pouch not as specified.	3.8.1
131.	Type II kit container not as specified.	3.8.2
132.	Welding not as specified.	3.8.3
133.	Riveted connections not as specified.	3.8.4
134.	Elastomeric materials not in conformance to FDA or NSF Standards.	3.3.1.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

Minor

201.	Stitching not as specified.	3.4.1.5
202.	Instructions missing or not as specified.	3.4.7, 3.5.8, 3.6.3
203.	Rivets not upset on exterior of container.	3.5.1.2
204.	Surfaces of container not prepared for painting as specified.	3.5.1.4
205.	Surfaces of container not enameled as specified.	3.5.1.5
206.	Marking on the blade not as specified.	3.5.3.1.4
207.	Marking, identification, and instructions missing, incomplete, illegible; type, size and location not specified, not affixed in the prescribed manner; incorrect label and color; not fabricated of the specified material, or not embossed, stamped, or printed as specified.	3.7, 3.7.1, 3.7.2

4.5.2 Tests.

4.5.2.1 Component test. The following repair kit components shall be tested as specified:

4.5.2.1.1 Rubber plug, 0.75 inch (19.05 mm). The 0.75-inch- (19.05-mm)-diameter rubber plug shall be wetted and forced through a hole not more than 0.44-inch (11.18-mm) diameter in a 3-ply, rubberized-nylon fabric not less than 0.125 inch (3.18 mm) thick. Any evidence of separation of rubber and screw or distortion of the screw shall constitute failure of the test (see 3.4.4.1).

4.5.2.1.2 Rotary cutter.

4.5.2.1.2.1 Rotary cutter hardness. The cutting edge of the rotary cutter shall be tested for hardness conforming to ASTM E 18. Nonconformance to 3.4.6 shall constitute failure of the test.

4.5.2.1.2.2 Performance. Five holes shall be cut in a rubber-coated fabric conforming to MIL-D-23119. Nonconformance to 3.4.6 shall constitute failure of the test.

4.5.2.1.3 Knife.

4.5.2.1.3.1 Grain size, steel. The steel for the knife shall be tested for grain in conformance with ASTM E 112. Nonconformance to 3.5.3.1 shall constitute failure of the test.

4.5.2.1.3.2 Hardness. The knife blade shall be tested conforming to ASTM E 18. The test shall be a three-point reading at heel, center, and 0.125 inch (3.18 mm) from the cutting edge. Nonconformance to 3.5.3.1 shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

4.5.2.1.3.3 Bending. The blade shall be secured in a vise 2 inches (50.8 mm) from the point and bent 5 to 15 degrees each way from vertical. Nonconformance to 3.5.3.1 shall constitute failure of the test.

4.5.2.1.4 Rubber plug, 2-inch (50.8 mm). The 2-inch (50.8-mm) diameter rubber plug shall be wetted and forced through a hole not more than 1-inch (25.4 mm) diameter in a 3-ply-rubberized-nylon fabric not less than 0.125 inch (3.18 mm) thick. Any evidence of separation of rubber and screw or distortion of the screw shall constitute failure of the test (see 3.5.6.1).

4.5.2.1.5 Repair sealing-clamp assembly. The bottom cup assembly of the repair sealing-clamp assembly shall be tested by applying a static tensile load of not less than 200 lbs to the stud at a right angle to the bottom cup. Separation of the stud, rivet, or hinge from the bottom cup, or permanent deformation of the hinge or bottom cup, shall constitute failure of this test (see 3.5.7).

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall conform to MIL-STD-105.

4.6.1.3 Examination. Samples selected conforming to 4.6.1.2 shall be examined for the following defects. AQL shall be 1.0 percent defective.

135.	Preservation not as specified for level A.
136.	Technical publications not preserved as specified.
137.	Box for type I kits not closed and sealed as specified for level A.
138.	Components not contained within the pouch or repair kit container as specified for level A.
139.	Gross weight or size exceeds the limitations of the applicable box specification for level A or B.
140.	Strapping not as specified for level A.
141.	Markings missing, illegible, incorrect, or incomplete for level A or B.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

5.1.1 Level A. The pliers of the type I kit, and all exposed treated and untreated ferrous metal surfaces of each knife of the type II kit, shall be coated with type P-1 or P-19 preservative. The preservative shall be in accordance with the applicable specification listed and shall be applied in accordance with MIL-P-116. The cutting edge of the rotary cutter and insert tool shall be coated with strippable compound in accordance with MIL-P-149, type II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

5.1.1.1 Type I kit. Each component of the kit shall be placed in its respective place within the kit pouch and all flaps secured with the snap fasteners. The pouch shall then be placed in a close-fitting box conforming to PPP-B-636, W6c, style optional, and the box closed and sealed as specified for method V in the appendix to the box specification.

5.1.1.2 Type II kit.

5.1.1.2.1 Instruction sheet. The instruction sheet shall be placed in the cover of the kit container, printed-side up, and secured in place by the spring brackets.

5.1.1.2.2 Hood. The hood shall be placed on top of the instruction sheet under the spring brackets. Prior to placing in the container, each hood shall have the vinyl-film hood sections neatly folded around the facepiece. Each folded hood shall measure approximately 6 by 10 inches.

5.1.1.2.3 Knife. The knife, coated with preservative as specified in 5.1.1, shall be preserved conforming to with MIL-P-116, method IC-1. The knife blade shall be protected to prevent damage to the barrier material.

5.1.1.2.4 Patches. Each patch, completely assembled with nuts finger tightened, shall be preserved in accordance with MIL-P-116, method IC-1 or IC-3. Patches shall then be placed and compactly arranged in the bottom of the kit container.

5.1.1.2.5 Clamps. Each clamp shall have the wingnut and top of the clamp removed, and the stud folded flat within the bottom half of the clamp. The top and bottom of the clamp, with the wing nut enclosed between, shall be secured together with the nylon cord. Each complete clamp shall then be preserved conforming to MIL-P-116, method IC-1 or IC-3.

5.1.1.2.6 Plugs, wood. The plugs shall be placed in the kit container without preservation.

5.1.1.2.7 Lock and keys (see 6.2). The lock with keys shall be preserved conforming to MIL-P-116, method IC-1 or IC-3, and placed in the kit container.

5.1.1.2.8 Type I kit. Each type I kit, preserved as specified in 5.1.1.1, shall be placed in the kit container.

5.1.1.2.9 Repair kit container. All components comprising the type II kit shall be contained within the repair kit container. The contents shall be blocked or cushioned, as required, to prevent free movement or damage. The container shall be closed and the latch secured in a manner to prevent accidental opening.

5.1.1.3 Type III kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

5.1.1.3.1 Clamps. The clamps shall be preserved as specified in 5.1.1.2.5. After the clamps are preserved, they shall be sealed in a polyethylene bag.

5.1.1.3.2 Plugs. Each plug shall be preserved conforming to MIL-P-116, submethod IC-1.

5.1.1.3.3 Technical publications. Technical publications shall be preserved conforming to MIL-P-116, submethod IC-1.

5.1.1.3.4 Consolidation. The preserved repair kit, consisting of four 3-inch-size clamps, two 5-inch-size clamps, two 7.50-inch-size clamps, two 3-inch-size plugs, two 5-inch-size plugs, and two technical publications shall be consolidated in a close-fitting, weather-resistant box conforming to PPP-B-636. The box shall be closed in accordance with applicable requirements of the appendix to the box specification.

5.1.2 Level C. Types I, II, and III kits shall be preserved as specified for level A except the boxes for placement of the pouches and consolidation shall be domestic class.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Type I, type II, and type III kits, preserved as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-621, class 2, or PPP-B-601, overseas type, grade B, style optional, in quantities not to exceed 200 lbs. Only kits of the same type shall be packed together. Type II kits shall be blocked within the box in in accordance with MIL-STD-1186 to prevent abrasion against each other. Box closure and strapping shall be in accordance with the appendix to the box specification, except that strapping shall conform to QQ-S-781, class I, type I or IV, finish B, size as applicable.

5.2.2 Level B. Type I, II, and III kits, preserved as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-636, V3c, V11c, V13c, or V15c, style optional, or PPP-B-640, class 2, style optional, in quantities not to exceed the weight or size limitation of the box. Only kits of like type shall be packed together. Type II kits shall be blocked within the box in accordance with MIL-STD-1186 to prevent abrasion against each other. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.2.3 Level C. Type I, II and II kits, preserved as specified in 5.1 shall be packed as specified in 5.2.2 for level B, except the boxes shall be domestic class.

5.3 Marking. In addition to any special marking specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The repair kits are intended for repairing collapsible fabric fuel tanks and fuel drums, pneumatic boats, and life rafts. The components may be specified individually in various quantities when the complete kit is not required.

6.2. Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article test is not required (see 3.2).
d. Type of repair kit, number, and identity of repair kit components required when the complete kit is not required (see 1.2 and 3.1).
e. Timeframe required for submission of the first article repair kits and number and types of repair kits or components required (see 3.2).
f. When padlock and keys are required (see 3.5.1.3).
g. Color required for container (see 3.5.1.5).
h. Level of preservation and packing required (see 5.1 and 5.2).
i. Any special marking (see 5.3).

6.3 First article. When a first article inspection is required, the item(s) should be a first produced model. The first article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Subject term (key word) listing.

Boat, repair
Collapsible fabric repair
Drum, repair
Tank, fuel
Kit, repair clamp
Kit, repair components
Kit, repair plug
Plug
Repair
Tank, repair

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

6.5 Cataloging data. For cataloging purposes, the National Stock Number shall be as follows:

3-inch Repair Sealing-Clamp Assembly	5340-00-720-8864
5-inch Repair Sealing-Clamp Assembly	5340-00-720-8863
7.50-inch Repair Sealing Clamp Assembly	5340-00-720-8858
3-inch plug	5510-00-255-9493
5-inch plug	5510-00-255-9492

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review activities:
DLA - CS
Air Force - 82

User activity:
Navy - MC, YD
DLA - GS

Preparing Activity:
Army - ME

Project 5430-0156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

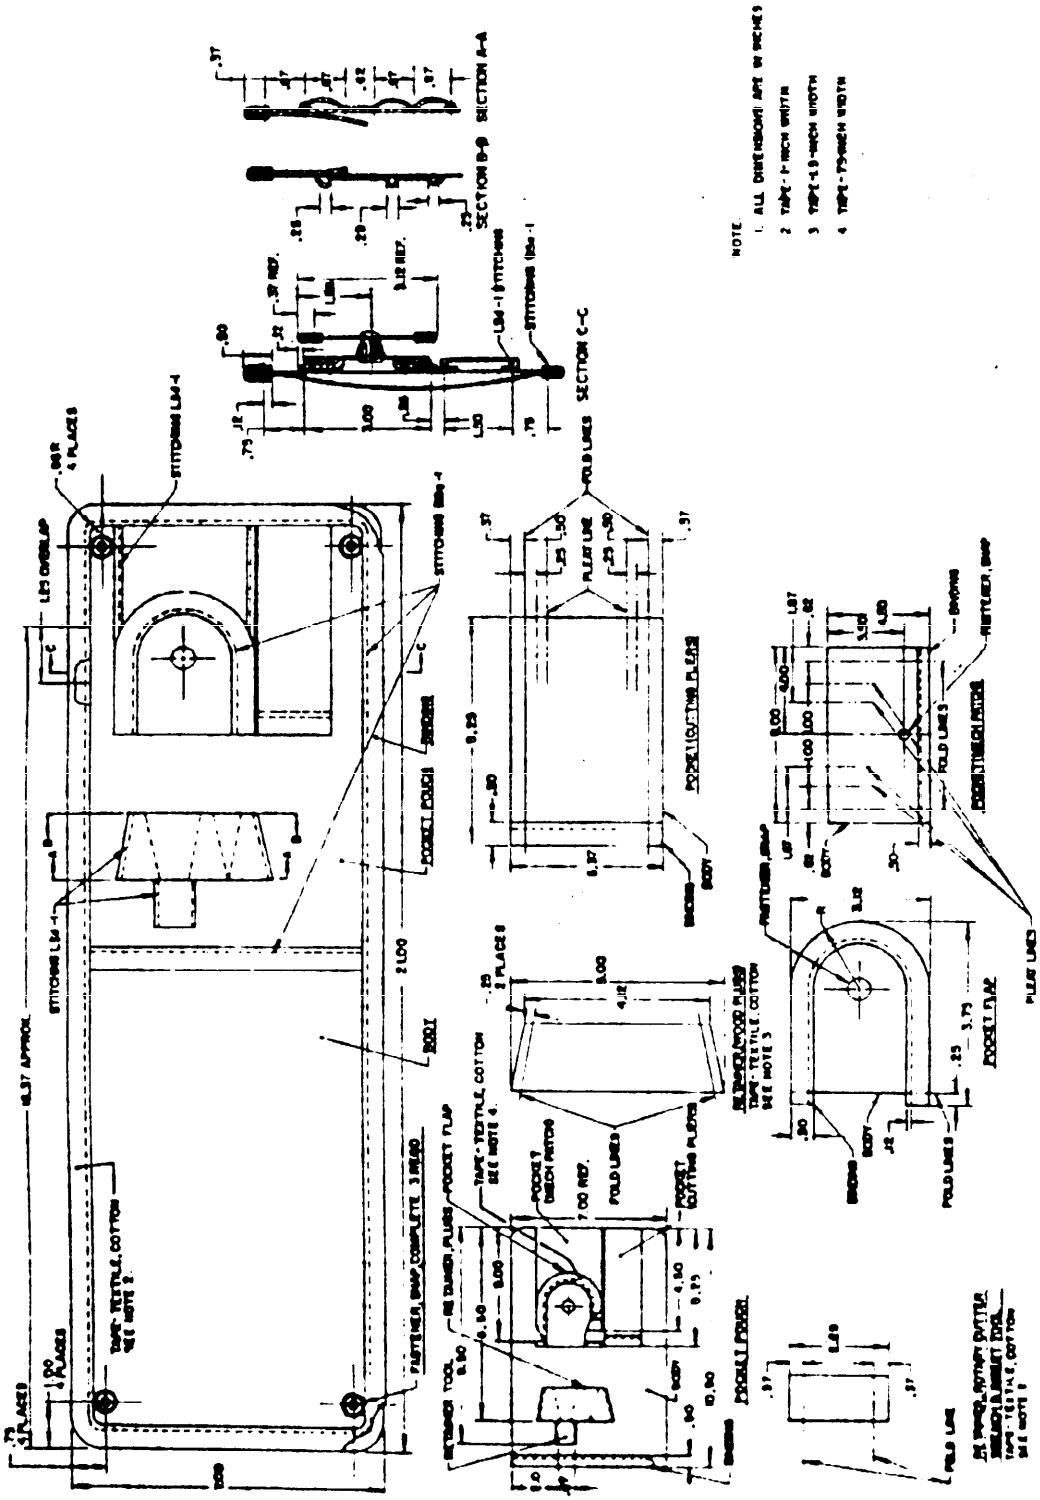


FIGURE 1. Pouch.

X-3063A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.


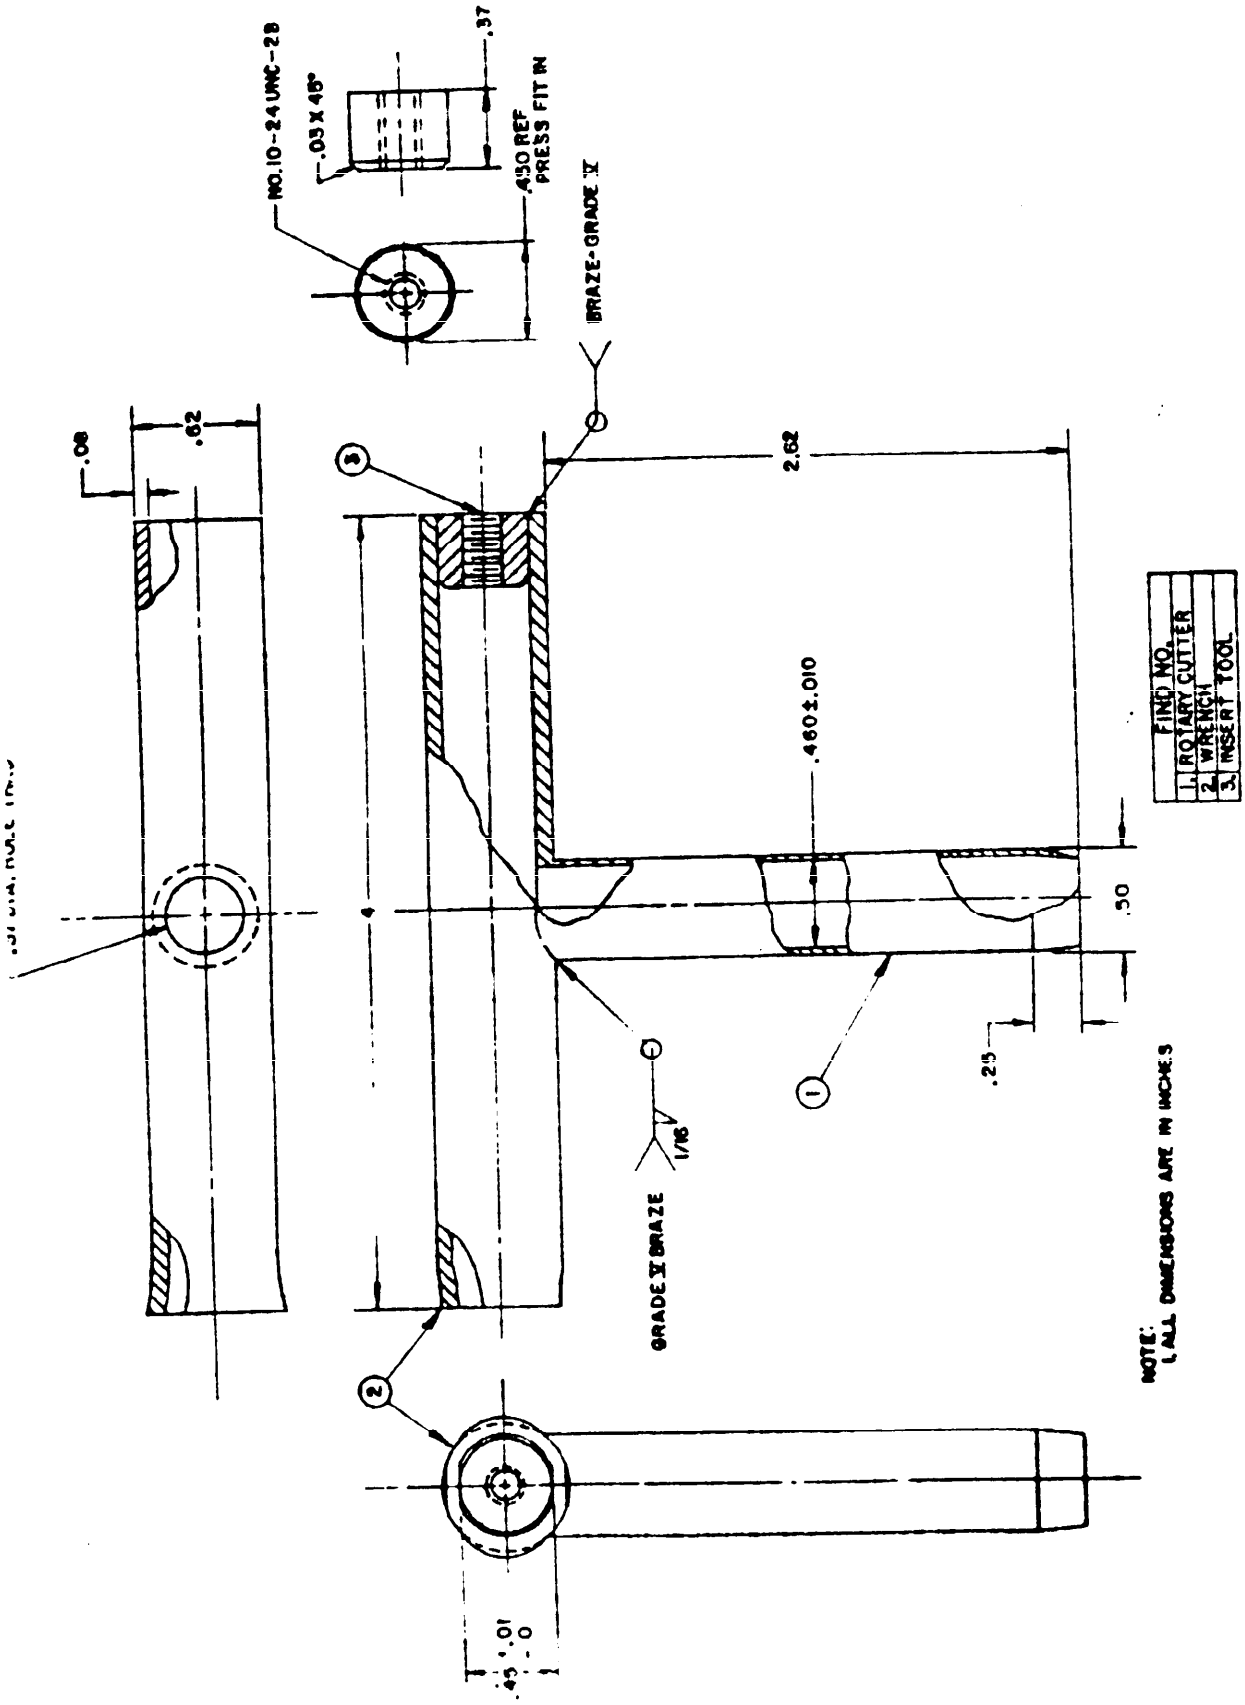


FIGURE 2. Rotary cutter, wrench and insert tool assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

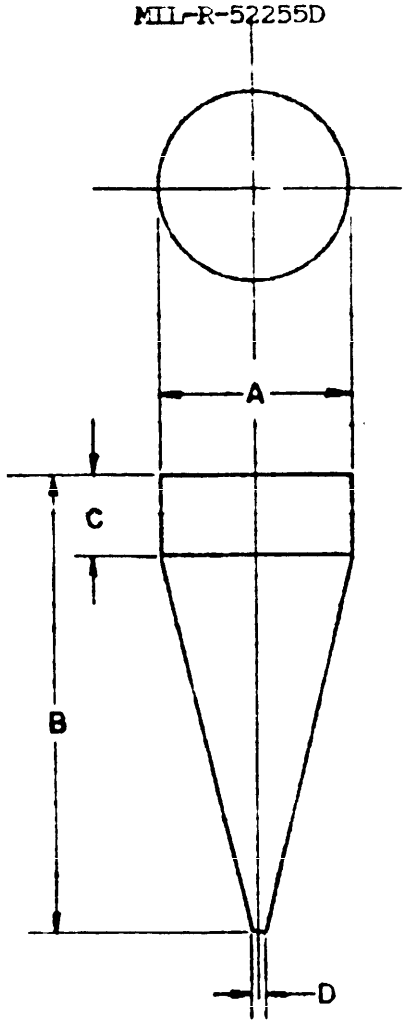


NOMINAL SIZE	DIMENSIONS IN INCHES			
	A	B	C	D
5/8	.62	3	.50	.12
1-1/2	1.50	4.50	1.00	.12
2	2	5.25	1.00	.12

FIGURE 3. PLUG, WOOD

X-3059

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

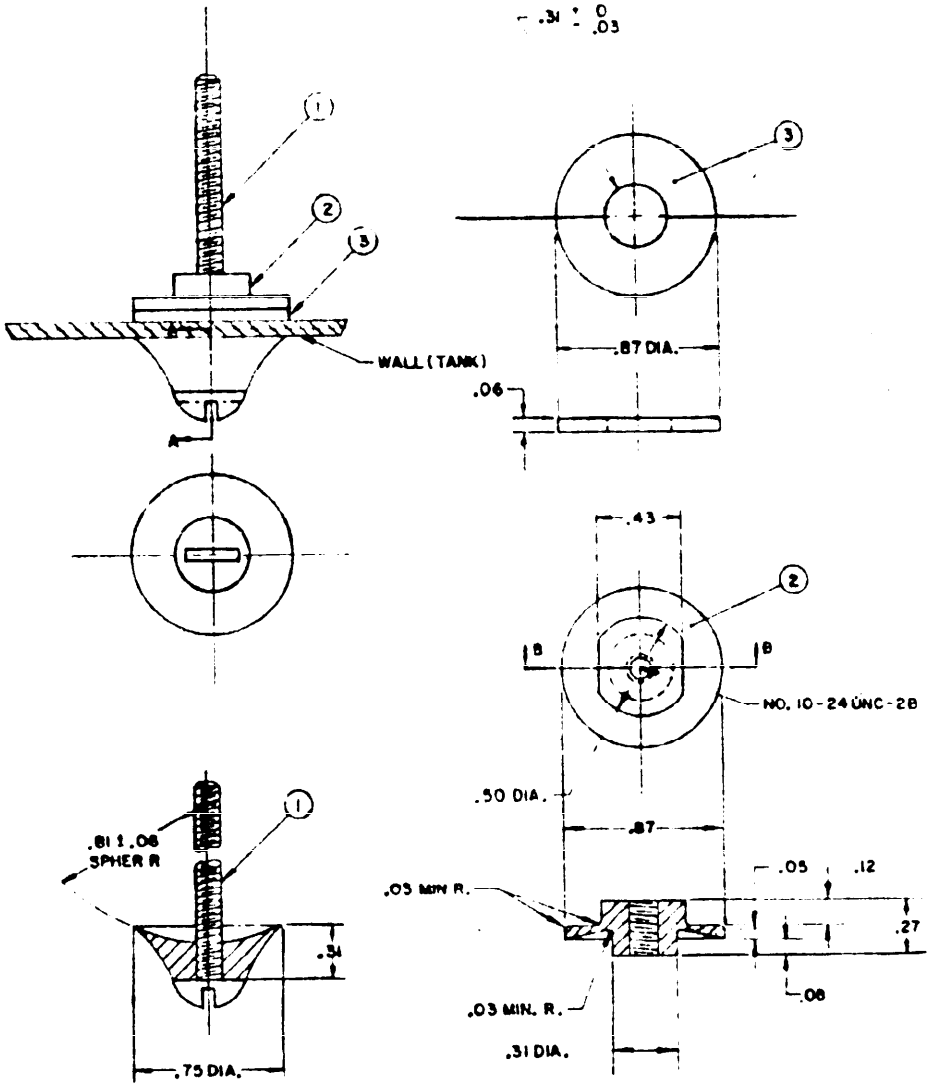

FIND NO.	
1	PLUG
2	LOCKING DISC
3	GASKET

NOTE:
1. ALL DIMENSIONS ARE IN INCHES

FIGURE 4. Mechanical patch assembly, 3/4 inch.

X-3060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

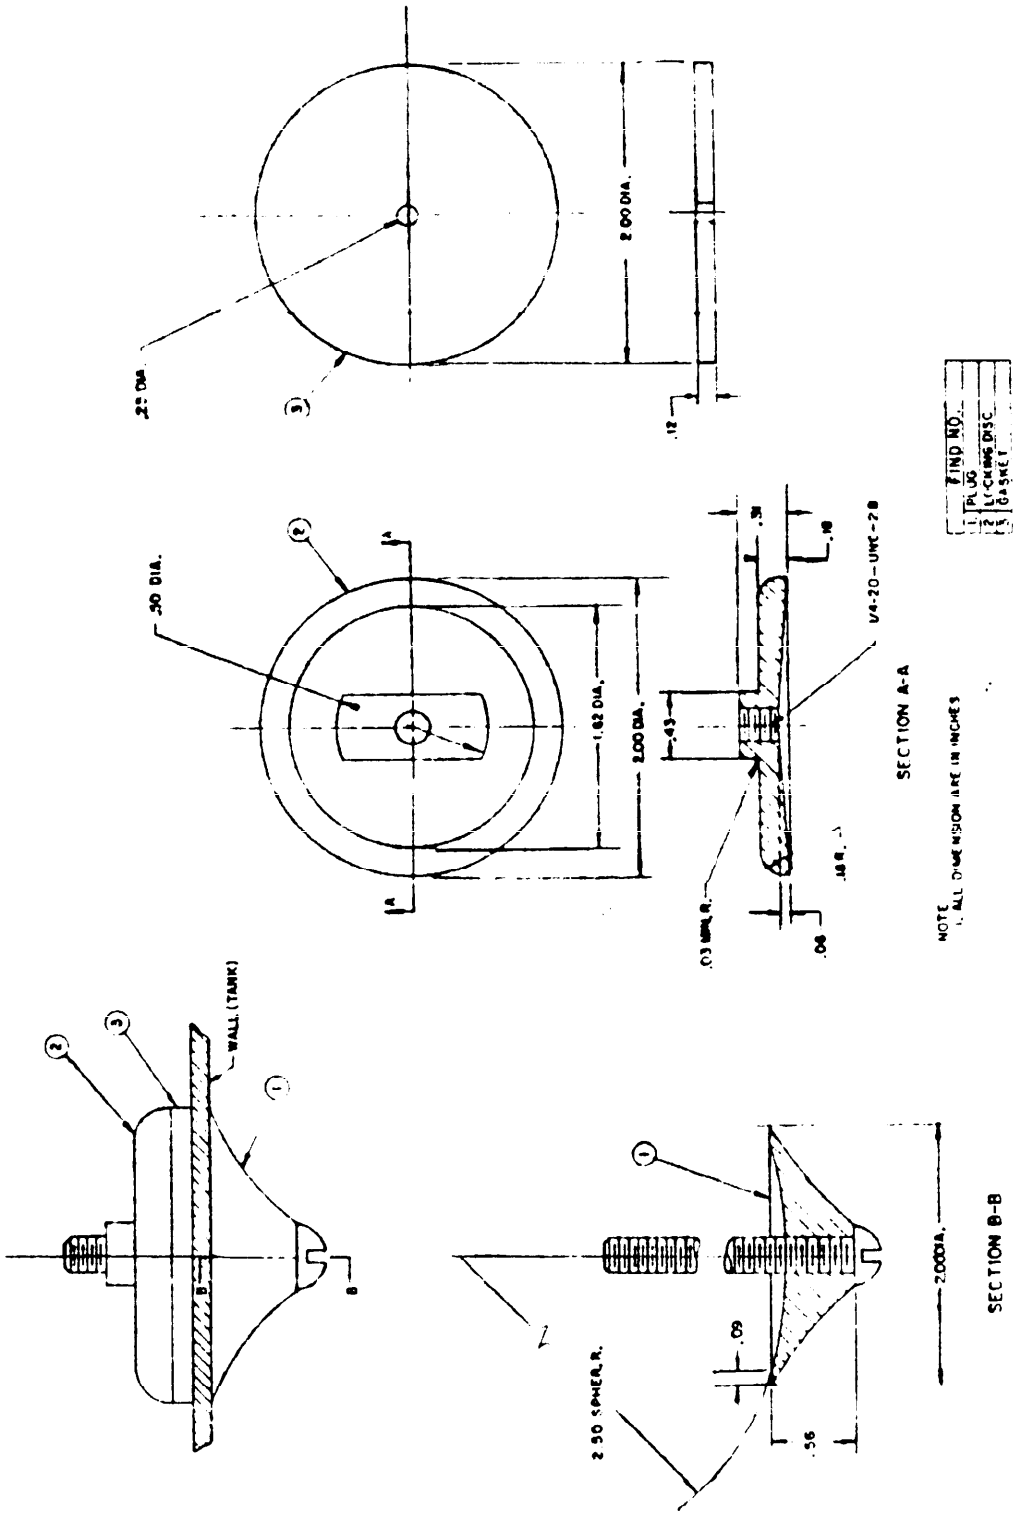


FIGURE 5. Mechanical patch assembly, 2 inch.

X-3061


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.




FIGURE 6. Instructions, type I and III repair kit.


X-3062A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

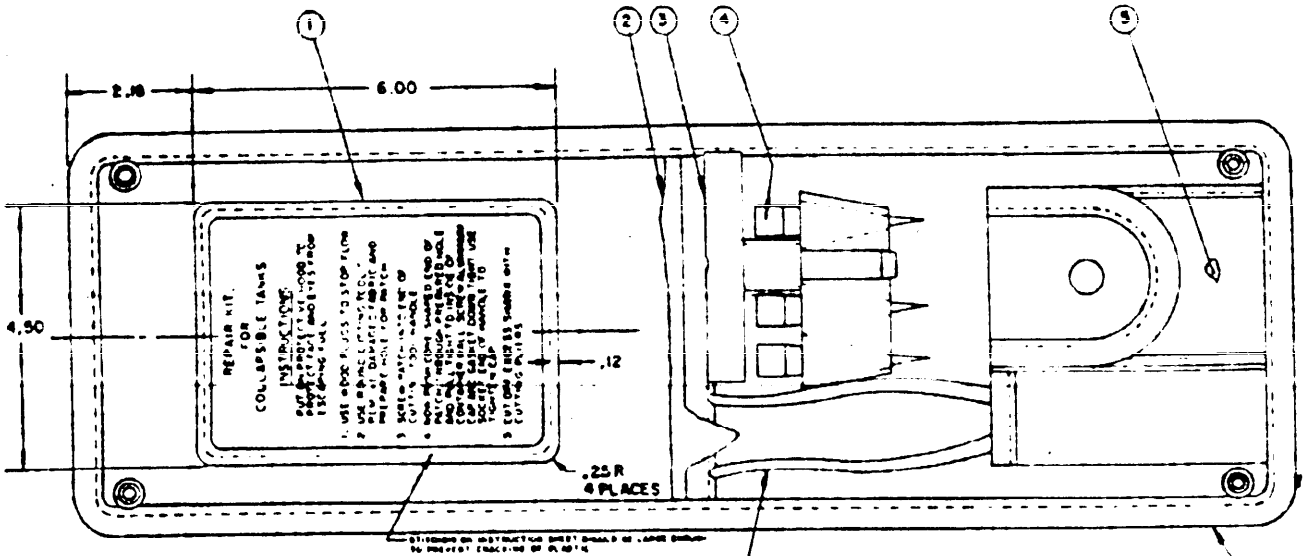

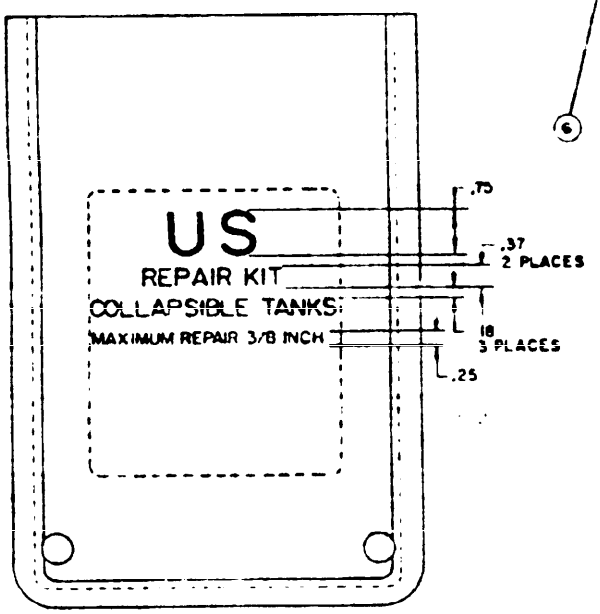

FRONT

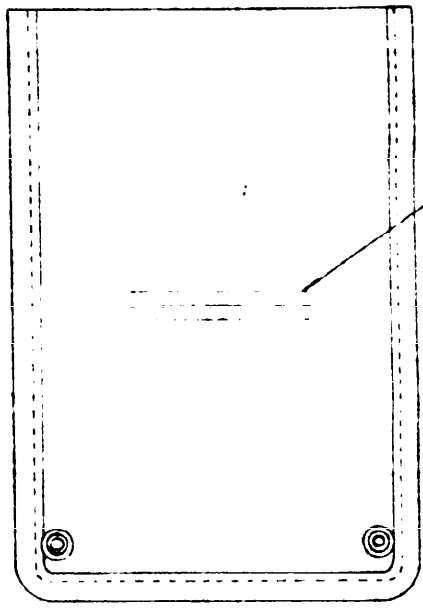

REAR

NOTE:
1. ALL DIMENSION ARE IN INCHES

FIND NO.	DESCRIPTION
1.	INSTRUCTIONS
2.	HOOD, FLEXIBLE, PROTECTIVE
3.	ROTARY CUTTER, WRENCH AND INSERT TOOL
4.	PLUGS, WOOD
5.	MECHANICAL PATCH ASSEMBLY 3/4 INCH
6.	PLIERS
7.	POUCH

FIGURE 7 Repair kit, collapsible tanks, type I and type III.

X-3064 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

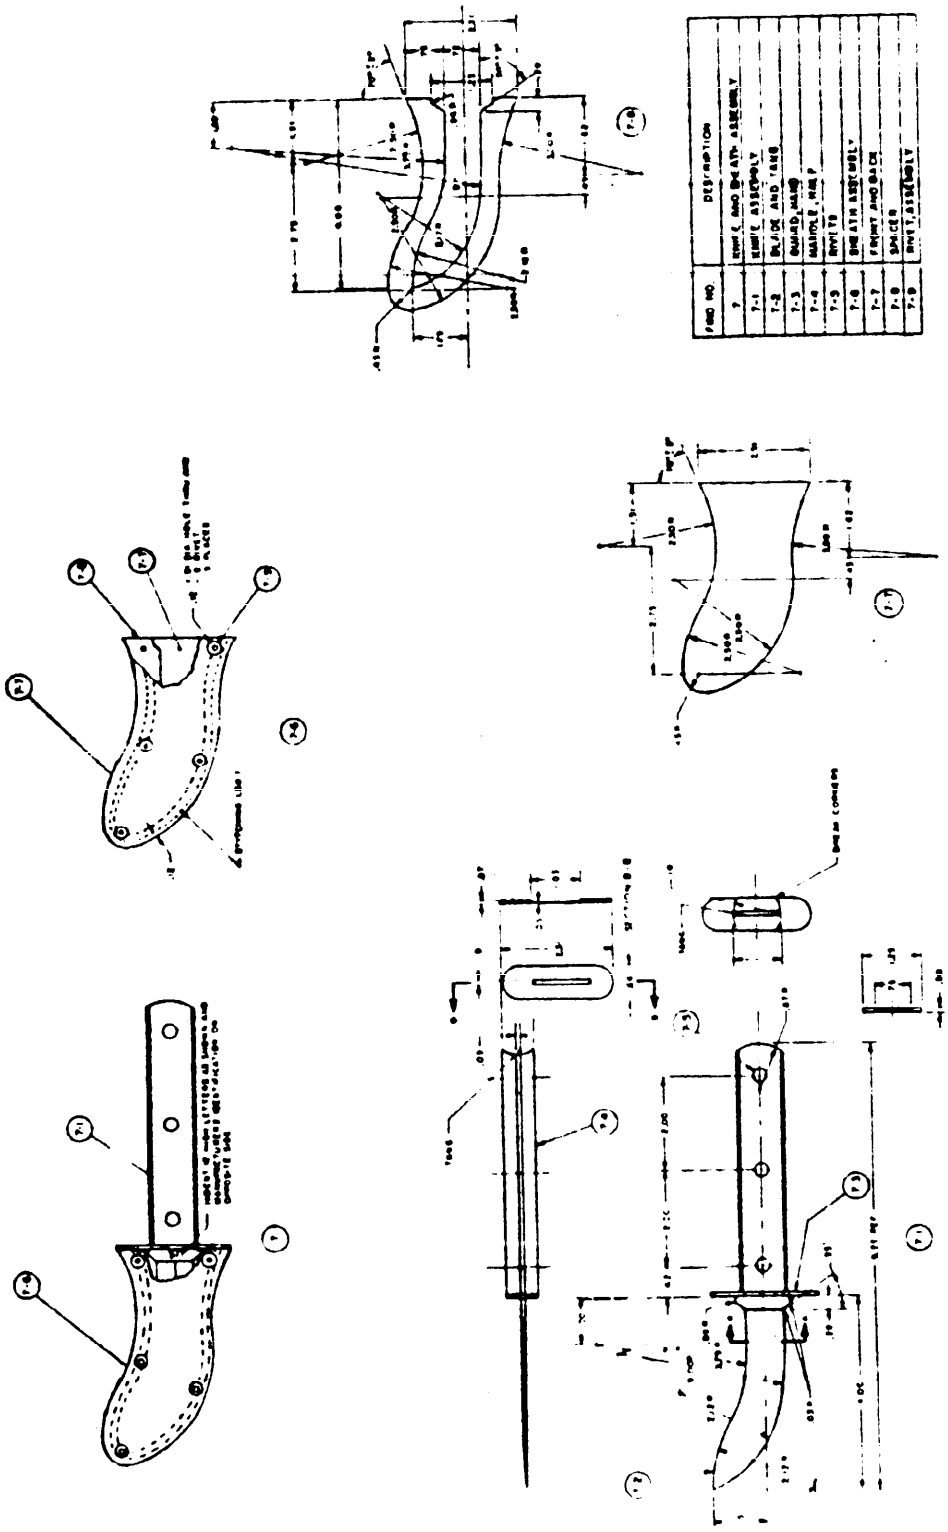


FIGURE 8. Knife and sheath assembly. X-3065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

REPAIR KIT,
FOR
COLLAPSIBLE TANKS
INSTRUCTIONS

PUT ON PROTECTIVE HOOD TO PROTECT FACE AND EYES FROM ESCAPING FUEL.


FOR REPAIR OF SMALL PUNCTURES UP TO 3/8 INCH, USE EQUIPMENT CONTAINED IN CANVAS POUNCH.

FOR TEARS UP TO 1-1/2 INCHES

USE 2 INCH PLUG PATCH, FIRST USING KNIFE TO MAKE HOLES FOR PATCH SHANK. BACK-OFF ALUMINUM FLANGE AND GASKET APPROXIMATELY 3/4 INCH THEN INSERT RUBBER PATCH THRU DAMAGED AREA AND QUICKLY TURN DOWN GASKET AND FLANGE UNTIL PATCH IS TIGHT.

FOR TEARS LARGER THAN 1-1/2 INCHES

USE 3, 5, OR 7-1/2 INCH SEALING CLAMPS AS SHOWN BELOW. USE KNIFE IF NECESSARY TO LENGTHEN TEAR TO ACCOMMODATE CLAMP.

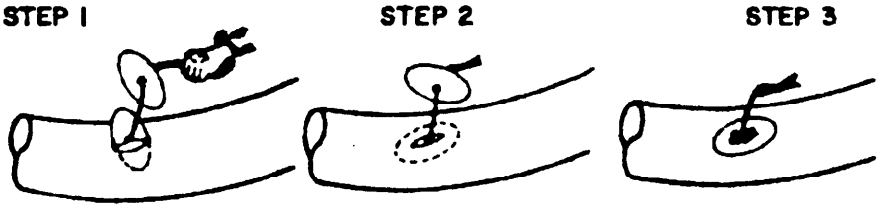

WOOD PLUGS ARE FOR USE ONLY UNTIL PROPER REPAIR ITEM HAS BEEN DECIDED UPON.


COMPONENTS


QUANTITY	NOMENCLATURE
1	PROTECTIVE HOOD
2	MECHANICAL PATCH, 2 INCH
2	REPAIR SEALING CLAMP, 3 INCH
2	REPAIR SEALING CLAMP, 5 INCH
2	REPAIR SEALING CLAMP, 7-1/2 INCH
2	WOOD PLUG, 1-1/2 INCH
2	WOOD PLUG, 2 INCH
1	KNIFE AND SHEATH
1	CANVAS FITTED POUCH
1	TYPE I, REPAIR KIT

FIGURE 9. Instructions.

X-3066 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

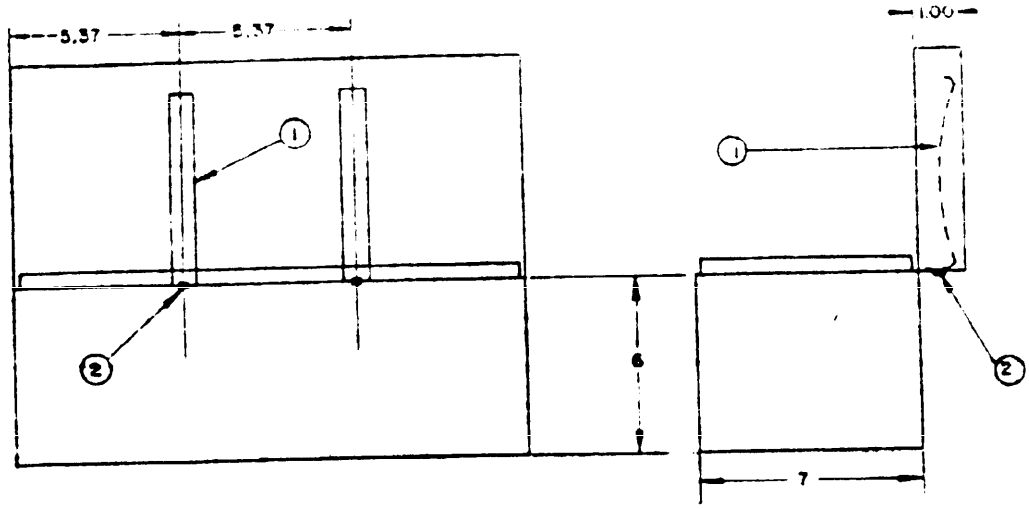

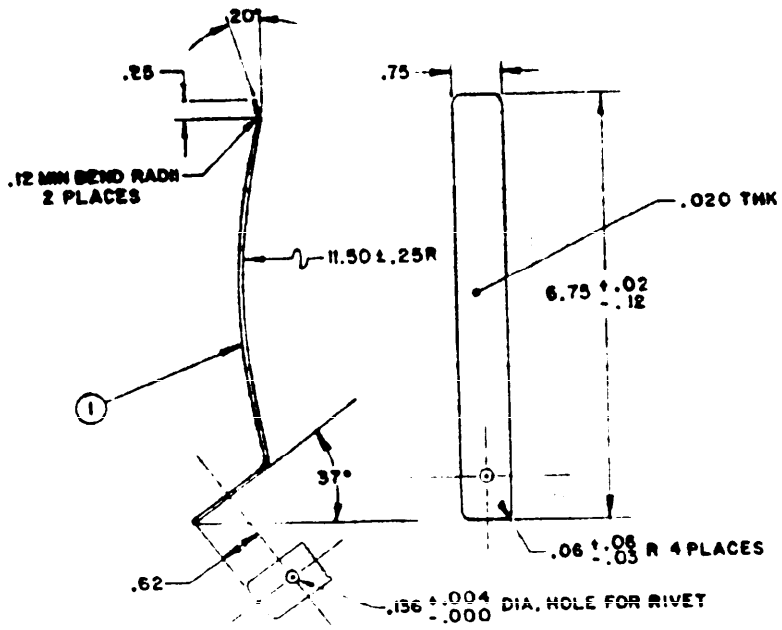


NOTE:
1. ALL DIMENSIONS ARE IN INCHES

FIND NO.	
1.	SPRING CLIP
2.	RIVET

FIGURE 10. Container, Type II repair kit.

X-3067

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

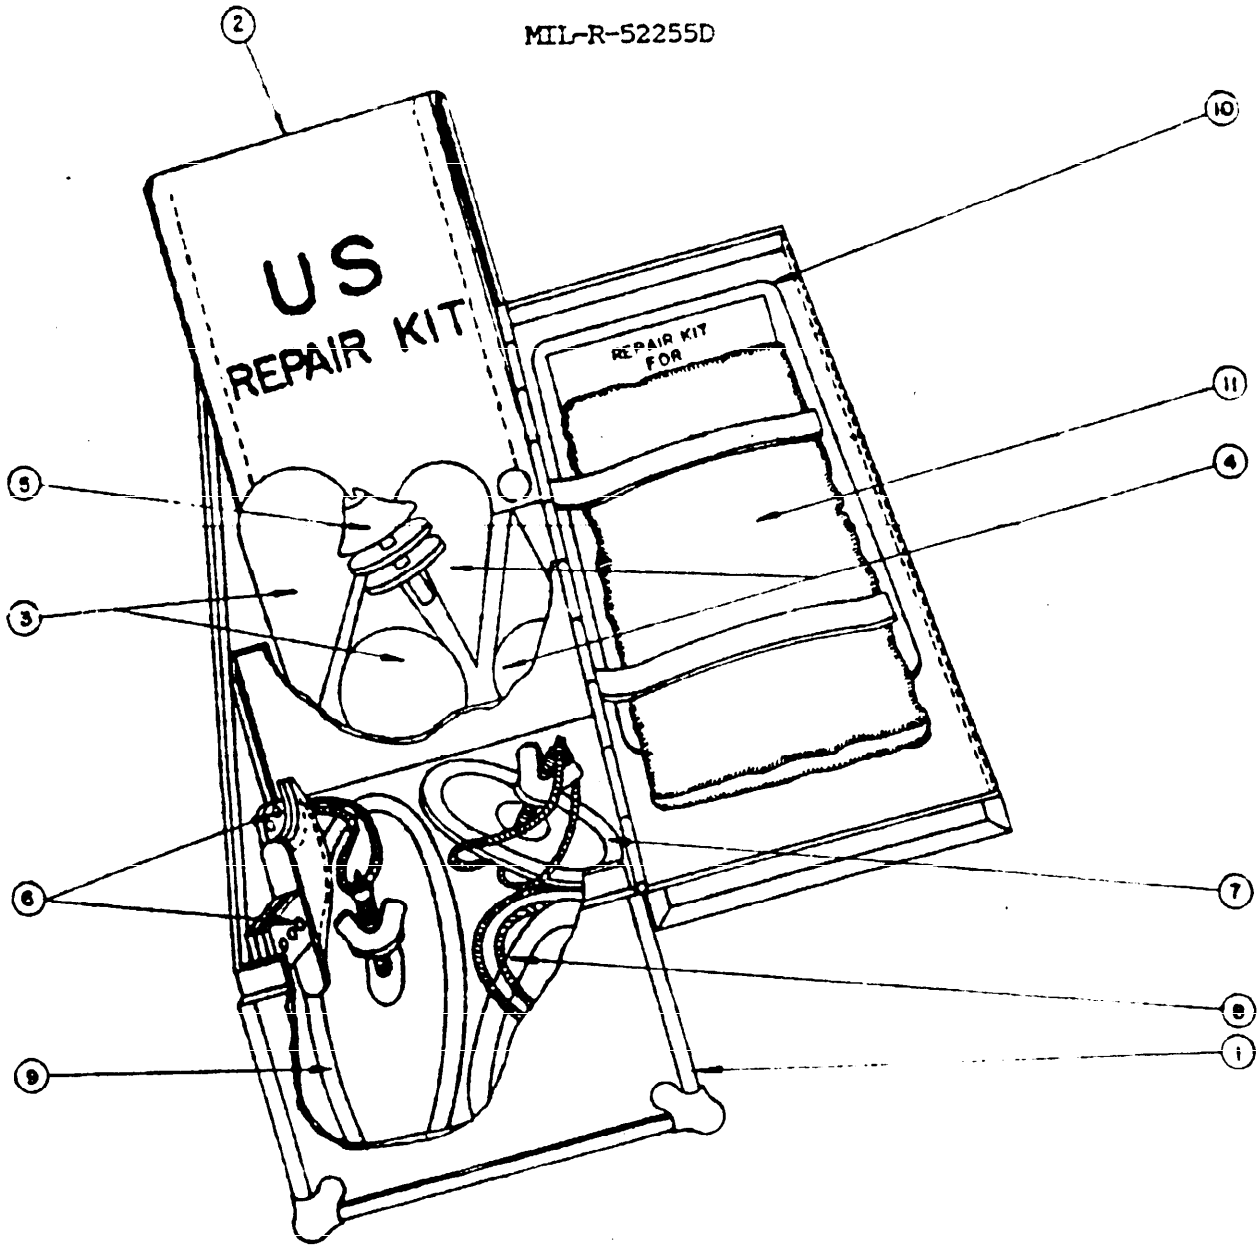


FIND NO.	DESCRIPTION
1	CONTAINER
2	REPAIR KIT, TYPE I, ASSEMBLY
3	PLUG, WOOD, 2 INCH
4	PLUG, WOOD, 1-1/2 INCH
5	MECHANICAL PATCH ASSEMBLY, 2 INCH
6	KNIFE AND SHEATH ASSEMBLY
7	REPAIR SEALING CLAMP ASSEMBLY, 3 INCH
8	REPAIR SEALING CLAMP ASSEMBLY, 5 INCH
9	REPAIR SEALING CLAMP ASSEMBLY, 7-1/2 INCH
10	INSTRUCTION SHEET
11	HOOD, FLEXIBLE, PROTECTIVE

FIGURE 11. Repair kit, collapsible tanks, type II.

X-3068 A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

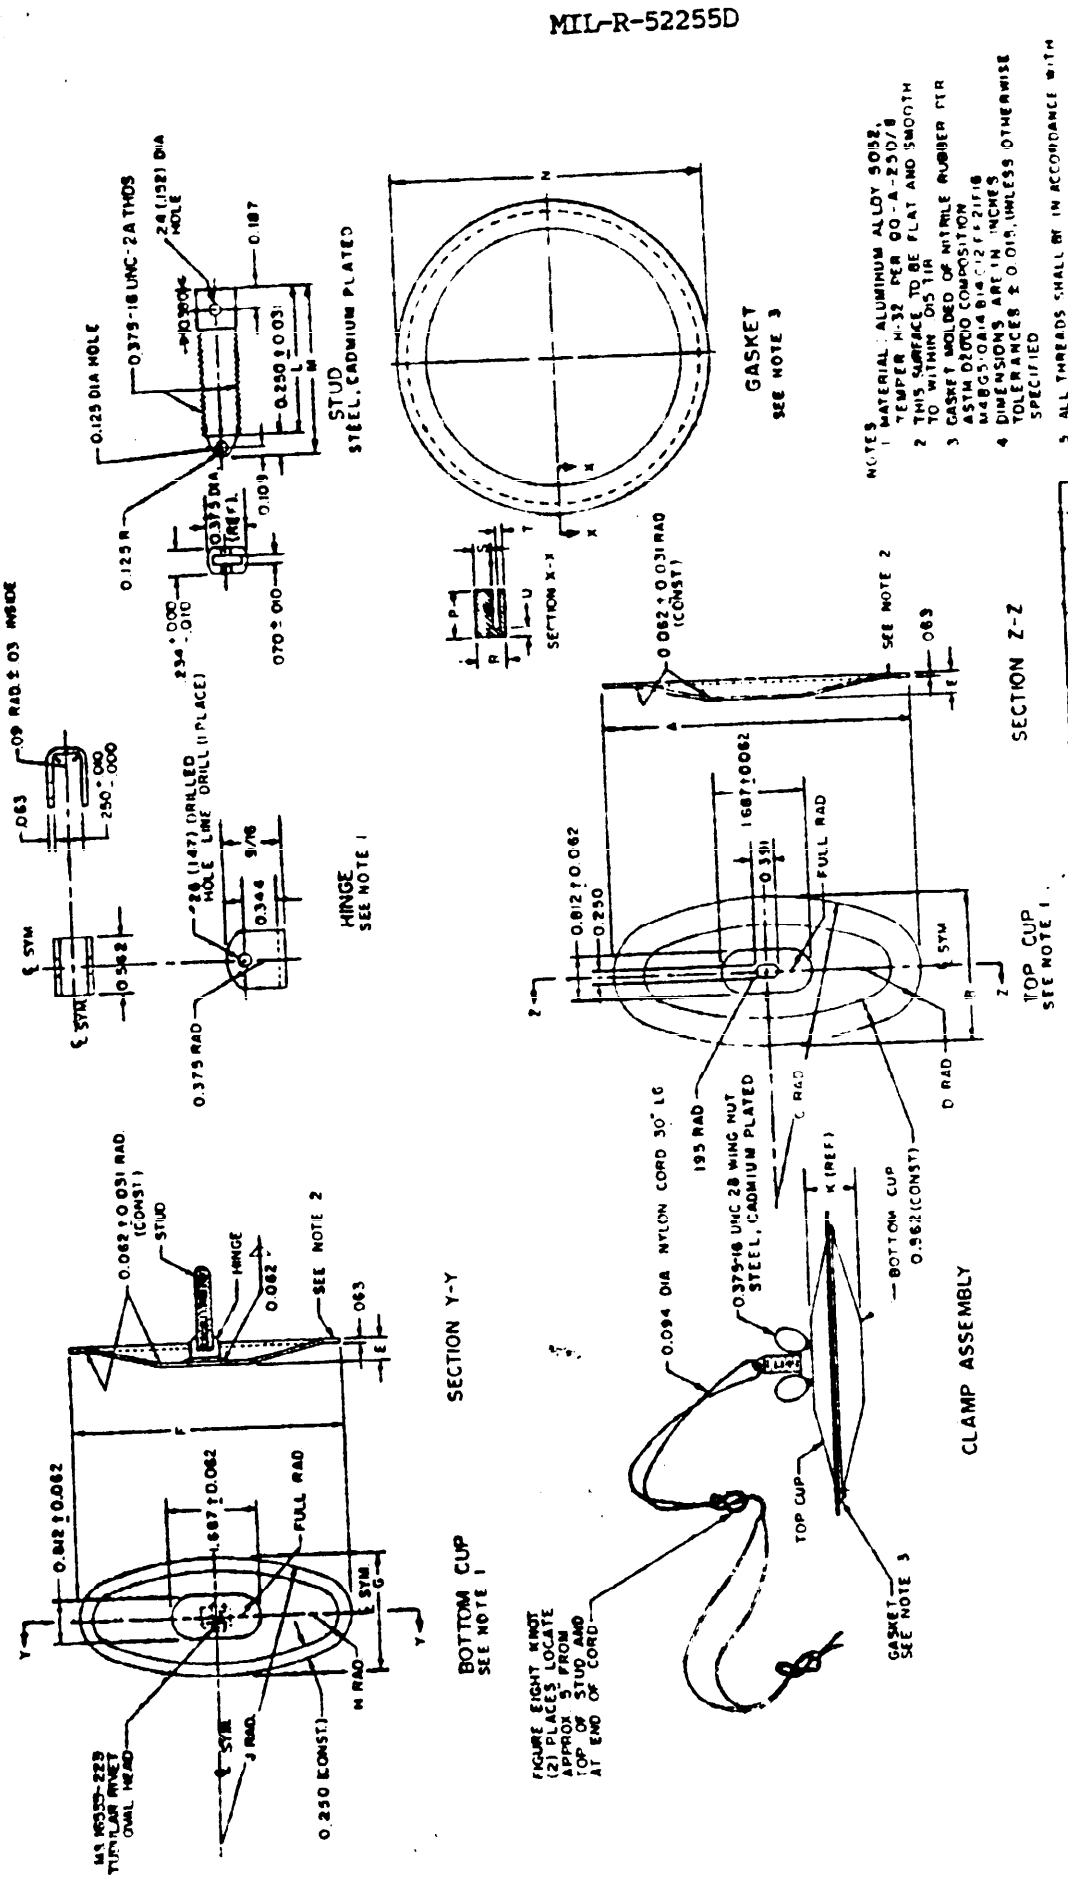


SIZE	A	B	C RAD	D RAD	E	F	G	H RAD	J RAD	K	L	M	N	P	R	S	T	U
3	3.875	2.500	2.687	0.937	0.391	3.250	1.875	0.625	2.375	0.969	1.437	1.625	2.625	0.250	0.312	0.187	0.062	0.062
5	5.906	2.906	5.906	1.078	0.391	5.253	2.250	0.750	5.656	0.969	1.437	1.625	3.750	0.312	0.312	0.187	0.062	0.062
7-1/2	8.437	4.187	8.156	1.531	0.500	7.750	3.500	1.187	7.812	1.187	2.187	2.375	5.812	0.437	0.312	0.187	0.062	0.062

FIGURE 12. Repair sealing clamp assembly.

X-2345F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

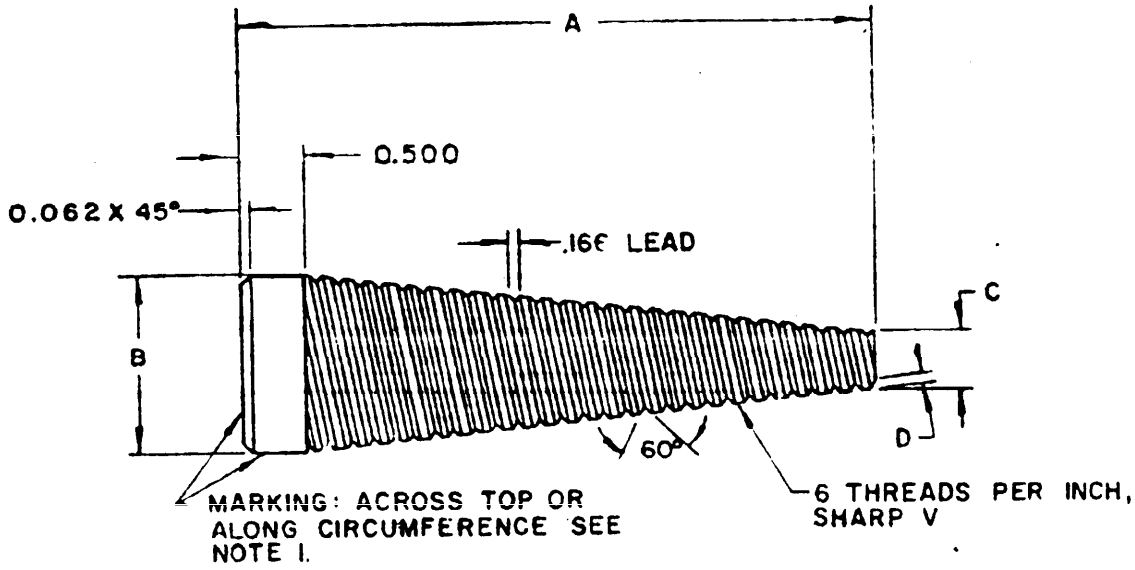

SIZE	A	B	C	D
3	3 ± 0.062	0.750 DIA.	0.250 DIA.	0.078
5	5 ± 0.062	1.500 DIA.	0.500 DIA.	0.094

NOTES:

1. IDENTIFICATION MARKING SHALL BE BLACK, INDELIBLE AND WATERPROOF. LETTERS SHALL BE CLEAR AND 0.125 INCH HIGH.
2. AFTER MARKING, PLUG SHALL BE GIVEN ONE COAT OF VARNISH CONFORMING TO MIL-V-173, COMPOSITION I.
3. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE IN INCHES, TOLERANCE ON DECIMALS ± .015, AND ANGLES ± 1° 30'.
4. MATERIAL SHALL CONFORM TO MM-L-736, TYPE I.

FIGURE 13. Wood plug, tapered, threaded.

X-2344E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:07Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-R-52255D	Repair Kit and Repair Kit Components, for Collapsible Fabric Tanks, Drums, and Boats

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In Block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir RDE Center
ATTN: STRBE-TSE
Ft. Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:07Z
Check the source to verify that this is the current version before use.