MILITARY SPECIFICATION SHEET

# BUR, BONE SURGERY (TUNGSTEN CARBIDE, 2 MM HEAD DIAMETER BY 7.5 MM CUTTING LENGTH,SIDE CUTTING, TAPERED-SHAPE C, MEDIUM SHANK-LENGTH 2)

The complete requirements for acquiring the bur described herein shall consist of this specification sheet and the latest issue of MIL-B-42017.

REQUIREMENTS:

Shall be a side cutting, tapered shape, medium shank, surgical buffing bur for use with the medium bur guard in National Stock Number (NSN) 6515-01-116-8197 DRILL, BONE, PNEUMATIC.

Shall be a one-piece bur made of C2 grade tungsten carbide, hot isostatically pressed, with a grain size of 1 to 2 microns.

Shall be examined at 30X magnification for bur defects not readily perceptible to the naked eye.

Shall not break when 8 pounds force is applied transversely at tip with the bur supported at and to the rear of the safeline.

Shall be of the design and dimensions shown in Figure 1 (7730).

NOTES:

This specification sheet covers the following item appearing in the Federal Supply Catalog:

| National Stock Number | Item Identification |
|---|---|
| 6515-01-139-7730 | BUR, BONE SURGERY, Side Cutting, Tapered Tungsten Carbide, 0.08 inch (2 mm) Head Diameter, 0.29 inch (7.5 mm) Cutting Length: Non-notched shank. |

Agent:
DLA-DM

Preparing activity:
DoD-MB


(Project No. 6515-3799)

AMSC N/A

FSC 6515

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:11Z
Check the source to verify that this is the currentversion before use.

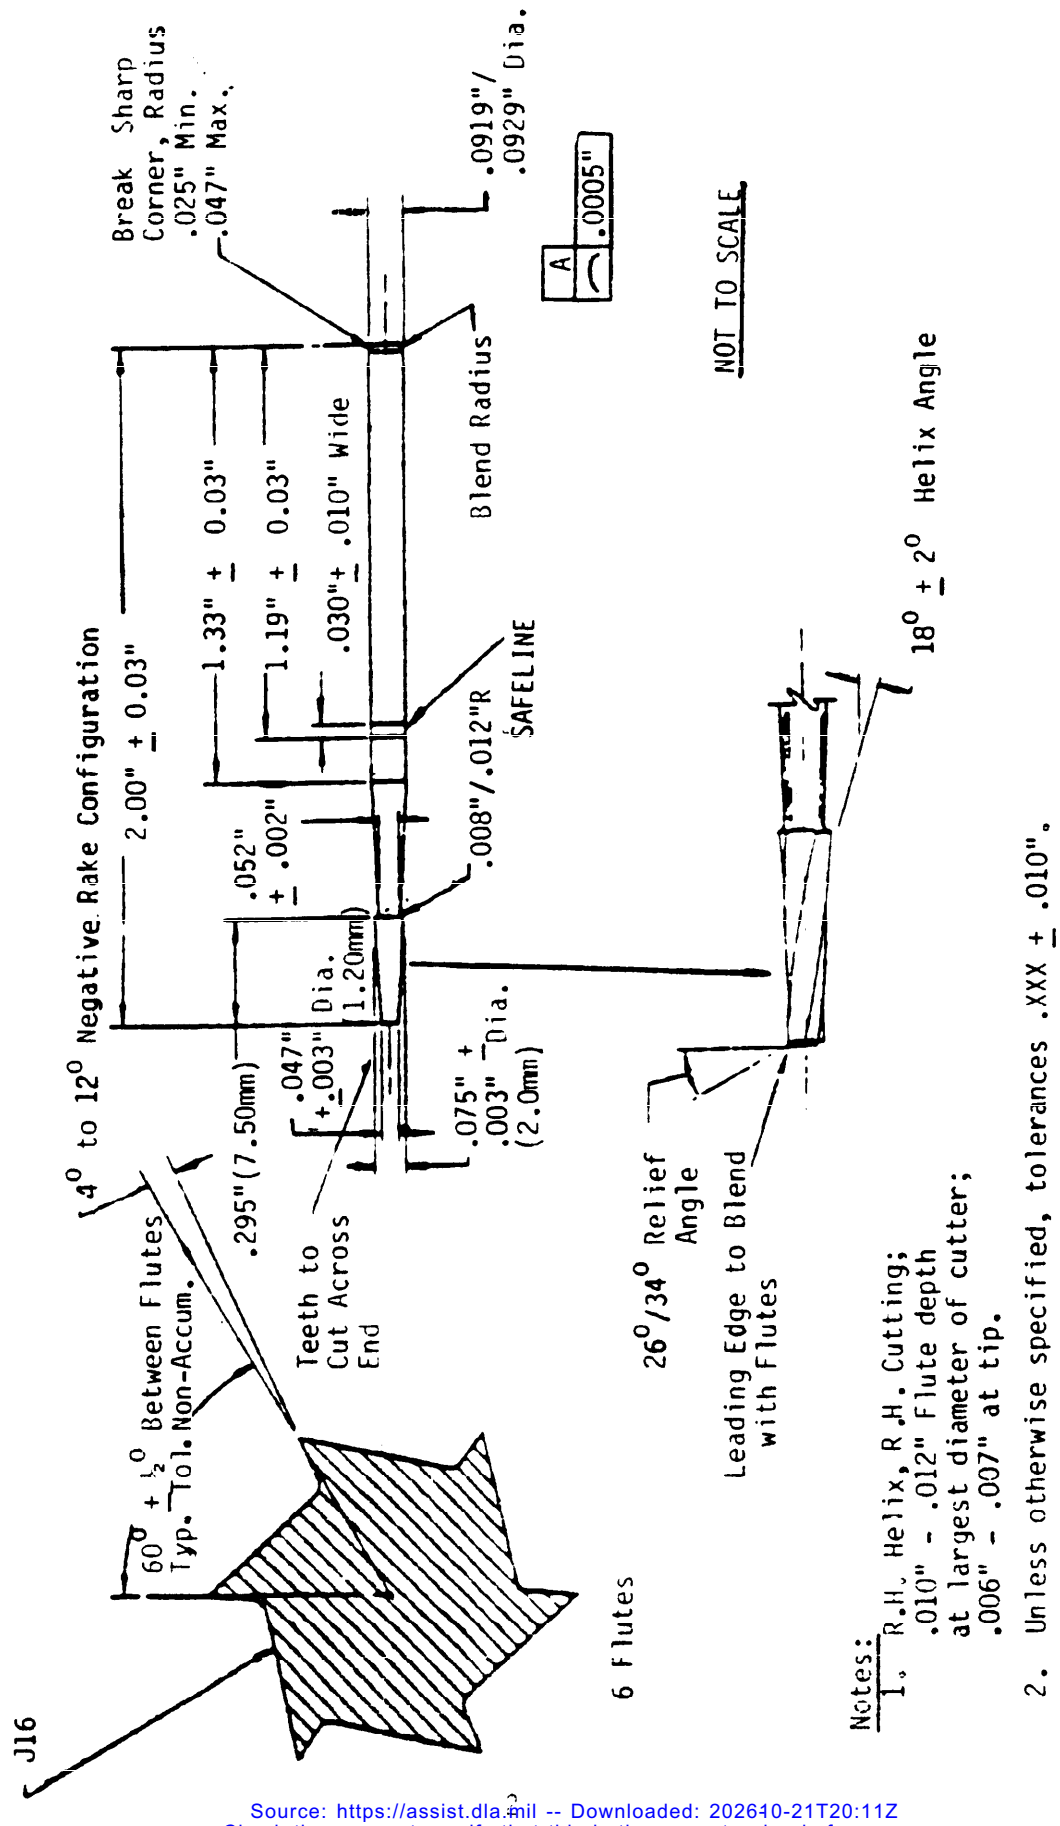


Notes:
1. R.H. Helix, R.H. Cutting; .010" - .012" Flute depth at largest diameter of cutter; .006" - .007" at tip.
2. Unless otherwise specified, tolerances .XXX ± .010".

Figure 1 (7730). Bur, Bone Surgery, 2.00 mm head diameter by 7.5 mm cutting length, Shape C, Length 2
NSN: 6515-01-139-7730



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:11Z
Check the source to verify that this is the current version before use.