MILITARY SPECIFICATION SHEET

BUR, BONE SURGERY (TUNGSTEN CARBIDE, 2 MM HEAD DIAMETER BY 19 MM CUTTING LENGTH, SIDE CUTTING, TAPERED-SHAPE C, MEDIUM SHANK-LENGTH 2)

The complete requirements for acquiring the bur described herein shall consist of this specification sheet and the latest issue of MIL-B-42017.

REQUIREMENTS:

Shall be a side cutting, tapered shape, medium shank, surgical buffing bur for use with the medium bur guard in National Stock Number (NSN) 6515-01-116-8197 DRILL, BONE, PNEUMATIC.

Shall be a one-piece bur made of C2 grade tungsten carbide, hot isotatically pressed, with a grain size of 1 to 2 microns.

Shall be examined at 30X magnification for bur defects not readily perceptible to the naked eye.

Shall not break when 4 pounds force is applied transversely at tip with the bur supported at and to the rear of the safeline.

Shall be of the design and dimensions shown in Figure 1 (7731).

NOTES:

This specification sheet covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6515-01-139-7731	BUR, BONE SURGERY, Side-Cutting, Tapered, Tungsten Carbide, 0.08 inch (2 mm) Head Diameter, 0.74 inch (19 mm) Cutting Length: Non-notched shank.

Agent:

DLA-DM

Preparing activity:

DoD-MB


(Project No. 6515-3800)

AMSC N/A

FSC 6515

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:11Z
Check the source to verify that this is the current version before use.

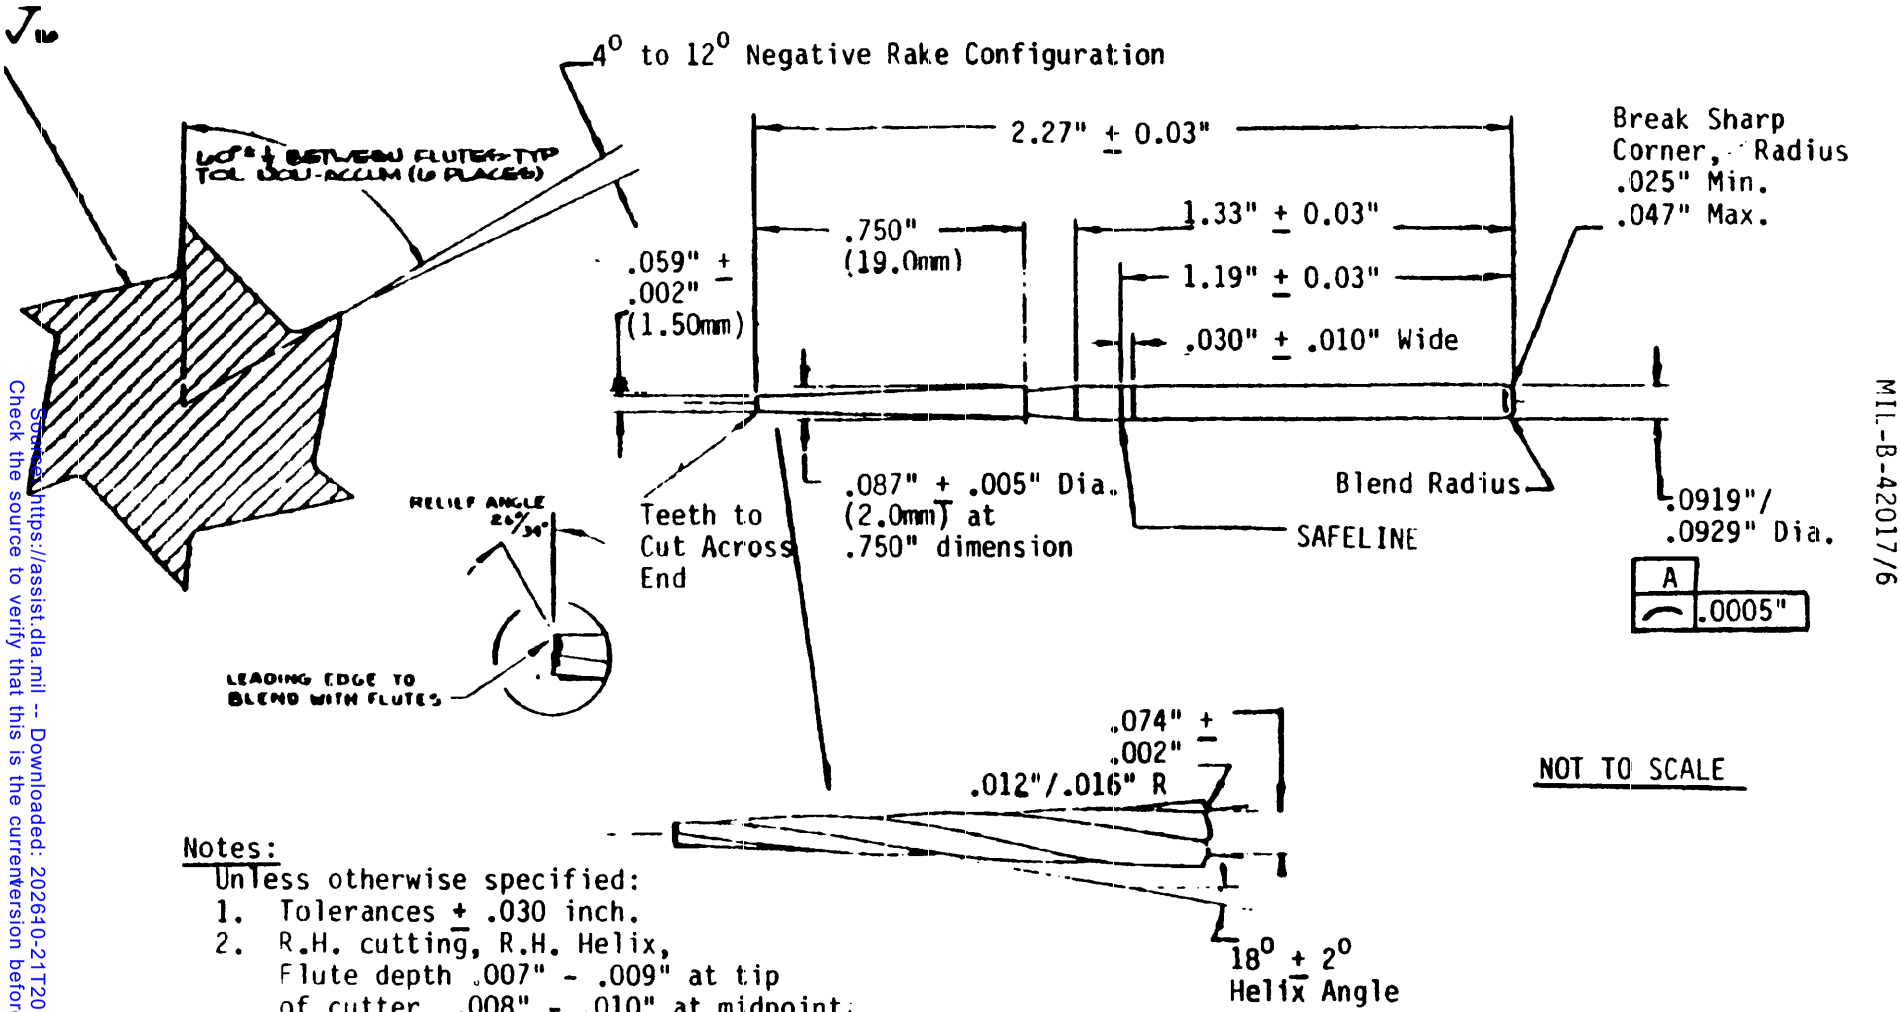

Notes:
Unless otherwise specified:
1. Tolerances ± .030 inch.
2. R.H. cutting, R.H. Helix, Flute depth .007" - .009" at tip of cutter, .008" - .010" at midpoint, Decreasing .001" - .002" at base to allow for wheel sweepout.

Figure 1 (7731). Bur, Bone Surgery, 2.0 mm head diameter by 19 mm cutting length, Shape C, Length 2
NSN: 6515-01-139-7731

MIL-B-42017/6

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T20:11Z
Check the source to verify that this is the current version before use.