INCH-POUNDS

MIL-C-24918B
17 March 1992
SUPERSEDING
MIL-R-24918A
15 November 1988

MILITARY SPECIFICATION

COAT, ALL-WEATHER, MAN'S, w/REMOVABLE LINER

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of man's all-weather coat made of water repellent treated polyester/cotton poplin with a removable liner.

1.2 Classification. The coat shall be in the following sizes and lengths as specified (see 6.2).

1.2.1 Sizes. 34, 36, 38, 40, 42, 44, 46, 48

1.2.2 Lengths. Short, Regular, Long, Extra Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Coast Guard Clothing and Textile Research and Development Office, P.O. Box 869, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

* A-A-50128	- Cloth, Interlining, Non-Woven
* A-A-50198	- Thread, Gimp, Cotton Buttonhole
* A-A-50199	- Thread, Polyester Core: Cotton- or Polyester-Covered
* A-A-50531	- Cloth, Poplin, Polyester and Cotton (Water Repellant)
* A-A-52094	- Thread, Cotton
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	- Fastener, Slide, Interlocking
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallets, Material Handling, Wood Post Construction, 4 Way Entry
MIL-C-21852	- Cloth, Taffeta, Nylon

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
* MIL-STD-2073-1	- DOD Material Procedures For Development and Applications of Packaging Requirements
* MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for outer shell and half liner shall be a water repellent treated polyester/cotton poplin, conforming to A-A-50531. The color shall match Blue 3376, piece number 85017.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

3.3.2 Fusible materials.

* 3.3.2.1 Interlining fusible (non-woven). The top collar, pocket welts, facing, long sleeve strap, epaulets, and belt shall be fused with a non-woven web, made of mechanically entangled fibers thermally bonded together and shall be binder free. The fusible cloth may be composed of 100% polyester fibers or a combination of polyester with nylon or rayon fibers with not less than 50% polyester fibers. The fusible adhesive shall be applied to one side of the web in a uniform dot pattern in accordance with good commercial practice. The color shall be black, dark grey or approximate the shade of the base fabric. The finished weight of the fusible material shall be a minimum of 1.5 ounces per square yard. Testing shall be as specified in Table IV.

The fused sample, consisting of fusible interlining and base fabric, shall conform to the requirements stated below when tested as specified in Table IV.

Component Testing Requirements

Appearance of fused samples 1/	
Initial 2/	No evidence of bubbling, delamination, change of color or strike through
After 5 dry cleanings 2/	No evidence of bubbling, delamination, change of color or strike through
Bond Strength (ounces per inch of width) 3/	
Initial	22 ounces (or splits)
After 5 dry cleanings	17 ounces (or splits)
Shrinkage	
After 1 dry cleaning	2% max.

1/ Applies to quality conformance and in-process tests.
2/ After evaluation for appearance and shrinkage, samples may be used for the remainder of tests.
3/ Item will be accepted if the fusible either splits from itself rather the separates from the outershell material or if it begins to separate from the outershell material higher than the minimum bond strength and splits from itself.

* 3.3.2.2 Interlining fusible (woven). The collar stand shall be fused with a 100% cotton, plain weave cloth. The color shall be white, black, dark grey or natural. The fusible adhesive shall be applied to one side of the fabric in a uniform dot pattern in accordance with good commercial practice. The finished fusible shall conform to the following requirements when tested as specified in Table IV:

Weight, ounces per square yard(min)	5.5 - 6.5
Yarns per inch (min)	
Warp	48
Filling	48

The interlining when fused to the base fabric, shall conform to the following requirements when tested as specified in Table IV:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Component Testing Requirements

Appearance of fused samples 1/	
Initial 2/	No evidence of bubbling, delamination, change of color or strike through
After 5 dry cleanings 2/	No evidence of bubbling, delamination, change of color or strike through

1/ applies to quality conformance and in-process tests
2/ after evaluation for appearance and shrinkage, samples may be used for the remainder of tests.

Bond Strength (ounces per inch of width)	
Initial	22 ounces
After 5 dry cleanings	17 ounces
Shrinkage	
After 1 dry cleaning	2% max.

3.3.2.3 Seam web. The tape for topstitched seams specified in Table II, shall be a polyamide fusible web, 3/8 (+1/16) inch in width and weigh 1.0 (+0.2) ounces per square yard, when tested as specified in Table IV. The color shall be natural.

3.3.2.4 Colorfastness. All dyed, finished, fusible interlining materials shall show fastness to dry cleaning (3 cycles), equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the finished, dyed fusibles shall show "fair" fastness after 3 dry cleanings when tested as specified in Table IV.

3.3.2.5 Fusing conditions. The interlinings shall be fused to the base fabrics on a fusing press. For optimum results with the applicable fusible material and press used, specific information should be obtained from the fusible supplier.

3.3.3 Sleeve hem interlining. The non-woven interlining for the sleeve (cuff) hem shall conform to type I of A-A-50128. The color shall be natural, black or grey.

3.3.4 Nylon taffeta. The fabric for the outer layers of the removable liner and for binding sleeves, pass-through pockets, and outer edges of the removable liner as well as the facing edges of the outer shell shall be a nylon taffeta conforming to type III or IV of MIL-C-21852, except that the finish shall be natural with no added starches or resins, and colorfastness to Wet Dry Cleaning shall be tested in accordance with FED-STD-191, TM 5622. Colorfastness to light does not have to be tested. The color shall match Blue 3376, piece number 85018.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

* 3.3.5 Removable quilted liner material (see 6.6).

* 3.3.5.1 Liner body. The material for the body of the removable liner shall be a thin, lightweight batting material composed of 65% polyolefin, 35% polyester (excluding scrim) quilted between two layers of material specified in 3.3.4 with the scrim facing the wearer. The material shall be quilted in 4 to 6 inch wide channels. The batting (excluding scrim) shall weigh 4.6 oz/sq yd (min) and shall be 0.4 inch (min) thick, when tested as specified in Table IV.

* 3.3.5.2 Liner sleeves. The material and the quilting pattern for the sleeves of the removable liner shall be as specified in 3.3.5.1 except that the material shall weigh 3.1 oz/sq yd (min) and shall be 0.3 inch (min) thick, when tested as specified in Table IV.

* 3.3.6 Thread. The thread used for seaming and stitching the coat shall be a polyester core thread conforming to type I of A-A-50199. The color of the thread shall be shade Blue AB, CA 66044 and in the following sizes:

Operation	Ticket No.
Seaming, stitching, buttonholes, buttons, and bartacks	50
Overedge stitching	70
Tacking	
Hand	70
Machine	30

* 3.3.6.1 Thread, cotton. As an alternate to the polyester-core thread, a cotton thread conforming to A-A-52094, may be used. The color shall be the same as specified in 3.3.6 and in the following types and sizes:

Operation	Type	Ticket No.
Seaming, stitching	III	0
		00
Buttonholes, buttons, and bartacks	III	A
Overedge stitching	I	70
Tacking		
Machine	I	70
Hand	II	16

* 3.3.6.2 Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning and light as specified and tested in A-A-50199 or A-A-52094.

* 3.3.7 Gimp. The gimp for reinforcing buttonholes shall be cotton, Blue AB C.A.66044, conforming to size No. 8, type I or II of A-A-50198.

* 3.3.7.1 Colorfastness. The gimp shall show colorfastness to dry cleaning as specified and tested in A-A-50198.

3.3.8 Buttons. The buttons shall be State Button Co. style No. 1010 or equal (see 6.7), 24, 30 and 40-line, Dk Navy #81. The reinforcement buttons shall be 1/2 inch, type II, style 15 of V-B-871 or equal (see 6.4 and 6.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

3.3.9 Buckles. The belt and sleeve strap buckles shall be State Button Co style "English" or equal (see 6.7), color Dk Navy, in the following sizes: Belt - 2 inch # 9943, and Sleeve Strap - 1 inch #9910 (see 6.4). As an alternate, the buckle may be State Button Co. nylon buckle or equal (see 6.7), color Blue 81, in the following sizes and style numbers: Belt - 2 inches, #8992 and Sleeve Strap - 1 inch, #8009 (see 6.4).

3.3.10 Slide fastener. The slide fastener for the coat and removable liner shall be type IV, style 1, size L, short tab pull and aluminum chain, conforming to V-F-106. The tape shall approximate shade Blue 3376 and may be 7/16 or 9/16 inch wide.

3.3.11 Combination identification personal and instruction label. Each coat and each liner shall have a combination identification personal and instruction label that conforms to type VI, class 15, of DDD-L-20. The printing shall show fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
COAT, ALL-WEATHER, MAN'S, w/ REMOVABLE LINER
CONTRACT NO: DLA 100-00-0-0000(Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)
CLEANING INSTRUCTIONS: For best results,

DRY CLEAN ONLY

3.3.11.1 Size label. Each coat and each liner shall have a size label conforming to type VI, class 2 of DDD-L-20. The printing shall show fastness to dry cleaning and bear the following inscription:

Size: 38R (Example)
Stock No: 8405-00-000-0000 (Example)

NOTE: Abbreviations to be used for the applicable lengths shall be "S" for Short, "R" for Regular, "L" for Long, "XL" for Extra Long.

* 3.4 Design. The coat shall be made from polyester/cotton poplin material. It shall be full length, double breasted, with half lining of self fabric, two pass-through welt pockets, and an all-around belt with buckle. It shall have a two piece sleeve with a set-in front and raglon back, sleeve straps positioned on front and back sleeve seams, secured with a buckle. The collar shall be convertible type, notched with pointed ends and overlapping lapels. The epaulets shall be threaded through a loop and secured with a button on each shoulder. The coat shall also have a removable liner with a slide fastener and pass-through pockets (see Figures 1 and 2).

3.4.1 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. Standard patterns shall show size, directional lines, placement marks, and notches for assembly. Unless otherwise indicated in Table II, the seam allowances shall be as follows:

1/2 inch	outer shell and pocket welt joining seams
1/4 inch	lining joining seams
	liner joining seams
	joining collar to collarstand, collarstand to coat and front facing to coat front
	assembling belt, epaulets, sleeve straps, collar, collarstand, and gun flap

3.5.1 List of pattern parts. The component parts of the coat shall be cut from materials specified in accordance with the number of parts indicated in Table I.

Table I. List of pattern parts

Material	Pattern Nomenclature	Cut Parts
Basic Material:		
Polyester/Cotton Poplin	Back	2
	Front	2
	Front facing	2
	Gun flap	2
	Back sleeve	2
	Front sleeve	2
	Sleeve back reinforcement	2
	Collar	2
	Collarstand	2
	Pocket welt	2
	Top pocket	2
	Under pocket	2
	Epaulet	4
	Sleeve strap	2
	Outside back yoke	1
	Belt	1
	Belt anchor	1
	Back lining	1
	Front lining	2
Cloth, Nylon, Taffeta	Back sleeve lining	2
	Front sleeve lining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Table I. List of pattern parts (con't)

Material	Pattern Nomenclature	Cut Parts
Interlining material:		
Fusible Interlining (woven)	Collarstand interlining	1
Fusible Interlining (Non-woven)	Front facing interlining	2
	Topcollar interlining	1
	Pocket welt interlining	2
	Epaulet interlining	2
	Sleeve strap interlining	2
	Belt interlining	1
Removable liner:		
Quilted batting	Back liner	1
	Front liner	2
	Back sleeve liner	2
	Front sleeve liner	2
Template	Buttons and Buttonholes	

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table II shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, (underthread) shall be on the inside of the coat or the coat side of the liner. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Unless otherwise specified, topstitching or edgestitching shall be 1/4 to 5/16 inch from the edge. The gauge of stitching for safety stitch construction shall be 1/4 inch. The guides and knives of the safety stitch machines shall be set to trim only the ravelled ends of the fabric. The fusing tape shall not be exposed in the seam construction. All bartacks shall be 3/8 (± 1/16) inch long and the width shall be 1/8 (± 1/32) inch wide unless otherwise specified in Table II.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings with stitch type 301 when not caught in other seams or stitching shall be backtacked not less than 1/2 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of 401 stitching shall be repaired using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

* 3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished coat is identical to that produced by following the sequence as listed in Table II. Any additional basting or holding stitching used to facilitate manufacturing is permissible provided that the thread is removed or does not show on the finished coat. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the coat shall be marked to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

3.7.2 Pressing. All pressing as required in Table II shall be performed with a heated pressing iron or steam pressing machine except the fusible pressing which shall be pressed as recommended by the fusible manufacturer.

All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

The statement "press fusible to various parts in accordance with the directions of the fusing manufacturer" refers to time, temperature and pressure.

3.8 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting.				
	a. Cut the coat in strict accordance with patterns furnished, which shall show size, shape, placement of pockets, directional lines for cutting, notches, and pattern marks for proper assembly of all component parts.				
	b. Cut all component parts of the basic material from one piece of material except collarstand, top and under pocket, back sleeve reinforcement, epaulet loops, sliding belt keeper loop, belt anchor, pocket facing, and hanger loop which may be cut from ends and when so cut shall approximate the shade of the main assembly.				
	c. Cut all component parts of the lining material from one piece of material.				
*	d. Cut the front and back parts of the removable liner from one piece of material so the batting scrim faces the wearer and the quilt panels run vertically. Cut the sleeves for the removable liner from the lighter weight batting material with the scrim facing the wearer. The sleeves shall match the shade of the liner material and shall match each other.				
*	e. Cut non-woven interlining 4 inches wide and of sufficient length to accommodate appropriate sleeve bottom.				
	f. Cut all other interlining fabrics in accordance with patterns furnished.				
	g. Cut the binding material for both the coat and liner on the bias, 1-1/4 to 1-3/8 inches wide.				
	h. Cut stripping for epaulet loops from basic material of sufficient width to finish 3/8 (± 1/8) inch wide and 2-1/2 (± 1/8) inches in length between bartacks (see operations 4 and 31).				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	i. Cut stripping for sliding belt keeper loop from basic material of sufficient width to finish 3/8 (± 1/8) inch wide and 2-1/2 (± 1/8) inches in length when in finished position on belt (see operation 4 and 12e).				
	j. Cut stripping for belt loops from basic material of sufficient width to finish 3/8 (± 1/8) inch wide and 2-7/8 (± 1/16) inches in length between top and finished end when positioned on coat (see operation 32).				
	k. Cut stripping for hanger loop from basic material of sufficient width to finish 3/8 (± 1/8) inch wide and 2 (± 1/8) inches in length between backstitching or bartacks (see operation 6e).				
	l. Seams employing fusible tape shall be pressed in accordance with the directions supplied by the manufacturer of the fusing material.				
	m. Fusing of the fusible to the basic material shall not be performed prior to cutting of cut parts.				
2.	Replacement of defective components.				
	During the spreading, cutting, and manufacturing process, components having material defects as specified in Table V shall be removed from production and replaced with non-defective and properly matched components.				
3.	Size and shade marking.				
	a. All component parts of the basic material, the lining, and the liner material shall be marked or ticketed to assure a uniform shade throughout the coat. Other parts cut from ends need not be shade marked.				
	b. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers are legible and do not show through on the outside of the coat; wherever possible, numbers shall be on the seam allowance.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Make epaulet loops and sliding belt keeper loop.					
	a. Fold a strip of basic fabric in half lengthwise; turn raw edges to the inside, and stitch 1/16 inch from each edge (see operations 1g and 1h).	301	EFp-2	8-10	50	50
	or					
	b. Abut raw edges of a basic fabric strip and double stitch not less than 3/16 inch gauge, using a covering stitch on the under side.	406	EFb-1	8-10	50	50
5.	Make collar.					
	a. Position topcollar interlining to under side of collar and press. Stitch collar to topcollar assembly face to face along outside edge.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	b. Trim, turn, force out edges and corners and topstitch 1/4 to 5/16 inch from edges.	301	SSe-2(b)	8-10	50	50
	c. Stitch raw edges of collar 1/8 inch from raw edge, simultaneously turning topcollar to allow the collar to roll properly.	301	SSa-1	8-10	50	50
6.	Make collarstand, attach collar and hanger loop.					
	a. Position collarstand interlining to collarstand and press. Position collar assembly between fused and unfused collarstand matching center back notches and with raw edges even, stitch top edge of collarstand and sides.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	NOTE: Fused collarstand shall face away from wearer.					
	b. Turn collarstand to finished position, edgestitch sides and top collarstand through all plies with the stitching 1/16 to 3/32 inch from turned edges.	301	SSe-2(b)	8-10	50	50
	c. Stitch 1/8 inch along bottom raw edge of collarstand.	301	SSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Collar shall measure 2-7/8 (± 1/8) inches wide at center back.					
	e. Hanger loop shall be made of basic material. Loop shall be double stitched using a cover stitch on underside, or with edges folded under (see operation 1k).	406 or 301	EFh-1 EFp-2	8-10 8-10	50 50	50 50
	f. Turn under each end of hanger loop, center it on collarstand over center back notch and backstitch or bartack the folded edges through all plies.	301 or Brtck	LSb-3	8-10 28 per brtck	50 50	50 50
7.	Make welt pockets.					
	a. Position fusible interlining to top underside of the open welt piece and press. Fold welt in half lengthwise, face to face and stitch side edges 1/2 inch from raw edges.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	b. Trim upper and lower corners of welt, turn and force out edges and points and topstitch.	301	SSe-2(b) and OSf-1	8-10	50	
	c. The welt when stitched to the coat front shall finish 2 (± 1/16) inches wide and 8 (± 1/16) inches long.					
8.	Make pockets.					
	a. Slash under pocket along marks and tongue notch ends. Superimpose under and top pocket pieces, wrong sides together and stitch around back and bottom edges.	301 or 401	SSe-2(a)	8-10	50	50
	b. Turn pocket right side out, and edgestitch 1/16 inch gauge.	301	SSe-2(b)	8-10	50	50
	c. Turn under raw edge of slash closest to edgestitching of under pocket. Starting at top of pocket stitch to approximately 1 inch below bottom tongue notch, through both pocket plys, 1/16 inch from turned edge, forming pocket facing.	301	LSd-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Set pockets.					
	Finished appearance. The pockets and welts shall be uniform in appearance and placement and shall lie flat and smooth, without twisting, pleating, or puckering. The stitching shall be uniform in width.					
	a. Position face side of welt against coat front as indicated by marks on pattern. Seam pocket welt to fronts 1/4 inch from raw edge of pocket welt. The stitching shall not extend beyond the pocket line.	301 or 401	SSa-1	8-10	50 50	50 70
	b. Slash pocket opening and tongue notch to ends of stitch line.					
	NOTE: Cuts shall not be visible on finished coat.					
*	c. Fold unstitched side of slash 1/8 inch, fold again, and stitch 1/16 inch from edge.	301	EFb-1	8-10	50	50
	d. Seam unfinished side of under pocket to welt-to-front joining seam next to slash (this may be performed as part of operation 9.a).	301	SSa-1	8-10	50	50
	e. Turn pocket to inside and raise stitch through welt and pocket inner ply evenly within 1/16 inch of turned edge.	301	SSe-2(b)	8-10	50	50
	f. With pocket in flat position, stitch down top and bottom edges of pocket welt, through front and hanging pocket, with two rows of stitching superimposed on the top stitching on pocket welt; the outer row shall be even within 1/16 inch of edge and the stitching at ends of hand opening shall be diagonal to the corners of the hand opening.	301	LSq-3(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Stitch front edge of under pocket inner ply to coat front 1/8 inch from coat front edge. Trim under pocket even with front edge.	301	SSa-1	8-10	50	50
10.	Make sleeve straps.					
	The sleeve straps shall finish 1 (±1/8) inch wide. The short strap shall be cut from the unfused end of the finished strap.					
	a. Position fusible interlining to underside of sleeve strap and press. Fold sleeve strap in half lenghthwise and stitch raw edges and point.	301 or 401	SSe-2(a)	8-10	50 50	50 70
	b. Trim corners, turn and topstitch along folded edges and point of sleeve straps. The underside of the sleeve straps shall not be exposed along the edges from the top side. Press.	301	SSe-2(b) and OSf-1	8-10	50	50
*	c. Cut short strap from unfused end of finished strap to measure approximately 3-1/2 inches long.					
	d. Thread buckle through the short strap, fold strap in half and stitch the raw edges together.	301	SSa-1	8-10	50	50
	NOTE: The raised side of the buckle shall finish away from the wearer.					
11.	Make belt anchor. Finished measurements shall be 1/2 (±1/8) inch wide and 12 (±1/8) inches long.					
	a. Fold belt anchor in half lengthwise and stitch 3/8 inch from raw edge and one end.	301	SSe-2(a)	8-10	50	50
	b. Trim, turn and topstitch along folded edges and finished end.	301	SSe-2(b) and OSf-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Stitch a buttonhole at the pointed end of the belt anchor. The buttonhole shall be cut-first, eyelet-end taper bar type with worked over gimp with ends of the gimp pulled through to the underside. Buttonhole shall be 3/4 inch in length and 1/2 to 3/4 inch from point with purling on the topside of anchor (see operation 12 c.).	Btnhl		52 per btnhl not including brtck	50	50
12.	Make belt.					
	a. Position belt interlining to underside of belt and press. Fold belt in half lenghthwise face to face, and seam edges and point together 3/8 inch from rav edges.	301	SSe-2(a)	8-10	50	50
		or 401			50	70
	b. Trim corners, turn, force out edges and topstitch along folded edges and point. The underside of the belt along the edges shall not be exposed from the topside. Press.	301	SSe-2(b) and OSf-1	8-10	50	50
*	c. Position unfinished end of belt anchor on back of belt, approximately 10-1/2 inches from buckle end. With a 1/4 inch turn up, stitch across the width of the belt anchor through all plies of the belt.	301	LSd-2	8-10	50	50
*	d. Stitch one reinforcement button through all plies of the belt to correspond with the buttonhole on belt anchor.	101		14-16 per button	50	50
		or 301		14-16 per button	50	50
	e. Fold sliding belt keeper loop in half lengthwise, face to face, and stitch 1/4 inch from ends (see operation 1.h). Position finished sliding belt keeper loop over unfinished end of belt.	301	SSa-1	8-10	50	50
	f. Fold unfinished end of belt over buckle bar 2 (± 1/4) inches.					
	NOTE: Raised side of the belt buckle shall finish away from the wearer.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Turn unfinished end of belt under 1/4 inch and stitch to belt 1/16 to 1/8 inch from fold at end.	301	LSd-1	8-10	50	50
	h. The finished belt shall measure 2 (± 1/8) inches wide.					
13.	Make belt loops.					
	a. Fold a strip of basic fabric in half lengthwise; turn raw edges to the inside, and stitch 1/16 inch from each edge (see operation 1h).	301	EPp-2	8-10	50	50
	OR					
	b. Abut raw edges of a basic fabric strip and double stitch not less than 3/16 inch gauge, using a covering stitch on the under side.	406	EFh-1	8-10	50	50
14.	Make outside back yoke.					
	Fold lower edge of outside back yoke 1/4 inch, fold again, and form a 3/8 inch hem and stitch along top folded edge.	301	EFb-1	8-10	50	50
15.	Make epaulets.					
	a. Position epaulet interlining to top ply of epaulet and press. Place top and bottom epaulet pieces face to face and stitch length sides and point 1/4 inch from raw edges.	301	SSe-2(a)	8-10	50	50
	b. Trim corners and turn to finished position, working out edges and point. Topstitch length sides and point.	301	SSe-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Stitch a buttonhole at the pointed end of each epaulet. The buttonhole shall be cut-first, eyelet-end taper bar type with worked over gimp with ends of the gimp pulled through to the underside. The inside edge of eyelet shall be 3/4 (± 1/8) from the pointed end of the epaulet. The buttonholes shall not be off center by more than 1/8 inch. Buttonholes shall be 7/8 inch in length with purling on the underside of loop.	Btnhl		50-54 per btnhl	50	50
	d. Bartack ends of buttonhole stitching and gimp by machine.	Brtck		21 per brtck	50	50
16.	Make front facing and attach label.					
	a. Position front facing interlining on front facings and press.					
	b. Bind back raw edge of facing. Binding shall finish 3/16 to 1/4 inch wide (see 3.3.4).	301	BSc-1	8-10	50	50
	c. Superimpose the right facing on the left facing at center back neck as indicated by notches on pattern. Stitch between the notches along outer edge through all plies.	301	SSa-1	8-10	50	50
*	d. Center the combination label on the right facing so the bottom edge is approximately 10 inches from the finished bottom edge of the facing. Stitch on all four sides.	301	LSbj-1	8-10	50	50
17.	Make gun flap.					
	a. Position gun flaps face to face, matching notches, and stitch 1/4 inch from outside raw edges. Turn to finished position, clip curves and work out edges.	301	SSe-2(a)	8-10	50	50
	b. Topstitch outside edge.	301	SSe-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	c. Position and stitch a cut-first, eyelet end square bar type buttonhole 5/8 inch from pointed end of gun flap and at a 45 degree angle. The buttonhole shall be worked over gimp with the ends of the gimp pulled thru to the underside. Buttonhole shall measure 1 inch from center of eyelet, with the purling on the outside of the gun flap.	Btnhl		50-54 per btnhl	50	50
*	d. Place finished gun flap on the right front of coat matching step on armhole. Stitch 1/4 inch on raw edges of shoulder and armhole.	301	SSa-1	8-10	50	50
18.	Make lining.					
	a. Stitch front lining to front sleeve lining at armhole.	515 or 516 or 519	SSa-2	8-10	50 70 (chain stitching) 70 70 (over edge stitching)	
	b. Position front top edge of back sleeve lining and front edge of sleeve back reinforcement onto shoulder edge of front lining and stitch. Stitching shall continue the entire length of sleeve.	515 or 516 or 519	SSa-2	8-10	50 70 (chain stitching) 70 70 (over-edge stitching)	
	c. Position back edge of sleeve back reinforcement and back edge of back sleeve lining to front edge of back lining and stitch to bottom of armhole. The sleeve back reinforcement shall finish between the sleeve lining and the outer shell of the coat.	515 or 516 or 519	SSa-2	8-10	50 70 (chain stitching) 70 70 (over-edge stitching)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Close side seam of front and back lining and underarm seam of sleeve in one operation.	515 or 516 or 519	SSa-2	8-10	50 (chain stitching)	70
					70 (over-edge stitching)	70
*	e. Fold bottom of lining 1/4 inch, fold again and stitch 1/16 inch from folded edge forming a 1/4 to 3/8 inch hem.	301	EFb-1	8-10	50	50
19.	Make back and vent.					
*	a. Position the backs face to face with the edge of the right back folded 1/2 inch over the left back. Insert the seam web against the left back under the folded edge of the right back. The seam web shall extend from the top of the vent to the neck edge of the coat.					
*	b. Clip top of right vent 1/2 inch for turn over. Starting at the top of the vent, stitch back pieces together (1/2 inch below top of vent to neckline) 3/8 inch from the folded edge catching the seam web in the stitching.	301	SSv-2(a)	8-10	50	50
*	c. Turn left back over the folded right back and press, forming left vent. Topstitch center back seam 1/4 inch from fold of seam. Fold left vent in line with the center back seam and turn raw edge to fold. Continue stitching to the bottom of the vent, catching the raw edge of the vent in the stitching. The distance from the vent edge to the stitching shall be even through out the length of the vent.	301	SSv-2(b)	8-10	50	50
		and 301	EFb-1	8-10	50	50
	d. Fold right side of vent under even with the right center back seam edge and with raw edge turned under, stitch 1/16 inch from back turned edge. Stitching shall be in line with the stitching at the right side of center back and shall be straight and even with respect to the left vent.	301	EFb-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. With left side of vent overlapping right side, box stitch top of vent through all plies. The box stitching shall be diagonal to the center seam (approximately 45°) and shall measure 1-1/4 (±1/4) inches long and 3/8 (±1/8) inch wide.	301	OSa-1	8-10	50	50
20.	Attach outside back yoke.					
	Superimpose outside back yoke on coat back assembly matching steps on back raglan seam and stitch 1/4 inch from sides and neck edge.	301	SSa-1	8-10	50	50
21.	Join sleeves to body.					
	a. Stitch front sleeve to front armhole from shoulder to about 3 inches below step on front.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	NOTE: Right front sleeve shall be stitched through gun flap and outer shell.					
	b. Turn and raise stitch seam 5/16 inch with stitching on front to step. At step, turn and stitch to joining seam line.	301	LSq-2(b)	8-10	50	50
	c. Stitch back sleeve to back armhole from neckline to about 3 inches below the step on back.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	d. Turn and raise stitch seam 5/16 inch with stitching on back to step. At step, turn and stitch to joining seamline.	301	LSq-2(b)	8-10	50	50
22.	Close side seams.					
	a. Position fronts on back, face to face with edge of front folded over edge of back. Insert seam veb on back under the folded edge of front, and stitch sides together 3/8 inch from folded edge, catching the seam veb in stitching.	301 or 401	SSv-2(a)	8-10	50 50	50 70
	b. Press the seam toward back, fusing the seam veb. Raise stitch 5/16 inch from folded edge of seam.	301	SSv-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
23.	Close sleeves and attach epaulets.					
	a. Join top arm seam from neckline to bottom of sleeve simultaneously stitching fusible tape to back edge of front sleeve and catching the short sleeve strap in stitching according to notches on patterns.	301 or 401	LSq-2(a)	8-10	50	50
*	b. Turn seam toward back and topstitch 5/16 inch from folded edge.	301 or 401	LSq-2(b)	8-10	50	50
	c. Stitch non-woven sleeve interlining across bottom width of sleeve 1/4 inch from raw edge. Top edge of interlining shall extend beyond the turn-up notch (fold) of sleeve.	301	SSa-1	8-10	50	50
	d. Press top arm seam and sleeve turn-up, fusing seam web.					
	e. Stitch or tack top of interlining to top arm seam.	103 or hand	SSm-1	4-8	50 50	
	f. Stitch underarm seam catching the long sleeve strap and the interlining in the stitching according to notches on patterns.	301	SSa-1	8-10	50	50
	g. Complete the stitching of sleeve to armhole.	301	SSa-1	8-10	50	50
	h. Stitch a second row of stitching adjacent to the first row, around the underarm from within 1 inch of the back step to within one inch of the front step. Clip seam allowance in this area as necessary to prevent puckering.	301	SSa-1	8-10	50	50
*	i. Position the notch on raw edge of epaulets on shoulder joining seam in the neck area so the top side of epaulet is facing the sleeve. Stitch 3/16 inch from raw edge.	301	SSa-1	8-10	50	50
24.	Attach collar/collarstand assembly to coat.					
	Position bottom edge of collar/collarstand assembly to neckline of shell, in accordance with notches, and stitch 1/4 inch from raw edges, catching the epaulets and size label centered at back neck edge, in the stitching. Clip front neckline seam allowance, as necessary.	301 or 401	SSa-1	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
25.	Attach lining to front facing.					
	a. Mark front facing 1-1/4 inches from bound back edge for positioning of lining.					
	b. Position raw edge of lining at notch on front facing and stitch lining to front facing forming a 1/2 inch pleat in the lining at center back. The inner fold of the pleat shall be turned toward the left.	301	LSa-1	8-10	50	50
26.	Attach facing/lining assembly to shell.					
	a. Position facing/lining assembly on front and neckline with the raw edges even. Stitch across neckline through coat and collarstand. Continue stitching across lapels and down coat fronts securing the under pocket in the stitching and across bottom of facing. Stitching across bottom of facing shall be in accordance with the required hem depth. The lapels shall be uniform in size and shape.	301 301	SSe-2(a) and LSq-2(a)	8-10 8-10	50 50	50 50
	b. Overedge stitch the bottom raw edge of sleeve lining.	516	SSa-1	8-10	50	50
	c. Superimpose bottom raw edge of sleeve and overedged sleeve lining and stitch with a 3/8 inch seam allowance, matching front and back sleeve seams.	301	SSa-1	8-10	50	50
	d. Turn up bottom of sleeve at notches. Align underarm and forearm seams of lining and shell and stitch along inside seam for a distance of 3-1/2 to 4 inches beginning 5 (± 1/2) inches from the folded edge.	301	SSa-1	8-10	50	50
27.	Finish coat fronts.					
	a. Turn facing to finished position, force out edges and topstitch fronts across top of lapels, down fronts and across bottoms to back edge of facing, securing the portion of bottom hem that under laps the facing, in the finished position (see operation 28).	301	SSe-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	b. Position facing/lining assembly to finished postion over the hanging pocket. Stitch through all plies of facing and pocket assembly by continuing the stitching from the top of the bag down 2 inches and out 1 inch at a right angle toward center front. Continue stitching down to close the pocket bag. This stitch shall be parallel to the center front and approximately 2 inches from the bound edge of the facing.	301	LSa-1	8-10	50	50
28.	Hem coat bottom.					
	a. Hem shall finish 1 (± 1/8) inch wide.					
	b. Turn up bottom of coat 1/2 inch, fold hem to finished position. Start stitching at back vent continuing to meet front facing, follow stitching down to meet topstitching of facing.	301	EFb-1	8-10	50	50
29.	Buttonholes.					
	a. Buttonholes for fronts shall be cut-first, eyelet-end square bar type with worked over gimp with ends of the gimp pulled through to the underside. Buttonholes shall be clean and correctly positioned. The ends of the buttonholes shall be bartacked in a seperate operation from buttonhole making, securely catching the ends of the gimp and covering the width of the bar. Buttonholes shall be measured from the center of the eyelet and placed as follows:					
	b. The purling of the left front buttonholes shall finish on the outside. The purling for the left and right lapels and anchor buttonhole on right front shall finish on the inside.					
	* (1). Mark and stitch a 1-1/8 to 1-1/4 inch horizontal buttonhole on the left and right lapels, 1 inch down from the top of the lapel and 5/8 inch in from the center front.	Btnhl		50-54 per btnhl	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	★ (2). Placing template even with the finished bottom hem, mark and stitch four 1-1/8 to 1-1/4 inch horizontal buttonholes on left front. Mark and stitch the anchor buttonhole on the right front.	Btnhl		50-54 per btnhl	50	50
	c. Bartack ends of buttonhole stitching and gimp by machine.	Brtck		21 per brtck	50	50
30.	Sew on buttons.					
★	a. Mark location and sew seven 40 line buttons with reinforcement buttons, three on left front and four on right front. Buttons shall be shank wrapped by hand or machine. The ends of hand shank wrapped buttons shall be tacked off with not less than two stitches. The second button from the top of the left front shall be reinforced with a 40 line anchor button. Top two buttons on each front shall be reinforced through the front facing, and bottom buttons shall be reinforced through coat front only.	101 or 301 or hand		14-16 btn	70	70
	b. Button complete coat front without puckers or twists, mark the location of two buttons on lapel, one on outside right and one on inside left facing. Sew two 30 line buttons as marked. The outside right button shall have a reinforcement button sewn through the front facing. Buttons shall be shank wrapped by hand or machine.	101 or 301 or hand		14-16 btn	70	70
	c. Mark location and sew one 24 line button, through all plies of the epaulet to correspond with buttonhole in each epaulet. The center of the epaulet when buttoned, shall be horizontal to the shoulder seam.	101 or 301 or hand		14-16 btn	70	70
	d. Mark location and sew one 30 line button with reinforcement button on right front to correspond with top buttonhole on left front.	101 or 301 or hand		14-16 btn	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THRAD NDL	THRAD BOB/ LPR
	e. Mark location and sew one 30 line button, on right front to correspond with the buttonhole on the gun flap.	101 or 301 or hand		14-16 btn	70	70
	f. Mark location and sew one reinforcement button on sleeve underarm seam sewn through the lining only, to correspond with loop on bottom of removable liner sleeve.	101 or 301 or hand		14-16 btn	70	70
	g. Sew one 24, 30, and 40 line button on inside of right facing below the combination label, sewn in a vertical line through the facing only.	101 or 301 or hand		14-16 btn	70	70
31.	Attach epaulet loops.					
	With ends of epaulet loops turned under, position loop on shoulder centered on sleeve outseam even with front/armhole joining seam. Backstitch or bartack each end (see operation 1h).	301 or Brtck	LSb-3	8-10 28 per brtck	50 50	50 50
32.	Attach belt loops to coat.					
	a. There shall be two belt loops on the coat, one on each of the side seams.					
*	b. Fold belt loop in half lengthwise and position on side seam with the raw edges approximately 1 inch below the top of the pocket welt location with the folded portion of the belt loop toward the hem. Stitch edge of loop 1/8 inch from raw edge.	301	SSa-3	8-10	50	50
NOTE:	Care shall be taken not to catch belt loop stitching in the lining.					
*	c. Fold belt loop up on side seam and backstitch or bartack (see operation 1j).	301 or Brtck	LSb-3	8-10 28 per brtck	50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Insert belt through belt loops and thread the belt anchor through the belt loop and button to the back side of the belt.					
33.	Set slide fastener on coat.					
	a. Position the slide fastener on the coat facings so that the ends of the fastener are equidistant from the bottom edge of the coat and the front edge of the chain is 1/8 to 3/16 inches from the bound edge. The separating pin of the slide fastener shall be on the right front facing.					
	b. Turn in the end of the tape 1/2 to 3/4 inch if end of tape is not finished and stitch the length of the tape 3/16 to 5/16 inch from back edge of the chain.	301	SSa-1	8-10	50	50
*34.	Make removable liner.					
	Position front liner to back liner with batting scrim facing the wearer. Stitch fronts to back, face to face at side seams.	512	SSa-1	8-10	50	50
35.	Join sleeves to liner.					
*	a. Position front and back sleeve liner face to face and stitch underarm seam.	301 or 512	SSa-1	8-10	50	50
	b. Stitch front and back sleeve assembly to armhole matching notches and underarm seams.	301 or 512	SSa-1	8-10	50	50
	c. Join top arm seam from neckline to bottom of sleeve.	301 or 512	SSa-1	8-10	50	50
36.	Bind edges of liner and attach size label.					
	Finished appearance. The binding shall be uniformly stitched with no raw edges showing. The fabric shall be caught in the stitching. The binding shall finish 1/4 (± 1/16) inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Bind edges of bottom, fronts and neck of liner in one operation. The binding shall start and finish other than at fronts and the end shall be turned in and caught in the stitching. The ends of the binding shall overlap not less than 1/2 inch with the end of the binding turned over on itself and securely stitched or bartacked. Liner size label shall be centered at neck and caught in stitching while attaching the binding so label faces the wearer.	301 or	BSc-1	8-10	50	50
		401 Brtck	BSc-1	8-10 28 per brtck	50 50	50 50
	b. Bind sleeve bottoms with binding starting and finishing at underarm seam. The end of the binding shall form into a loop to accommodate the reinforcement button on coat lining. The end of binding shall be bartacked or securely stitched.	301 or	BSc-1	8-10	50	50
		401 Brtck	BSc-1	8-10 28 per brtck	50 50	50 50
	c. Slash opening of pocket on front liner as indicated by marks on pattern. Bind pocket pass-through opening. The ends of binding shall overlap not less than 1/2 inch. The top end of the binding shall be turned over onto itself and securely stitched or bartacked.	301	BSc-1	8-10	50	50
37.	Set slide fastener and attach combination label on liner.					
	a. Position combination identification label on center back 2 (+ 1/2) inches below neck edge and stitch label on all four sides.	301	SSa-1	8-10	50	50
	b. Position the slide fastener on the underside of liner with the back edge of the chain immediately adjacent to bound edge of liner, and ends equidistant from bottom of liner.					
	c. Turn in the raw edge of the slide fastener tape 1/2 to 3/4 inch, if end of tape is not finished, and stitch the length of the tape with the stitching superimposed on the binding stitching.	301	LSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

TABLE II- CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	d. The slider shall be positioned on right side of liner.				
38.	Clean coat.				
	a. Trim thread ends and remove loose threads.				
	b. Remove spots, stains and markings.				
	c. Remove shade tickets.				
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.				
39.	Press coat.				
	Press collar, fronts, backs, sleeves and hems with steam pressing machine or hand pressing iron.				
40.	Attach liner to coat.				
	Attach liner to coat by means of the slide fasteners, checking the finished operation to insure free and easy manipulation of the slider. There shall be no bulging or distortion of the coat or the liner when fastner is engaged. The liner shall match the coat in size.				
41.	Button and belt coat.				
	Button 4 front buttons on left front and one anchor button on right front. Buckle belt loosely around coat and position buckle on center front.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

* 3.9 Sizes and measurements. Finished measurements shall be as shown in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and measurements

Size	(A) Chest	(B) Sleeve Inseam	(C) Center Back Length	(D) Liner Back Length
		Short		
34	42	17	39-1/4	29-1/4
36	44	17	39-1/2	29-1/2
38	46	17	39-3/4	29-3/4
40	48	17	40	30
42	50	17	40-1/4	30-1/4
44	52	17	40-1/2	30-1/2
46	54	17	40-3/4	30-3/4
48	56	17	41	31
		Regular		
34	42	18	41-1/4	31-1/4
36	44	18	41-1/2	31-1/2
38	46	18	41-3/4	31-3/4
40	48	18	42	32
42	50	18	42-1/4	32-1/4
44	52	18	42-1/2	32-1/2
46	54	18	42-3/4	32-3/4
48	56	18	43	33
		Long		
34	42	19-1/4	43-1/4	33-1/4
36	44	19-1/4	43-1/2	33-1/2
38	46	19-1/4	43-3/4	33-3/4
40	48	19-1/4	44	34
42	50	19-1/4	44-1/4	34-1/4
44	52	19-1/4	44-1/2	34-1/2
46	54	19-1/4	44-3/4	34-3/4
48	56	19-1/4	45	35
		X-Long		
34	42	20	45-1/4	35-1/4
36	44	20	45-1/2	35-1/2
38	46	20	45-3/4	35-3/4
40	48	20	46	36
42	50	20	46-1/4	36-1/4
44	52	20	46-1/2	36-1/2
46	54	20	46-3/4	36-3/4
48	56	20	47	37
TOLERANCE	(±3/4)	(±1/2)	(±1/2)	(±1/2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

NOTE: All measurements shall be taken with coat fully buttoned, placed smooth and flat.

(A) Chest- Twice the measurement taken across front at the base of armholes from folded edge to folded edge.
(B) Sleeve inseam - Measurement shall be taken along sleeve inseam from base of armhole to bottom of sleeve.
(C) Center back length - Measurement shall be taken from the neckline seam to bottom edge of coat.
(D) Liner back length- Measurement shall be taken from the top edge of neckline to bottom edge of liner.

3.10 Workmanship. The finished coats and liners shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or selected defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, testing shall be performed on components listed in Table IV and in accordance with characteristics noted. The methods of testing specified in FED-STD-191, wherever applicable and as listed in Table IV shall be followed. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Component	Lot expressed as	Sample unit for testing
Tape, non-woven polyamid web for seams	Yards	two 24 inch long specimens 1/
Fusible interlining Woven	Yards	two 24 by 24 inch specimens 1/
Fusible interlining Non-woven	Yards	two 24 by 24 inch specimen 1/

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Table IV - Component testing

Component	Characteristic	Requirement paragraph	Test method
Polyamide fusible web for seams	Width	3.3.2.3	5020
	Weight	3.3.2.3	5041
Woven interlining fused to basic cloth	Construction 1/	3.3.2.2	2/
	Appearance	3.3.2.2	Visual
	Weight 1/	3.3.2.2	5041
	Yarns per inch 1/		
	- Warp	3.3.2.2	5050
	- Filling	3.3.2.2	5050
	Bond strength		
	-initial	3.3.2.2	5951
	-after 5 dry cleanings	3.3.2.2	5580 3/ and 5951
	Shrinkage		
	-after 1 dry cleaning	3.3.2.2	5580

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Table IV - Component testing (Continued)

Component	Characteristic	Requirement paragraph	Test method
Non-woven interlining fused to basic cloth	Construction 1/	3.3.2.1	2/
	Appearance	3.3.2.1	Visual
	Weight 1/	3.3.2.1	5041
	Bond strength		
	-initial	3.3.2.1	5951
	-after 5 dry cleanings	3.3.2.1	5580 3/ and 5951
	Shrinkage		
	-after 1 dry cleaning	3.3.2.1	5580
All dyed fusible interlinings	Colorfastness to:		
	-after 3 dry cleanings	3.3.2.4	5620
Lining material	Construction	3.3.5.1/3.3.5.2	2/

1/ Tested before fused to basic material.
2/ A certificate of compliance will be acceptable for this requirement.
3/ Pressing and shrinkage requirements shall not apply.

4.4.2 In-process inspection.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the facings, top collar, pocket welts, sleeve straps, epaulets, belt and collarstand which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample shall be prepared following fusing of every 100 facings, top collars, pocket welts, sleeve straps, epaulets, belt and collarstands, or once every 4 hours, whichever occurs first.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through, bubbling, and delamination. If there is any evidence of these conditions present, the previously fused pieces represented by the sample shall be inspected for the above conditions. Any fused part exhibiting one of the above conditions shall be removed from the lot. (see 3.3.2.1 and 3.3.2.2).

4.4.2.4 Bond strength. The method of testing shall be as specified in 4.4.2.4.1. If the check sample fails the bond strength requirements, the previously fused pieces and check samples shall be re-fused after the fault has been corrected. If the check sample fails a second time, all fused pieces represented by the sample shall be rejected. (see 3.3.2.1 and 3.3.2.2).

4.4.2.4.1 Apparatus and procedures for in-process bond strength testing. The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

(1) Three 1 x 8 inch wide strips parallel to the warp direction shall be cut from right, middle and left side of the check sample for peel strength testing.

(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips for a distance of 2 inches.

(3) Secure the end of the basic fabric to a lightweight clamp like holder, 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.

(4) Position the fusible in another clamp 1 inch or more in width and approximately 1.0 ounce in weight and pull the fusible downwards in a vertical direction with a steady continuous motion (motion to be exerted by hand) until complete separation of the fusible from the samples. Minimum bond strength readings shall be taken visually from the spring scale. Failure of any individual strip shall indicate failure of the check sample.

NOTE: Care shall be taken not to jerk the fabric during testing

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one finished coat. The lot size shall be expressed in units of coats.

4.4.3.1 Visual examination. As a final stop in the contractor's production control plan before formation of a lot:

(a) Each coat shall be buttoned on a model form or hanger and examined for selected defects.
(b) A coat containing a selected defect shall not be included in the end item lot.

* Any lot found to have a selected defect in the final examination shall cause the lot to be rejected.

Selected defects are those defects in Table V which are identified by an asterisk (*) in the Classification column. The selected asterisk defects are listed individually in Table VI.

The coats shall be examined for defects in shade, design, material, construction and workmanship and the defects classified in accordance with Tables V and VI.

Defects I through IX are general defects.
Defects X through XVIII should be inspected with the coat on a model form, completely buttoned and buckled.
Defects XIX through XXXII should be inspected with the coat spread out on the table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Defects	Classification Major	Minor A	Minor B
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGE			
a. Hole, cut, tear, smash, mend, burn, scorched area, needle chew:			
1. On outside and facing	101		
2. On inside, lining, and liner (longest dimension in any direction)			
(a) Up to 1/4 inch, inclusive			301
(b) More than 1/4 inch		201	
b. Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place, shade bar:			
1. On outside and facing (longest dimension in any direction):			
(a) Up to 1/2 inch, inclusive		202	
(b) More than 1/2 inch	102		
2. On inside		203	
3. On liner or lining		204	
c. Loose yarn, snagged thread, coarse yarn, or woven in waste; more than 1 inch, on the outside		205	
d. Permanent fold, pleat, or crease in cloth, (caused by seaming or stitching):			
1. On outside and facing	103		
2. On liner and lining		206	
e. Needle chew:			
1. Up to 1/4 inch inclusive		207	
2. More than 1/4 inch	104		
f. Knot or slub (exceeding the limits specified in the basic cloth specification)		208	
II. SHADED PART			
a. On outside:			
1. Any part shaded from the other parts (except parts which may be cut from ends)	105		
2. Variation in shade within a part	106		
3. Parts cut from ends badly shaded			302
b. On inside:			
1. Lining - badly shaded except sleeve lining		209	
2. Sleeve lining - not matching or badly shaded			303
3. Liner - badly shaded		210	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
III. PRESSING			
a. Pressing omitted for any specified operation (unless otherwise specified herein)	107		
b. Sleeve not roll pressed			304
c. Edge of collar or front not pressed solid, smooth, and flat			305
d. Wrinkles, creases or pressing impressions not removed			306
* e. Fold of back vent not pressed as specified			307
IV CLEANNESS			
a. Spot or stain on outside:			
1. Up to 1/4 inch inclusive in longest direction		211	
2. More than 1/4 inch in longest direction	108		
b. Any marking exposed or visible on outside	109		
c. Thread ends or floats:			
1. Three or more on outside of coat not trimmed to 1/4 inch or less	110		
2. Five or more inside the coat and liner not trimmed to 1/2 inch or more			308
d. Two or more shade or size tickets not removed			309
e. Basting thread (including monofilament thread or fragments of monofilament thread) not completely removed from outside			310
f. Fusible resin visible on outside:			
1. Up to 1/4 inch inclusive in longest direction		212	
2. More than 1/4 inch in longest direction	111		
g. Fusible resin visible on inside:			
1. Up to 1/4 inch inclusive in longest direction			311
2. More than 1/4 inch in longest direction		213	
V. COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	112		
b. Any component not as specified	113		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)		214	
d. Any operation not as specified (unless otherwise classified herein)		215	
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		216	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
VI CUTTING			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns, or not in accordance with specification requirements	114		
VII SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam noticeably puckered (score only when on major portion of seam)		217	
2. Seam irregular, pleated, or wavy (unless otherwise classified herein)		218	
3. Any part of coat or liner caught in an unrelated operation or stitching	115		
4. End of stitching when not caught in other seams or stitching not backstitched as specified (except attaching labels and automatic stitching)			312
5. Thread break secured by stitching back of the break less than 1/2 inch			313
6. Ends of a continuous line of stitching overlapped less than 1/2 inch			314
7. Not specified color thread used on outside	116		
8. Stitching attaching labels or automatic stitching not finished as specified			315
9. Needle penetrations visible on outside		219	
10. Broken, missing or skipped stitches on edge, top or raised stitches (when seam is seamed, turned and stitched):			
(a) - 1/4 inch up to 1/2 inch inclusive			316
(b) - more than 1/2 inch		220	
b. Gage of stitching and seam allowance:			
1. Edge, top or raised stitching seam too close to edge resulting in damage to cloth	117		
2. Seam allowance not as specified by 1/8 inch or more. (Score only when condition exists on more than 1/2 the length of the seam)		221	
3. Irregular or not within range specified or varies more than 1/16 inch when no range is specified. (Score only when condition exists on more than 1/2 the length of the seam)		222	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
c. Open seam			
1. Outside (including undercollar)			
(a) - up to 1/4 inch inclusive			317
(b) - more than 1/4 inch up to 3/4 inch inclusive		223	
(c) - more than 3/4 inch	118		
2. On inside and liner			
(a) - up to 3/4 inches inclusive			318
(b) - more than 3/4 inches		224	

* NOTE: A seam is classified as open when one or more stitches joining a seam are broken or runoff, or when two or more continuous skipped stitches occur. Double stitched seams and safety stitches are considered open when one or both rows of the stitching are open.

d. Runoff, skipped or broken stitch on joining seam - use (open seam) classification			
e. Raw edge: 1/			
1. On outside:			
(a) - up to 3/4 inch inclusive		225	
(b) - more than 3/4 inch	119		
2. On inside and liner			
(a) - 1/4 inch up to 2 inches			319
(b) - More than 2 inches		226	

* NOTE: A raw edge is defined as an edge not finished as specified including any protruding edge on the outside of the coat.

f. Seam and stitch type:			
1. Not specified seam or stitch type	120		
2. Looper thread of 400 series stitch type on outside	121		
3. Any line of stitching omitted or insecure	122		
4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			320
5. Direction of seam not as specified		227	
g. Stitch tension:			
1. Loose tension resulting in a loose seam	123		
2. Loose tension on raised or edge stitching resulting in exposed loops of lower or top thread		228	
3. Thread tension (stitches break when normal strain is applied in the direction of the seam or stitching)	124		

1/ Raw edge resulting from missing, incomplete, or loose serging shall be scored as a raw edge on inside.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
h. Stitches per inch (score only when condition exists on more than 1/2 the length of seam):			
1. More than the maximum specified			321
2. Less than the minimum specified:			
(a) - by one or two stitches			322
(b) - by three or more stitches		229	
i. Bartack, backtack, tack or tacking (except buttonhole bartack):			
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		230	
2. Loose stitch tension			323
j. Needle perforations more than 1 inch in length			324
VIII BUTTONHOLE			
a. Omitted, added, not specified type or not finished as specified	125		
b. Misplaced or not positioned as specified; out of alignment resulting in bulge or twist when buttoned	126		
c. Gimp omitted, uncut buttonhole, incomplete stitching or stitching not securely caught in fabric, not pulled through to underside		231	
d. Ragged edge, broken stitch or two or more skipped stitches		232	
e. Buttonhole stitching extending beyond tack			325
f. Purling not finished on the side specified		233	
g. Buttonhole stitching not uniform and even			326
h. Bartack missing, loose or misplaced (not serving intended purpose)		234	
i. Stitches per buttonhole or tack less than specified minimum number by:			
1. One to three stitches			327
2. Four or more stitches		235	
j. Two or more buttonholes out of vertical alignment by:			
1. 1/8 inch to 1/4 inch inclusive			328
2. More than 1/4 inch		236	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
k. Spacing between two or more buttonholes unequal by 1/4 inch or more	237		
l. Ragged inside edges, i.e., yarns or thread ends not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching:			
1. Less than 4 buttonholes			329
2. Four or more buttonholes	238		
IX BUTTON (including reinforcement button)			
a. Omitted, broken or defective	239		
b. Out of horizontal or vertical alignment by:			
1. 3/16 inch to 3/8 inch			330
2. More than 3/8 inch	240		
c. Misplaced, loose, not attached as specified, or insecurely sewn	241		
d. Tacking stitches omitted or insecure (hand sewn)			331
e. Shank wrapping (when required) omitted, loose or insecurely wrapped	242		
f. Stitching on button not locked at end of cycle (tug at loose end of the thread when accesible to determine whether it will ravel)			332
g. Any part of coat puckered or pleated by button sewing			333
X COLLAR OR LAPEL			
a. Not uniform in size or shape - any point varying:			
1. More than 1/4 inch with corresponding point on matching part	*		
2. More than 1/8 inch up to 1/4 inch inclusive with corresponding point on matching part	127		
3. More than 1/16 up to 1/8 inch inclusive with corresponding point on matching part	243		
b. Twisted, not smooth and flat, short or tight causing collar or lapel to turn out	128		
c. Collar:			
1. Collar off center by 1/4 inch or more 2/	244		
2. Finished width of collar or collarstand at center back not as specified	245		
3. Collar or collarstand too loose or tight causing puckers or pleats on collar, collarstand or neckline	246		

2/ Center of collar is determined by aligning the two shoulder seams at junction of collar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
4. Edge of collar not properly forced out, i.e., having a fold of more than 1/8 inch in depth		247	
5. Fusible collarstand interlining not extended into seam joining the collarstand and collar		248	
6. Finished width of collar not as specified			334
7. Undercollar exposed along collar edge for a length of 1/2 inch or more			335
8. Collar edge crooked, irregular or wavy		249	
d. Lapel:			
1. Left and right lapel varying in length by:			
(a) - more than 1/4 inch up to 1/2 inch inclusive		250	
(b) - more than 1/2 inch	129		
XI FRONT AND FRONT FACING			
a. Front facing excessively full, tight, or twisted:			
1. At lapel	130		
2. Below lapel		251	
b. Front facing short, tight, or twisted causing fullness or twist on front or causing lapel end to curl up	131		
c. Front facing too long causing bottom corner of front to curl up	132		
d. Front tight or short, button out of alignment with buttonhole, or front facing tight or twisted causing noticeable bulge or twist		252	
e. Fronts uneven in length at bottom or top by:			
1. More than 1/4 inch up to 1/2 inch inclusive			336
2. More than 1/2 inch		253	
f. Front edge not folded straight with warp line	133		
g. Front edge irregular, stretched uneven			337
h. Front facing exposed beyond edge of front for a length of 1 inch or more		254	
i. Front of coat pleated or puckered at corner of pocket welt	134		
j. Front part exposed along lapel edge			338
XII. POCKET			
a. Pockets out of alignment (in any direction) or misplaced by:			
1. More than 1/2 inch		*	
2. More than 3/8 inch up to 1/2 inch inclusive	135		
3. 1/4 inch up to 3/8 inch inclusive		255	
b. Pocket notch exposed on outside		256	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
c. Pocket welt:			
1. Not uniform in size and shape - any point varying			
(a) - more than 3/8 inch with corresponding point	136		
(b) - 1/4 inch up to 3/8 inch with corresponding point		257	
2. Twisted or full (not finished smooth, flat and even)		258	
3. Inner pocket welt exposed along top or bottom edge of pocket welt			339
4. Length or width not as specified by:			
(a) - 1/8 inch up to 1/4 inch inclusive			340
(b) - more than 1/4 inch up to 3/8 inch inclusive		259	
(c) - more than 3/8 inch	137		
5. Welt stitching not as specified		260	
6. Back edge of welt short causing pleat or puckers on front or too loose causing welt to gap	138		
7. Interlining omitted	139		
d. Pocket opening:			
1. Not smooth and flat	140		
2. End not caught in welt stitching	141		
e. Front of hanging pocket not stitched under facing		261	
XIII SHOULDER CONSTRUCTION			
a. Improperly joined or set causing front or back of shoulder to twist	142		
b. Any component tight, twisted, pleated, creased, full, or puckered		262	
XIV EPAULET			
a. Not uniform in size or shape - any point varying:			
1. More than 3/8 inch with corresponding point on matching part	143		
2. 1/4 inch up to 3/8 inch (inclusive) with corresponding point on matching part		263	
b. Epaulet tight, loose, or badly distorted when buttoned		264	
c. Interlining short, tight, or twisted affecting appearance of epaulet		265	
d. Not positioned as specified or attached crookedly		266	
e. Buttonhole not centered or positioned from finished end of loop as specified			341

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
f. Epaulet loop(s) less than 2 or more than 2-1/2 inches long			342
g. Epaulet loop not attached or not positioned properly			343
XV FRONT GUN FLAP			
a. Not shaped as specified		267	
b. Not positioned as specified		268	
c. Button not aligned with buttonhole causing a bulge or twist on flap or front of coat when buttoned	144		
d. Buttonhole not positioned as indicated		269	
e. Purling on buttonhole on the underside of the gun flap		270	
f. Front end extending into neck seam at shoulder seam			344
XVI SLEEVE			
a. Sleeve lining twisted, tight, or short causing fullness or twist on outside of sleeve	145		
b. Sleeve tight in lower front armhole causing a bulge, break, or twist in sleeve	146		
c. Sleeve fullness at armholes misplaced, affecting appearance		271	
d. Sleeve tight at armholes, causing ridges, puckers, or pleat on outside		272	
e. Underarm seam of sleeve staggered more than 3/8 inch with side seam at armhole			345
f. Interlining twisted, tight, or pleated causing puckering on outside of sleeve clearly noticeable		273	
g. Sleeves reversed i.e., right sleeve set in left armhole	147		
XVII BACK VENT			
a. Vent opening reversed	148		
b. Boxstitching omitted or not as specified	149		
c. Row of stitching across top of vent opening omitted, insecure,or not as specified	150		
d. Raw edge at top of pleat exposed below double row of stitching			346
e. Lengths uneven by 1/4 inch or more			347
f. Width of vent turnback less than specified			348

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
XVIII SLEEVE STRAPS			
a. Edge of sleeve strap not parallel to bottom edge of sleeve by more than 1/4 inch		274	
b. Width of strap not as specified		275	
c. Not attached or not positioned as specified		276	
d. Out of alignment by:			
1. More than 1/4 inch with each other		277	
2. More then 1/2 inch with each other	151		
XIX PLEAT			
a. Omitted or not specified type	152		
b. Not positioned as specified		278	
c. Depth of pleat at top end of back lining not as specified			349
XX LINING			
a. Twisted, tight, or short causing bulge or twist on front	153		
b. Too long causing lining to sag at bottom		279	
c. Any required tack or backtack on sleeve lining omitted, unsecured, or not positioned as specified		280	
d. Bottom edge or hem not finished as specified			350
e. Stitching of facing to pocket omitted, insecure or not positioned as specified		281	
XXI BINDING			
a. Omitted	154		
b. Twisted			351
c. Not securely caught, causing binding to pull away from fabric	155		
d. Binding short or tight, causing edge of seam to curl and not lie flat		282	
e. Stretched causing edge to be wavy in appearance		283	
f. End not overlapped as specified			352
g. Not starting or finishing as specified or incomplete		284	
XXII BELT			
a. Buckle defective	156		
b. Buckle stitching insecure		285	
c. Irregular in width by more than 1/8 inch			353
d. End poorly shaped			354

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
e. Belt in reversed position		286	
f. Twisted or puckered		287	
g. Width not as specified			355
XXIII BELT LOOP			
a. Omitted	157		
b. Finished length or width not as specified			356
c. Not positioned as specified by more than 1/2 inch		288	
d. Loop not attached as specified or opening not as specified		289	
e. Belt loop set at an angle, more than 1/4 inch off the perpendicular		290	
XXIV BELT ANCHOR			
a. Finished length or width not as specified			357
b. Misplaced, i.e., stitched to belt so that belt buckle cannot be positioned at front center when fronts are buttoned		291	
c. Not positioned through belt loop, i.e., not serving intended purpose			358
d. Extends below bottom edge of belt			359
XXV HANGER LOOP			
a. Finished width or length not as specified			360
b. Not positioned as specified, by more than 1/4 inch			361
c. Not attached as specified			362
d. Insecure			363
XXVI FUSIBLE TAPE AND FUSIBLE INTERLINING			
a. Omitted	158		
b. Twisted causing puckers, pleats, or twists on the outside of coat	159		
c. Any evidence of bleed through, bubbling, delamination, or color change	160		
d. Not positioned or stitched as specified		292	
e. Exposed		293	
XXVII HEM			
a. Twisted or pleated		294	
b. Puckers			364
c. Width of hem not as specified			365

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
XXVIII LABEL			
a. Missing, incorrect, or illegible:			
1. Combination identification personal and instruction label	161		
2. Size label		295	
b. Not attached as specified, misplaced, or stitching through the printing			366
XXIX LINER			
a. Size shown on liner not same as coat		296	
b. Liner tight or short causing puckering of coat	162		
c. Ends of binding not caught in bartack or stitching			367
d. Fabric not securely caught in binding		297	
e. Fronts uneven in length by more than 3/4 inch		298	
f. Vent flaps uneven in length by more than 3/8 inch			368
g. Finished width of binding not as specified			369
h. Binding finishing at top of vent			370
i. Ends of binding overlapped less than 1/2 inch			371
j. End of binding on sleeve bottom not finishing at underarm seam or not formed into a loop to accommodate a 24 line button		299	
XXX SLIDE FASTENER			
a. Slide fastener not type, style, size, type of pull, or finish required	163		
b. Slide fastener does not function properly - pull detaches, slider binds or sticks, or chain unmeshes	164		
c. Slider positioned on left side of liner (as worn)	165		
d. Slide fastener not positioned as specified		300	
e. Ends of slide fastener unequal in distance from bottom edge of liner by more than 1 inch		201a	
f. Slide fastener pull tab not on outside of liner		202a	
g. Slide fastener tape stitched too close to metal chain not permitting slider to move freely	166		
h. Slide fastener tapes wavy or puckered (too tight or too full)		203a	
i. Slide fastener separating pin not on right facing of coat			372
j. Slide fastener retainer not on right side of liner (as worn)			373
k. Coat or liner twisted or distorted when slide fastener is engaged	167		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
XXXI ARMHOLE			
a. Crooked or puckered seam		204a	
b. Any component part on or around armhole that is tight, twisted, pleated, creased, full, or puckered		205a	
XXXII COLLAR CLOSURE (POSITION OF LAPEL BUTTON)			
a. Misplaced on right front causing a noticeable bulge or twist on fronts when buttoned		206a	
b. Misplaced on right front causing collar ends to overlap when buttoned		207a	

* TABLE VI - Selected defects

COLLAR OR LAPEL
Not uniform in size or shape - any point varying more than 1/4 inch with corresponding point on matching part.
POCKETS
Out of alignment (in any direction) or misplaced by more than 1/2 inch.

4.4.3.2 Dimensional examination. The coats shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table III shall be scored as a measurement defect.

b. Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.3.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examinations in 4.4.3.2		
One class	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/ Polyethylene bag not as specified. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A. The coats shall be hung with fronts lapping, buttoned, and belted on hanger. The hanger shall be made of high impact polypropylene. The hook of the hanger shall be square and made of 8 gauge wire. The hanger shall be able to withstand a garment weighing a minimum of 5 lbs. The hanger shall measure 17 inches across the width for all sizes. Each coat shall then be enclosed in a open-bottom polyethylene bag of 0.0006 inch (± 20%) thickness which shall extend beyond the bottom of the coat. The top of the bag shall be sealed to fit over the shoulders and shall have a small opening centered at the top to accommodate the hanger hook. Suggested dimensions for the bag are 21 inches wide by 50 inches long with a 4 inch gusset at each side.

5.1.2 Level C. Each coat shall be preserved to afford adequate protection against deterioration and physical damage during shipment to the first recovering activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A or C as specified (see 6.2).

* 5.2.1 Level A packing. Fifteen (15) coats of one size and length only, preserved as specified in 5.1 shall be packed in a front loading style fiberboard wardrobe container (see 6.5). The container shall be a regular slotted container, made of double wall corrugated fiberboard, 350 T. The front panel shall have a diagonal score or horizontal cut. The dimensions of the container shall be 21 inches X 22 inches X 48 inches. The hanger bar of the container shall be 21 inches long, made of galvanized steel, have end brackets to fit securely onto the side panels of the container, and shall accept square hook hangers. The container shall be fabricated according to good commercial practice. Three inch wide (minimum) fiberglass reinforced plastic adhesive tape shall be used to first seal completely the overlapped top flaps of the container, and then the butted top flaps. The tape shall be centered over the butted edges of the flaps. A third taping operation shall completely seal the edges of the flaps. The fourth taping operation shall close the front panel along the length of the side opening, and across the bottom cut edge, as applicable. Reinforcement tape shall be placed in two locations across the side closure, spaced equidistantly from the top and bottom of the panel. When the quantity per size and length is ten (10) coats or less, a 14 inch X 22 inch X 48 inch container may be used. As an alternate, a 54 inch high container shall be obtained for customers desiring direct delivery from the supplier to the point-of-sale or issue.

5.2.2 Level C. Coats of one size and length only, preserved as specified in 5.1, shall be packed in a manner to ensure carrier acceptance and safe delivery at destination at the lovest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classificaiton Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages, and shipping containers shall be marked in accordance with MIL-STD-129. When wardrobe containers are used, the container shall have marked on each side in bold, clear, red or blue lettering not less than two inches high "DO NOT DROP" and "THIS SIDE UP" with arrows pointing to the top of the container.

5.4 Palletization. When specified (see 6.2) items, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.5 Packaging requirements and codes. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coats are intended for wear by all male personnel of the U.S. Coast Guard and the U.S. Air Force.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes and lengths required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2).
f. When palletization is required (see 5.4).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

6.4 Buckles and buttons. A suggested source of supply for the buckles and buttons is the State Button Co., 45 West 18th St., New York, NY 10011.

6.5 Box. A suggested source of supply for the boxes is CLOPAK, 44 Norfolk Avenue, Easton, MA 02375.

* 6.6 Quilted batting. Thinsulate type CS 150 and type CS 100 (body and sleeves respectively) have been found to be acceptable for the construction of the quilted batting. These products are available from the 3M Company, St. Paul, MN 55144-1000.

6.7 Equal item Prior to the use of an "or equal" item, the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

6.8 Recycled materials. It is encouraged that recycled materials be used when practical as long as it meets the requirements of this specification.

6.9 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.10 Subject term (key word) listing.

Raincoat, water repellent treated polyester/cotton poplin
Raincoat, with lining
Raincoat, with removable liner

Custodian:
Coast Guard - CT
Air Force - 11

Review Activity:
DLA - CT
Air Force - 82, 99

Preparing Activity:
Coast Guard - CT

Project No. 8405-0165

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.


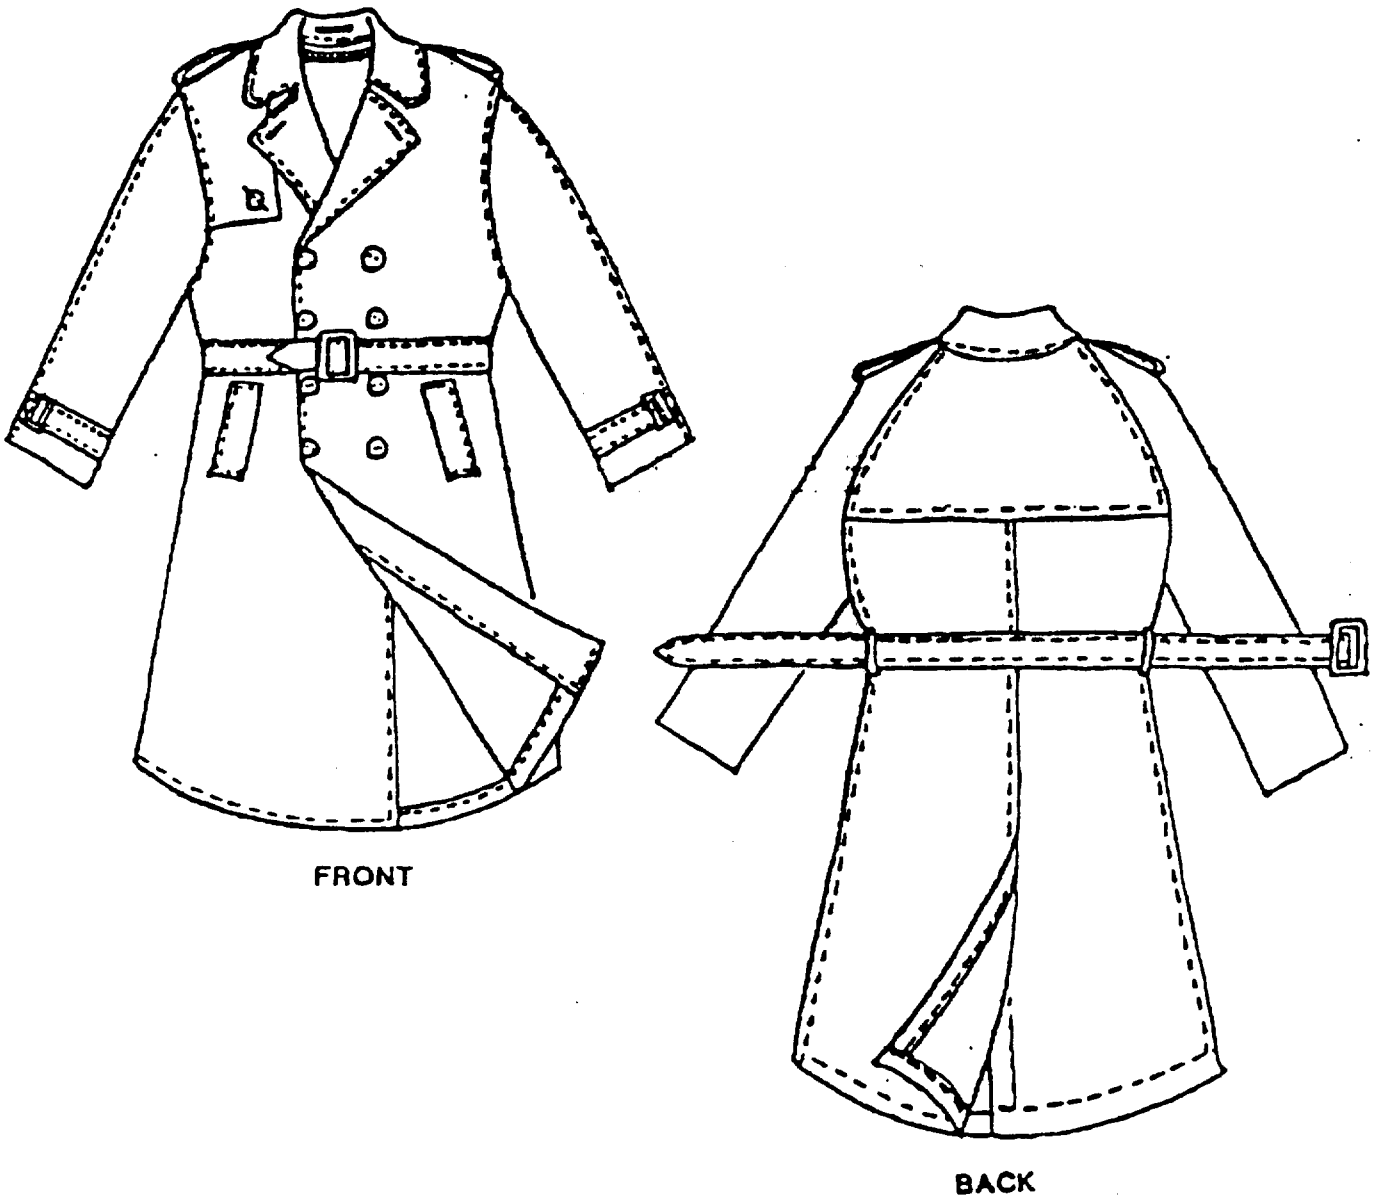


Figure 1 - Raincoat, Men's (w/Removable Liner)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

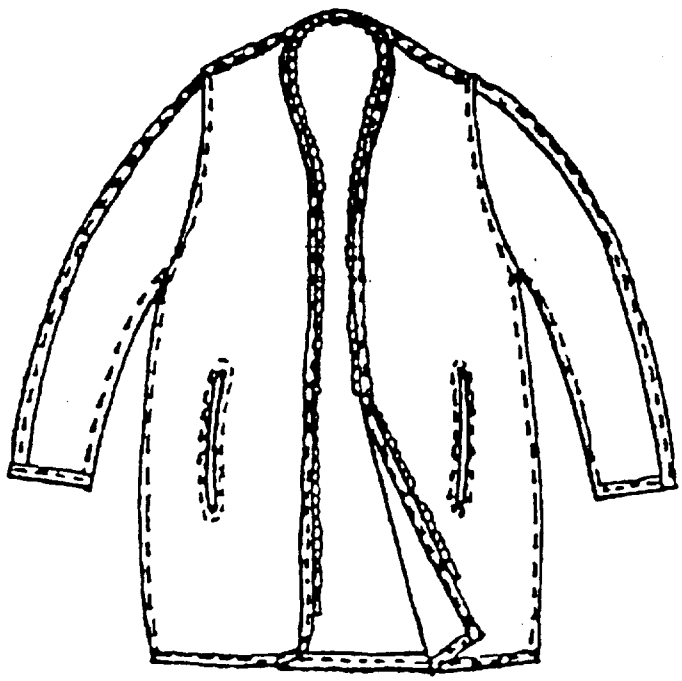

FRONT

Figure 2 - Raincoat, Men's (Removable Liner)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
P.O. Box 59, Code 50
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24918B	COAT, ALL-WEATHER, MAN'S, W/REMOVABLE LINER

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
	☐ VENDOR
	☐ USER
b. ADDRESS (Street, City, State, ZIP Code)	☐ MANUFACTURER
	☐ OTHER (Specify):

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) — Optional	b. WORK TELEPHONE NUMBER (Include Code) — Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) — Optional	8. DATE OF SUBMISSION (YYMMDD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:56Z
Check this source to verify that this is the current version before use.