INCH-POUND

MIL-F-24787/6(SH)
3 September 1993

MILITARY SPECIFICATION

FITTINGS, END, TYPE U, 180° RETURN, HOSE TO HOSE, REUSABLE FOR FLEXIBLE HOSE ASSEMBLIES

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers reusable 180° return fittings for use with wire or synthetic fiber reinforced rubber hose.

1.2 Classification. The 180° return fittings shall be type U. See MIL-F-24787, table III for identification of corresponding hose type (MIL-H-24135 and MIL-H-24136 specification sheet number) for each group number specified herein.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, SEA 03Q42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-N-281 - Nickel-Copper Alloy Bar, Rod, Sheet, Strip, Wire, Forgings, and Structural and Special Shaped Sections.
QQ-N-286 - Nickel-Copper-Aluminum Alloy, Wrought (UNS N05500).
QQ-N-288 - Nickel-Copper Alloy and Nickel-Copper-Silicon Alloy Castings.

MILITARY

MIL-T-1368 - Tube and Pipe, Nickel-Copper Alloy, Seamless and Welded.
MIL-T-16420 - Tube, Copper-Nickel Alloy, Seamless and Welded (Copper Alloy Numbers 715 and 706).
MIL-H-24135 - Hose Synthetic Rubber, Wire Reinforced, for Flexible Hose Assemblies, General Specification for.
MIL-H-24136 - Hose, Synthetic Rubber, Synthetic Fiber Reinforced, for Flexible Hose Assemblies, General Specification for.
MIL-B-24480 - Bronze, Nickel-Aluminum (UNS No. C95800) Castings for Sea Water Service.
MIL-F-24787 - Fittings, End, Reusable for Flexible Hose Assemblies, General Specification for.

(Unless otherwise indicated, copies of the federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of DoDISS cited in the solicitation. Unless otherwise specified, the issues of the documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

AMS 6381 - Steel Tubing, Mechanical 0.95Cr - 0.20Mo. (0.38 - 0.43C (SAE 4140). (DoD adopted)

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

(Non-Government standards and other publications are normally available from the organizations which prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:40Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 The 180° return fittings furnished under this specification shall conform to the requirements of MIL-F-24787 and as specified herein.

3.1.1 Fitting availability. Type U 180° return fittings are available in the classes and sizes indicated in table I.

TABLE I. Type U 180° return fitting by group and size.

Fitting size (hose dash no.)	Fitting group										
	I	II	III	IV	V	VI	VII	VIII	IX	X	XI
24			X			X					
40				X							
48				X							
64				X							
80									X		
96									X		
128									X		
160									X		
192									X		

NOTE: X's denote where 180° return fittings are available by group and size.

3.2 Dimensions. Fitting dimensions shall be in accordance with figure 1 and the tables thereto.

3.3 Materials. Fitting materials shall be in accordance with figure 1 and the tables thereto.

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be in accordance with MIL-F-24787 and as specified herein.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of the manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Qualification. One hundred and eighty degree return fittings, hose to hose, are not normally subjected to qualification testing since they do not attach to piping. They are qualified for a particular subgroup whenever a fitting of that subgroup is submitted to and passes the requisite qualification testing.

5. PACKAGING

5.1 Packaging requirements shall be in accordance with MIL-F-24787.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. End fittings to this specification are intended for use in shipboard or shore to ship piping systems where pressures do not exceed the flange rated working pressure, and temperatures do not exceed that of the applicable hose.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification sheet.
(b) Fitting size (hose dash no.)
(c) Fitting group number.
(d) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.1.1).
(e) Quantity of fittings.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:40Z
Check the source to verify that this is the current version before use.

6.3 Subject term (key word) listing.


Wire
Synthetic fiber

Preparing activity:
Navy - SH
(Project 4730-N086-6)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:40Z
Check the source to verify that this is the currentversion before use.

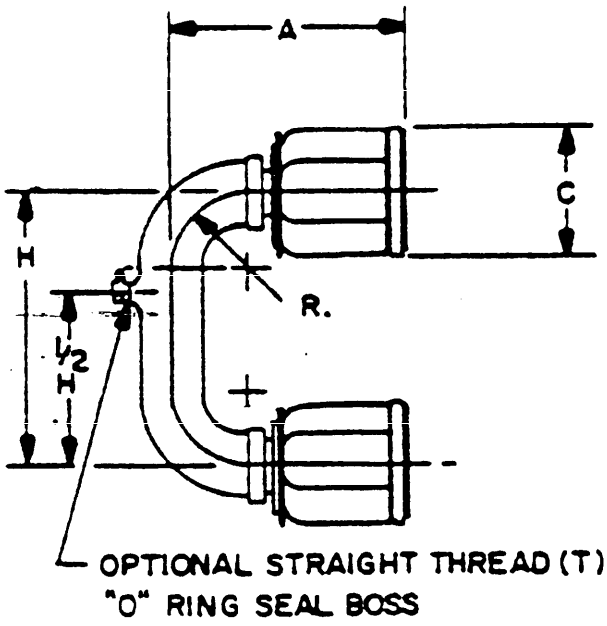


U-BEND

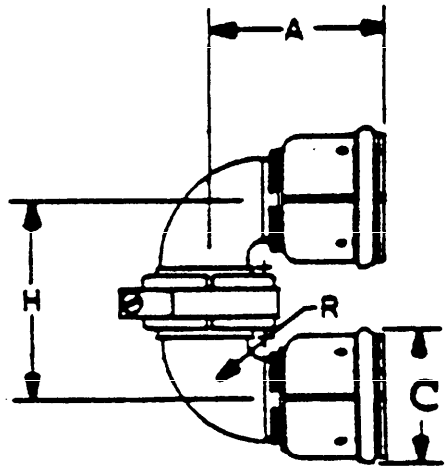

SPLIT CLAMP

TYPE U-----RING AND BAND

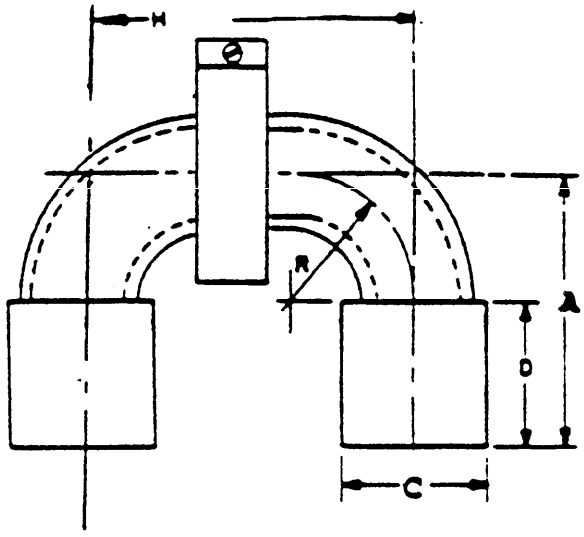

SPLIT CLAMP

TYPE U----BOLT TOGETHER

FIGURE 1. Type U end fittings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:40Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions for group III, type U hose to hose with U-bend.

Hose (dash no.)	Boss thread UNF-2B	A max	C max	H nom	R min
-24	5/16-24	7.75	4.25	6.50	2.00

TABLE III. Dimensions for group VI, type U hose to hose with U-bend.

Hose (dash no.)	Boss thread UNF-2B	A max	C max	H nom	R min
-24	5/16-24	7.25	3.16	6.50	2.00

TABLE IV. Dimensions for group IV type U hose to hose with split clamp.

Hose (dash no.)	A max	C max	H nom	R min
-40	5.70	3.90	5.40	1.88
-48	6.05	4.50	5.92	2.09
-64	6.46	4.50	5.95	2.09

Notes for tables II and III.

1. Sizes -20 and larger do not have this hex.
2. Dimensions are in inches.
3. The fitting assembly materials shall conform to QQ-N-281 or QQ-N-286.
4. Socket alternative material shall conform to QQ-N-288.
5. The 90° tube elbow for sizes -6 through -12 shall conform to MIL-T-1368 and for sizes -16 and larger to MIL-T-16420.

TABLE V. Dimensions for group IX type U hose to hose, bolt together.

Hose (dash no.)	A nom	C max	D nom	H max	R ref
-80	8.75	11.50	5.00	13.38	3.50
-96	9.25	12.00	5.00	14.14	4.00
-128	10.50	14.00	5.00	17.20	5.00
-160	12.00	16.50	5.00	19.20	6.38
-192	15.00	20.00	6.50	21.12	7.35

NOTES:

1. Dimensions are in inches.
2. Material shall be bronze in accordance with MIL-B-24480.
3. Material for fasteners shall be QQ-N-281 or QQ-N-286.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-F-24787/6(SH)	2. DOCUMENT DATE (YYMMDD) 930903

3. DOCUMENT TITLE
FITTINGS, END, TYPE U, 180^0 RETURN, HOSE TO HOSE, REUSABLE FOR FLEXIBLE HOSE ASSEMBLIES

4. NATURE OF CHANGE (identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC) MR. CARL BANKS, SEA 03Y23 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: DSN: TPOC: 703-602-0367 8-332-0367
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03Q42 2531 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:40Z
Check the source to verify that this is the current version before use.