MIL-O-24905A(CG)
13 December 1983
SUPERSEDING
MIL-O-24905(CG)
17 May 1982

MILITARY SPECIFICATION

OVERCOAT, MAN'S, REEFER (COAST GUARD)

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a man's double-breasted reefer overcoat.

1.2 Classification The overcoat shall be of one type only and in the following sizes and lengths (see 6.2):

Sizes	- 34, 36, 38, 40, 42, 44, 46 and 48
Length	- Short, regular, long, and extra-long

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
CCC-C-438	- Cloth, Buckram, Cotton
CCC-C-458	- Cloth, Flannel, Cotton
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp and Spun Hair-Wool or Rayon Filling
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill Rayon
MIL-B-371	- Braid, Textile (Cotton, Tubular)
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	- Pads, Shoulder and Sleeve-Head
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-24903	- Cloth, Elastique, Polyester Wool
MIL-C-43251	- Cloth, Pile, Acrylic Fiber Pile
MIL-T-43548	- Thread, Polyester, Cotton-Covered, Rayon Covered
MIL-C-43718	- Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other government documents, drawings, and publications The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, NW., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606).

3. REQUIREMENTS

3.1 Guide samples Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from the specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials (see 6.4)

3.3.1 Basic material The basic material shall be polyester and wool elastique conforming to MIL-C-24903.

3.3.2 Linings

3.3.2.1 Lining, pile The acrylic pile for the body lining shall conform to class 2 of MIL-C-43251 and shall be dyed to match shade Blue 3362.

3.3.2.2 Lining, sleeve The material for the quilted sleeve lining shall consist of a top (face) layer of rayon; a middle layer of 3.3 ounce polyester filler; and a bottom (back) layer of plain weave cloth. The quilted lining shall be constructed with a 1 inch diamond shape pattern. The quilted lining may also be of an "or equal" item (see 6.5 and 6.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.3 Binding The material for binding the bottom hem and facing of the overcoat and bottom edge of lining shall be a 3.7 ounce rayon material, shade Blue 3351, conforming to class 1 of MIL-C-368. The rayon binding shall be cut on a 45 (+ 5) degree angle in strips 3/4 to 7/8 inches wide. The ends of the strip shall be joined together, by stitch type 301 and the seam type SSa-1 with 10-12 stitches per inch.

3.3.4 Collar interlining The material for the collar interlining shall be cotton buckram, natural or bleached, conforming to type I, class 2 of CCC-C-438, except that the test for shrinkage shall be in accordance with test method 5580 of FED-STD-191 and the stiffness requirement shall not be less than 0.015 inch-pounds in the filling.

3.3.5 Undercollar cloth The undercollar material shall be wool flannel conforming to MIL-C-15062. The shade shall be blue approximating the shade of the basic material and requirements for perspiration and crocking shall not apply.

3.3.6 Wigan The material for interlining the sleeve bottoms shall be cotton, wigan, natural shade or dyed black, conforming to type I, of MIL-C-16375.

3.3.7 Coat front (see figure 3)

3.3.7.1 Basic material The basic material for the coat front shall be cotton warp and spun hair-wool filling conforming to type II, class 2 of MIL-C-297. The interlining shall be dyed black.

3.3.7.2 Haircloth The haircloth used for the coat front shoulder piece shall be of a good commercial grade.

3.3.7.3 Flannel The flannel used for the coat front padding shall be unbleached, double napped, conforming to type II, class 1 of CCC-C-458.

3.3.8 Pocketing

3.3.8.1 Inside pocket The material for the inside pocket and pocket stays shall be polyester/cotton twill conforming to class 1 of MIL-C-43718. The shade shall be natural or black. When a black shade is used, the colorfastness requirements for perspiration and crocking shall not apply.

3.3.8.2 Front pockets The material for the front pockets shall be a soft filled cotton flannel having a smooth suede finish on one side, in natural or gray shade and shall conform to the following minimum requirements:

Weight (oz/sq yd)	6.0
Yarns per inch:	
Warp	44
Filling	40
Breaking strength (pounds)	
Warp	60
Filling	35

The use of sulphur dyes and dyes containing elementary sulphur compounds capable of oxidation to sulphuric acid is prohibited. The dyed material shall show minimum of good fastness to wet-dry cleaning and shall show a Munsell Value for crocking not lower than 8.5 when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.9 Shoulder and sleeve-head pads The shoulder pads shall conform to type I class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.10 Threads

3.3.10.1 Cotton thread The cotton thread for seaming and stitching the overcoat shall be dyed Blue AT Cable No. 66060 and shall conform to type I of V-T-276 in the following types and sizes:

Use	Type	Ticket No.	Ply
Seaming and stitching	1C2	0	3
Tacking armholes and attaching sleeve-head pads	1A1 or 1A2	30	3
Buttonholes and bartacks	1C2	A, B	3
Button sewing:			
Hand	1B3	12 or 16	4
Machine	1A3	20	4

3.3.10.2 Thread, covered polyester As an alternate to the cotton thread, a covered polyester thread may be used. When this option is exercised the thread shall match Blue AT, Cable No. 66060 and shall conform to MIL-T-43548:

Use	Ticket No.	Ply
Seaming and stitching	50	2 or 3
Tacking armholes and attaching sleeve-head pads	30	2 or 3
Buttonholes and bartacks	30	2 or 3
Button sewing:		
Hand	30	2 or 3
Machine	30	2 or 3

3.3.10.3 Basting thread Thread for basting and tacking may be bleached or unbleached and shall be of a good commercial grade cotton. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed or removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.10.4 Silk thread The silk thread for hand and machine stitching the overcoat shall be dyed Blue AT, Cable No. 66060 and shall conform to V-T-301 as follows:

Use	Type	Class	Letter Size Designation	Ply
Machine felling, blind-stitching	I	-	A, B	3
Buttonholes and bartacks	I	-	B, C	3
Hand felling	III	3	A, C	2

3.3.10.4.1 The following threads may be utilized as alternates to the silk threads specified above for the operations indicated:

a. For machine felling and blind felling - polyester thread conforming to type I, size A/3 or AA/2 of V-T-285 or a monofilament nylon thread of comparable type and size.
b. For hand felling - nylon thread conforming to type IV, size A/2 or C/2 of V-T-295.

3.3.10.5 Nylon thread If an automatic machine which sews and shanks (wraps) the buttons in one operation imitating hand sewing is used, the thread shall be nylon waxed monocord, special No. 4, having a breaking strength of 11 pounds and a minimum length per pound of 3,250 yards and shall be tested for these requirements in accordance with test methods outlined in V-T-295.

3.3.10.6 Colorfastness of threads The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301 and MIL-T-43548. When no standard sample is available, the dyed threads shall show good colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301 and MIL-T-43548.

3.3.11 Gimp The gimp for reinforcing the buttonholes shall be thread, cotton, gimp, buttonhole conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed shade Blue AT, Cable No. 66060.

3.3.11.1 Colorfastness The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show good fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.12 Tapes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.12.1 Woven tape The tape shall be cotton, preshrunk, conforming to Type 1, class 1 or class 2 of DDD-T-86. The widths shall be as follows:

1/2 inch for staying lapels, fronts and bottom edges
5/8 inch for staying bridle at breakline of lapel
1/4 inch for staying back armhole, lower part of front armhole, and fold line of left vent

3.3.12.2 Cross-cut tape The tape for staying the front shoulder, neck gorge, back neckline and upperpart of front armhole shall conform to class 1 of MIL-C-43718. The tape shall be cut across the width of the cloth in strips 1/2 (+ 1/16) inch wide and shall be dyed or undyed. The raw edges of the tape shall be treated with a synthetic resin to prevent raveling when tested as specified in 4.4.1.

3.3.12.3 Tape, fusible web The tape for joining the fronts and facings shall be a non-woven thermoplastic polyamid resin, natural color, 18 to 32 grams per square yard and 5/8 inch in width (see 4.4.1).

3.3.12.4 Fusible tape The tape for staying the fold line of the left vent shall be a fusible tape 1/2 inch in width and shall be capable of withstanding dry cleaning operations when tested as specified in 4.4.1.

3.3.13 Buttons

3.3.13.1 Metal buttons The gold plated metal buttons for the front of the overcoat shall be 35-line regular shank conforming to type I, style 5, class A of MIL-B-3461. The buttons for the left front shall be supplied with ring type toggles. The buttons for the right front and the two buttons under the lapels shall be supplied with stay buttons as specified in 3.3.13.2.

3.3.13.2 Plastic buttons The plastic inside anchor button shall be Shade Black BT, cable no. 62001 conforming to type II, class D, style 20 and 21, 30-line of V-B-871. The stay buttons used with the metal buttons shall conform to type II, class D, style 15, 20-line of V-B-871.

3.3.14 Hanger loop The hanger loops for the overcoat shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371. The braid shall be black or shall match the lining or basic material and shall show good fastness to crocking and wet-dry cleaning when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.15 Combination label Each overcoat shall have a combination identification, size and instruction label that conforms to type VI class 14 of DDD-L-20. The printing on the label shall show fastness to dry cleaning. The label shall bear the following inscription:

OVERCOAT, MAN'S, REEFER (COAST GUARD)
BASE FABRIC: 55% POLYESTER 45% WOOL
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 40 REGULAR (EXAMPLE)
NAME OF SUPPLIER:

DRY CLEAN ONLY

NOTE: The length (short, regular long or extra-long) may be abbreviated as S, R, L or XL.

3.4 Design The overcoat shall be double breasted, fully lined, with set-in sleeves, a convertible collar, two outside (beason style) pockets, an inside right breast welt pocket, a two piece back with center vent and eight 35-line Coast Guard metal buttons on front.

3.4.1 Figure Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are intended to be used only for cutting the contractors working patterns. The working patterns shall be identical to the standard patterns. Unless otherwise specified in Table I seam allowances shall be as follows:

Joining center back and side seams	1/2 inch
Joining shoulders, armholes, sleeves	3/8 inch
Joining facings to fronts	1/8 to 3/16 inch
Joining linings at sides and back	1/2 inch
Joining shoulders and sleeves of lining	3/8 inch

3.5.1 Pattern parts The component parts of the overcoat shall be cut from material as specified in accordance with the number of parts required for manufacturing process as follows:

Material	Nomenclature of Pattern Parts	Cut Parts
Cloth, polyester/wool elastique	Front	2
	Back	2
	Facing	2
	Topsleeve	2
	Undersleeve	2
	Topcollar	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of Pattern Parts	Cut Parts
Cloth, polyester/wool elastique (cont'd)	Topcollar stand	1
	Vent piece	1
	Outer pocket welt	2
	Outer pocket facing	2
	Inside pocket welt and facing	1 1/
Acrylic Pile, lining	Front lining	2
	Back lining	2
	Optional back lining	1
Quilted, Sleeve lining	Top sleeve lining	2
	Under sleeve lining	2
Undercollar cloth	Undercollar front 2/	2
	Undercollar back 2/	2
Cloth, Twill, Polyester	Inside pocket	1
Cloth, flannel, cotton	Outer pocket top ply	2
	Outer pocket bottom ply	2
Cloth, interlining	Undercollar front interlining	2
	Undercollar back interlining	2
Cloth, wigan, cotton	Sleeve wigan	2
Templates	Undercollar shaper	-
	Undercollar stand marker	-
	Lapel shaper	-
	Finished collar and lapel shaper	-
	COAT FRONT	
Cloth, interlining	Front canvas	2
	Chest piece interlining	2
	Shoulder V backing	2
Haircloth	Shoulder piece	2
Flannel	Chest piece flannel	2

1/ As an alternate, basic material may be used in place of undercollar material.
2/ When automatic pocket machine is used, pattern part may be slit in two.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.6 Construction

3.6.1 Stitches, seams and stitching Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the overcoat. Unless otherwise specified, edgestitching shall be 1/2 inch from the folded edge.

3.6.2 Thread breaks and ends of seams Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch, unless otherwise specified. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired by using 301 stitch type.
NOTE: The backtack shall be three rows of continuous stitching superimposed on one another.

3.6.3 Stitches per inch The minimum and maximum number of stitches shall be as specified in Table I.

3.7 Manufacturing operation requirements The overcoats shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished overcoats are identical to that produced by following the sequence listed in Table I.

3.7.1 Shade and size marking The component parts shall be marked, ticketed/or bundled to insure a uniform shade and size throughout the overcoat. Any method may be used except:

(1) Corrosive metal fastening devices.
(2) Adhesive type tickets which discolor or adhere to the material upon removel of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the overcoat and wherever possible, is covered by the seam allowance.

3.7.2 All pressing operations referenced in Table I shall be performed by using a heated pressing iron and steam pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the overcoat in strict accordance with patterns furnished which show size, shape, directional lines, and notches for proper assemble of all parts. Perforated and plain paper markers are prohibited on the basic fabric. Felt back paper markers are permitted. b. Cut the component outer shell parts of the overcoat from one piece of material except the vent piece, pocket piping and pocket facings which may be cut from ends. When so cut, these parts shall approximate the shade of the overcoat. The undercollar parts shall be shade marked and shall match each other when assembled. c. Cut the component body lining parts of the overcoat from one piece of material. The pile shall be cut so that the nap of the pile lays downwards. d. Quilted sleeve linings need not be cut from one piece of quilted material as long as component parts closely approximate the shade of each other. e. Cut all inside pocket stays 2 inches wide in the warp direction. The length of the individual pocket stay shall be 1 1/2 inches longer than the nominal finished pocket opening of the inside pockets.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects as classified in section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.1) All parts shall be marked, ticketed or bundled, except pocket facings.					
4.	Raw edges The raw edges of all joining seams except fronts to facings, collar stand to collar, collar to undercollar at top edge and those seams required to be bound, shall be serged prior to joining.	503 or 504 or 602	EFd-1	8-10	0/3	0/3
5.	Make collar a. The collar shall consist of topcollar and collar stand, a four-piece undercollar, and a four-piece interlining.					
	b. Join the topcollar to the collar stand with a 1/4 inch seam, distributing proper fullness on the collar-stand between the center notch and each end.	301 or 401	SSz-3(a)	10-14	0/3	0/3
	c. Open the seam and stitch on each side of the seam 1/16 inch from the seam line.	301	SSz-3(b)	10-14	0/3	0/3
	d. Stitch 3/8 inch from edge, face to face, the undercollar center back seam and seams joining center and end sections.	301	SSa-1	10-14	0/3	0/3

Source: https://assist.dla.mil -- 12 Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make collar (cont'd)					
	e. Press seams open and flat with a heated pressing iron.					
	f. Stitch 1/4 inch from edge, the interlining center back seam and seams joining center and end section with the edges overlapped 1/2 inch.	301	LSa-1	10-14	0/3	0/3
	g. Pad interlining to undercollar with 7 or 8 rows of blindstitching.	103 or 306	SSm-7 or8	4-8	0/3	0/3
	h. Press undercollar flat.					
	i. Mark, shape and trim undercollar to conform to undercollar shaper template. Trim interlining 1/8 - 3/16 from neck edge of undercollar.					
	j. Mark the breakline of the finished undercollar in accordance with marks on pattern.					
	k. Seam interlining to undercollar along breakline mark.	301	SSv-1	10-14	0/3	0/3
	l. Baste the topcollar to undercollar along crease-line and outer edge putting in proper fullness.	Hand or Machine		Commercial		
	m. Trim, and turn edges of topcollar over interlining between undercollar and interlining and baste edges.	Hand or Machine		Commercial		
	n. Fell top, corners and side edges of topcollar to finished undercollar by hand. Top edge may be machine felled with simulated hand stitching. When simulated hand stitching is used, the operation shall precede collar basting.	Hand or Machine		8-10 6-10	C(silk) A(silk)	A(silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make collar (cont'd)					
	o. Trim neck edge of topcollar to allow for seaming.					
	p. Press and crease the stand of the topcollar and the undercollar together in one operation to shape stretching the outer edge of the collar across the shoulders and holding the creaseline short.					
6.	Make sleeves and sleeve linings					
	a. Sleeves shall be set-in type consisting of a topsleeve and undersleeve.					
	b. Joing forearm seam of sleeve (basic material) face to face 1/2 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3	0/3
	c. Press forearm seam open and flat holding seam short.					
	d. Stitch sleeve interlining (wigan) to forearm seam and sides of backarm seam allowances. Bottom edge sleeve interlining shall be 1/2 to 3/4 inch below turnup notches. Trim ends of sleeve interlining even with edges of sleeve.	301 or 401	SSa-1	10-14	0/3	0/3
	e. Press turnup of sleeve as indicated by notches in pattern.					
	f. Join backarm seam of sleeve, face to face, 1/2 inch from edge.	301 or 401	SSa-1	10-14	0/3	0/3
	g. Press backarm seam open and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:54Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Make sleeves and sleeve linings (cont'd)					
	h. Join the forearm seam of the sleeve linings, face to face, 1/2 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3	0/3
	i. Join the back arm seam of sleeve linings, face to face, 1/2 inch from edge.	301 or 401	SSa-1	10-14	0/3	0/3
7.	Make outside vertical slash pockets					
	a. Each front shall have a double welted beason style pocket.					
	b. Stitch, face side up, the welt piece to top ply of pocketing.	301	LSa-1	10-14	0/3	0/3
	c. Stitch, face side up, the facing piece to bottom ply of pocketing.	301	LSa-1	10-14	0/3	0/3
	d. Position face side of welt piece on the outside of each front as indicated by marks on pattern. Double stitch 1/4 to 3/8 inch gage between marks and cut midway between the two parallel rows of stitching, tongue notching ends of opening. Turn pocket thru opening, form and stitch a 1/16 to 1/8 inch wide welt on each side of opening, simultaneously catching the assembled facing piece and bottom ply of pocketing on the underside when forming the welting on the back edge of the opening (nearest side seam).	301	SSaf-2 (shows finished seam)	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Make outside vertical slash pockets (cont'd) NOTE: The assembled facing piece and bottom ply of pocketing may be attached separately by stitching down back edge of the pocket opening through all plies of material. The line of stitching shall be superimposed on the first line of stitching. The back edge of the opening may also be closed on the underside, when this method is used, the line of stitching shall be adjacent to the first line of stitching. The back edge of the pocket opening closing shall be performed prior to operation 8e.	301	SSa-1	10-14	0/3	0/3
	e. Operation d may be accomplished with a double welt pocket machine which stitches, cuts and turns welt edges in one operation. When this machine is used, the beason piece may be trimmed to permit insertion into the machine. The joining seams of the beason piece shall be topstitched through front and all plies of material. When this machine is used, the contractor may utilize the machine manufacturers recommended pocket stay material.	101 and 301		10-14	A/3 0/3	0/3
	f. Sew a row of stitching the length of the pocket opening on each side 1/2 to 5/8 inch from and parallel to the finished edge of the pocket. The bottom ply of the pocketing shall be turned back before stitching front edge of pocket.	301	OSf-1 and LSa-1	10-14	0/3	0/3
	g. Close pocketing 1/2 to 5/8 inch from raw edges around outer and bottom edges and up inside edge to bottom of welt catching ends of beason and facing pieces.	301	SSa-1	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Make outside vertical slash pockets (cont'd)					
	h. Starting at ends of the two previously stitched rows of parallel stitching make a uniform point 5/8 to 3/4 inch from each end of pocket opening. Stitch thru all plies catching pocketing at both ends and interlining at top end of pocket.	301	SSv-1	10-14	0/3	0/3
	i. Stitch a 1 to 1 1/4 inch or two 1/2 to 5/8 inch horizontal bartacks at each end of pocket opening connecting the parallel rows of stitching at bottom of each point.	Bartack		56 per bartack 1 to 1 1/4 inch or 28 per bartack 1/2 to 5/8 inch	B	A
	j. The finished pocket opening shall measure 7 1/4 (± 3/8) inches long.					
8.	Baste coat front to fronts					
	a. The coat front shall extend the full length of the overcoat and well beyond the armhole and shoulder.					
	b. Construct canvas coat front in accordance with figure 3.					
	c. Baste coat front to each respective front along center keeping the hanging pocket smooth and flat when caught in the basting.	Hand or Machine				
	d. Tack front edge of hanging pocket to coat front.	Hand or 103 or 301	SSm-1	2-4 4-6 4-6	0/3 or Comm'l 0/3 or Comm'l 0/3 or Comm'l	0/3 or Comm'l

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Baste coat front to fronts (cont'd)					
	e. In addition, baste coat front to respective front as follows:	Hand or Machine				
	1. Across shoulder 2. Around armhole and down back edge 3. Along breakline of lapel 4. Down lapel and front edge					
	f. Position a 5/8 inch wide bridle stay tape adjacent to and behind breakline of each lapel. The bridle stay shall extend sufficiently above gorge seam to permit catching the stay in the gorge seam tacking and to within 1 1/2 inches from bottom of lapel breakline. Baste tape even and smooth for a distance of 1 1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 3/8 inch chest fullness. The balance of the tape shall be basted without tautness or fullness. Tape and interlining may be stamped or marked to assure proper amount of fullness.					
	g. Pad (blindstitch) each lapel of overcoat with not less than 7 equally spaced rows of stitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or 306	SSm-7 SSm-7	4-6 4-6	0/3 0/3	 0/3
	h. Blindstitch bridle stay along both edges to coat front.	103 or 306	SSm-2 SSm-2	4-8 4-8	0/3 0/3	 0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make backs and form vent					
	a. Join back pieces, face to face, to form a center back seam. The bottom edge of the center back stitching shall terminate at the top of the vent.	301 or 401	SSa-1	10-14	0/3	0/3
	b. Notch seam allowances top of right vent and press seam open and flat.					
	c. Stitch 1/2 inch wide cross cut tape to back at neckline.	301	SSaa-1	10-14	0/3	0/3
	d. Fold left vent against underside of back in line with the center back seam and vent notch at bottom and press flat.					
	e. Open folded vent, position and attach the fusible tape stay with the edge in the creased edge of vent at the fold line and fused to the back side of the turned portion of vent.					
	f. Turn inwards back edge of left vent so as to produce a finished left vent facing 1 1/2 (± 1/8) inches wide.					
	g. Turn top and back edge of right vent piece in accordance with marks on patterns. Back edge turned over top edge. Stitch 1/16 to 1/8 inch from the turned edge.	301	EFa-1	10-14	0/3	0/3
	h. Join right vent piece to right vent, face to face, 1/2 inch from edge.	301	SSe-2(a)	10-14	0/3	0/3
	i. Turn right vent assembly to finished position and top stitch from top to bottom 1/8 inch from turned vent edge.	301	SSe-2(b)	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (con'td)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make backs and form vent (cont'd)					
	j. Keeping vent closed and straight, with notches at bottom of back aligned, place a diagonal row of stitching at the top (left) vent, through back and vent piece, with the base inclined approximately 10 degrees toward the front and bottom of coat. Finished stitching shall measure 2 (± 1/4) inches long.	301	SSv-1	10-14	0/3	0/3
10.	Stitch tapes and join sides					
	a. Join, 1/2 inch from edge, face to face, the fronts and back at sides.	301 or 401	SSa-1	10-14	0/3	0/3
	b. Press seams open and flat. NOTE: The armhole tape may be pressed during the pressing of the side seams utilizing a suitable pressbuck.					
	c. Stitch a 1/2 inch wide cross-cut tape at front neck to gorge.	301	SSaa-1	10-14	0/3	0/3
	d. Stitch a 1/2 inch wide cross-cut tape on each front shoulder 3/4 to 1 inch from neck to within 1/2 to 3/4 inch from armhole.	301	SSaa-1	10-14	0/3	0/3
	e. Stitch a 1/2 inch wide cross-cut tape on front armhole from 2 to 2 1/2 inches of armhole notch to within 1/2 to 3/4 inch from shoulder.	301	SSaa-1	10-14	0/3	0/3
	f. Stitch a 1/4 inch wide woven tape to lower part of front armhole from cross-cut tape to approximately 3/8 inch from top upper part of back armhole. Draw the tape slightly from side seam to back notch.	301	SSaa-1	10-14	0/3	0/3
	g. Press the taped area of the armhole shrinking in fullness.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Press and shape fronts a. Press front edge, lapel, and chest of right and left fronts individually on a suitable shaped pressing block with a steam pressing machine to conform to the shape of the body, b. Shape lapels by cutting in accordance with lapel shaper. c. Trim and straighten front and bottom edges of overcoat matching vent lengths. d. Trim back canvas interlining 1/4 inch along lapel front and bottom. e. The canvas interlining at the bottom may be cut diagonally so that the bottom edge is not caught in the tape stitching. f. Bind bottom edge of coat.					
12.	Join shoulder seams a. Join shoulder seams of overcoat, 3/8 inch from edge, working in proper fullness on back with the seam slightly curved towards front. b. Press shoulder seam open and flat over a suitable block; holding shoulder seam short and shaping armhole end of seam towards the front.	301	SSa-1	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Set sleeves, shoulder pads and sleeve head pads					
	a. Stitch sleeve to armhole, 3/8 inch from edge, matching notches as indicated on pattern. Ease in fullness of sleeve so that set sleeve in finished overcoat is free of wrinkles or puckering at armhole seam.	301	SSa-1	10-14	0/3	0/3
	b. Press armhole seam open from 2 1/2 to 3 inches forward of shoulder seam on front to back notch.					
	c. Insert shoulder pads between the canvas interlining and the felt padding and securely tack to the shoulders in the proper position.	Hand or Machine	SSm-1	2-4	0/3 or commercial	
	d. Tack sleeve head pad to armhole seam from front sleeve notch to back seam of sleeve; continue tacking all around armhole seam.	301	SSa-1	4-6	0/3	0/3
14.	Make lining stay tabs					
	a. Stay tabs shall be made of rayon binding or base fabric. Tabs shall be double stitched using a cover stitch on the underside, or with edges folded under.	406 or 301	EFh-1 or EFp-2	8-10	0/3	0/3
	b. Tabs shall measure 1/4 to 3/8 inch wide and 3 1/4 (± 1/8) inches long.					
	or					
	c. As an alternate, a commercial type black tape 1/4 to 3/8 inch wide may be used.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Make right inside welt pocket and attach label					
	a. Bind back edge of facings.	301	BSc-1	10-14	0/3	0/3
	b. The openings of the finished vertical pocket shall be 5 3/4 (± 1/4) inches. The depth of the finished vertical pockets shall be 4 3/4 (± 3/8) inches when measured from the bottom of the pocket opening.					
	c. Mark position for a 3/16 to 1/4 inch wide double piped inside vertical breast pocket on the right front facing, as indicated by marks on pattern.					
	d. Place the inside pocket facing to the pocketing with the top and centers aligned. Turn in both sides of facing and stitch 1/16 inch from edge along fold line. Selvage edge need not be turned under.	301	LSd-1	10-14	0/3	0/3
	e. Place pocket facing and front facing, face to face centering pocketing and pocket marks on facing and stitch with two rows of stitching 1/4 to 5/16 inch apart, simultaneously catching a staypiece on the underside.	301	SSv-2	10-14	0/3	0/3
	f. Cut opening of pocket thru front facings and stay piece midway between the rows of stitching and tongue notch ends of opening. Turn pocket thru the cut opening forming a double piped opening. Topstitch thru seam allowance along seamline joining each pocket ply and stay piece.	301	SSaf-2(b) (shows finished seam)	10-14	0/3	0/3
	g. Draw piped edges together on the underside, turn in tongue notched ends and tack across the width of opening.	301	SSa-1	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Make right inside welt pocket and attach label (cont'd)					
	h. Starting at ends of pocket opening stitch around all raw edges of pocket.	301	SSa-1	10-14	0/3	0/3
	NOTE: As an alternate, the above pocket opening operations may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be vertically slit in two to permit insertion into the machine. Ends of the pocket shall be securely tacked. Close top of pocket on inside by stitching through all plies. In addition, when this machine is used, the supplier may utilize the machine manufacturer's recommended pocket stay material.	101 and 301		10-14 10-14	A/3 0/3	 0/3
	i. The bottom edge of label may be inserted and caught under the edge of the pocket facing piece when making the pocket. The three remaining sides shall be stitched to the pocketing. The label may be stitched to pocket, on all four sides, centered on pocket directly below facing.	301	LSbj-1	10-14	0/3	0/3
16.	Make body lining					
	a. Position a suitable 2 inch wide tacking strip to back side of front lining even with side raw edge. Baste tacking strip to front lining.	Hand or Machine	SSaa-1	-	-	-
	b. Position back edge of facing over top of front edge of front lining, 3/8 to 1/2 inch from edge. Topstitch facings to lining. Stitching shall be superimposed on binding stitching.	301	LSa-1	10-14	0/3	0/3
	c. Basting operation 16a may be disregarded when operations 16a and 16b can be satisfactorily accomplished without basting.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Make body lining (cont'd)					
	d. Join back pile lining pieces, face to face, forming a center back seam. Seam ends at top of vent opening. This operation shall be omitted when using the optional one piece back lining. Press seam open and flat.	301 or 401	SSa-1	10-14	0/3	0/3
	e. Join fronts and back lining pieces at sides, face to face.	301 or 401	SSa-1	10-14	0/3	0/3
	f. Join linings at shoulder, face to face.	301 or 401	SSa-1	10-14	0/3	0/3
	g. Attach sleeve linings to body lining, face to face, according to notches.	301 or 401	SSa-1	10-14	0/3	0/3
	h. Open all lining seams and press flat.					
	i. Trim bottom of body lining if necessary and bind bottom raw edge of pile lining. Binding shall extend around vent opening. Two lining stay tabs shall be caught 3/8 inch into the binding on the back side of the lining. Stay tabs shall be positioned, one on each side joining seam.	301	BSc-1	10-14	0/3	0/3
17.	Join facings and fronts with tape					
	a. Baste facing with attached linings to fronts, putting in proper lapel fullness.	Machine or Hand				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Join facings and fronts with tape (cont'd)					
	b. Join facings and fronts together with a 1/2 inch wide woven tape 1/8 to 3/16 inch from edges. The tape shall extend from 1/2 inch in back of lapel notch, down front and across bottom of coat extending not less than 3 inches beyond back edge of facing.	301	SSab-1 and OSa-1	10-14	0/3	0/3
	c. Blindstitch back edge of tape to edge of interlining from top of lapel (notch to bottom of coat), with stitch catching only the interlining.	103 or 306	SSm-1 SSm-1	4-6 4-6	0/3 0/3	0/3
	NOTE: As an alternate to operations b and c, a 5/8 inch fusible tape may be used in lieu of the 1/2 inch woven tape. When this method is used, the tape must be pressed and fused to the interlining and the back edge of the tape shall not be blindstitched to the interlining.					
	d. Press front edges flat and smooth removing fullness.					
	e. Remove all basting stitches, trim lower front corner of facings, corner of lapels, and notch lapels for proper turning.					
	f. Spread open the front facing seam from lapel notch to bottom edge of overcoat and press smooth and flat. When the 5/8 inch fusible tape is used, this operation need not be performed.					
	g. Join sleeve bottom of lining to sleeve bottom of outershell at notches as indicated on patterns.	301	SSa-1	10-14	0/3	0/3
	h. Tack forearm seam of sleeve lining to forearm seam of overcoat shell between notches.	301	SSa-1	-	Commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Join facings and fronts with tape (cont'd)					
	i. Tack backarm seam of sleeve lining to backarm seam of overcoat shell between notches.	301	SSa-1	-	Commercial	
	j. Turn overcoat to finished position.					
18.	Set collar					
	a. Stitch topcollar to front facing at gorge to a point not less than 1 inch back of lapel breakline. Notch seam allowance of gorge facing at end of stitching. Spread gorge seam open and tack, catching bridle tape and canvas interlining in the tacking and continue stitching topcollar and collarstand to neckline across front facing and back through all plies of material 3/8 inch from edge catching hanger loop at center back (± 1/2 inch). The finished hanger loop opening shall measure 2 to 2 1/2 inches.	301	SSa-1	10-14	0/3	0/3
	b. Baste undercollar to neckline of collar with center seam of undercollar matching center back seam.	Machine or Hand	LSa-1	-	Commercial	
	c. Fell edge of undercollar to neckline and securely hand tack corners of undercollar to lapel at notch.	Hand or Machine (Hand type)		8-10 6-8	C(silk) A(silk)	
	d. The finished collar shall measure 3 (± 1/4) inches wide at center back.					
	e. The finished collarstand shall measure 1 (± 1/4) inches wide at center back.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Set collar (cont'd) f. The finished notch opening shall measure 3 1/2 (± 1/4) inches deep.					
19.	Form bottom hem Turn up bottom of overcoat 1 1/4 (± 1/8) inch and baste across bottom.	Machine	EFa-1	-	Commercial	
20.	Edgestitching Edgestitching continuously the collar, lapels, fronts, bottom edge at facings, left vent (up to row of diagonal stitching) 1/2 inch from the folded edge.	301	SSae-2(b) and EFa-1	10-14	0/3	0/3
21.	Tacking a. Tack crown of sleeve lining to crown of outershell at the padding, 2 1/2 to 3 inches on both sides of shoulder seam.	Hand or Machine	-	8-10	Commercial	
	b. With fronts spread out flat, baste facing to front at inner edge of facing along the entire length.	Hand or Machine	-	-	Commercial	
	c. Tack front tacking strip to coat front along center of tacking strip.	Hand or Machine	-	8-10	Commercial	
	d. Fell hem of overcoat to body securing 3/8 inch of of lining stay tabs at the side seams.	Hand or Machine	LSa-1	8-10	Commercial	
22.	Press lapel and edges of front Press lapel and front edges prior to marking and making buttonholes.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Mark and stitch buttonholes a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with gimp and the stitching securely caught in the fabric. Ends of gimp finishing on top of buttonhole shall be pulled thru to the underside. Buttonholes shall be clean, correctly positioned and purling finishing on the outside.					
	b. The ends of all buttonholes shall be tacked by hand or machine in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall be not more than 1/4 inch long.	Bartack or Hand		21-22 per bartack 10-12	B	A
	c. The inside purled eyelet edge on front buttonhole shall be 3/4 (± 1/8) inch from the finished edge, vertically aligned, and equally spaced.					
	d. The inside purled eyelet edge on lapel buttonholes shall be 3/4 (± 1/8) inch from the finished edge.					
	e. Mark and stitch as indicated by marks on pattern, three 1 1/8 to 1 1/4 inch horizontal buttonholes on left front and one on right front to correspond with top buttonhole on left front.	Buttonhole	Size buttonhole 1 1/8 1 1/4 inch	Stitches buttonhole 60-65 70-75 not including bartack	B	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Mark and stitch buttonholes (cont'd) f. Mark and stitch a 1 1/8 to 1 1/4 inches horizontal buttonhole on the lapel of each front as indicated by lapel buttonhole marker.	Button-hole	Size button-hole 1 1/8 to 1 1/4 inch	Stitches per button hole 60-65 70-75 not including bartack	B	A
24.	Cleaning a. Remove all basting threads. b. All ends of stitching shall be trimmed and loose threads removed from the overcoat. c. All spots, stains, and marking tickets shall be removed without injury to the material.					
25.	Pressing a. Press edge of lapels, fronts, collar, and bottom of overcoat on edge pressing machine. b. Press right and left fronts on right and left chest machine respectively. c. Roll press sleeves. d. Press balance of fronts, side seams, and back on body machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
25.	Pressing(cont'd) e. Press collar creasing it at the collar stand location on collar machine stretching outer edge of collar over shoulder area. Collar shall not be short nor too long. f. Press armholes and shoulders on an armhole machine. g. Press armhole solid from the inside, creasing armhole from not less than 1/2 inch above backarm seam to not less than 4 inches of shoulder seam. The armpit and back of the armhole shall be held short and pressed flat. h. Press lapels. The creasing of the lapels shall extend a uniform distance from the gorge seam. The lapels shall be roll pressed from midway between the gorge seam to bottom of lapel.					
26.	Finish pressing a. Press lining smooth and flat with a hand iron. b. Block armholes and shrink topsleeve on armhole blocking machine. c. Touch up any area missed by hand or machine pressing. d. Remove gloss, creases, and all pressing impressions e. Place overcoat on hanger until thoroughly dry.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
27.	Mark and sew buttons a. Metal buttons shall be sewn with the anchor in an upright position and aligned with corresponding buttonholes so that no bulging or distortion when fronts and neck are buttoned. b. All metal buttons, with the exception of the three on the left hand front, shall be backed with plastic stay buttons. c. The three left hand front buttons, shall be inserted through a small diameter hole in the front and secured on the back with a leather washer and bodkin combination. d. Hand or machine sewn inside plastic anchor button shall have the thread tightly wrapped not less than four times around to form a 1/8 to 3/16 inch shank. The thread ends shall be hidden and securely tacked off with not less than 2 stitches. e. Fronts - Six buttons, three on each front as follows: Right front 1. Top buttons through all plies. 2. Lower two buttons through interlining and top ply of pocketing. Left front 1. Top button through interlining. 2. Lower two buttons through interlining and top ply of pocketing.	Hand or 101 or 301 or 801 (see Figure 2)		Stitches per button 4 (double thread) 14-16 14-16 12(min)	12/4 16/4 20/4 20/4 No. 4 (nylon)	20/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Table I - Construction of overcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
27.	Mark and sew buttons (cont'd) Center of each button shall be sewn 6 (± 1/4) inches from the finished front edge.					
	f. One on each front at lapel through facing. Position of button shall correspond to lapel buttonhole.	Hand or 101 or 301 or 801 (see figure 2)		Stitches per button 4 (double thread) 14-16 14-16 12(min)	16/4 20/4 20/4 No. 4 (nylon)	20/4
	g. Anchor button - one on left front directly under outside top button. The back side of this button shall be caught onto the outside button shank with a minimum of four stitches.	Hand or 101 or 301 or 801 (see figure 2)		4(double thread 14-16 14-16 12(min)	12/4 or 16/4 20/4 20/4 No. 4 (nylon)	20/4
28.	Fold each overcoat Refer to Section 5 for instructions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements Finished measurements shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements

	(A)	(B) Sleeve Inseam Length				(C) Center Back Length			
Size	Chest	Short	Regular	Long	X-Long	Short	Regular	Long	X-Long
34	40	16 1/2	17 1/2	18 1/2	19 1/2	30 1/4	31 3/4	33 3/4	35 3/4
36	42	16 1/2	17 1/2	18 1/2	19 1/2	30 1/2	32	34	36
38	44	16 1/2	17 1/2	18 1/2	19 1/2	30 3/4	32 1/4	34 1/4	36 1/4
40	46	16 1/2	17 1/2	18 1/2	19 1/2	31	32 1/2	34 1/2	36 1/2
42	48	16 1/2	17 1/2	18 1/2	19 1/2	31 1/4	32 3/4	34 3/4	36 3/4
44	50	16 1/2	17 1/2	18 1/2	19 1/2	31 1/2	33	35	37
46	52	16 1/2	17 1/2	18 1/2	19 1/2	31 3/4	33 1/4	35 1/4	37 1/4
48	54	16 1/2	17 1/2	18 1/2	19 1/2	32	33 1/2	35 1/2	37 1/2
Tolerance	± 1	± 3/8	± 3/8	± 3/8	± 3/8	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Refer to Figure 1 for A, B, and C measurements. All measurements shall be taken with coat fully buttoned, placed smooth and flat.

(A) Chest - Twice the measurement taken across front at the base of armholes from folded edge to folded edge.
(B) Sleeve inseam length Measurement shall be taken along sleeve inseam from base of armhole to bottom of sleeve.
(C) Center back length - Measurement shall be taken from the neckline seam to bottom edge of overcoat.

3.9 Workmanship The finished overcoat shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of the inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

4.1.1 Certficiate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspections (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, a certificate of compliance shall be furnished for the resin treatment requirements of 3.3.12.2 the fusible web tape requirements of 3.3.12.3, the fusible tape requirements of 3.3.12.4, the colorfastness requirements of 3.3.14, and the cotton flannel requirements of 3.3.8.2.

4.4.2 Examination of the end item Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished overcoat. The lot size shall be expressed in units of overcoats.

4.4.2.1 Visual examination The overcoats shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classified in accordance with the following list:

Defects	Classification Major	Minor A	Minor B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Hole, cut, tear or needle chew			
1. on the outside	X		
2. on the inside:			
-up to 1/8 inch (inclusive)			X
-more than 1/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES (cont'd)			
b. Mend, darn or patch			
1. on the outside	X		
2. on the inside:			
-up to 1/4 inch (inclusive)			X
-more than 1/4 inch		X	
c. Weakening defects			
1. Smash	X		
2. Multiple float or loose slub:			
-on the outside	X		
-on the inside		X	
d. Unsightly slub, shade bar or selvage			
-on the outside	X		
-on the inside (except selvage)		X	
SHADED PARTS			
a. On outside of overcoat			
1. Any part shaded (except parts which may be cut from ends)	X		
2. Parts cut from ends badly shaded		X	
3. Variation in shade within a part (except parts which may be cut from ends)	X		
b. On inside of overcoat			
1. Any part badly shaded (except parts which may be cut from ends)		X	
2. Parts cut from ends shaded			X
PRESSING			
a. Burned or scorched			
-on outside	X		
-on inside		X	
b. Pressing omitted (entire garment)	X		
c. Poorly pressed (unless otherwise classified)		X	
d. Basting or pressing impressions not removed (score only when the condition is clearly noticeable)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
PRESSING (cont'd)			
e. Gloss mark not removed throughout major portion of overcoat			X
f. Lapel, front or collar edge bulky, or not pressed solid or lapel not rolled pressed			X
g. Sleeves not roll pressed		X	
h. Body lining not pressed smooth			X
i. Inside of armhole not creased or not creased solid		X	
j. Armhole not blocked or poorly blocked		X	
CLEANNESS			
a. Spot or stain on outside (largest dimension in any direction):			
1. -up to 3/8 inch inclusive			X
2. -more than 3/8 inch up to 3/4 inch inclusive		X	
3. -more than 3/4 inch	X		
b. Any marking exposed or visible on outside	X		
c. Five or more thread ends on outside not trimmed to 3/8 inch			X
d. Two or more shade or size tickets on overcoat			X
e. Basting thread (including monofilament thread or fragments of monofilament thread) not completely removed from outside			X
COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified (type, size, color, etc)	X		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)		X	
d. Any operation not as specified (unless otherwise classified herein)			X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
f. Any outside parts assembled with the face side on the underside (unless otherwise specified)	X		
CUTTING			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns or not in accordance with specification requirements	X		
b. Twill line of any outside part not running in specified direction	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
CUTTING (cont'd)			
c. Any outside component part not cut in the same direction of nap	X		
d. Nap of pile lining not laying upwards		X	
SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seams on overcoat except lining badly twisted, puckered or pleated, clearly noticeable (unless otherwise classified herein)	X		
2. Seams on overcoat lining badly twisted, puckered or pleated, clearly noticeable (unless otherwise classified herein)		X	
3. Part of overcoat caught in any unrelated operation or stitching	X		
4. Unsightly felling or blindstitching exposed and visible on outside of overcoat		X	
5. Ends of all seams or stitching when not caught in other seam or stitching backtacked less than 3/8 inch		X	
6. Stitching overlapping ends of thread break less than 1/2 inch			X
7. Wrong shade of thread on outside of overcoat	X		
8. Needle perforations visible on outside		X	
b. Gauge of stitching (edge or raised stitching)			
1. Irregular, i.e., unevenly gauged or corresponding stitchings not uniform, (to be scored only when condition exists along major portion of seam)		X	
2. Not within range or gauge specified or varies more than 1/16 inch when no range is specified			X
3. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X		
c. Open seam or runoff			
1. On outside of overcoat:			
a. Gorge seam, lapel, and front edge or seam joining beason style pockets:			
-less than 1/8 inch			X
-1/8 inch or more but not more than 1/4 inch		X	
-more than 1/4 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
SEAMS AND STITCHING (cont'd)			
b. All other seams:			
-less than 1/4 inch			X
-1/4 inch or more but not more than 1/2 inch		X	
-more than 1/2 inch	X		
2. On inside of overcoat:			
a. Seam joining inside pocket to facing:			
-1/8 inch or less			X
-more than 1/8 inch but not more than 1/4 inch		X	
-more than 1/4 inch	X		
b. All other seams (except machine and hand felling):			
-1/4 inch or more but not more than 1/2 inch			X
-more than 1/2 inch		X	
c. Machine and hand felling:			
-1/2 inch or more but not more than 1 inch			X
-more than 1 inch		X	
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or two or more continuous skipped or run-off stitches occur.			
d. Raw edges			
1. On the outside of overcoat:			
-less than 1/8 inch			X
-1/8 inch or more but not more than 1/4 inch		X	
-more than 1/4 inch	X		
2. On the inside of overcoat			
-1/4 inch or less on inside pocket in joining to facing		X	
-more than 1/4 inch on inside pocket in joining to facing	X		
-more than 1/4 inch except on inside pocket in joining to facing		X	
NOTE: Raw edges are classified as such only if occuring where the edge is required to be turned under. Raw edges not securely caught in stitching shall be classified as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
SEAMS AND STITCHING (cont'd)			
e. Seam and stitch type:			
1. Not specified seam or stitch type	X		
2. Any line of stitching omitted or insecure		X	
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread of 401 stitch type on outside	X		
f. Stitch tension:			
1. Loose tension resulting in a loose seam:			
(a) -up to 1/2 inch inclusive			X
(b) -more than 1/2 inch up to 3/4 inch		X	
(c) -more than 3/4 inch	X		
2. Loosely exposed loops of lower or top thread on edge, top or raised stitching		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
g. Stitches per inch (score only when condition exists on more than 1/2 the length of seam):			
1. -more than the maximum specified			X
2. -less than the minimum specified:			
(a) by one or two stitches			X
(b) by three or more stitches		X	
h. Runoff, skipped or broken stitch:			
1. Joining seam - use "Open seam" classification			
2. Edge, top or raise stitching (more than 1/4 inch)			X
i. Bartack, backtack, tack or tacking (except buttonhole bartack):			
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type			X
2. Loose stitch tension			X
BUTTONHOLES			
a. Stitching not securely caught in fabric, causing stitching to pull away from fabric	X		
b. One or more broken or continuous skipped stitches in buttonhole	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
BUTTONHOLES (cont'd)			
c. One or more omitted or added	X		
d. Bartack omitted or loose on:			
-one buttonhole		X	
-two or more buttonholes	X		
e. Wrong type		X	
f. Bartack misplaced, not serving intended purpose on:			
-one buttonhole			X
-two or more buttonholes		X	
g. Gimp omitted in one or more buttonholes or ends of gimp not pulled through underside		X	
h. Ragged edges		X	
i. One or more buttonholes finished with the purling on the reversed side		X	
j. Buttonhole stitching not covering gimp for a distance of more than 1/8 inch			X
k. One or more buttonholes poorly repaired, i.e., bulky or stitches not uniform		X	
l. Cut straight end of buttonhole visible and exposed beyond bartack on one or more buttonholes		X	
m. One or more buttonholes less than 1 1/8 inches or more than 1 1/4 inches long		X	
BUTTONS			
a. Omitted, broken or defective		X	
b. Part of garment pleated or puckered by button sewing			X
c. Misplaced, loose; not attached as specified; or insecurely sewn			X
d. Tacking stitches omitted or insecure (hand sewn)			X
e. Button sewn with anchor in other than specified direction		X	
f. Shank wrapping (when required) omitted, loosely wrapped or not specified shank length			X
g. Stitching on button not locked at end of cycle (tug at loose end of the thread when accessible to determine whether it will ravel)			X
ALIGNMENT OF FRONT BUTTONS AND BUTTONHOLES			
a. Not aligned causing a noticeable bulge or twist on fronts when buttoned:			
-if caused by misplaced buttons		X	
-if caused by reasons other than misplaced buttons	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
ALIGNMENT OF FRONT BUTTONS AND BUTTONHOLES (cont'd)			
b. Button on left front not in horizontal alignment with corresponding button on right front by:			
-1/2 inch or more but not more than 1 inch		X	
-more than 1 inch	X		
c. Spacing between front buttonholes varying more than 1/4 inches			X
LENGTH OF BUTTONED FRONTS			
a. Left front shorter than right front at bottom corner by:			
-1/8 inch or more but not more than 1/4 inch		X	
-more than 1/4 inch	X		
b. Left front longer than right front at bottom corner by:			
-more than 1/4 inch but not more than 3/8 inch			X
-more than 3/8 inch		X	
c. Bottom corner of right front exposed beyond bottom edge of left front by more than 1/8 inch		X	
d. Fronts uneven in length by more than 3/8 inch at neck when buttoned		X	
CONSTRUCTION OF FRONTS			
a. Front not properly shaped or constructed causing left front to swing to the right or left by more than 2 inches from an imaginary perpendicular line drawn from forward edge of top button to bottom of overcoat with overcoat buttoned (measure horizontally at bottom of coat from imaginary line to front edge of left front)		X	
b. Left front rolling outward below bottom front button, when buttoned		X	
c. Fronts puckered, twisted or not smooth, having a wavy appearance	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
FRONT FACING			
a. Short, tight, or twisted, causing puckers or twist on fronts	X		
b. Long, causing bottom corner of front to curl up	X		
c. Exposed along edge of left front			X
d. Fullness on facing between buttons and buttonholes or between buttonhole or buttons and front edge			X
e. Tacking at back edge of facing to interlining omitted or insecure			X
COLLAR (construction and setting)			
a. Collar closure (position of lapel button):			
-misplaced on right front causing a noticeable bulge or twist on fronts when buttoned		X	
b. Collar setting			
1. Short, i.e., causing puckers on back or fronts pulling lapel breakline causing fronts to roll out	X		
2. Long, i.e., setting away from neck, collar not fitting neck, or lapel rolling higher than 2 inches above center of top front button or buttonhole	X		
3. Collar not properly set, causing a decided curve or bulge on creaseline at joining to gorge seam	X		
4. Tight at joining to gorge seam or across back, causing fullness on lapels or fullness or pleats across outside of back	X		
5. Collar off center by more than 1/4 inch with shoulder seams matching		X	
c. Collar edge			
1. Collar edge short across shoulders, causing collar to rise above creaseline by:			
-1/4 inch or more but not more than 1/2 inch		X	
-more than 1/2 inch	X		
2. Irregular, affecting appearance		X	
3. Undercollar exposed along collar edge (to be scored only when the condition exists along major portion of seam)		X	
4. Collar edge not properly forced out, i.e., having a fold of more than 1/16 inch (to be scored only when condition exists along major portion of seam)			X
5. Tacking on corners of undercollar to lapel omitted or insecured		X	
6. Outer edge of collar stretched (wavy effect)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
COLLAR (construction and setting (cont'd)			
d. Topcollar			
1. Tight, i.e., causing edges to curl or bulging on undercollar		X	
2. Twisted, i.e., having a diagonal twist	X		
3. Full, i.e., having puckers or fullness	X		
4. Full, i.e., topcollar folds 1/8 inch or more from creased edge or breakline of undercollar		X	
5. Finished collar width at center back less than 2 3/4 inches or more than 3 1/4 inches measured from breakline to the outer edge.		X	
6. Tight at joining to gorge seam or across back, causing fullness on lapels or across outside of back		X	
7. Pucker or pleats on topcollar at joining to topcollar stand		X	
8. Finished collar stand width at center back less than 3/4 inch or more than 1 1/4 inch		X	
e. Undercollar			
1. Interlining pleated, causing topcollar not to lie flat	X		
2. Interlining tight or twisted, causing puckers of undercollar		X	
3. Row of stitching along creasline through interlining omitted or insecure			X
4. One or more undercollar seams not pressed open		X	
5. Tight at joining to fronts or back causing puckers or pleats at neck of coat	X		
6. Center seam from center back seam:			
-1/4 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
7. Tacking on corner of undercollar to lapel omitted or insecure			X
8. Lower raw edge of undercollar not enclosed within the felling		X	
f. Gorge seam			
1. Not straight		X	
2. Seam not spread open		X	
3. Tacking omitted or insecure			X
4. Length of seam on outside not uniform with other side by 3/8 inch or more (measured from collar breakline to end of gorge seam at notch)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
LAPELS			
a. Lapel facings			
1. Twisted, short or tight causing lapels to curl out, or twist on facing	X		
2. Fullness (not smooth and flat)		X	
3. Pleated or puckered	X		
b. Lapel edges			
1. Irregular or not properly forced out, causing crooked edges		X	
2. Front part exposed on lapel edge		X	
3. Tape set on too tight causing puckering at edges		X	
4. Bulky or wavy			X
c. Bridle tape			
1. Misplaced, not serving intended purpose		X	
2. Loose, causing breakline not to lie flat		X	
3. Tight, causing puckers or pleats along breakline		X	
4. Omitted on one or both fronts	X		
d. Collar and lapel shapes			
1. Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length by:			
-1/4 inch or more but less than 1/2 inch		X	
-1/2 inch or more	X		
2. Lapels poorly shaped or not of uniform shape or size		X	
3. Length of shaped lapels uniform, but varying from pattern shaper by:			
-1/4 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
4. Rounded corners of collar poorly shaped, not of uniform size or shape		X	
5. Gap between top edge of lapels and ends of collar not uniform with other side by more than 1/4 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
BEASON POCKETS			
a. Construction and setting			
1. Other than slash type	X		
2. Diagonal reinforcing row of stitching at corners of pocket opening omitted or insecure		X	
3. Poorly shaped or not uniform in shape or size		X	
4. Piped edges irregular in width by more than 1/16 inch		X	
5. Bartack (single or double) missing, insecure, or misplaced not serving intended purpose at ends of pocket opening	X		
6. Bartack (single or double) not extending full width of parallel row of stitching		X	
7. Row of stitching parallel to pocket opening less than 1/2 inch or more than 5/8 inch from the piped edge			X
8. Point less than 5/8 inch or more than 3/4 inch from end of pocket opening			X
9. Notch exposed on end of welt or raw edge at corner	X		
b. Alignment and dimensions			
1. Out of horizontal alignment by:			
-3/8 inch or more but not more than 5/8 inch		X	
-more than 5/8 inch	X		
2. Top unequally spaced from seam joining backs and front by more than 3/4 inch		X	
3. Finished welt edge less than 1/16 inch or more than 1/8 inch wide at pocket opening		X	
4. Length of pocket openings:			
-less than 6 3/4 inches but not less than 6 1/2 inches			X
-more than 7 5/8 inches but not more than 8 inches			X
-less than 6 1/2 inches or more than 8 inches		X	
-unequal in length by more than 1/2 inch	X		
SHOULDER			
a. Improperly joined or set, causing shoulder or back to twist	X		
b. One or both shoulder seams not pressed open		X	
c. Shoulder seam curved towards back at armhole seam by more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
SHOULDER PAD			
a. Not properly set causing shoulder to twist, pucker or bulge	X		
b. Misplaced, not serving intended purpose, i.e., too far back or too far forward, not completely or securely caught in armhole tacking		X	
ARMHOLE			
a. Construction			
1. Badly stretched	X		
2. Tape set too tight, causing puckering around armhole	X		
3. Crooked seam		X	
4. Tacking of linings and interlinings to armhole seams omitted on one or both armholes		X	
5. Armholes not securely tacked		X	
6. Tape stitching exposed and visible on outside surface of coat (to be scored only when the condition exists along major portion of seam)			X
b. Sleeve head pad			
Not completely tacked to armholes, or misplaced, not serving intended purpose		X	
SLEEVE			
a. Construction and hang			
1. Sleeve fullness misplaced	X		
2. Sleeves tight at armholes, i.e., crease effect not present on front or back of sleeves respectively or causing fold of undersleeve or on armhole at base of sleeve	X		
3. Lower part of top sleeve tight causing bulge, break or twist on front base of armhole	X		
4. Sleeve too far front or back i.e., front edge of sleeve away from lower end of beason pocket opening:			
-by more than 1 inch but not more than 2 inches		X	
-by more than 2 inches	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
SLEEVE (cont'd)			
5. Hang of sleeves in opposite directions, i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1 inch but not exceeding 1 1/2 inches from lower end of beason pocket opening		X	
6. Sleeve backarm seams unequal distance from shoulder seams (outside) by 1/2 inch or more		X	
b. Sleeve lining			
1. Twisted, tight or short causing bulge or twist on outside of sleeves	X		
2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch			X
3. Sleeve lining seams out of alignment more than 3/4 inch with sleeve seams at armhole			X
c. Construction of sleeves			
1. One or both wool sleeve seams not pressed open		X	
2. Blindstitching on bottom turn up omitted or insecure (when applicable)			X
3. Tacking of sleeve lining seams to sleeve seams omitted, insecure or incomplete for a distance of more than 6 inches from the top end or more than 6 inches from bottom edge of sleeves (when applicable)		X	
4. Bottom edge of sleeve uneven by more than 1/4 inch		X	
5. Wigan tight, twisted or pleated causing puckering on outside of sleeve, clearly noticeable		X	
6. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch or blindstitching, tacking on bottom turn-up to wigan omitted or insecure		X	
FRONT AND BOTTOM EDGES			
a. Front edge stretched		X	
b. Tape set too tight, causing puckering on front or bottom edge		X	
c. Front edge irregular, not properly forced out, causing crooked or curved edges		X	
d. Facing exposed on left or right edge (to be scored only when the condition exists along major portion of seam)		X	
e. Bottom edge stretched or uneven			X
f. Stitching along bottom edge exposed on outside except for top stitching along facing			X
g. Bottom corner of left front poorly shaped, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
FITTING			
a. Fitting of body lining, front inerlining, and liner:			
-tight, short or twisted causing puckers or twists on outside	X		
b. Canvas front too full, causing front to have a wavy appearance or not lie smoothly	X		
VENT			
a. Length of diagonal stitching at top of vent less than 1 3/4 inches or more than 2 1/4 inches			X
b. Right side of back overlapping left side at vent opening	X		
c. Left and right vent unequal by:			
-more than 1/8 inch but not more than 1/4 inch		X	
-more than 1/4 inch	X		
d. Left vent edge stretched causing vent to spread open		X	
e. Left vent edge crooked, affecting appearance		X	
f. Tape omitted on left vent edge		X	
Outside of Overcoat			
FRONT AND LAPEL BUTTONHOLES (position spacing from edge and spacing from each other)			
a. Position of lapel buttonhole not parallel with top edge by more than 1/4 inch			X
b. Lapel and front buttonholes not positioned as specified on patterns		X	
c. Front buttonholes:			
1. Unevenly spaced from finished front edge by:			
-1/8 inch but not more than 1/4 inch		X	
-more than 1/4 inch	X		
2. More than 1/4 inch from equal spacing		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
FRONT BUTTONS (position from edge, vertical alignment and secure sewing)			
a. Position from finished front edge to center of its circumference:			
-less than 5 3/4 inches but not less than 5 1/2 inches or more than 6 1/4 inches but not more than 6 1/2 inches			X
-less than 5 1/2 inches or more than 6 1/2 inches		X	
b. Out of vertical alignment by:			
-1/4 inch or more but not more than 3/8 inch		X	
-more than 3/8 inch	X		
c. Top (left and right front) and lapel (left and right) buttons not caught through facing		X	
d. Other front buttons not caught through number of plies specified		X	
e. Anchor button (left front) not caught into top left front button		X	
Inside of Overcoat			
FACINGS, FRONT			
a. Fullness on facings between buttons, buttonholes or between front edge and buttons and buttonholes		X	
b. Felling of inner bottom edge of facing, the width between the folded edge of hem and lining omitted or insecure		X	
c. Not bound along back edge	X		
INSIDE POCKET			
a. Positioned other than specified	X		
b. Width of pocket opening or depth of pocket not as specified		X	
c. Opening gapped by more than 1/4 inch in the center of opening			X
d. Finished width of piping less than 3/16 inch or more than 1/4 inch			X
e. Stay omitted			X
f. Tacking along front edge of silesia pocket through facing and interlining omitted or insecure		X	
g. Tacking on upper or back edges of inside pocket to interlining omitted or insecure			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
FRONT AND BACK LINING			
a. Too full			X
b. Twisted not affecting smoothness on outside surface on front or back			X
c. Too long, causing lining to be exposed below bottom edge of coat		X	
d. One or more seams not pressed open and flat			X
e. Not bound across bottom edge	X		
f. Bottom edge binding twisted or puckered			X
g. Sleeve lining at base of armhole full or twisted			X
h. Felling at bottom corner of front lining omitted or insecure			X
HANGING POCKETS			
a. Suede side of flannel pocketing material not finished on inside of pocket		X	
b. Front edge not tacked to interlining		X	
c. Front edge insecurely tacked to interlining			X
HANGER LOOP			
a. Omitted or ends not securely stitched		X	
b. Misplaced, 1/2 inch or more off center with center back seam			X
c. Finished free length less than 2 inches or more than 2 1/2 inches			X
IDENTIFICATION LABEL			
a. Missing, incorrect or illegible		X	
b. Not stitched on 4 sides			X
c. Reversed, i.e., bottom edge not facing towards pocket opening			X
BOTTOM HEM			
a. Irregular in width by more than 3/16 inch			X
b. Twisted, affecting smoothness on outside of coat		X	
c. Twisted, not affecting smoothness on outside of coat			X
d. Width of finished hem less than 1 1/8 inches or more than 1 3/8 inches			X
e. Bottom hem not bound as specified		X	
LINING STAY TABS			
a. Missing (one or more)	X		
b. Not attached securely (one or more)			X
c. Not attached (one or more)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination The overcoats shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a size measurement defect.
b. Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B (combined)	15.0	III
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

4.4.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing and marking complies with Section 5 requirement of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (interior and exterior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Distorted or bulging containers.
Content	Open and non-continuous heat sealed seams and closure of polyethylene bag. 1/ Alternate closure of polyethylene bag not provided with tuck or reverse flap. 1/
	Omission of required vent hole in polyethylene bag. 1/

1/ For these defects, one package shall be examined from each shipping container in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging Preservation packaging shall be level A or C (see 6.2).

5.1.1 Level A Each overcoat shall be unbuttoned and folded as follows:

(1) With the collar, extended, lay garment flat, lining side down.
(2) Fold sleeves in half so that the bottom of sleeves touch collar breakline.
(3) Fold each front in half lengthwise so that the fronts meet at the center back.
(4) Fold overcoat in half lengthwise.
(5) Fold bottom up to collar.

The completely folded overcoat shall measure approximately 14 inches by 23 inches. Each overcoat shall be inserted in a snug-fitting clear polyethylene film bag of not less than 0.00125 inch thickness (+ 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C (Commercial packaging) Overcoats shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A Seven overcoats, of one size and length, packaged as specified in 5.1 shall be packaged in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 3A of MIL-B-17757. The liner shall be Type CF, class weather-resistant, in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, seven in depth within the container with every other one reversed and the length of the bags parallel to the side panels of the container. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B Seven overcoats, of one size and length, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The liner shall be Type CF, class domestic in accordance with the requirements specified in MIL-B-17757. Level A packages shall be packed flat, seven in depth within the container with every other one reversed, and the length of the bags parallel to the side panels of the container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

5.2.3 Level C (Commercial Packing) Overcoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages The polyethylene bagged packages, specified in 5.1.1, shall have the required information legibly printed or stamped in black bold letters, 1/4 inch in height, directly on the bag across the center face or on a white paper label inserted within the bag to permit ready identification. The bag or label shall indicated the following information:

STOCK NUMBER
NOMENCLATURE
SIZE AND LENGTH
QUANTITY

5.3.2 Labels, mixed sizes Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained herein.

6. NOTES

6.1 Intended use The overcoat (reefer) is intended for use by male Coast Guard personnel.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2).
d. Levels of packaging and packing required (see 5.1 and 5.2).
e. When a first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.

6.3 Samples and patterns For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

6.4 Recycled material It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

6.5 Quilted sleeve lining A suggested source of supply for the quilted sleeve lining material is The Capital Quilted Co., 317 San Paul Street, Jersey City, NJ 07306.

6.6 Equal item Prior to the use of an "or equal" item, the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

Custodian:
Navy - NU

Review activity:
Navy - CG
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8405-N921

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.


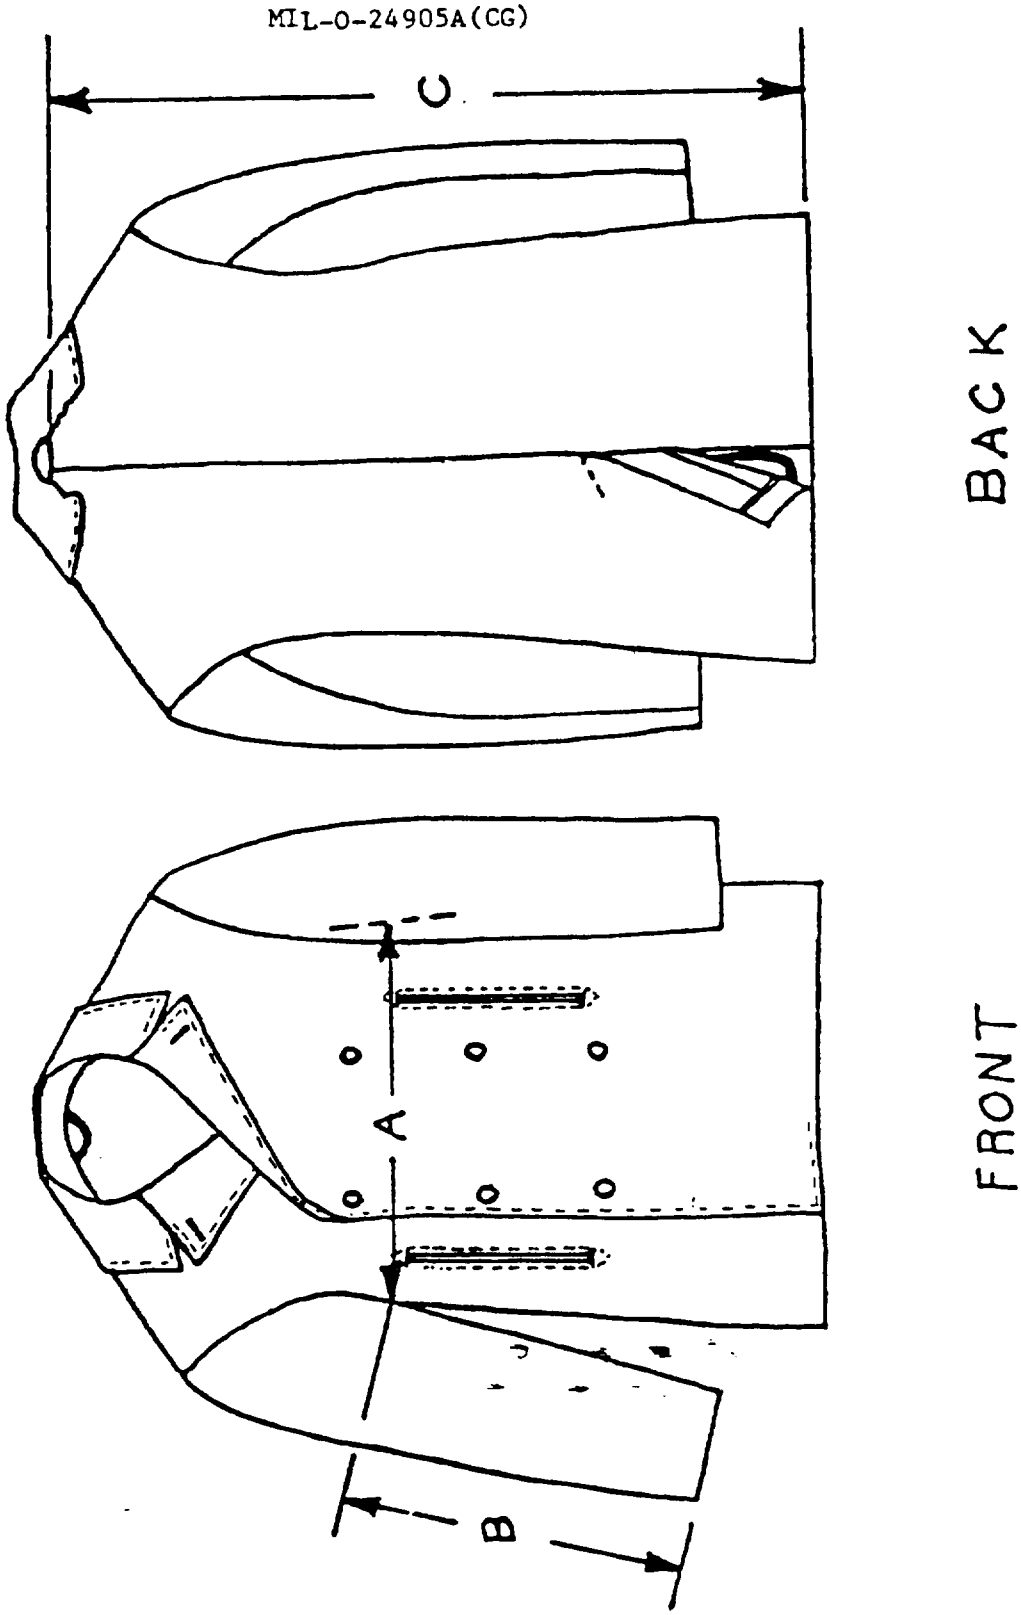


FIG. 1 OVERCOAT, MAN'S, REEFER (CG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Stitch Class 800.- This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

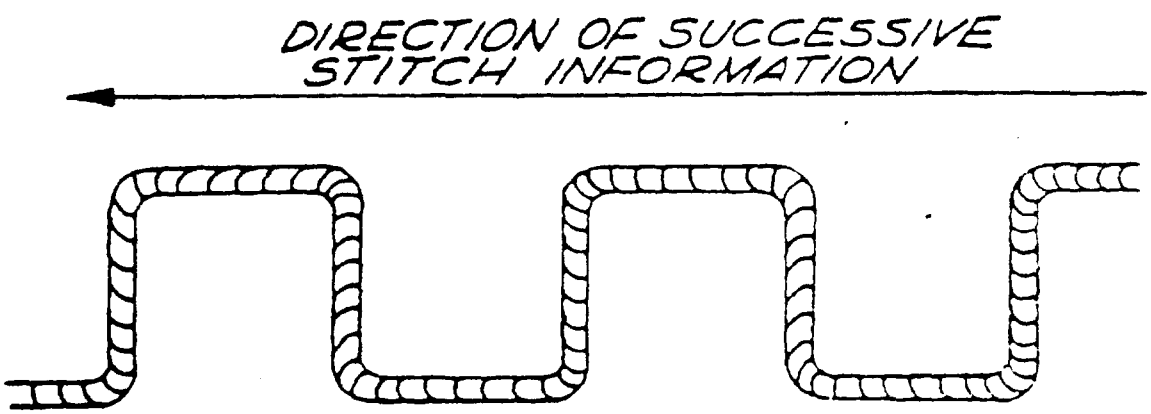

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE – 2 -STITCH TYPE 801

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

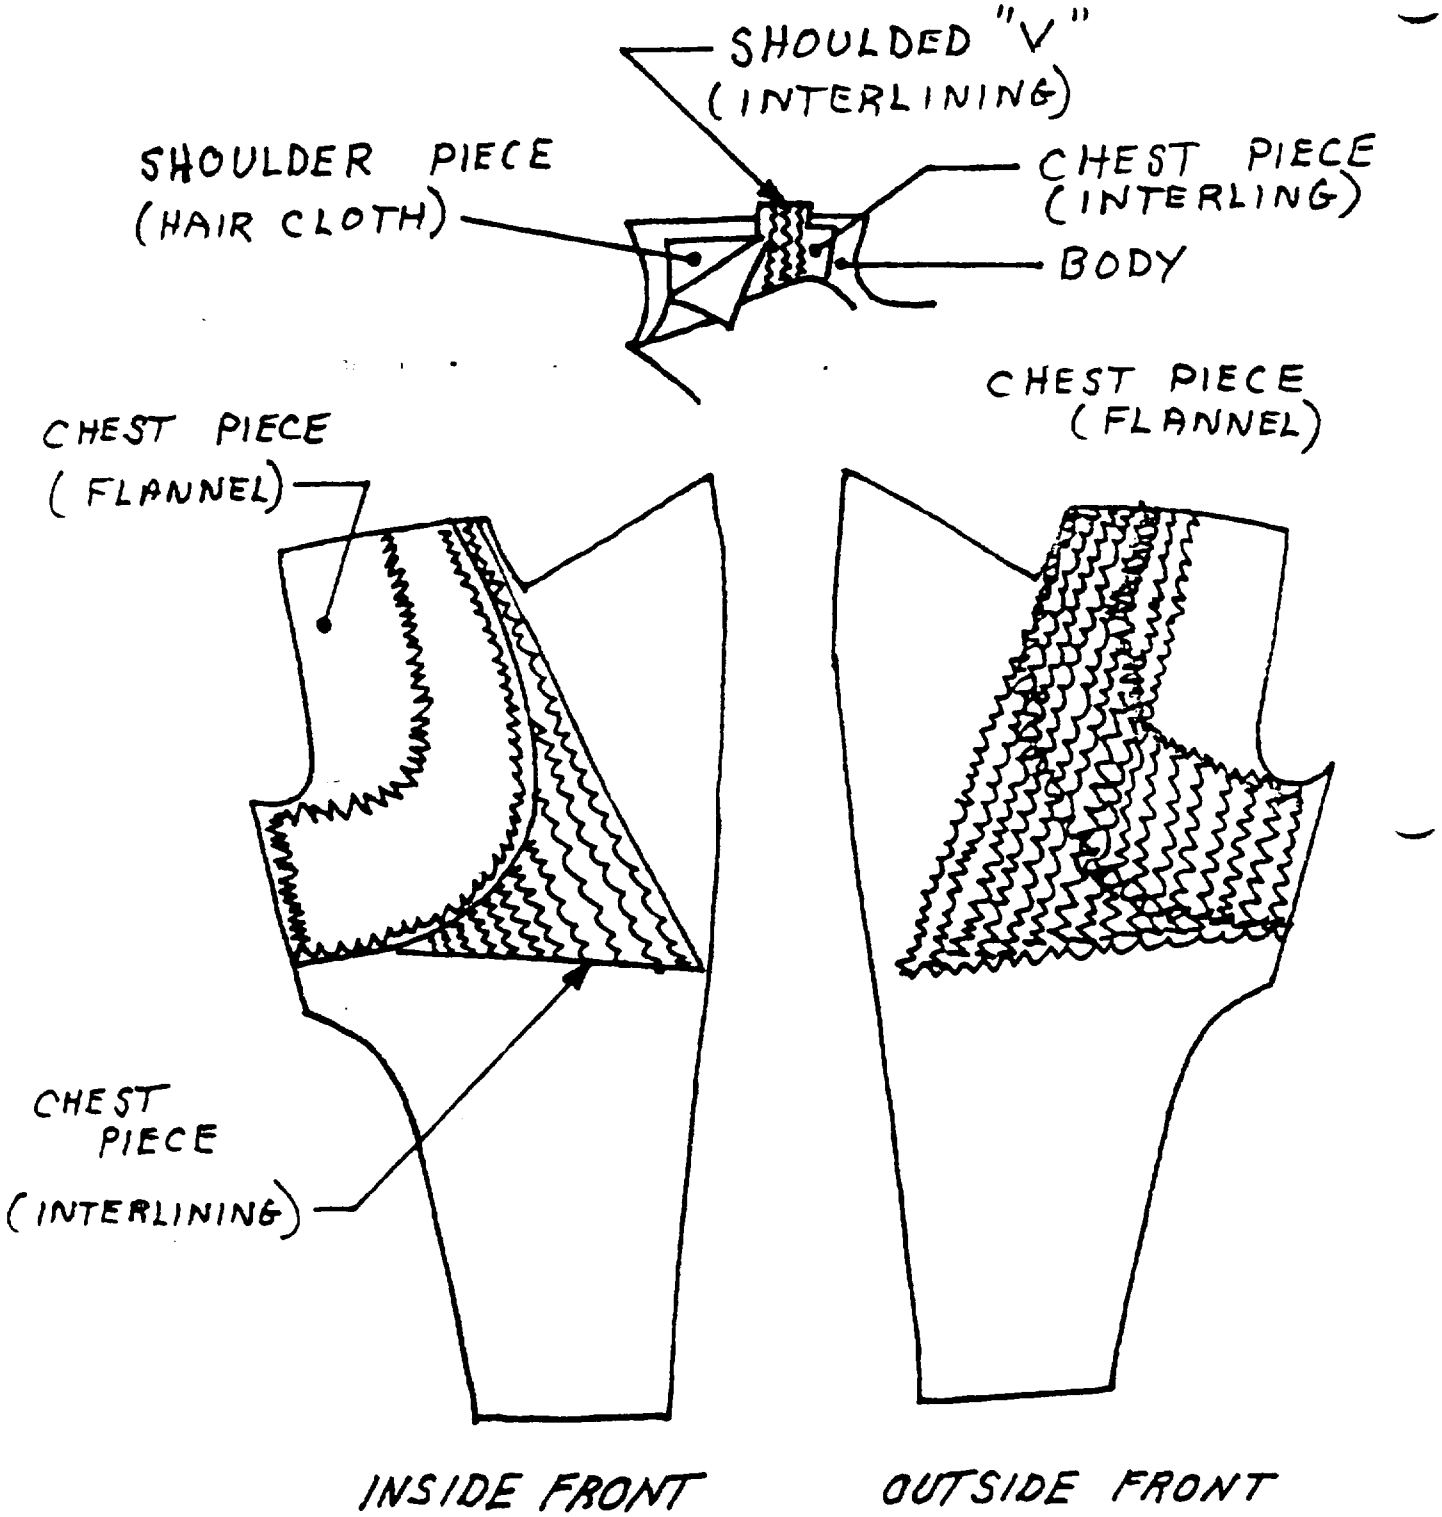


FIG. - 3 COAT FRONT - COAST GUARD OVERCOAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

NAVY CLOTHING and TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-O-24905A(CG)	OVERCOAT, MAN'S, REEFER (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.