INCH-POUNDS

MIL-O-24906B(CG)
19 SEP 1989
SUPERSEDING
MIL-O-24906A(CG)
13 December 1983

MILITARY SPECIFICATION

OVERCOAT, WOMAN'S, REEFER (COAST GUARD)

This specification is approved for use by the United States Coast Guard, Department of Transportation and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for a woman's double breasted reefer overcoat and requirements for sponging the basic material.

1.2 Classification. The overcoat shall be of one type only and in the following sizes and lengths (see 6.2):

Sizes	6, 8, 10, 12, 14, 16, 18, 20 and 22
Lengths	Short, Regular, Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
CCC-C-438	- Cloth, Buckram, Cotton
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp and Spun Hair-Wool Filling
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	- Braid, Textile, Tubular
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	- Pads, Shoulder and Sleeve-Head
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-C-24903	- Cloth, Elastique, Polyester/Wool
MIL-C-43251	- Cloth, Pile, Synthetic Fiber Pile
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon- or Polyester-Covered
MIL-C-43718	- Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon, For Pockets
MIL-C-44192	- Container, Shipping and Storage, Coat (Hanger Pack)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-2073-1	- DoD Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

Department of Defense Standard Shades for Buttons

(Applications for copies should be addressed to the Color Association of The United States, 343 Lexington Ave. New York, NY 10016-0927.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes

Source: https://assist.dla.mil -- Downloaded: 202640-20T02:51Z
Check the source to verify that this is the currentversion before use.

precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

* 3.2 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Material.

* 3.3.1 Basic material. The basic material shall be polyester and wool elastique conforming to MIL-C-24903 except that prior to cutting and assembling, the basic material shall be sponged for shrinkage. The sponging method shall be the "London Shrunk" cold water method with the proper amount of wetting agent added to wet out the water repellent treated fabric.

3.3.2 Linings.

* 3.3.2.1 Lining, pile. The acrylic pile for the body lining shall conform to class 2 of MIL-C-43251 except it shall be dyed to match shade Blue 3362. The standard sample piece number is 85019.

* 3.3.2.2 Lining, sleeve. The material for the quilted sleeve lining shall consist of the following (see 4.4.1):

Face layer
The material for the face layer shall be a 3.7 ounce rayon material, shade Blue 3351, conforming to class 1 of MIL-C-368. The standard sample piece number is 1533.

Filling layer
3.3 ounce bonded polyester fibers

Back layers
tricot - no yield
white, natural or blue in color

The quilted lining shall be constructed with a 1 by 1 1/2 inch diamond pattern using 8 stitches per inch. The thread for the stitching shall be black nylon. The quilted lining may also be of an "or equal" item (see 6.5).

* 3.3.3 Binding. The material for binding the bottom hem and facing of the overcoat, lining stay tabs and bottom edge of lining shall be a 3.7 ounce rayon material, shade Blue 3351, conforming to class 1 of MIL-C-368. The rayon binding shall be cut on a 45 (± 5) degree angle in strips 3/4 to 1 inch wide. The ends of the strip shall be joined together by stitch type 301 and the seam type SSa-1 with 10-12 stitches per inch. The standard sample piece number is 1533.

3.3.4 Collar interlining. The material for the collar interlining shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

cotton buckram, natural or bleached, conforming to type I, class 2 of CCC-C-438, except that the test for shrinkage shall be in accordance with test method 5580 of FED-STD-191 and the stiffness requirement shall not be less than 0.015 inch-pounds in the filling.

3.3.5 Undercollar cloth. The undercollar material shall be wool flannel conforming to MIL-C-15062. The shade shall be blue approximating the shade of the basic material and requirements for perspiration and crocking shall not apply.

3.3.6 Wigan. The material for interlining the sleeve bottoms shall be cotton, wigan, natural shade or dyed black, conforming to type I, of MIL-C-16375.

3.3.7 Coat front interlining. The material for interlining the overcoat fronts shall be cotton warp and spun hair-wool filling conforming to type II, class 2 of MIL-C-297. The interlining shall be dyed black.

3.3.8 Pocketing.

3.3.8.1 Inside pocket. The material for the inside pocket and pocket stays shall be polyester/cotton twill conforming to class 1 of MIL-C-43718. The shade shall be natural or black. When a black shade is used, the colorfastness requirements for perspiration and crocking shall not apply.

3.3.8.2 Front pockets. The material for the front pockets shall be a soft filled cotton flannel having a smooth suede finish on one side, in natural or gray shade and shall conform to the following minimum requirements:

Weight (oz/sq yd)	6.0
Yarns per inch:	
Warp	44
Filling	40
Breaking strength (pounds)	
Warp	60
Filling	35

The use of sulphur dyes and dyes containing sulphur compounds capable of oxidation to sulphuric acid is prohibited. The dyed material shall show a minimum of good fastness to wet-dry cleaning and shall show a Munsell Value for crocking not lower than 8.5 when tested as specified in 4.4.1.

3.3.9 Shoulder and sleeve-head pads. The shoulder pads shall conform to type I class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.10 Threads.

3.3.10.1 Cotton thread. The cotton thread for seaming and stitching the overcoat shall be dyed Blue AT Cable No. 66060 in accordance with the Standard Shades for Threads and shall conform to type I of V-T-276 in the following types and sizes:

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Use	Type	Ticket No.	Ply
Seaming and stitching	1C2	0	3
Tacking armholes and attaching sleeve-head pads	1A1 or 1A2	30	3
Buttonholes and bartacks	1C2	A, B	3
Button sewing:			
Hand	IB3	12 or 16	4
Machine	IA3	20	4

* 3.3.10.2 Thread, polyester core. As an alternate to the cotton thread, a cotton-covered or rayon-covered polyester thread conforming to MIL-T-43548 may be used. The polyester core, polyester-covered thread is not allowed. When this option is exercised, the thread shall match Blue AT, Cable No. 66060 in accordance with the Standard Shades for Threads.

Use	Ticket No.	Ply
Seaming and stitching	50	2 or 3
Tacking armholes and attaching sleeve-head pads	30	2 or 3
Buttonholes and bartacks	30	2 or 3
Button sewing:		
Hand	30	2 or 3
Machine	30	2 or 3

* 3.3.10.3 Basting thread. Thread for basting and tacking may be bleached or unbleached and shall be of a good commercial grade cotton. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed or removed.

3.3.10.4 Silk thread. The silk thread for hand and machine stitching the overcoat shall be dyed Blue AT, Cable No. 66060 in accordance with the Standard Shades for Threads and shall conform to V-T-301 as follows:

Use	Type	Class	Letter Size Designation	Ply
Machine felling, blindstitching	I	-	A, B	3
Buttonholes and bartacks	I	-	B, C	3
Hand felling	III	3	A, C	2

3.3.10.4.1 The following threads may be utilized as alternates to the silk threads specified above for the operations indicated:

a. For machine felling and blind felling - polyester thread conforming to type I, size A/3 or AA/2 of V-T-285 or a monofilament nylon thread of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

comparable type and size.

b. For hand felling - nylon thread conforming to type IV, size A/2 or C/2 of V-T-295.

3.3.10.5 Nylon thread. If an automatic machine which sews and shanks (wraps) the buttons in one operation imitating hand sewing is used, the thread shall be nylon waxed monocord, special No. 4, having a breaking strength of 11 pounds and a minimum length per pound of 3,250 yards and shall be tested for these requirements in accordance with test methods outlined in V-T-295.

* 3.3.10.6 Colorfastness of threads. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301 and MIL-T-43548. As a limit of acceptability, or when no standard sample is available, the dyed threads shall show a minimum of good colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301, and MIL-T-43548.

* 3.3.11 Gimp. The gimp for reinforcing the buttonholes shall be thread, cotton, gimp, buttonhole conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed shade Blue AT, Cable No. 66060 in accordance with the Standard Shades for Threads.

* 3.3.11.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. As a limit of acceptability, or when no standard sample is available, the dyed gimp shall show a minimum of good fastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.12 Tapes.

3.3.12.1 Woven tape. The tape shall be cotton, preshrunk, conforming to type 1, class 1 or class 2 of DDD-T-86. The widths shall be as follows:

1/2 inch for staying lapels, fronts, and bottom edges
5/8 inch for staying bridle at breakline of lapel
1/4 inch for staying back armhole, lower part of front armhole, and fold line of left vent

3.3.12.2 Cross-cut tape. The tape for staying the front shoulder, neck gorge, back neckline and upperpart of front armhole shall conform to class 1 of MIL-C-43718. The tape shall be cut across the width of the cloth in strips 1/2 (± 1/16) inch wide and shall be dyed or undyed. The raw edges of the tape shall be treated with a synthetic resin to prevent raveling when tested as specified in 4.4.1.

3.3.12.3 Tape, fusible web. The tape for joining the fronts and facings shall be a non-woven thermoplastic polyamid resin, natural color, 18 to 32 grams per square yard and 5/8 inch in width (see 4.4.1).

3.3.12.4 Fusible tape. The tape for staying the fold line of the left vent shall be a fusible tape 1/2 inch in width and shall be capable of withstanding dry cleaning operations when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

3.3.13 Buttons.

* 3.3.13.1 Metal buttons. The gold plated metal buttons for the front of the overcoat shall be 35-line conforming to type I, style 5, class A of MIL-B-3461 except the buttons shall be regular shank. The buttons for the right front shall be supplied with ring type toggles. The buttons for the left front and the two buttons under the lapels shall be supplied with stay buttons as specified in 3.3.13.2.

* 3.3.13.2 Plastic buttons. The plastic inside anchor button shall be Shade Black BT, cable no. 62001 in accordance with the Standard Shades for Buttons conforming to type II, class D, style 20 and 21, 30-line of V-B-871. The stay buttons used with the metal buttons shall conform to type II, class D, style 15, 18-line of V-B-871. As an alternate, the stay buttons used with the metal buttons shall conform to type II, class D, style 15, 18-line of V-B-871, except that they shall have two (2) holes.

3.3.14 Hanger loop. The hanger loops for the overcoat shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371. The braid shall be black or shall match the lining or basic material and shall show good fastness to crocking and wet-dry cleaning when tested as specified in 4.4.1.

* 3.3.15 Combination label. Each overcoat shall have a combination identification, size and instruction label conforming to type VI, class 14 of DDD-L-20. The printing on the label shall show fastness to dry cleaning. The label shall bear the following inscription:

NAME OF ITEM: OVERCOAT, WOMAN'S, REEFER (COAST GUARD)
FIBER CONTENT: 55% POLYESTER 45% WOOL
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)
SIZE: 20 REGULAR (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

DRY CLEAN ONLY

NOTE: The length (short, regular, or long) may be abbreviated S, R, or L.

3.4 Design. The overcoat shall be double breasted, fully lined, with set-in sleeves, a convertible collar, two outside (welt style) pockets, an inside left breast welt pocket, a two piece back with center vent and eight 35-line Coast Guard metal buttons on front.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. Unless otherwise specified in Table I, seam allowances shall be as follows:

Joining center back, side seams and sleeves	1/2 inch
Joining shoulders and armholes	3/8 inch
Joining facings to fronts	1/8 to 3/16 inch
Joining linings at sides and back	1/2 inch
Joining shoulders and sleeves of lining	3/8 inch

3.5.1 Pattern parts. The component parts of the overcoat shall be cut from material as specified in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Cloth, polyester/wool elastique	Front	2
	Back	2
	Facing	2
	Topsleeve	2
	Undersleeve	2
	Topcollar	1
	Collar stand	1
	Vent piece	1
	Front pocket piping	2
	Front pocket facing	2
	Inside pocket piping and facing	1 1/
Acrylic pile, lining	Front lining	2
	Back lining	2
	Optional back lining	1
Quilted, sleeve lining	Top sleeve lining	2
	Under sleeve lining	2
Undercollar cloth	Undercollar front 2/	2
	Undercollar back 2/	2
Cloth, twill, polyester/cotton	Inside pocket	1
Cloth, flannel, cotton	Front pocket top	2
	Front pocket under	2
Cloth, interlining	Undercollar front interlining	2
	Undercollar back interlining	2
Cloth, wigan, cotton	Sleeve wigan	2
Templates	Undercollar shaper	-
	Undercollar stand marker	-
	Lapel shaper	-
	Finished collar and lapel shaper	-
	Lapel buttonhole marker	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Cloth, interlining (coat front)	Front canvas	2

1/ When automatic pocket machine is used, pattern part may be slit in two.
2/ As an alternate, basic material may be used in place of undercollar material.

3.6 Construction

* 3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the overcoat. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. Unless otherwise specified, edgestitching shall be 1/2 inch from the folded edge. The guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch, unless otherwise specified. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired by using 301 stitch type.

NOTE: The backtack shall be three rows of continuous stitching superimposed on one another.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operation requirements. The overcoats shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished overcoats are identical to that produced by following the sequence listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

* 3.7.1 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the overcoat. Any method may be used except:

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of the tickets

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the overcoat and wherever possible, is covered by the seam allowance.

3.7.2 All pressing operations referenced in Table I shall be performed by using a heated pressing iron and steam pressing machine.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting.				
*	a. Cut the overcoat in strict accordance with patterns furnished which show size, shape, directional lines, and notches for proper assembly of all parts. Perforated paper markers are prohibited on the basic fabric.				
	b. Cut the component outer shell parts of the overcoat from one piece of material except the vent piece, pocket piping, and pocket facings which may be cut from ends. When so cut, these parts shall approximate the shade of the overcoat. The undercollar parts shall be shade marked and shall match each other when assembled.				
	c. Cut the component body lining parts of the overcoat from one piece of material. The pile shall be cut so that the nap of the pile lays downwards.				
	d. Quilted sleeve linings need not be cut from one piece of quilted material as long as component parts closely approximate the shade of each other.				
	e. Cut all inside pocket stays 2 inches wide in the warp direction. The length of the individual pocket stay shall be 1-1/2 inches longer than the nominal finished pocket opening of the inside pockets.				
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects as classified in section 4 shall be removed from production and replaced with non-defective and properly matched components.				

Source: https://assist.dla.mil -- Downloaded: 20261O-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
3.	Shade and size marking. (see 3.7.1)					
*	All parts shall be marked or ticketed except pocket facings.					
4.	Raw edges.					
*	The raw edges of basic material for the side seams, center back seam and darts shall be serged prior to joining. In addition, the back and top edge of the right vent piece and back edge of left vent piece shall be serged.	503 or 504 or 602	EFd-1	8-10	0/3	0/3
5.	Make collar.					
	a. The collar shall consist of topcollar and collar stand, a four-piece undercollar, and a four-piece interlining.					
	b. Join the topcollar to the collar stand with a 1/4 inch seam, distributing proper fullness on the collarstand between the center notch and each end.	301 or 401	SSz-3(a)	10-14	0/3	0/3
	c. Open the seam and stitch on each side of the seam 1/16 inch from the seam line.	301	SSz-3(b)	10-14	0/3	0/3
	d. Stitch 3/8 inch from edge, face to face, the undercollar center back seam and seams joining center and end sections.	301	SSa-1	10-14	0/3	0/3
	e. Press seams open and flat with a heated pressing iron.					
	f. Stitch 1/4 inch from edge, the interlining center back seam and seams joining center and end section with the edges overlapped 1/2 inch.	301	LSa-1	10-14	0/3	0/3
	g. Pad interlining to undercollar with 7 or 8 rows of blindstitching.	103 or 306	SSm-7 or 8	4-8	0/3	0/3
	h. Press undercollar flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	BOB/ LPR
	i. Mark, shape, and trim undercollar to conform to undercollar shaper template. Trim interlining 1/8 - 3/16 from neck edge of undercollar.					
	j. Mark the breakline of the finished undercollar in accordance with marks on pattern.					
	k. Seam interlining to undercollar along breakline mark.	301	SSv-1	10-14	0/3	0/3
*	l. Position the topcollar on undercollar, placing the seam (operation 5b) 3/8 to 1/2 inch below undercollar breakline (operation 5k.) and baste along breakline and outer edges, distributing proper fullness along the outer edge over shoulder area.	Hand or Machine		Commercial		
*	m. Trim extra material of topcollar at the outer edges, leaving 3/8 to 1/2 inch of material. Turn edges of topcollar over interlining between undercollar and interlining and baste edges.	Hand or Machine		Commercial		
	NOTE: Both left and right collar points should be well rounded and uniform.					
	n. Fell top, corners, and side edges of topcollar to finished undercollar by hand. Top edge may be machine felled with simulated hand stitching. When simulated hand stitching is used, the operation shall precede collar basting.	Hand or Machine		8-10 6-10	C silk A silk	A silk
	o. Trim neck edge of topcollar to allow for seaming.					
	p. Press and crease the stand of the topcollar and the undercollar together in one operation to shape stretching the outer edge of the collar across the shoulders and holding the creaseline short.					
6.	Make sleeves and sleeve linings. a. Sleeves shall be set-in type consisting of a topsleeve and undersleeve.					

Source: https://assist.dla.mil -- Downloaded: 202640-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Join forearm seam of sleeve (basic material) face to face 1/2 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3	0/3
*	c. Press forearm seam open and flat without stretching forearm seam.					
*	d. Stitch sleeve interlining (wigan) to forearm seam and sides of backarm seam allowances. Bottom edge of sleeve interlining shall be 1 to 1 1/4 inch below turnup notches. Trim ends of sleeve interlining even with edges of sleeve.	301 or 401	SSa-1	10-14	0/3	0/3
	e. Press turnup of sleeve as indicated by notches in pattern.					
	f. Join backarm seam of sleeve, face to face, 1/2 inch from edge.	301 or 401	SSa-1	10-14	0/3	0/3
	g. Press backarm seam open and flat.					
	h. Join the forearm seam of the sleeve linings, face to face, 1/2 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3	0/3
	i. Join the back arm seam of sleeve linings, face to face, 1/2 inch from edge.	301 or 401	SSa-1	10-14	0/3	0/3
7.	Make front darts.					
	a. Form and stitch a cut dart in each front as indicated by marks on patterns.	301	SSa-1	10-14	0/3	0/3
	b. Press dart open and flat.					
8.	Make front vertical slash pockets.					
	a. Each front shall have a double piped welt style pocket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Stitch, face side up, the piping piece to top ply of pocketing.	301	LSa-1	10-14	0/3	0/3
	c. Stitch, face side up, the facing piece to bottom ply of pocketing.	301	LSa-1	10-14	0/3	0/3
	d. Position face side of piping piece on the outside of each front as indicated by marks on pattern. Double stitch 1/4 to 3/8 inch gage between marks and cut midway between the two parallel rows of stitching, tongue notching ends of opening. Turn pocket thru opening, form and stitch a 1/16 to 1/8 inch wide piping on each side of opening, simultaneously catching the assembled facing piece and bottom ply of pocketing on the underside when forming the welting on the back edge of the opening (nearest side seam).	301	SSaf-2 (shows finished seam)	10-14	0/3	0/3
	NOTE: The assembled facing piece and bottom ply of pocketing may be attached separately by stitching down back edge of the pocket opening through all plies of material. The line of stitching shall be superimposed on the first line of stitching. The back edge of the opening may also be closed on the underside. When this method is used, the line of stitching shall be adjacent to the first line of stitching. The back edge of the pocket opening closing shall be performed prior to operation 8e.	301	SSa-1	10-14	0/3	0/3
*	e. Operation d may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the inside pocket piping and facing may be trimmed to permit insertion into the machine. The joining seams of the inside pocket piping and facing shall be topstitched through front and all plies of material. When this machine is used, the contractor may utilize the machine manufacturers recommended pocket stay material.	101 and 301		10-14	A/3 0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Sew a row of stitching the length of the pocket opening on each side 1/2 to 5/8 inch from and parallel to the finished edge of the pocket. The bottom ply of the pocketing shall be turned back before stitching front edge of pocket.	301	OSf-1 and LSa-1	10-14	0/3	0/3
*	g. Close pocketing 1/2 to 5/8 inch from raw edges around outer and bottom edges and up inside edge to bottom of welt catching ends of inside pocket piping and facing pieces.	301	SSa-1	10-14	0/3	0/3
	h. Starting at ends of the two previously stitched rows of parallel stitching make a uniform point 5/8 to 3/4 inch from each end of pocket opening. Stitch thru all plies catching pocketing at both ends and interlining at top end of pocket.	301	SSv-1	10-14	0/3	0/3
	i. Stitch a 1 to 1-1/4 inch or two 1/2 to 5/8 inch horizontal bartacks at each end of pocket opening connecting the parallel rows of stitching at bottom of each point.	Bartack		56 per bartack 1 to 1 1/4 inch or 28 per bartack 1/2 to 5/8 inch	B	A
*	NOTE: The bartack shall be 1/8 (± 1/32) inch wide.					
	j. The finished pocket opening shall measure 7-1/4 (± 3/8) inches long.					
9.	Baste front canvas to overcoat fronts.					
*	a. The front canvas shall extend the full length of the overcoat and well beyond the armhole and shoulder. The front canvas shall be cut and constructed as follows:					
	(1) Cut the front canvas in strict accordance with the furnished pattern which shall show type, size, directional lines and marks for proper assembly.					
	(2) Form dart at top edge of front canvas and stitch.	304	LSa-1	4-8	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
*	b. Baste front canvas to each respective overcoat front along center, keeping the hanging pocket smooth and flat when caught in the basting.	Hand or Machine			
*	c. Tack front edge of hanging pocket to front canvas.	Hand or		2-4	0/3 or comm'l
		103 or	SSm-1	4-6	0/3 or comm'l
		301	SSm-1	4-6	0/3 0/3 or or comm'l
	d. In addition, baste front canvas to respective overcoat front as follows: 1. Across shoulder 2. Around armhole and down back edge 3. Along breakline of lapel 4. Down lapel and front edge	Hand or Machine			
*	e. Position a 5/8 inch wide bridle stay tape adjacent to and behind breakline of each lapel. The bridle stay shall extend sufficiently above gorge seam to permit catching the stay in the gorge seam tacking and to within 1 1/2 inches from bottom of lapel breakline. Baste tape even and smooth for a distance of 1 1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 3/8 inch chest fullness. The balance of the tape shall be basted without tautness or fullness. Tape and front canvas may be stamped or marked to assure proper amount of fullness.				
	f. Pad (blindstitch) each lapel of overcoat with not less than 7 equally spaced rows of stitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or	SSm-7	4-6	0/3
		306	SSm-7	4-8	0/3 0/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	g. Blindstitch bridle stay along both edges through all plies to overcoat front.	103 or 306	SSm-2 SSm-2	4-8 4-8	0/3 0/3	0/3
10.	Make backs and form vent.					
	a. Join back pieces, face to face, to form a center back seam. The bottom edge of the center back stitching shall terminate at the top of the vent.	301 or 401	SSa-1	10-14	0/3	0/3
	b. Notch seam allowances at top of right vent and press seam open and flat.					
	c. Stitch 1/2 inch wide cross cut tape to back at neckline.	301	SSaa-1	10-14	0/3	0/3
	d. Fold left vent against underside of back in line with the center back seam and vent notch at bottom and press flat.					
	e. Open folded vent, position and attach the fusible tape stay with the edge in the creased edge of vent at the fold line and fused to the back side of the turned under portion of vent.					
	f. Turn inwards back edge of left vent so as to produce a finished left vent facing, 1 1/2 (± 1/8) inches wide.					
	g. Turn top and back edge of right vent piece in accordance with marks on patterns, with back edge turned over top edge. Stitch 1/16 to 1/8 inch from the turned edge.	301	EFa-1	10-14	0/3	0/3
	h. Join right vent piece to right vent, face to face, 1/2 inch from edge.	301	SSe-2(a)	10-14	0/3	0/3
	i. Turn right vent assembly to finished position and top stitch from top to bottom 1/8 inch from turned vent edge.	301	SSe-2(b)	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	j. Keeping vent closed and straight, with notches at bottom of back aligned, place a diagonal row of stitching at the top (left) vent, through back and vent piece, with the base inclined approximately 10 degrees toward the front and bottom of overcoat. Finished stitching shall measure 2 (± 1/4) inches long.	301	SSv-1	10-14	0/3	0/3
11.	Stitch tapes and join sides.					
	a. Join, 1/2 inch from edge, face to face, the fronts and back at sides.	301 or 401	SSa-1	10-14	0/3	0/3
	b. Press seams open and flat.					
	NOTE: The armhole tape may be pressed during the pressing of the side seams utilizing a suitable buck press.					
	c. Stitch a 1/2 inch wide cross-cut tape at front neck to gorge.	301	SSaa-1	10-14	0/3	0/3
	d. Stitch a 1/2 inch wide cross-cut tape on each front shoulder 3/4 to 1 inch from neck to within 1/2 to 3/4 inch from armhole.	301	SSaa-1	10-14	0/3	0
	e. Stitch a 1/2 inch wide cross-cut tape on front armhole from 2 to 2-1/2 inches of armhole notch to within 1/2 to 3/4 inch from shoulder.	301	SSaa-1	10-14	0/3	0/3
	f. Stitch a 1/4 inch wide woven tape to lower part of front armhole from cross-cut tape to approximately 3/8 inch from top upper part of back armhole. Draw the tape slightly from side seam to back notch.	301	SSaa-1	10-14	0/3	0/3
	g. Press the taped area of the armhole, shrinking in fullness.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
12.	Press and shape fronts.				
	a. Press front edge, lapel, and chest of right and left fronts individually on a suitable shaped pressing block with a steam pressing machine to conform to the shape of the body.				
	b. Shape lapels by cutting in accordance with lapel shaper.				
	c. Trim and straighten front and bottom edges of overcoat matching vent lengths.				
*	d. Trim front canvas 1/4 inch along lapel front and bottom edge.				
*	e. The front canvas at the bottom may be cut diagonally so that the bottom edge is not caught in the tape stitching.				
*	f. Bind bottom edge of overcoat (see 3.3.3).				
13.	Join shoulder seams.				
	a. Join shoulder seams of overcoat, 3/8 inch from edge, working in proper fullness on back with the seam slightly curved towards front.	301	SSa-1	10-14	0/3 0/3
*	b. Press shoulder seam open and flat over a suitable block; without stretching shoulder seam and shaping armhole end of seam towards the front.				
14.	Set sleeves, shoulder pads, and sleeve head pads.				
*	a. Stitch sleeve to armhole, 3/8 inch from edge, matching notches as indicated on pattern. Ease in fullness of sleeve so that set sleeve in finished overcoat is free of wrinkles or puckering at armhole seam. Trim armhole.	301	SSa-1	10-14	0/3 0/3
	b. Press armhole seam open from 2-1/2 to 3 inches forward of shoulder seam on front to back notch.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	c. Baste the shoulder pad to the armhole seam outlet, centered over the shoulder seam, with the raw edges of pad and armhole even.	Hand or Machine	SSm-1	2-4	0/3 or Cmrcl
	d. Tack sleeve head pad to armhole seam from front sleeve notch to back seam of sleeve. Continue tacking all around armhole seam.	301	SSa-1	4-6	0/3 0/3
15.	Make lining stay tabs.				
*	a. Stay tabs shall be made of basic material (see 3.3.1) or rayon binding (see 3.3.3). Tabs shall be double stitched using a cover stitch on the underside, or with edges folded under.	406 or 301	EFh-1 or EFp-2	8-10 8-10	0/3 0/3 0/3 0/3
	b. Tabs shall measure 1/4 to 3/8 inch wide and 3-1/4 (± 1/8) inches long.				
	or				
	c. As an alternate, a commercial type black tape 1/4 to 3/8 inch wide may be used.				
16.	Make left inside welt pocket and attach label.				
	a. Bind back edge of facings.	301	BSc-1	10-14	0/3 0/3
	b. The opening of the finished vertical pocket shall be 5-3/4 (± 1/4) inches. The depth of the finished vertical pocket shall be 4-3/4 (± 3/8) inches when measured from the bottom of the pocket opening.				
	c. Mark position for a 3/16 to 1/4 inch wide double piped inside vertical breast pocket on the left front facing, as indicated by marks on pattern.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Place the inside pocket facing to the pocketing with the top and centers aligned. Turn in both sides of facing and stitch 1/16 inch from edge along fold line. Selvage edge need not be turned under.	301	LSd-1	10-14	0/3	0/3
	e. Place pocket facing and front facing, face to face, centering pocketing and pocket marks on facing and stitch with two rows of stitching 1/4 to 5/16 inch apart, simultaneously catching a staypiece on the underside.	301	SSv-2	10-14	0/3	0/3
	f. Cut opening of pocket thru front facings and stay piece midway between the rows of stitching and tongue notch ends of opening. Turn pocket thru the cut opening forming a double piped opening. Topstitch thru seam allowance along seamline joining each pocket ply and stay piece.	301	SSaf-2(b) (shows finished seam)	10-14	0/3	0/3
	g. Draw piped edges together on the underside, turn in tongue notched ends and tack across the width of opening.	301	SSa-1	10-14	0/3	0/3
	h. Starting at ends of pocket opening stitch around all raw edges of pocket.	301	SSa-1	10-14	0/3	0/3
	NOTE: As an alternate, the above pocket opening operations may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be vertically slit in two to permit insertion into the machine. Ends of the pocket shall be securely tacked. Close top of pocket on inside by stitching through all plies. In addition, when this machine is used, the supplier may utilize the machine manufacturer's recommended pocket stay material.	101 and 301		10-14 10-14	A/3 0/3	 0/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	i. The bottom edge of label may be inserted and caught under the edge of the pocket facing piece when making the pocket. The three remaining sides shall be stitched to the pocketing.	301	EFa-1 and LSbj-1	10-14	0/3	0/3
	or					
	j. As an alternate, the label may be stitched to the pocket, on all four sides, centered on pocket directly below facing.	301	LSbj-1	10-14	0/3	0/3
17.	Make body lining.					
	a. Position a suitable 2 inch wide tacking strip to back side of front lining even with side raw edge. Baste tacking strip to front lining.	Hand or Machine	SSaa-1			
	b. Position back edge of facing over top of front edge of front lining, 3/8 to 1/2 inch from edge. Topstitch facings to lining. Stitching shall be superimposed on binding stitching.	301	LSa-1	10-14	0/3	0/3
	c. Basting operation 17a may be disregarded when operations 17a and 17b can be satisfactorily accomplished without basting.					
	d. Join back pile lining pieces, face to face, forming a center back seam. Seam ends at top of vent opening. This operation shall be omitted when using the optional one piece back lining. Press seam open and flat.	301 or 401	SSa-1	10-14	0/3	0/3
	e. Join fronts and back lining pieces at sides, face to face.	301 or 401	SSa-1	10-14	0/3	0/3
	f. Join linings at shoulder, face to face.	301 or 401	SSa-1	10-14	0/3	0/3
	g. Attach sleeve linings to body lining, face to face, according to notches.	301 or 401	SSa-1	10-14	0/3	0/3
	h. Open all lining seams and press flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	i. Trim bottom of body lining if necessary and bind bottom raw edge of pile lining. Binding shall extend around vent opening. Two lining stay tabs shall be caught 1/4 inch into the binding on the back side of the lining. Stay tabs shall be positioned, one on each side joining seam.	301	BSc-1	10-14	0/3	0/3
18.	Join facings and fronts with tape.					
	a. Baste facing with attached linings to fronts, putting in proper lapel fullness.	Machine or Hand				
	b. Join facings and fronts together with a 1/2 inch wide woven tape 1/8 to 3/16 inch from edges. The tape shall extend from 1/2 inch in back of lapel notch, down front and across bottom of overcoat extending not less than 3 inches beyond back edge of facing.	301	SSab-1 and OSa-1	10-14	0/3	0/3
	c. Blindstitch back edge of tape to edge of interlining from top of lapel (notch to bottom of coat), with stitch catching only the interlining.	103 or 301	SSm-1 SSm-1	4-6 4-6	0/3 0/3	0/3
	NOTE: As an alternate to operations b and c, a 5/8 inch fusible tape may be used in lieu of the 1/2 inch woven tape. When this method is used, the tape must be pressed and fused to the interlining and the back edge of the tape shall not be blindstitched to the interlining.					
	d. Press front edges flat and smooth removing fullness.					
	e. Remove all basting stitches, trim lower front corner of facings, corner of lapels and notch lapels for proper turning.					
	f. Spread open the front facing seam from lapel notch to bottom edge of overcoat and press smooth and flat. When the 5/8 inch fusible tape is used, this operation need not be performed.					

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	g. Join sleeve bottom of lining to sleeve bottom of outershell at notches as indicated on patterns.	301	SSa-1	10-14	0/3 0/3
	h. Tack forearm seam of sleeve lining to forearm seam of overcoat shell between notches.	301	SSa-1	-	Comrcl
	i. Tack back arm seam of sleeve lining to backarm seam of overcoat shell between notches.	301	SSa-1	-	Comrcl
	j. Turn overcoat to finished position.				
19.	Set collar.				
*	a. Stitch topcollar to front facing at gorge to a point not less than 1 inch back of lapel breakline. Notch seam allowance of gorge facing at end of stitching. Spread gorge seam open and tack, catching bridle tape and canvas interlining in the tacking. Trim topcollar stand if necessary to finish 1 3/8 (± 1/8) inches wide at center back. Continue stitching topcollar and collarstand to neckline across front facing and back through all plies of material 3/8 inch from edge catching hanger loop at center back (± 1/2 inch). The finished hanger loop opening shall measure 2 to 2-1/2 inches.	301	SSa-1	10-14	0/3 0/3
	NOTE: The collarstand measurement shall be taken from the collar breakline (crease) to the neckline seam.				
	b. Baste undercollar to neckline of collar with center seam of undercollar matching center back seam.	Machine or Hand	LSa-1	-	Comrcl
*	c. Fell edge of undercollar to neckline, with 5/8 inch seam allowance and securely hand tack corners of undercollar to lapel at notch.	Hand or Machine (Hand type)		8-10 6-8	C(silk) A(silk)
	d. The finished collar shall measure 3 (± 1/4) inches wide at center back.				
	e. The finished notch opening shall measure 3-1/2 (± 1/4) inches deep.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
20.	Form bottom hem. Turn up bottom of overcoat 1-1/4 (± 1/8) inch and baste across bottom.	Ma-chine	EFa-1	-	Comrcl
21.	Tacking.				
*	a. Tack crown of sleeve lining to crown of outershell at the padding, 2-1/2 to 3 inches on both sides of shoulder seam.	Hand or Machine	-	8-10	Comrcl
	b. With fronts spread out flat, baste facing to front at inner edge of facing along the entire length.	Hand or Machine	-	-	Comrcl
	c. Tack front tacking strip to coat front along center of tacking strip.	Hand or Machine	-	8-10	Comrcl
	d. Fell hem of overcoat to body securing 3/8 inch of lining stay tabs at the side seams.	Hand or Machine	LSa-1	8-10	Comrcl
22.	Edgestitching.				
*	Edgestitch continuously the collar, lapels, fronts, bottom edge at facings, left vent (up to row of diagonal stitching) 1/2 inch from the folded edge.	301	SSae-2(b) and EFa-1	10-14	0/3 0/3
23.	Press lapel and edges of front. Press lapel and front edges prior to marking and making buttonholes.				
24.	Mark and stitch buttonholes.				
	a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with gimp and the stitching securely caught in the fabric. Ends of gimp finishing on top of buttonhole shall be pulled thru to the underside. Buttonholes shall be clean, correctly positioned and purling finishing on the outside.				
	b. The ends of all buttonholes shall be tacked by hand or machine in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall be not more than 1/4 inch long.	Bar-tack Hand		21-22 per bartack 10-12	B A B

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. The inside purled eyelet edge on front buttonhole shall be 3/4 (± 1/8) inch from the finished edge, vertically aligned, and equally spaced.					
	d. The inside purled eyelet edge on lapel buttonholes shall be 3/4 (± 1/8) inch from the finished edge.					
	e. Mark and stitch as indicated by marks on pattern, three 1 1/8 to 1 1/4 inch horizontal buttonholes on right front and one on left front to correspond with top buttonhole on right front.	Btnhl	Size btnhl 1-1/8 1-1/4 inch	Stchs btnhl 60-65 70-75 not including bartack	B	A
	f. Mark and stitch a 1-1/8 to 1-1/4 inches horizontal buttonhole on the lapel of each front as indicated by lapel buttonhole marker.	Btnhl	Size btnhl 1-1/8 to 1-1/4 inch	Stchs per btnhl 60-65 70-75 not including bartack	B	A
25.	Cleaning. a. Remove all basting threads.					
	b. All ends of stitching shall be trimmed and loose threads removed from the overcoat.					
	NOTE: Care shall be taken when trimming thread ends so that damage to the fabric not result.					
	c. All spots, stains, and marking tickets shall be removed without injury to the material.					
26.	Pressing. a. Press edge of lapels, fronts, collar, and bottom of overcoat on edge pressing machine.					
	b. Press right and left fronts on right and left chest machine respectively.					
	c. Roll press sleeves.					
	d. Press balance of fronts, side seams, and back on body machine.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	e. Press collar on collar machine, stretching outer edge of collar over shoulder area. Collar shall not be short nor too long.				
	f. Press armholes and shoulders on an armhole machine.				
	g. Press armhole solid from the inside, creasing armhole from not less than 1/2 inch above backarm seam to not less than 4 inches of shoulder seam. The armpit and back of the armhole shall be held short and pressed flat.				
	h. Press lapels. The creasing of the lapels shall extend a uniform distance from the gorge seam. The lapels shall be roll pressed from midway between the gorge seam to bottom of lapel.				
27.	Finish pressing.				
	a. Press lining smooth and flat with a hand iron.				
	b. Block armholes and shrink topsleeve on armhole blocking machine.				
	c. Touch up any area missed by hand or machine pressing.				
	d. Remove gloss, creases, and all pressing impressions.				
	e. Place overcoat on hanger until thoroughly dry.				
28.	Mark and sew buttons.				
	a. Metal buttons shall be sewn with the anchor in an upright position and aligned with corresponding buttonholes so that there is no bulging or distortion when fronts and neck are buttoned.				
	b. All metal buttons, with the exception of the three on the right hand front, shall be backed with plastic stay buttons.				

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	c. The three right hand front buttons shall be inserted through a small diameter hole in the front and secured on the back with a leather washer and ring toggle combination.				
	d. The hand or machine sewn inside plastic anchor button shall have the thread tightly wrapped not less than four times around to form a 1/8 to 3/16 inch shank. The thread ends shall be hidden and securely tacked off with not less than 2 stitches.				
	e. Fronts - Six buttons, three on each front as follows:	Hand or 101 or 301 or 205		Stchs per button 4 (double) thread 14-16 14-16 12(min)	12/4 16/4 20/4 20/4 No. 4 (nylon)
	Left front 1. Top buttons through all plies. 2. Lower two buttons through interlinings and top ply of pocketing.				
	Right front 1. Top button through interlining. 2. Lower two buttons through interlining and top ply of pocketing.				
	Center of each button shall be sewn 5 (± 1/4) inches from the finished front edge.				
	f. One of each front at lapel through facing. Position of button shall correspond to lapel buttonhole.	Hand or 101 or 301 or 205		Stchs per button 4 (double thread) 14-16 14-16 12(min)	12/4 or 16/4 20/4 20/4 20/4 No.4 (nylon)

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF OVERCOAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
*	g. Anchor button - one on inside right front directly under outside top button. The button shall be caught onto the outside button shank with a minimum of four stitches.	Band or 101 or 301 or 205		4 (double) thread 14-16 14-16 12(min)	12/4 or 16/4 20/4 20/4 20/4 No.4 (nylon)

*29. Pack each overcoat.
Refer to Section 5 for instructions.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Finished measurements shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements

Size	(A) Bust	(B) Sleeve Inseam Length Short	Regular	Long	(C) Center Back Length Short	Regular	Long
6	38	16	17	18	26-3/4	28-1/4	30-1/4
8	39	16	17	18	27	28-1/2	30-1/2
10	40	16	17	18	27-1/4	28-3/4	30-3/4
12	41-1/2	16	17	18	27-1/2	29	31
14	43	16	17	18	27-3/4	29-1/4	31-1/4
16	44-1/2	16	17	18	28	29-1/2	31-1/2
18	46-1/2	16	17	18	28-1/4	29-3/4	31-3/4
20	48-1/2	16	17	18	28-1/2	30	32
22	50-1/2	16	17	18	28-3/4	30-1/4	32-1/4
Tolerance:	± 1	± 3/8	± 3/8	± 3/8	± 1/2	± 1/2	± 1/2

NOTE: Refer to Figure 1 for A, B, and C measurements. All measurements shall be taken with overcoat fully buttoned, placed smooth and flat.

(A) Bust - Twice the measurement taken across front at the base of armhole from folded edge to folded edge.

(B) Sleeve inseam length - Measurement shall be taken along sleeve inseam from base of armhole to bottom of sleeve.

(C) Center back length - Measurement shall be taken from the neckline seam to bottom edge of overcoat.

* 3.9 Workmanship. The finished overcoat shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels. As a final step in the contractor's production control plan before formation of a lot, each coat (after pressing but prior to packaging) shall be buttoned on a model form and examined for selected defects. A coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in 4.4.2.1 and indicated by an asterisk (*).

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to acertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance shall be furnished for the resin treatment requirements of 3.3.12.2, the fusible web tape requirements of 3.3.12.3, the fusible tape requirements of 3.3.12.4, the colorfastness requirements of 3.3.14, the quilted lining requirements of 3.3.2.2 and the cotton flannel requirements of 3.3.8.2.

* 4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished overcoat. The lot shall be rejected if a selected defect is found during the end item examination. The lot size shall be expressed in units of overcoats.

4.4.2.1 Visual examination. The overcoats shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classified in accordance with the following list:

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Hole, cut, tear or needle chew			
1. on the outside	X		
2. on the inside:			
- up to 1/8 inch (inclusive)			X
- more than 1/8 inch		X	
b. Mend, darn or patch			
1. on the outside	X		
2. on the inside:			
- up to 1/4 inch (inclusive)			X
- more than 1/4 inch		X	
c. Weakening defects			
1. Smash	X		
2. Multiple float or loose slub:			
- on the outside	X		
- on the inside		X	
d. Unsightly slub, shade bar or selvage			
- on the outside	X		
- on the inside (except selvage)		X	
SHADED PARTS			
a. On outside of overcoat			
1. Any part shaded (except parts which may be cut from ends)	X		
2. Parts cut from ends badly shaded		X	
3. Variation in shade within 2 parts (except parts which may be cut from ends)	X		
b. On inside of overcoat			
1. Any part badly shaded (except parts which may be cut from ends)		X	
2. Parts cut from ends shaded			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
PRESSING			
a. Burned or scorched			
- on outside	X		
- on inside		X	
b. Pressing omitted (entire garment)	X		
c. Poorly pressed (unless otherwise classified)		X	
d. Basting or pressing impressions not removed (score only when the condition is clearly noticeable)			X
e. Gloss mark not removed throughout major portion of overcoat			X
f. Lapel, front or collar edge bulky, or not pressed solid or lapel not rolled pressed			X
g. Sleeves not roll pressed		X	
h. Body lining not pressed smooth			X
i. Inside of armhole not creased or not creased solid		X	
j. Armhole not blocked or poorly blocked		X	
CLEANNESS			
a. Spot or stain on outside (largest dimension in any direction):			
1. Up to 3/8 inch inclusive			X
2. More than 3/8 inch up to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. Any marking exposed or visible on outside	X		
* c. Thread ends not trimmed			
1. Three or more on outside larger than 1/4 inch		X	
2. Five or inside longer than 1/2 inch			X
d. Two or more shade or size tickets on overcoat			X
e. Basting thread (including monofilament thread or fragments of monofilament thread) not completely removed from outside			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified (type, size, color, etc)	X		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)		X	
d. Any operation not as specified (unless otherwise classified herein)			X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
f. Any outside parts assembled with the face side on the underside (unless otherwise specified)	X		
CUTTING			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns or not in accordance with specification requirements	X		
b. Twill line of any outside part not running in specified direction	X		
c. Any outside component part not cut in the same direction of nap	X		
* d. Nap of pile lining not laying downwards		X	
SEAMS AND STITCHING			
* a. Accuracy of seaming			
1. Seams on overcoat except lining badly twisted, puckered, or pleated, clearly noticeable (unless otherwise classified herein)	X		
2. Seams on overcoat lining badly twisted, puckered, or pleated, clearly noticeable (unless otherwise classified herein)		X	
3. Part of overcoat caught in any unrelated operation or stitching		X	
4. Unsightly felling or blindstitching exposed and visible on outside of overcoat		X	

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
5. Ends of all seams or stitching when not caught in other seam or stitching backtacked less than 3/8 inch		X	
6. Stitching overlapping ends of thread break less than 1/2 inch			X
7. Wrong shade of thread on outside of overcoat	X		
8. Needle perforations visible on outside		X	
b. Gauge of stitching (edge or raised stitching)			
1. Irregular, i.e., unevenly gauged or corresponding stitchings not uniform (to be scored only when condition exists along major portion of seam)		X	
2. Not within range or gauge specified or varies more than 1/16 inch when no range is specified			X
3. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X		
c. Open seam or runoff			
1. On outside of overcoat:			
(a) Gorge seam, lapel, and front edge or seam joining welt style pockets:			
- less than 1/8 inch			X
- 1/8 inch or more but not more than 1/4 inch		X	
- more than 1/4 inch	X		
b. All other seams:			
- less than 1/4 inch			X
- 1/4 inch or more but not more than 1/2 inch		X	
- more than 1/2 inch	X		
2. On inside of overcoat:			
(a) Seam joining inside pocket to facing:			
- 1/8 inch or less			X
- more than 1/8 inch but not more than 1/4 inch		X	
- more than 1/4 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
(b) All other seams (except machine and hand felling):			
- 1/4 inch or more but not more than 1/2 inch			X
- more than 1/2 inch		X	
(c) Machine and hand felling:			
- 1/2 inch or more but not more than 1 inch			X
- more than 1 inch		X	
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or two or more continuous skipped or run-off stitches occur.			
* d. Raw edges			
1. On the outside of overcoat:			
- up to 1/2 inch, inclusive			X
- more than 1/2 inch up to 3/4 inch, inclusive		X	
- more than 3/4 inch	X		
2. On the inside of overcoat (excluding an edge that is not required to be turned under, pinked or overedged)			
- 3/8 inch up to 2 inches, inclusive			X
- more than 2 inches		X	
NOTE: Raw edges are classified as such only if occurring where the edge is required to be turned under. Raw edges not securely caught in stitching shall be classified as an open seam.			
e. Seam and stitch type:			
1. Not specified seam or stitch type	X		
2. Any line of stitching omitted or insecure		X	
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread of 401 stitch type on outside	X		
f. Stitch tension:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
1. Loose tension resulting in a loose seam:			
(a) up to 1/2 inch inclusive			X
(b) more than 1/2 inch up to 3/4 inch		X	
(c) more than 3/4 inch	X		
2. Loosely exposed loops of lower or top thread on edge, top, or raised stitching		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
g. Stitches per inch (score only when condition exists on more than 1/2 the length of seam):			
1. More than the maximum specified			X
2. Less than the minimum specified:			
(a) by one or two stitches			X
(b) by three or more stitches		X	
h. Runoff, skipped, or broken stitch:			
1. Joining seam - use "Open seam" classification			
2. Edge, top, or raise stitching (more than 1/4 inch)			X
i. Bartack, backtack, tack or tacking (except buttonhole bartack):			
* 1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		X	
2. Loose stitch tension			X
BUTTONHOLES			
a. Stitching not securely caught in fabric, causing stitching to pull away from fabric	X		
b. One or more broken or continuous skipped stitches in buttonhole	X		
c. One or more omitted or added	X		
d. Bartack omitted or loose on:			
- one buttonhole		X	
- two or more buttonholes	X		

Source: https://assist.dla.mil -- Downloaded: 202640-20T02:51Z
Check the source to verify that this is the currenversion before use.

Defects	Classification Major	Minor A	Minor B
e. Wrong type		X	
f. Bartack misplaced, not serving intended purpose on:			
- one buttonhole			X
- two or more buttonholes		X	
g. Gimp omitted in one or more buttonholes or ends of gimp not pulled through underside		X	
h. Ragged edges		X	
i. One or more buttonholes finished with the purling on the reversed side		X	
j. Buttonhole stitching not covering gimp for a distance of more than 1/8 inch			X
k. One or more buttonholes poorly repaired, i.e., bulky or stitches not uniform		X	
l. Cut straight end of buttonhole visible and exposed beyond bartack on one or more buttonholes		X	
m. One or more buttonholes less than 1-1/8 inches or more than 1-1/4 inches long		X	
BUTTONS			
a. Omitted, broken or defective		X	
b. Part of garment pleated or puckered by button sewing			X
c. Misplaced, loose; not attached as specified; or insecurely sewn			X
* d. Tacking stitches omitted or insecure (hand sewn)		X	
e. Button sewn with anchor in other than specified direction		X	
* f. Shank wrapping (when required) omitted, loosely wrapped or not specified shank length		X	
* g. Stitching on button not locked at end of cycle (tug at loose end of the thread when accessible to determine whether it will ravel)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
*COAT SHALL NOW BE BUTTONED ON MODEL FORM			
ALIGNMENT OF FRONT BUTTONS AND BUTTONHOLES			
* a. Top or lower front button and corresponding buttonhole misplaced or not positioned as specified by:			
1. 3/8 to 1/2 inch, inclusive	X		
2. More than 1/2 inch	*		
b. Not aligned, causing a noticeable bulge or twist on fronts when buttoned:			
- if caused by reasons other than misplaced buttons	X		
c. Button on left front not in horizontal alignment with corresponding button on right front by:			
- 1/2 inch or more but not more than 1 inch		X	
- more than 1 inch	X		
c. Spacing between front buttonholes varying more than 1/4 inch			X
*FRONTS			
* a. Right front shorter than left front at bottom corner by:			
- 1/8 inch to 1/4 inch, inclusive		X	
- more than 1/4 inch	*		
* b. Right front longer than left front at bottom corner by:			
- 1/8 to 1/4 inch, inclusive		X	
- more than 1/4 inch	*		
* c. Left front at bottom corner exposed beyond bottom edge of right front by more than 1/8 inch		X	
d. Fronts uneven in length by more than 3/8 inch at neck when buttoned		X	
e. Unbuttoned fronts uneven in length by 3/8 inch or more	X		
CONSTRUCTION OF FRONTS			
a. Front not properly shaped or constructed causing right front to swing to the right or left by more than 2			

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the currentversion before use.

Defects	Classification Major	Minor A	Minor B
inches from an imaginary perpendicular line drawn from forward edge of top button to bottom of overcoat with overcoat buttoned (measure horizontally at bottom of coat from imaginary line to front edge of right front)		X	
b. Right front rolling outward below bottom front button, when buttoned		X	
c. Fronts puckered, twisted, or not smooth, having a wavy appearance	X		
FRONT FACING			
* a. Short, tight, or twisted, causing puckers or twists on fronts	X		
b. Long, causing bottom corner of front to curl up	X		
c. Exposed along edge of right front			X
d. Fullness on facing between buttons and buttonholes or between buttonhole or buttons and front edge			X
e. Tacking at back edge of facing to interlining omitted or insecure			X
COLLAR (construction and setting)			
a. Collar closure (position of lapel button):			
- misplaced on left front causing noticeable bulge or twist on fronts when buttoned		X	
b. Collar setting			
1. Short, i.e., causing puckers on back or fronts pulling lapel breakline causing fronts to roll out	X		
2. Long, i.e., setting away from neck, collar not fitting neck, or lapel rolling higher than 2 inches above center of top front button or buttonhole	X		
3. Collar not properly set, causing a decided curve or bulge on creaseline at joining to gorge seam	X		
4. Tight at joining to gorge seam or across back, causing fullness on lapels or fullness or pleats across outside of back	X		
* 5. Collar off center at front by 1/4 inch or more with shoulder seamlines matching		X	
c. Collar edge			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
1. Collar edge short across shoulders, causing collar to rise above creaseline by:			
- 1/4 inch or more but not more than 1/2 inch		X	
- more than 1/2 inch	X		
2. Irregular, affecting appearance		X	
3. Undercollar exposed along collar edge (to be scored only when the condition exists along major portion of seam)		X	
4. Collar edge not properly forced out, i.e., having a fold of more than 1/16 inch (to be scored only when condition exists along major portion of seam)			X
5. Tacking on corners of undercollar to lapel omitted or insecured		X	
6. Outer edge of collar stretched (wavy effect)		X	
d. Topcollar			
1. Tight, i.e., causing edges to curl or bulging on undercollar		X	
2. Twisted, i.e., having a diagonal twist	X		
3. Full, i.e., having puckers or fullness	X		
4. Full, i.e., topcollar folds 1/8 inch or more from creased edge or breakline of undercollar		X	
5. Finished collar width at center back less than 2-3/4 inches or more than 3-1/4 inches measured from breakline to the outer edge		X	
6. Tight at joining to gorge seam or across back, causing fullness on lapels or across outside of back		X	
7. Pucker or pleats on topcollar at joining to topcollar stand		X	
8. Finished collar stand width at center back less than 3/4 inch or more than 1-1/4 inch		X	
e. Undercollar			
1. Interlining pleated, causing topcollar not to lie flat	X		
2. Interlining tight or twisted, causing puckers of undercollar		X	
3. Row of stitching along creaseline through interlining omitted or insecure			X
4. One or more undercollar seams not pressed open		X	
5. Tight at joining to fronts or back causing puckers or pleats at neck of coat	X		
6. Center seam from center back seam:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
-1/4 inch or more but not more than 3/8 inch			X
-more than 3/8 inch		X	
7. Tacking on corner of undercollar to lapel omitted or insecure			X
8. Lower raw edge of undercollar not enclosed within the felling		X	
f. Gorge seam			
1. Not straight		X	
2. Seam not spread open		X	
3. Tacking omitted or insecure			X
4. Length of seam on outside not uniform with other side by 3/8 inch or more (measured from collar breakline to end or gorge seam at notch)			X
LAPELS			
a. Lapel facings			
1. Twist on facing	X		
2. Fullness (not smooth and flat)		X	
3. Pleated or puckered	X		
b. Lapel edges			
1. Irregular or not properly forced out, causing crooked edges		X	
2. Front part exposed on lapel edge		X	
3. Tape set on too tight causing puckering at edges		X	
4. Bulky or wavy			X
* c. Bridle tape:			
1. Misplaced, not serving intended purpose		X	
2. Loose, causing breakline not to lie flat		X	
3. Tight, causing puckers or pleats along breakline		X	
4. Omitted on one or both fronts	X		
5. Bridle tape basted onto or extending beyond breakline on lapel side at gorge	*		
6. Bridle tape more than 5/8 inch behind lapel breakline at gorge	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
7. Bridle tape basted onto or extending beyond breakline on lapel side at lapel bottom	*		
8. Bridle tape more than 7/8 inch behind lapel breakline at lapel bottom	*		
d. Collar and lapel shapes			
1. Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length by:			
- 1/4 inch or more but less than 1/2 inch		X	
- 1/2 inch or more	*		
2. Lapels poorly shaped or not of uniform shape or size		X	
3. Length of shaped lapels uniform, but varying from pattern shaper by:			
- 1/4 inch or more but not more than 3/8 inch			X
- more than 3/8 inch		X	
* 4. Collar points not rounded, poorly shaped, not of uniform size or shape		X	
5. Gap between top edge of lapels and ends of collar not uniform with other side by more than 1/4 inch	X		
6. Twisted, short or tight, causing collar or lapel to curl out	*		
7. Misshaped or distorted - any point varying from finished shaper by:			
- 1/4 inch or more but less than 1/2 inch.	X		
- 1/2 inch or more	*		
8. Not uniform in size or shape, varying from matching parts by:			
- 1/4 inch or more but less than 1/2 inch.		X	
- 1/2 inch or more	X		
WELT POCKETS			
a. Construction and setting			
1. Other than slash type	X		
2. Diagonal reinforcing row of stitching at corners of pocket opening omitted or insecure		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
3. Poorly shaped or not uniform in shape or size		X	
4. Piped edges irregular in width by more than 1/16 inch		X	
5. Bartack (single or double) missing, insecure, or misplaced not serving intended purpose at ends of pocket opening	X		
6. Bartack (single or double) not extending full width of parallel row of stitching		X	
7. Row of stitching parallel to pocket opening less than 1/2 inch or more than 5/8 inch from the piped edge			X
8. Point less than 5/8 inch or more than 3/4 inch from end of pocket opening			X
9. Notch exposed on end of welt or raw edge at corner	X		
* b. Alignment and dimensions			
1. Out of alignment in any direction or misplaced at any point by:			
- more than 3/8 inch	*		
- more than 1/4 inch up to 3/8 inch inclusive	X		
- more than 1/8 inch up to 1/4 inch inclusive		X	
2. Top unequally spaced from seam joining backs and front by more than 3/4 inch		X	
3. Finished welt edge less than 1/16 inch or more than 1/8 inch wide at pocket opening		X	
4. Length of pocket openings:			
- less than 6-3/4 inches but not less than 6-1/2 inches			X
- more than 7-5/8 inches but not more than 8 inches			X
- less than 6-1/2 inches or more than 8 inches		X	
- unequal in length by more than 1/2 inch	X		
SHOULDER			
a. Improperly joined or set, causing shoulder or back to twist	X		
b. One or both shoulder seams not pressed open		X	
c. Shoulder seam curved towards back at armhole seam by more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
SHOULDER PAD			
a. Not properly set causing shoulder to twist, pucker, or bulge	X		
b. Misplaced, not serving intended purpose, i.e., too far back or too far forward, not completely or securely caught in armhole tacking		X	
ARMHOLE			
a. Construction			
1. Badly stretched	X		
2. Tape set too tight, causing puckering around armhole	X		
3. Crooked seam		X	
4. Tacking of linings and interlinings to armhole seams omitted on one or both armholes		X	
5. Armholes not securely tacked		X	
6. Tape stitching exposed and visible on outside surface of coat (to be scored only when the condition exists along major portion of seam)			X
b. Sleeve head pad			
Not completely tacked to armhole, or misplaced, not serving intended purpose		X	
SLEEVE			
a. Construction and hang			
1. Sleeve fullness misplaced	X		
2. Sleeves tight at armholes, i.e., crease effect not present on front or back of sleeves respectively or causing fold of undersleeve or an armhole at base of sleeve	X		
3. Lower part of top sleeve tight causing bulge, break or twist on front base of armhole	X		
4. Sleeve too far front or back, i.e., front edge of sleeve away from lower end of welt pocket opening:			
- by more than 1 inch but not more than 2 inches		X	
- by more than 2 inches	X		
5. Hang of sleeves in opposite directions, i.e., one sleeve too far forward and one sleeve too far back, tolerance of 1 inch but not exceeding 1 1/2 inches from lower end of welt pocket opening		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
6. Sleeve backarm seams unequal distance from shoulder seams (outside) by 1/2 inch or more		X	
7. Set improperly, causing sleeve to break or twist	*		
b. Sleeve lining			
1. Twisted, tight or short causing bulge or twist on outside of sleeves	X		
2. Sleeve lining too long, causing lining to sag at bottom more than 1/2 inch			X
3. Sleeve lining seams out of alignment more than 3/4 inch with sleeve seams at armhole			X
c. Construction of sleeves			
1. One or both wool sleeve seams not pressed open		X	
2. Blindstitching on bottom turn up omitted or insecure (when applicable)			X
3. Tacking of sleeve lining seams to sleeve seams omitted, insecure or incomplete for a distance of more than 6 inches from the top end or more than 6 inches from the bottom edge of sleeves (when applicable)		X	
4. Bottom edge of sleeve uneven by more than 1/4 inch		X	
5. Wigan tight, twisted or pleated causing puckering on outside of sleeve, clearly noticeable		X	
6. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch or blindstitching, tacking on bottom turn-up to wigan omitted or insecure		X	
FRONT AND BOTTOM EDGES			
a. Front edge stretched		X	
b. Tape set too tight, causing puckering on front or bottom edge		X	
c. Front edge irregular, not properly forced out, causing crooked or curved edges		X	
d. Facing exposed on left or right edge (to be scored only when the condition exists along major portion of seam)		X	
e. Bottom edge stretched or uneven			X
f. Stitching along bottom edge exposed on outside except for top stitching along facing			X
g. Bottom corner of right front poorly shaped, affecting appearance		X	
FITTING			
a. Fitting of body lining, front interlining, and liner:			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
- tight, short or twisted causing puckers or twists on outside	X		
b. Front canvas too full, causing front to have a wavy appearance or not lie smoothly	X		
VENT			
a. Length of diagonal stitching at top of vent less than 1-3/4 inches or more than 2-1/4 inches			X
b. Right side of back overlapping left side at vent opening	X		
c. Left and right vent unequal by:			
- more than 1/8 inch but not more than 1/4 inch		X	
- more than 1/4 inch	X		
d. Left vent edge stretched causing vent to spread open		X	
e. Left vent edge crooked, affecting appearance		X	
f. Tape omitted on left vent edge		X	
Outside of Overcoat			
FRONT AND LAPEL BUTTONHOLES (position spacing from edge and spacing from each other)			
a. Position of lapel buttonhole not parallel with top edge by more than 1/4 inch			X
b. Lapel and front buttonholes not positioned as specified on patterns		X	
c. Front buttonholes:			
1. Unevenly spaced from finished front edge by:			
- 1/8 inch but not more than 1/4 inch		X	
- more than 1/4 inch	X		
2. More than 1/4 inch from equal spacing		X	
FRONT BUTTONS (position from edge, vertical alignment and secure sewing)			
a. Position from finished front edge to center of its circumference:			
- less than 4-3/4 inches but not less than 4-1/2 inches or more than 5-1/4 inches but not more than 5-1/2 inches			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
- less than 4-1/2 inches or more than 5-1/2 inches		X	
b. Out of vertical alignment by:			
- 1/4 inch or more but not more than 3/8 inch		X	
- more than 3/8 inch	X		
c. Top (left and right front) and lapel (left and right) buttons not caught through facing		X	
d. Other front buttons not caught through number of plies specified		X	
e. Anchor button (left front) not caught into top left front button		X	
Inside of Overcoat			
FACINGS, FRONT			
a. Fullness on facings between buttons, buttonholes or between front edge and buttons and buttonholes		X	
b. Felling of inner bottom edge of facing, the width between the folded edge of hem and lining omitted or insecure		X	
c. Not bound along back edge	X		
INSIDE POCKET (COAT SPREAD OUT ON TABLE)			
a. Positioned other than specified	X		
b. Width of pocket opening or depth of pocket not as specified		X	
c. Opening gapped by more than 1/4 inch in the center of opening			X
d. Finished width of piping less than 3/16 inch or more than 1/4 inch			X
e. Stay omitted			X
f. Tacking along front edge of silesia pocket through facing and interlining omitted or insecure		X	
g. Tacking on upper or back edges of inside pocket to interlining omitted or insecure			X

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
FRONT AND BACK LINING (COAT ON MODEL FORM)			
a. Too full			X
b. Twisted not affecting smoothness on outside surface on front or back			X
c. Too long, causing lining to be exposed below bottom edge of coat		* X	
d. One or more seams not pressed open and flat			X
e. Not bound across bottom edge	X		
f. Bottom edge binding twisted or puckered			X
g. Sleeve lining at base of armhole full or twisted			X
h. Felling at bottom corner of front lining omitted or insecure			X
i. Twisted, affecting smoothness on outside surface on front and back	X		
HANGING POCKETS (COAT SPREAD OUT ON TABLE)			
a. Suede side of flannel pocketing material not finished on inside of pocket		X	
b. Front edge not tacked to interlining		X	
c. Front edge insecurely tacked to interlining			X
HANGER LOOP			
a. Omitted or ends not securely stitched		X	
b. Misplaced, 1/2 inch or more off center with center back seam			X
c. Finished free length less than 2 inches or more than 2-1/2 inches			X
IDENTIFICATION LABEL			
* a. Missing, incorrect, or illegible	X		
b. Not stitched on 4 sides			X

Source: https://assist.dla.mil -- Downloaded: 20260-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
c. Reversed, i.e., bottom edge not facing towards pocket opening			X
BOTTOM HEM			
a. Irregular in width by more than 3/16 inch			X
b. Twisted, affecting smoothness on outside of coat		X	
c. Twisted, not affecting smoothness on outside of coat			X
d. Width of finished hem less than 1-1/8 inches or more than 1-3/8 inches			X
e. Bottom hem not bound as specified		X	
LINING STAY TABS			
a. Missing (one or more)	X		
b. Not attached securely (one or more)			X
c. Not attached (one or more)		X	
*SELECTED DEFECTS			
ALIGNMENT OF FRONT BUTTONS AND BUTTONHOLES			
a. Top or lower front button and corresponding buttonhole misplaced or not positioned as specified by more than 1/2 inch	*		
LAPEL AND COLLAR			
a. Twisted, short or tight causing collar or lapel to curl out	*		
b. Misshapen or distorted, any point varying from finished shaper by 1/2 inch or more	*		
c. Not uniform in size or shape, varying from matching part by 1/2 inch or more	*		
* BRIDLE TAPE			
a. Bridle tape basted onto or extending beyond breakline on lapel side at gorge	*		
b. Bridle tape more than 5/8 inch behind lapel breakline at gorge	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
c. Bridle tape basted onto or extending beyond breakline on lapel side at lapel bottom	*		
d. Bridle tape more than 7/8 inch behind lapel			
WELT POCKET			
Out of alignment in any direction or misplaced at any point by more than 3/8 inch	*		
SLEEVE			
Set improperly, causing sleeve to break or twist	*		
FRONTS			
a. Right front shorter than left front at bottom corner by more than 1/4 inch	*		
b. Right front longer than left front at bottom corner by more than 1/4 inch	*		

* 4.4.2.1.1 Model forms. The model forms for the selected defects examination and as specified in 4.4.2.1, shall be woman's forms conforming to the measurements specified below. The coat size listed shall be examined on the appropriate model form size as specified below:

Coat size	Model form size	Model form measurements 1/ Bust 2/	Waist	Hips
6	10	35 1/2	26 1/2	37
8, 10	14	38 1/2	29 1/2	39 1/2
12	16	40	31	41
14	18	41 1/2	32 1/2	43
16, 18	20	43 1/2	34 1/2	45
20, 22	22	46 1/2	37	47

1/ Unless otherwise specified, the tolerances shall be ± 1/2 inch.
2/ The tolerance shall be ± 1 inch.

4.4.2.2 Dimensional examination. The overcoats shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

b. Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

* 4.4.2.3 Inspection levels and acceptable quality levels. The inspection

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

levels and acceptable quality levels (AQL's), expressed in defects per 100 units for visual and dimensional examination shall be as follows:

		Inspection level
For visual examination in 4.4.2.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level, expressed in defects per hundred units shall be 6.5.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

* 5.1 Preservation-packaging. Preservation packaging shall be hanger packs as specified in 5.1.1 (see 6.2).

* 5.1.1 Hanger packs. Overcoats shall be hung with fronts lapped and unbuttoned, on a 17 inch hanger and preserved as specified in the appendix of MIL-C-44192.

* 5.2 Packing. Packing shall be hanger packs as specified in 5.2.1 (see 6.2).

* 5.2.1 Hanger packs. Ten (10) overcoats of one size and length only, packaged as specified in 5.1.1 shall be packed in a type I container, using either style A or style B hanger bar in accordance with MIL-C-44192. No mixed sizes are permitted within the same container.

* 5.2.2 Palletization. When specified (see 6.2), overcoats, packed as specified in 5.2 shall be palletized in accordance with the appendix of MIL-C-44192 using pallet load pattern number 95.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129. When hanger packs are used, the container shall have marked on each side in bold, clear, red or blue lettering "THIS SIDE UP" with arrows pointing to the top of the container.

* 5.4 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The overcoat (reefer) is intended for use by female Coast Guard personnel.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification.
b. Issue of the DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced.
c. Sizes and lengths required (see 1.2).
d. When a first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval.
e. Levels of packaging and packing required (see 5.1 and 5.2).
f. When palletization is required (see 5.2.2).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

6.5 Equal item. Prior to the use of an "or equal" item, the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.7 Subject term (key word) listing.
Double breasted
Overcoat
Pockets, welt
Poly/wool elastique
Reefer

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT
Navy - CG

Project No. 8410-0695

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

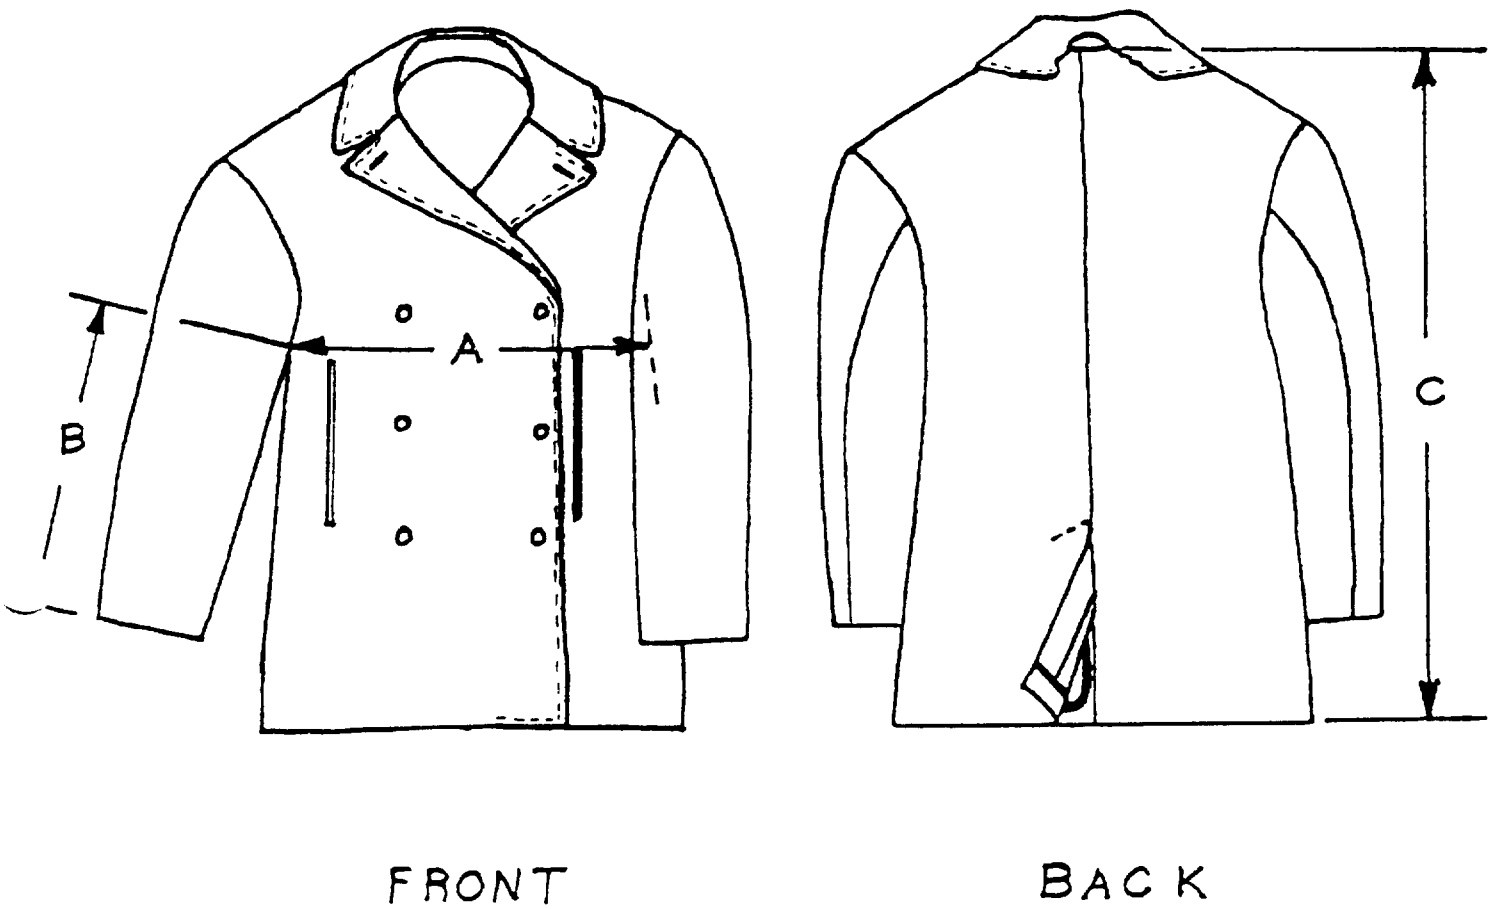


Figure 1 - Overcoat, Woman's, Reefer (Coast Guard)

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 202610-20T02:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-O-24906B(CG)	OVERCOAT, WOMAN'S, REEFER (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T02:51Z
Check the source to verify that this is the current version before use.