
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR4QX22YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of specification MIL-F-18327.

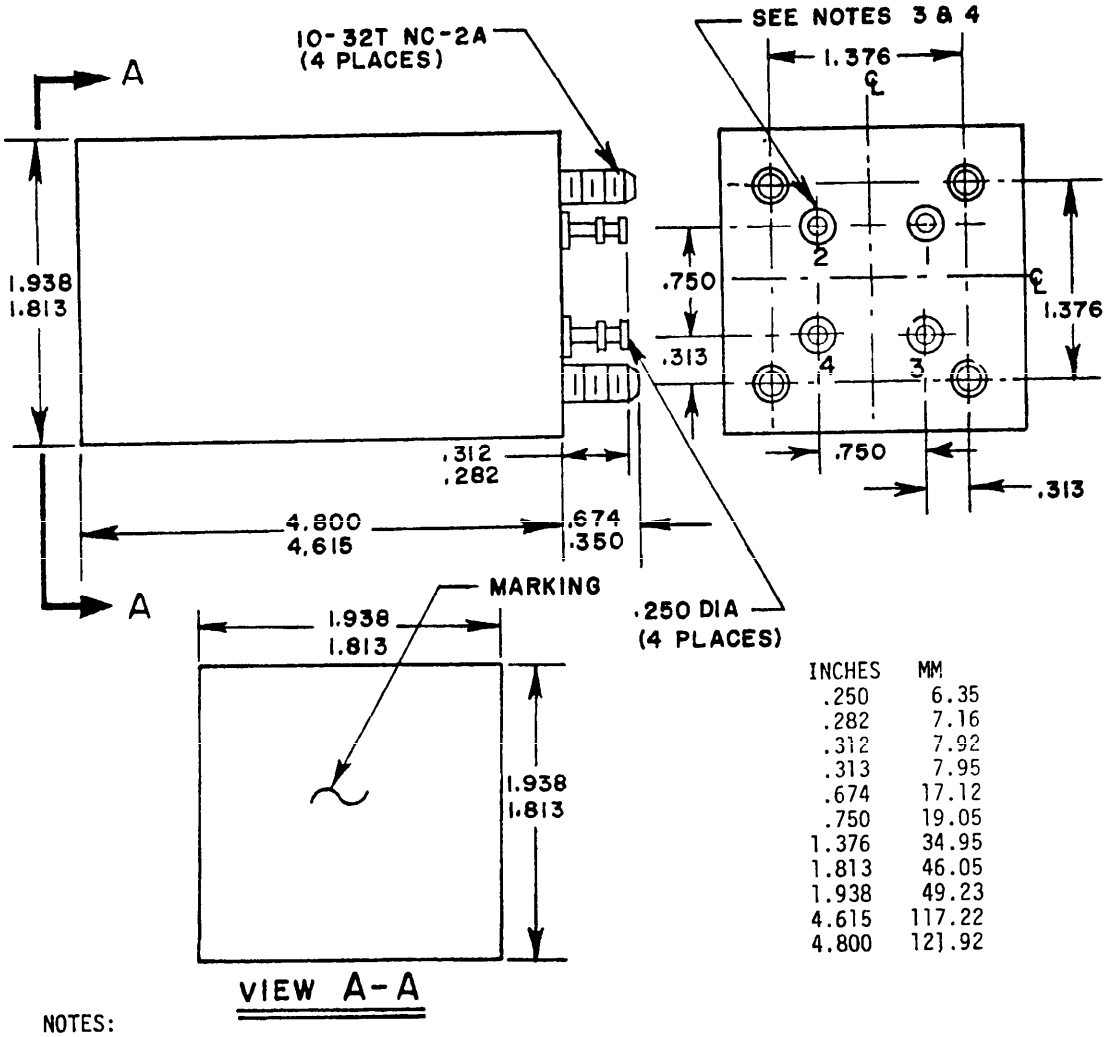

INCHES	MM
.250	6.35
.282	7.16
.312	7.92
.313	7.95
.674	17.12
.750	19.05
1.376	34.95
1.813	46.05
1.938	49.23
4.615	117.22
4.800	121.92

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification: 1 - 2 Input
   3 - 4 Output
4. Terminal design optional, but must accept 2 tinned #20 stranded wires. Insulation portion of terminal No. 1 shall be of a different color than the insulation portion of terminals 2, 3 and 4. Terminals 2, 3 and 4 shall have the insulation color.

FIGURE 1. Case configuration and dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Solder.

Weight: 1.25 pounds (460.68 grams).

Terminal strength: Method 211, MIL-STD-202.
Test condition A (Pull) - 2 pounds.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 100 megohms when measured between each terminal and case.

Stability at temperature extremes:

2 hours at $+15^{\circ}{}^{+0^{\circ}}_{-3^{\circ}}$ C.

2 hours at $+45^{\circ}{}^{+3^{\circ}}_{-0^{\circ}}$C.

Measurements at 25°C after test:
Electrical characteristics - As specified in table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature $85^{\circ}{}^{+10^{\circ}}_{-5^{\circ}}$ C.

Signal input level - 0.3 vrms.
Measurements at 25°C after test.
Insulation resistance - Not less than 100 megohms between each terminal and case.
Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test.
Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 85°C.
Exposure time - 1 hour.
Measurement at 25°C after test:
Insulation resistance - Not less than 100 megohms between each terminal and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.
Measurement at 25°C after test:
Insulation resistance - Not less than 100 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Polarization voltage: 100 Vdc.
Measurement at 25°C after test:
Insulation resistance - Not less than 100 megohms between each terminal and case.

Part number: M18327/67-(dash number from table I.)

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR4QX22YY1	001	1000 ±15%	2000 ±1.0%	12015	7.5±1.5 (at ref freq)	11825 Hz to 12205 Hz		3	Zero
						11715 Hz	15		
						12315 Hz	15		
						9000 Hz to 8000 Hz	60		
						8000 Hz to 1 Hz	60		
						15000 Hz to 200 kHz	60		
						200 kHz to 300 kHz	50		
						300 KHz to 1 MHz	35		

Custodians:
Army - EL
Navy - EC
Air Force - 99

Review activities:
Army - MU, MI
Navy - SH
Air Force - 11, 17
DLA - ES

User activities:
Army - ME, AT, AV, WC
Navy - MC, CG, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0182)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.