
MILITARY SPECIFICATION SHEET

FILTERS, BAND PASS, .530 INCH CAN STYLE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this Specification Sheet and the latest issue of MIL-F-18327.

INCHES	MM
.004	0.10
.008	0.20
.017	0.43
.04	1.0
.096	2.44
.183	4.65
.435	11.05
.530	13.46
.79	20.1

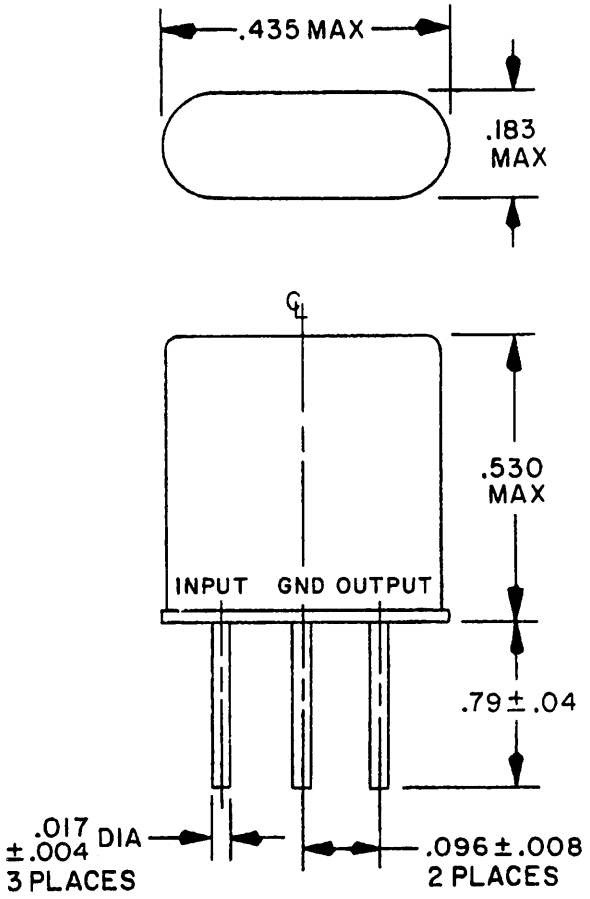

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The filters are electrically symmetrical and may be installed in reverse position without changing the performance characteristics.

FIGURE 1. Case and mounting dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable pin.

Weight: .04 ounces maximum.

Terminal strength: Method 211, MIL-STD-202. Test condition A (pull), 9 newtons.

Solderability: Method 208, MIL-STD-202. All terminations of each filter to be tested.

Solder dip dwell time: Method 208, MIL-STD-202.

Examination of terminations: Method 208, MIL-STD-202.

Dielectric withstanding voltage:

Terminals to case:

At atmospheric pressure: Method 301, MIL-STD-202. 100 V rms between each terminal (except ground) and case.

At reduced pressure: In accordance with MIL-F-18327.

Input to output: Method 301, MIL-STD-202. The following details shall apply:

Magnitude and nature of test voltage: 50 V dc.

Duration of application of test voltage: 5 ±1 second. The test voltage shall be raised from 0 to the specified value within 1 second maximum.

Points of application of test voltage: Between input and output terminals. Test shall be repeated with reverse voltage polarity.

Limiting of surge current: 30 to 50 mA.

Examinations after test: Filters shall be examined for evidence of breakdown and damage.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal (except ground) and case.

Stability at temperature extremes:

1 hour at -20°C, +0°C, -3°C.

1 hour at 70°C, +3°C, -0°C.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature 70°C, +10°C, -5°C.

Signal input level - See table I.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

Insulation resistance - Not less than 1,000 megohms between each terminal (except ground) and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 1 shall be 20°C and at step 3 shall be 70°C.

Exposure time - 30 minutes.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Immersion: Method 104, test condition A, MIL-STD-202. After final cycle, filters shall be washed under running tap water and dried. After the drying period, the filters shall be subjected to the following:

Measurements at 25°C.

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Flammability: Not applicable.

Part number: M18327/69- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics. 1/ 2/


Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
001	1.5 k	5.0	10.7	2.0	10,685	18		100
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,715	18		"
002	3.0 k	2.0	"	"	10,677	18		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,723	18		"
003	3.0 k	2.0	"	"	10,675	18		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,725	18		"
004	3.9 k	---	"	"	10,666	18		"
			"	"	10,690		3	"
			"	"	10,710		3	"
			"	"	10,734	18		"
005	5.0 k	-1.5 3/	"	"	10,650	18		"
			"	"	10,685		3	"
			"	"	10,715		3	"
			"	"	10,750	18		"
006	1.0 k	3.0	21.4	"	21,370	18		"
			"	"	21,392.5		3	"
			"	"	21,407.5		3	"
			"	"	21,430	18		"
007	1.0 k	2.0	"	"	21,365	18		"
			"	"	21,390		3	"
			"	"	21,410		3	"
			"	"	21,435	18		"
008	1.5 k	---	"	"	21,350	18		"
			"	"	21,385		3	"
			"	"	21,415		3	"
			"	"	21,450	18		"
009	1.2 k	4.0	16.9	"	16,872	18		"
			"	"	16,892.5		3	"
			"	"	16,907.5		3	"
			"	"	16,928	18		"
010	1.5 k	---	"	"	16,866	18		"
			"	"	16,890		3	"
			"	"	16,910		3	"
			"	"	16,934	18		"

1/ Ripple: 0.5 dB maximum throughout the 3 dB passband.
2/ VSWR: 4.5 maximum throughout the 3 dB passband.
1.5 maximum at the reference frequency.
3/ A negative value for capacitance indicates inductive reactance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

APPLICATION INFORMATION:

With two crystal filters connected in tandem as shown on figure 2 with the coupling capacitor as specified in table II, the electrical characteristics shall be as specified in table II.

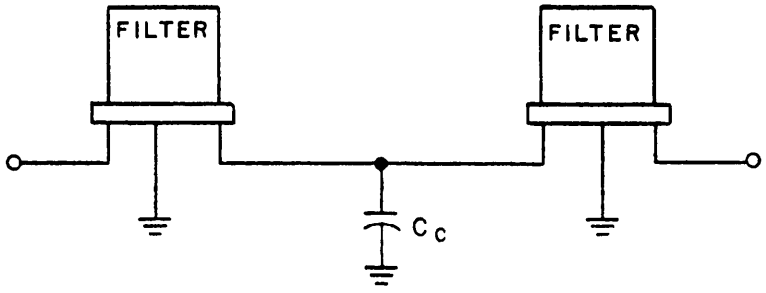

NOTES:
1. The two filters are the same dash number specified in table II.
2. The C_c is called the coupling capacitor as specified in table II.
3. Ripple: 1.0 dB maximum throughout the 3 dB passband.
4. VSWR: 4.5 maximum throughout the 3 dB passband.
   1.3 maximum at the reference frequency.

FIGURE 2. Tandom crystal filters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

TABLE II. Tandem electrical characteristics. 1/ 2/

Coupling capacitor (pF) (MIL-C-20) part number	Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
15 (CCR05 CG150 JP)	001	1.5 k	3.0	10.7	2.5	10,687.5	40		100
				"	"	10,696.25		3	"
				"	"	10,703.75		3	"
				"	"	10,712.5	40		"
6.8 (CCR 05CH 6R8DP)	002	3.0 k	1.0	"	"	10,680	40		"
				"	"	10,694		3	"
				"	"	10,706		3	"
				"	"	10,720	40		"
4.7 (CCR 05CH 4R7CP)	003	3.0 k	---	"	"	10,675	40		"
				"	"	10,692.5		3	"
				"	"	10,707.5		3	"
				"	"	10,725	40		"
1.5 (CCR 05CH 1R5CP)	004	3.9 k	---	"	"	10,666	40		"
				"	"	10,690		3	"
				"	"	10,710		3	"
				"	"	10,734	40		"
0 4/ (open circuit)	005	5.0 k	-1.5 3/	"	"	10,650	40		"
				"	"	10,685		3	"
				"	"	10,715		3	"
				"	"	10,750	40		"
8.2 (CCR 05CH 8R2OP)	006	1.0 k	1.0	21.4	"	21,375	40		"
				"	"	21,392.5		3	"
				"	"	21,407.5		3	"
				"	"	21,425	40		"
3.9 (CCR 05CH 3R9CP)	007	1.0 k	1.0	"	"	21,365	40		"
				"	"	21,390		3	"
				"	"	21,410		3	"
				"	"	21,435	40		"
2.7 (CCR 05CH 2R7CP)	008	1.5 k	1.0	"	"	21,350	40		"
				"	"	21,385		3	"
				"	"	21,415		3	"
				"	"	21,450	40		"
12 (CCR05 CG120JP)	009	1.2 k	1.0	16.9	"	16,875	40		"
				"	"	16,892.5		3	"
				"	"	16,907.5		3	"
				"	"	16,925	40		"
5.6 (CCR0 5CH5 R6DP)	010	1.5 k	---	"	"	16,866	35		"
				"	"	16,890		3	"
				"	"	16,910		3	"
				"	"	16,934	35		"

1/ Ripple: 1.0 dB maximum thrughout the 3 dB passband.
2/ VSWR: 4.5 maximum throughout the 3 dB passband.
1.3 maximum at the reference frequency.
3/ A negative value for capacitance indicates inductive reactance.
4/ Do not short to ground.

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Extent of Qualification:

Qualification testing and approval to M18327/69-001 shall be sufficient to grant qualification approval to M18327/69-001 thru M18327/69-010.

Qualification testing and approval to M18327/69-001, /70-001, /71-001, /72-001, /73-011, /74-001, /75-005, /76-024, and /77-001 shall be sufficient to grant qualification approval to MIL-F-18327/69 through MIL-F-18327/77, inclusive.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0273-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.