
MILITARY SPECIFICATION SHEET

FILTERS, BAND PASS, .62 INCH 6 PIN RECTANGULAR STYLE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this Specification Sheet and the latest issue of MIL-F-18327.

INCHES	MM
.004	0.10
.031	0.80
.04	1.0
.126	3.20
.14	3.5
.157	3.99
.62	15.9
.71	18.2
.945	24.00
1.50	38.4

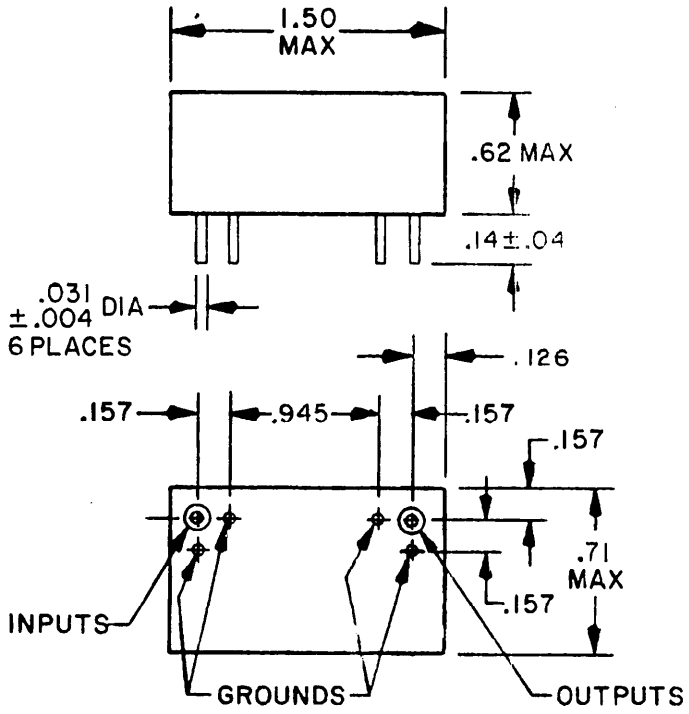

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm).
4. The filters are electrically symmetrical and may be installed in reverse position without changing the performance characteristics.

FIGURE 1. Case and mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable pin.

Weight: .88 ounces maximum.

Terminal strength: Method 211, MIL-STD-202. Test condition A (pull), 9 newtons.

Solderability: Method 208, MIL-STD-202. All terminations of each filter to be tested.

Solder dip dwell time: Method 208, MIL-STD-202.

Examination of terminations: Method 208, MIL-STD-202.

Dielectric withstanding voltage:

Terminals to case:

At atmospheric pressure: Method 301, MIL-STD-202. 100 V rms between each terminal (except ground) and case.

At reduced pressure: In accordance with MIL-F-18327.

Input to output: Method 301, MIL-STD-202. The following details shall apply:

Magnitude and nature of test voltage: 50 V dc.

Duration of application of test voltage: 5 ±1 second. The test voltage shall be raised from 0 to the specified value within 1 second maximum.

Points of application of test voltage: Between input and output terminals. Test shall be repeated with reverse voltage polarity.

Limiting of surge current: 30 to 50 mA.

Examinations after test: Filters shall be examined for evidence of breakdown and damage.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal (except ground) and case.

Stability at temperature extremes:

1 hour at -20°C, +0°C, -3°C.

1 hour at 70°C, +3°C, -0°C.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature 70°C, +10°C, -5°C.

Signal input level - See table I.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

Insulation resistance - Not less than 1,000 megohms between each terminal (except ground) and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 1 shall be -20°C and at step 3 shall be 70°C.

Exposure time - 30 minutes.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Immersion: Method 104, test condition A, MIL-STD-202. After final cycle, filters shall be washed under running tap water and dried. After the drying period, the filters shall be subjected to the following:

Measurements at 25°C.

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Flammability: Not applicable.

Part number: M18327/75- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
001	910	25	10.7	3.5	10,687.5	65		100
			"	"	10,691.25	45		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	45		"
			"	"	10,712.5	65		"
002	"	"	"	3.0	10,680	65		"
			"	"	10,686	45		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	45		"
			"	"	10,720	65		"
003	"	"	"	3.0	10,675	65		"
			"	"	10,682.5	45		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	45		"
			"	"	10,725	65		"
004	"	"	"	"	10,650.5	65		"
			"	"	10,665	45		"
			"	"	10,685		3	"
			"	"	10,715		3	"
			"	"	10,735.5	45		"
			"	"	10,750	65		"
005	"	"	"	4.0	10,687.5	90		"
			"	"	10,691.25	70		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	70		"
			"	"	10,712.5	90		"
006	"	"	"	3.5	10,680	90		"
			"	"	10,686	70		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	70		"
			"	"	10,720	90		"
007	"	"	"	"	10,675	90		"
			"	"	10,682.5	70		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	70		"
			"	"	10,725	90		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
008	910	25	10.7	3.5	10,650	90		100
	"		"	"	10,665	70		"
	"		"	"	10,685		3	"
	"		"	"	10,715		3	"
	"		"	"	10,735	70		"
	"		"	"	10,750	90		"
009	"	15	21.4	4.0	21,387.5	65		"
	"		"	"	21,391.25	45		"
	"		"	"	21,396.25		3	"
	"		"	"	21,403.75		3	"
	"		"	"	21,408.75	45		"
	"		"	"	21,412.5	65		"
010	"	"	"	3.0	21,380	65		"
	"		"	"	21,386	45		"
	"		"	"	21,394		3	"
	"		"	"	21,406		3	"
	"		"	"	21,414	45		"
	"		"	"	21,420	65		"
011	"	"	"	"	21,375	65		"
	"		"	"	21,382.5	45		"
	"		"	"	21,392.5		3	"
	"		"	"	21,407.5		3	"
	"		"	"	21,417.5	45		"
	"		"	"	21,425.5	65		"
012	"	"	"	"	21,350	65		"
	"		"	"	21,365	45		"
	"		"	"	21,385		3	"
	"		"	"	21,415		3	"
	"		"	"	21,435	45		"
	"		"	"	21,450	65		"
013	"	"	"	4.5	21,387.5	90		"
	"		"	"	21,391	70		"
	"		"	"	21,396.25		3	"
	"		"	"	21,403.75		3	"
	"		"	"	21,409	70		"
	"		"	"	21,412.5	90		"
014	"	"	"	3.5	21,380	90		"
	"		"	"	21,386	70		"
	"		"	"	21,394		3	"
	"		"	"	21,400		3	"
	"		"	"	21,414	70		"
	"		"	"	21,420	90		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
015	910	15	21.4	3.5	21,375	90		100
			"	"	21,382.5	70		"
			"	"	21,392.5		3	"
			"	"	21,407.5		3	"
			"	"	21,417.5	70		"
			"	"	21,425	90		"
016	"	"	"	"	21,350	80		"
			"	"	21,365	70		"
			"	"	21,385		3	"
			"	"	21,415		3	"
			"	"	21,435	70		"
			"	"	21,450	80		"

1/ Ripple: 2.0 dB maximum throughout the 3 dB passband.
2/ VSWR: 4.5 maximum throughout the 3 dB passband.
1.3 maximum at the reference frequency.

QUALITY ASSURANCE PROVISIONS:

Extent of Qualification:

Qualification testing and approval to M18327/75-005 and M18327/75-013 shall be sufficient to grant qualification approval to M18327/75-001 thru M18327/75-016.

Qualification testing and approval to M18327/69-001, /70-001, /71-001, /72-001, /73-011, /74-001, /75-005, /76-024, and /77-001 shall be sufficient to grant qualification approval to MIL-F-18327/69 through MIL-F-18327/77, inclusive.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0273-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.