
MILITARY SPECIFICATION SHEET

FILTERS, BAND PASS, .61 INCH RECTANGULAR STYLE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this Specification Sheet and the latest issue of MIL-F-18327.

INCHES	MM	INCHES	MM
.004	0.10	.157	3.99
.01	0.2	.27	6.9
.020	0.51	.35	9.0
.031	0.80	.49	12.5
.04	1.0	.53	13.4
.06	1.5	.61	15.5
.100	2.54	.70	17.8
.126	3.20	.75	19.0
.138	3.51	.93	23.5

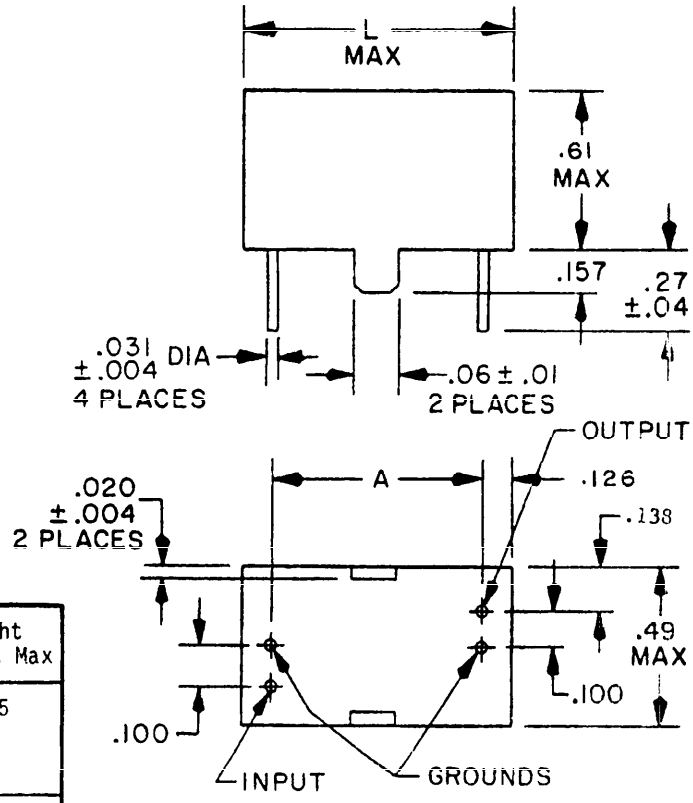

	A	L Max	Weight Ounces Max
001, 004, 007 010 thru 016, 028 031 thru 035, 041	.35	.61	.25
002, 005, 008 017, thru 023, 029 036, thru 040, 042	.53	.75	.28
003, 006, 009 024 thru 027 030	.70	.93	.34

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm).
4. These filters are electrically symmetrical and may be installed in reverse position without changing the performance characteristics.

FIGURE 1. Case and mounting dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal (5 sides), base material: epoxy.

Terminals: Solderable pin.

Weight: See figure 1.

Terminal strength: Method 211, MIL-STD-202. Test condition A (pull), 9 newtons.

Solderability: Method 208, MIL-STD-202. All terminations of each filter to be tested.

Solder dip dwell time: Method 208, MIL-STD-202.

Examination of terminations: Method 208, MIL-STD-202.

Dielectric withstanding voltage:

Terminals to case:

At atmospheric pressure: Method 301, MIL-STD-202. 100 V rms between each terminal (except ground) and case.

At reduced pressure: In accordance with MIL-F-18327.

Input to output: Method 301, MIL-STD-202. The following details shall apply:

Magnitude and nature of test voltage: 50 V dc.

Duration of application of test voltage: 5 ±1 second. The test voltage shall be raised from 0 to the specified value within 1 second maximum.

Points of application of test voltage: Between input and output terminals. Test shall be repeated with reverse voltage polarity.

Limiting of surge current: 30 to 50 mA.

Examinations after test: Filters shall be examined for evidence of breakdown and damage.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal (except ground) and case.

Stability at temperature extremes:

1 hour at -20°C, +0°C, -3°C.

1 hour at 70°C, +3°C, -0°C.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature 70°C, +10°C, -5°C.

Signal input level - See table I.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

Insulation resistance - Not less than 1,000 megohms between each terminal (except ground) and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 1 shall be -20°C and at step 3 shall be 70°C.

Exposure time - 30 minutes.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Immersion: Method 104, test condition A, MIL-STD-202. After final cycle, filters shall be washed under running tap water and dried. After the drying period, the filters shall be subjected to the following:

Measurements at 25°C.

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal (except ground) and case.

Flammability: Not applicable.

Part number: M18327/76- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
001	3.0 k	---	10.7	3.0	10,677.5	60		100
			"	"	10,692.5		6	"
			"	"	10,707.5		6	"
			"	"	10,722.5	60		"
002	"	---	"	4.0	10,680	80		"
			"	"	10,685	60		"
			"	"	10,692.5		6	"
			"	"	10,707.5		6	"
			"	"	10,715	60		"
			"	"	10,720	80		"
003	"	---	"	5.0	10,682.5	90		"
			"	"	10,685	75		"
			"	"	10,692.5		6	"
			"	"	10,707.5		6	"
			"	"	10,715.5	75		"
			"	"	10,717.5	90		"
004	3.9 k	---	"	3.0	10,670	60		"
			"	"	10,690		6	"
			"	"	10,710		6	"
			"	"	10,730	60		"
005	"	---	"	4.0	10,673	80		"
			"	"	10,680	60		"
			"	"	10,690		6	"
			"	"	10,710		6	"
			"	"	10,720	60		"
			"	"	10,727	80		"
006	"	---	"	5.0	10,676	90		"
			"	"	10,680	75		"
			"	"	10,690		6	"
			"	"	10,710		6	"
			"	"	10,720	75		"
			"	"	10,724	90		"
007	5.0 k	-1.5 3/	"	2.5	10,655	60		"
			"	"	10,685		6	"
			"	"	10,715		6	"
			"	"	10,745	60		"
008	"	"	"	3.0	10,660	80		"
			"	"	10,670	60		"
			"	"	10,685		6	"
			"	"	10,715		6	"
			"	"	10,730	60		"
			"	"	10,740	80		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
009	5.0 k	-1.5 3/	10.7	4.0	10,665	90		100
			"	"	10,670	70		"
			"	"	10,685		6	"
			"	"	10,715		6	"
			"	"	10,730	70		"
			"	"	10,735	90		"
010	3.3 k	---	"	3.0	10,687.5	75		"
			"	"	10,691.25	50		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	50		"
			"	"	10,712.50	75		"
011	"	---	"	2.5	10,680	65		"
			"	"	10,686	50		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	50		"
			"	"	10,720	65		"
012	"	"	"	"	10,675	75		"
			"	"	10,682.5	50		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	50		"
			"	"	10,725	75		"
013	5.6 k	-1.5 3/	"	2.0	10,650	65		"
			"	"	10,665	45		"
			"	"	10,685		3	"
			"	"	10,715		3	"
			"	"	10,735	45		"
			"	"	10,750	65		"
014	3.3 k	2.5	"	3.0	10,687.5	65		"
			"	"	10,691.25	50		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	50		"
			"	"	10,712.5	65		"
015	"	2.0	"	2.5	10,680	65		"
			"	"	10,686	50		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	50		"
			"	"	10,720	65		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
016	3.3 k	1.5	10.7	2.5	10,675	65		100
			"	"	10,682.5	50		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	50		"
			"	"	10,725	65		"
017	"	---	"	4.0	10,687.5	90		"
			"	"	10,691.25	65		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,709.75	65		"
			"	"	10,712.5	90		"
018	"	---	"	3.5	10,680	90		"
			"	"	10,686	65		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	65		"
			"	"	10,720	90		"
019	"	---	"	"	10,675	90		"
			"	"	10,682.5	65		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	65		"
			"	"	10,725	90		"
020	5.6 k	-1.5 3/	"	"	10,650	80		"
			"	"	10,665	60		"
			"	"	10,685		3	"
			"	"	10,715		3	"
			"	"	10,735	60		"
			"	"	10,750	80		"
021	3.3 k	2.5	"	4.0	10,687.5	90		"
			"	"	10,691.25	65		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	65		"
			"	"	10,712.5	90		"
022	"	2.0	"	3.5	10,680	90		"
			"	"	10,686	65		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	65		"
			"	"	10,720	90		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
023	3.3 k	1.5	10.7	3.5	10,675	90		100
			"	"	10,682.5	65		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	65		"
			"	"	10,725	90		"
024	"	---	"	5.5	10,691.25	90		"
			"	"	10,696.25		3	"
			"	"	10,703.75		3	"
			"	"	10,708.75	90		"
025	"	---	"	4.0	10,686	90		"
			"	"	10,694		3	"
			"	"	10,706		3	"
			"	"	10,714	90		"
026	"	---	"	"	10,682.5	90		"
			"	"	10,692.5		3	"
			"	"	10,707.5		3	"
			"	"	10,717.5	90		"
027	5.6 k	-1.5 3/	"	"	10,665	90		"
			"	"	10,685		3	"
			"	"	10,715		3	"
			"	"	10,735	90		"
028	1.0 k	1.0	21.4	3.0	21,377.5	60		"
			"	"	21,392.5		6	"
			"	"	21,407.5		6	"
			"	"	21,422.5	60		"
029	"	"	"	4.0	21,380	80		"
			"	"	21,384.5	60		"
			"	"	21,392.5		6	"
			"	"	21,407.5		6	"
			"	"	21,415.5	60		"
			"	"	21,420	80		"
030	"	"	"	5.0	21,382.5	90		"
			"	"	21,385	75		"
			"	"	21,392.5		6	"
			"	"	21,407.5		6	"
			"	"	21,415	75		"
			"	"	21,417.5	90		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
031	910	3.0	21.4	3.0	21,387.5	65		100
			"	"	21,391.25	45		"
			"	"	21,398.25		3	"
			"	"	21,403.75		3	"
			"	"	21,408.75	45		"
			"	"	21,412.5	65		"
032	1.6 k	1.0	"	"	21,387.5	65		"
			"	"	21,391.25	45		"
			"	"	21,396.25		3	"
			"	"	21,403.75		3	"
			"	"	21,408.75	45		"
			"	"	21,412.5	65		"
033	"	"	"	2.5	21,380	65		"
			"	"	21,386	45		"
			"	"	21,394		3	"
			"	"	21,406		3	"
			"	"	21,414	45		"
			"	"	21,420	65		"
034	"	"	"	"	21,375	65		"
			"	"	21,382.5	45		"
			"	"	21,392.5		3	"
			"	"	21,407.5		3	"
			"	"	21,417.5	45		"
			"	"	21,425	65		"
035	2.3 k	-2.0 3/	"	"	21,350	65		"
			"	"	21,365	45		"
			"	"	21,385		3	"
			"	"	21,415		3	"
			"	"	21,435	45		"
			"	"	21,450	65		"
036	910	3.0	"	4.0	21,387.5	90		"
			"	"	21,391	65		"
			"	"	21,396.25		3	"
			"	"	21,403.75		3	"
			"	"	21,409	65		"
			"	"	21,412.5	90		"
037	1.6 k	1.0	"	"	21,387.5	90		"
			"	"	21,391	65		"
			"	"	21,396.25		3	"
			"	"	21,403.75		3	"
			"	"	21,409	65		"
			"	"	21,412.5	90		"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:25Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued. 1/ 2/

Dash number	Impedance (ohms) Source and load	Capacitance -0, +100 percent (pF)	Reference frequency (MHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB) Min	Discrimination (dB) Max	Rated voltage (mV rms)
038	1.6 k	1.0	21.4	3.0	21,380	90		100
			"	"	21,386	65		"
			"	"	21,394		3	"
			"	"	21,406		3	"
			"	"	21,414	65		"
			"	"	21,420	90		"
039	"	"	"	"	21,375	90		"
			"	"	21,387.5	65		"
			"	"	21,392.5		3	"
			"	"	21,407.5		3	"
			"	"	21,417.5	65		"
			"	"	21,425	90		"
040	2.3 k	-2.0 3/	"	"	21,350	80		"
			"	"	21,365	60		"
			"	"	21,385		3	"
			"	"	21,415		3	"
			"	"	21,435	60		"
			"	"	21,450	80		"
041	1.2 k	---	16.9	"	16,877.5	60		"
			"	"	16,892.5		6	"
			"	"	16,907.5		6	"
			"	"	16,922.5	60		"
042	1.2 k	---	16.9	4.0	16,880	80		"
			"	"	16,885	60		"
			"	"	16,892.5		6	"
			"	"	16,907.5		6	"
			"	"	16,915	60		"
			"	"	16,920	80		"

1/ Ripple: 2.0 dB maximum throughout the 3 dB passband.
2/ VSWR: 4.5 maximum througout the 3 dB passband.
1.3 maximum at the reference frequency.
3/ A negative value for capacitance indicated reactive inductance.

QUALITY ASSURANCE PROVISIONS:

Extent of Qualification:

Qualification testing and approval to M18327/76-010, -024, -031, and -037 shall be sufficient to grant qualification approval to M18327/76-001 thru M18327/76-042.

Qualification testing and approval to M18327/69-001, /70-001, /71-001, /72-001, /73-011, /74-001, /75-005, /76-024, and /77-001 shall be sufficient to grant qualification approval to MIL-F-18327/69 through MIL-F-18327/77, inclusive.

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0273-9)

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:25Z
Check the source to verify that this is the current version before use.