
MILITARY SPECIFICATION SHEET

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT,
LEAD CONVERSION, .200 OR .230 DIAMETER PIN CENTER TO A LARGER DIAMETER


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pads described herein shall consist of this specification and the latest issue of MIL-M-38527.

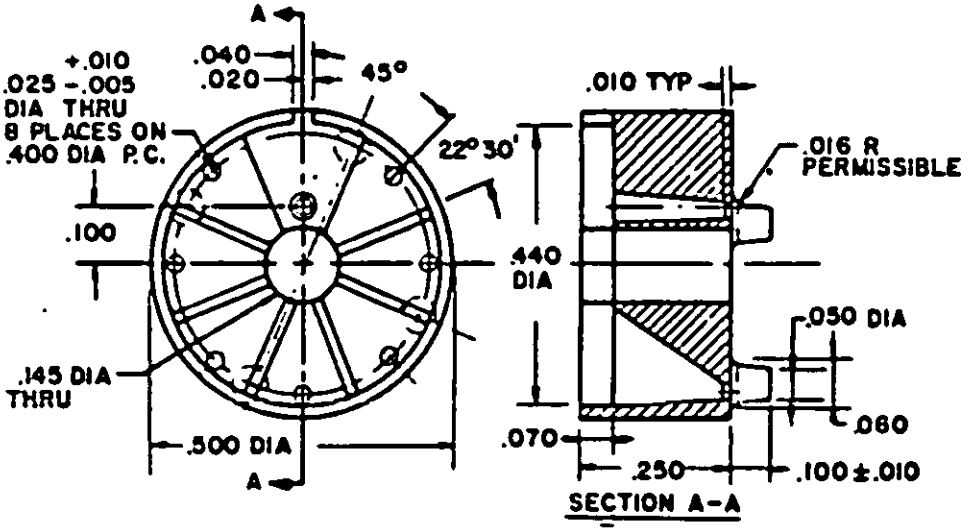

INCHES	MM
.005	0.13
.010	0.25
.016	0.41
.020	0.51
.025	0.64
.040	1.02
.045	1.14
.050	1.27
.060	1.52
.070	1.78
.100	2.54
.250	6.35
.400	10.16
.440	11.18
.500	12.70

M38527/04-001

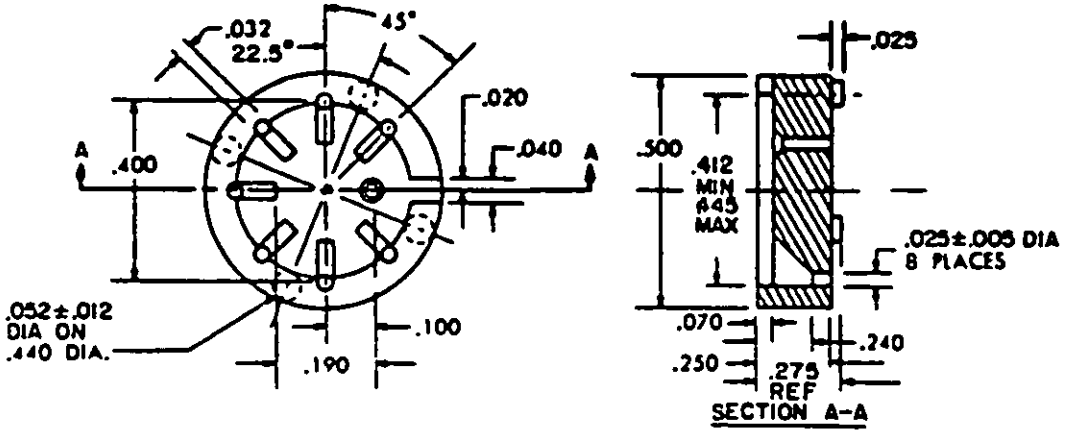


INCHES	MM
.005	0.13
.012	0.30
.020	0.51
.025	0.64
.032	0.81
.040	1.02
.052	1.32
.070	1.78
.100	2.54
.190	4.83
.240	6.10
.250	6.35
.275	6.99
.400	10.16
.412	10.46
.440	11.18
.445	11.30
.500	12.70

M38527/04-002

FIGURE 1. Mounting pads.


(A) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

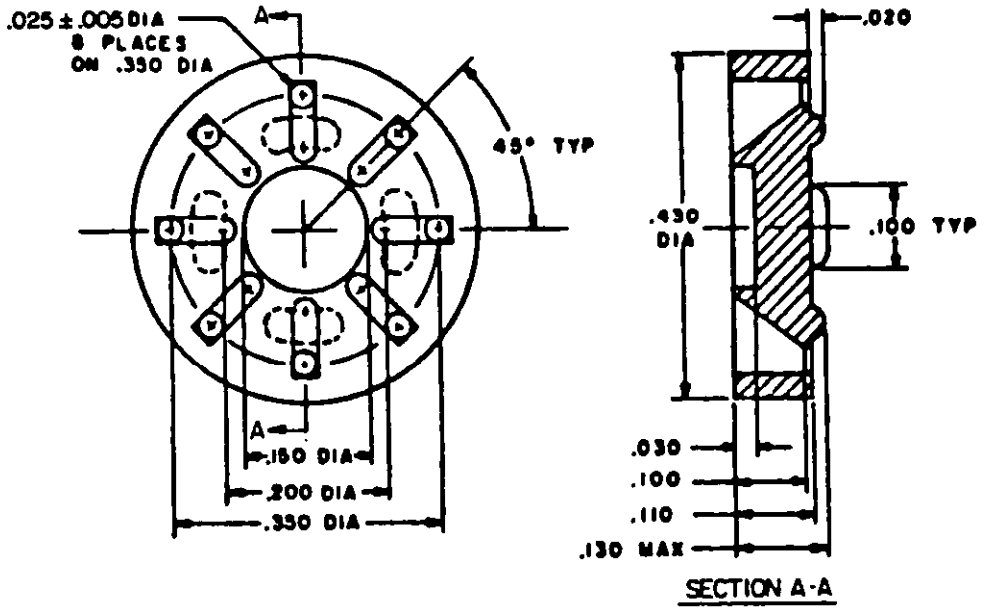

INCHES	MM
.005	0.13
.020	0.51
.025	0.64
.030	0.76
.100	2.54
.110	2.79
.130	3.30
.150	3.81
.200	5.08
.350	8.89
.430	10.92

M38527/04-003

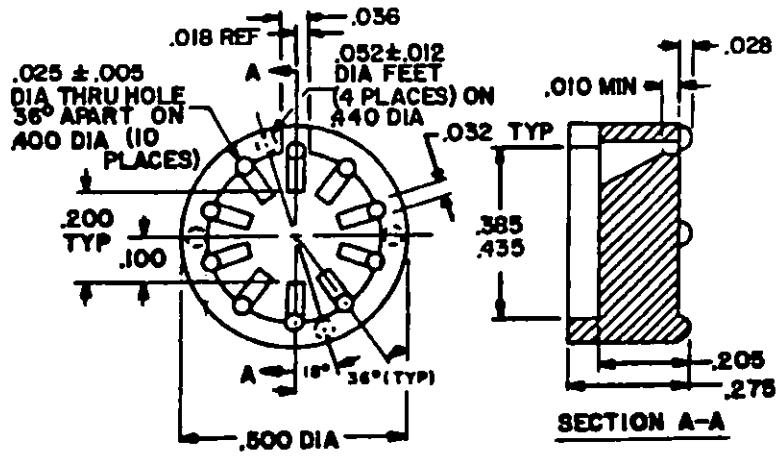


INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.012	0.30
.018	0.46
.025	0.64
.028	0.71
.032	0.81
.036	0.91
.052	1.32
.100	2.54
.200	5.08
.205	5.21
.275	6.99
.385	9.78
.400	10.16
.435	11.05
.440	11.18
.500	12.70

M38527/04-004


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

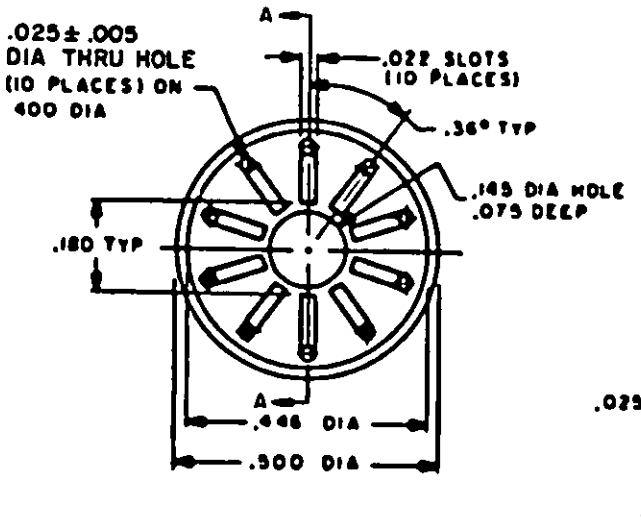

INCHES	MM
.005	0.13
.010	0.25
.015	0.38
.022	0.56
.025	0.64
.075	1.90
.145	3.68
.150	3.81
.180	4.57
.350	8.89
.400	10.16
.446	11.33
.500	12.70

M38527/04-005

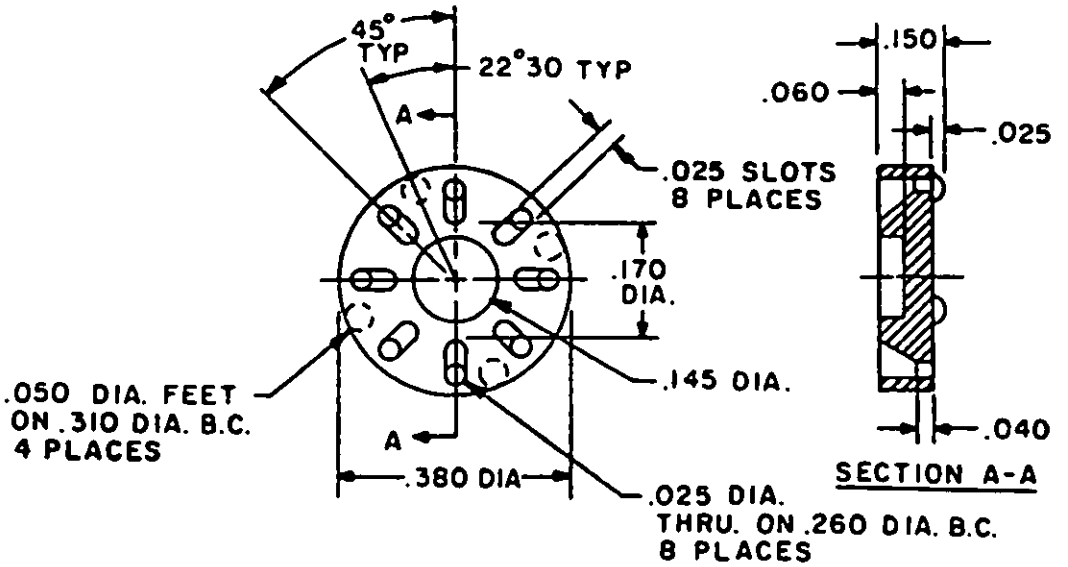


Ⓐ INCHES	MM
.025	0.64
.040	1.02
.050	1.27
.060	1.52
.145	3.68
.150	3.81
.170	4.32
.260	6.60
.310	7.87
.380	9.65

M38527/04-006


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

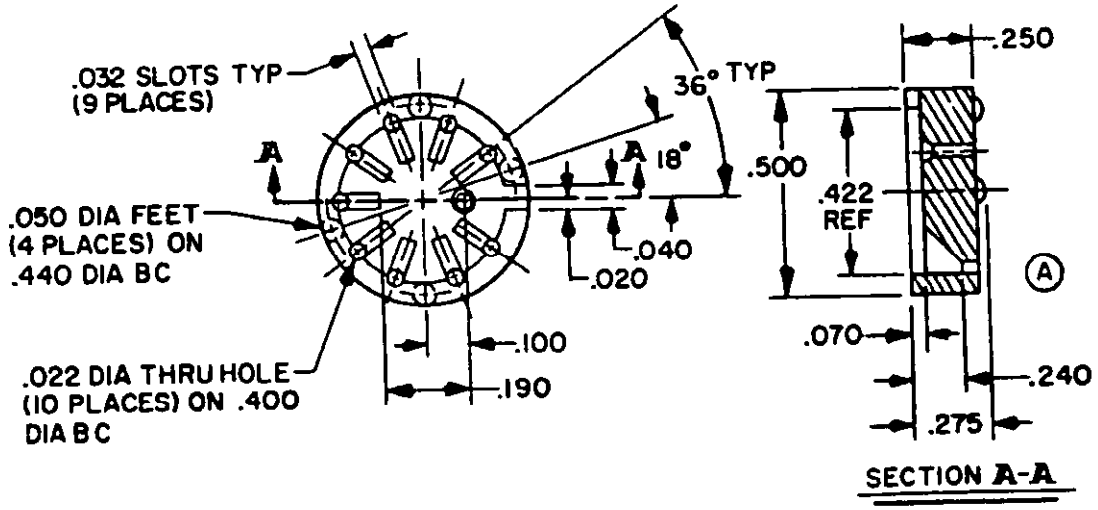

INCHES	MM
.020	0.51
.022	0.56
.032	0.81
.040	1.02
.050	1.27
.070	1.78
.100	2.54
.190	4.83
.240	6.10
.250	6.35
.275	6.99
.400	10.16
.422	10.72
.440	11.18
.500	12.70

M38527/04-007

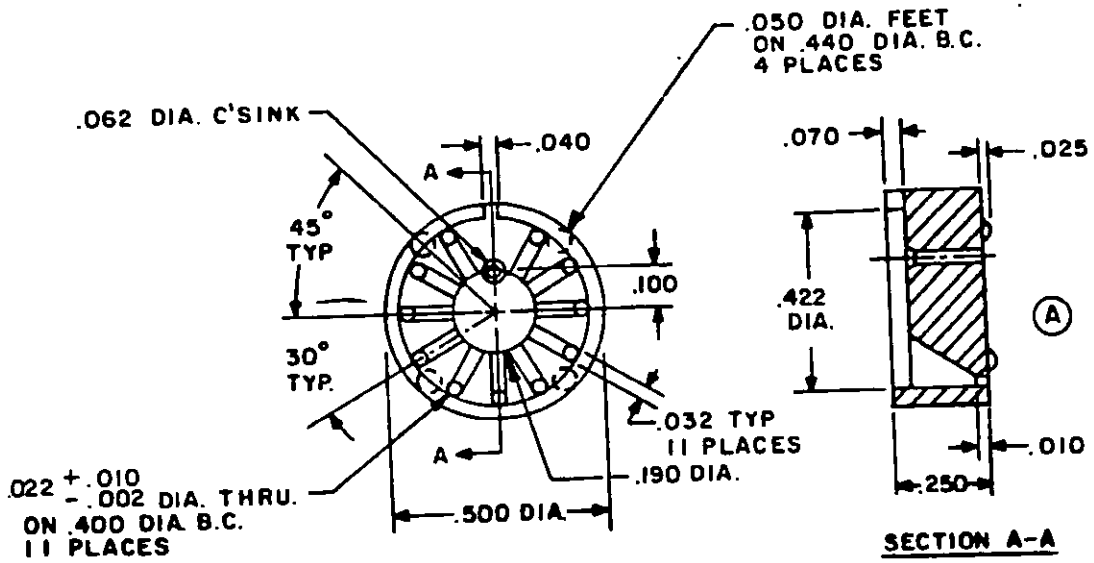


INCHES	MM
.002	0.51
.010	0.25
.022	0.56
.025	0.64
.032	0.81
.040	1.02
.050	1.27
.062	1.57
.070	1.78
.100	2.54
.190	4.83
.250	6.35
.400	10.16
.422	10.72
.440	11.18
.500	12.70

M38527/04-008


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

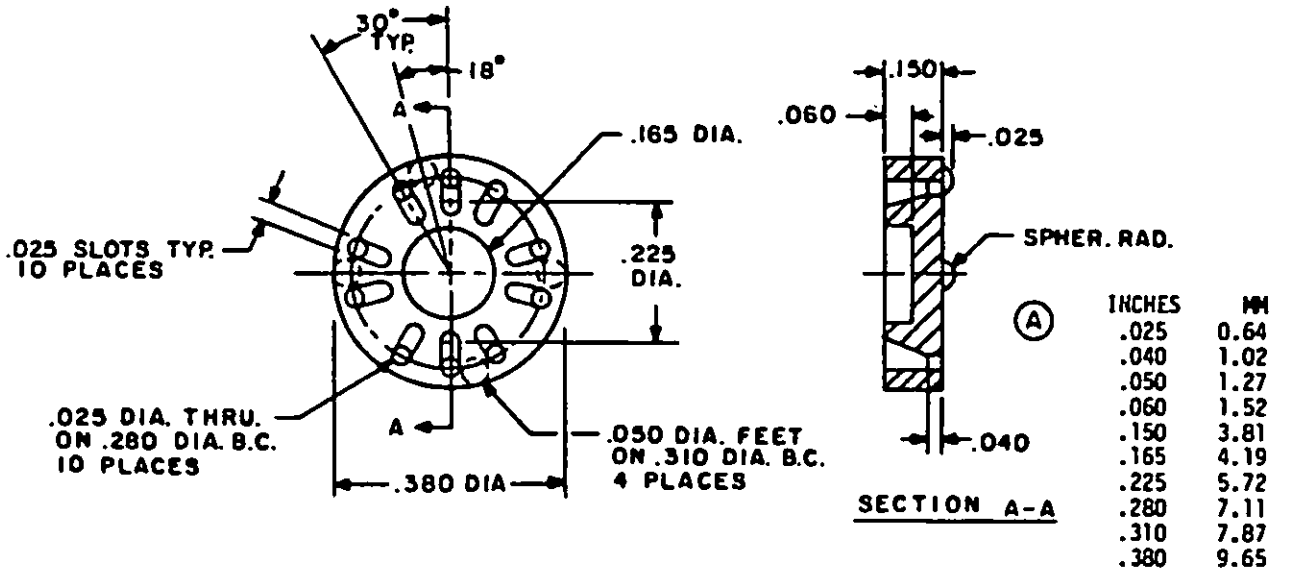

INCHES	MM
.025	0.64
.040	1.02
.050	1.27
.060	1.52
.150	3.81
.165	4.19
.225	5.72
.280	7.11
.310	7.87
.380	9.65

M38527/04-009

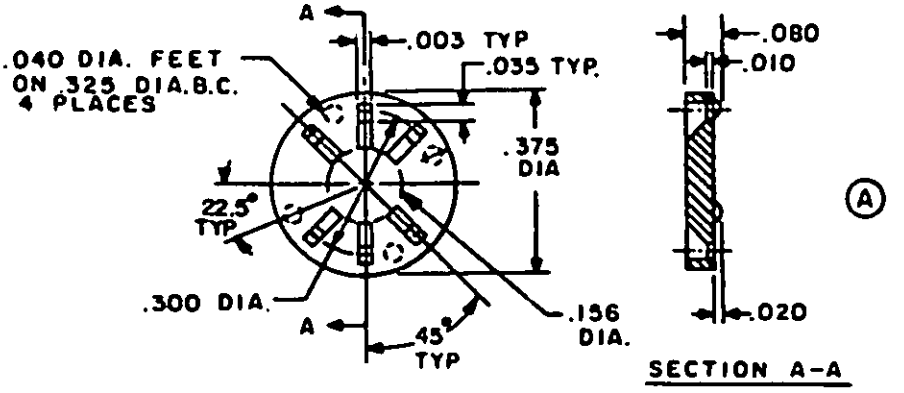


INCHES	MM
.010	0.25
.020	0.51
.030	0.76
.035	0.89
.040	1.02
.080	2.03
.156	3.96
.300	7.62
.325	8.26
.375	9.53

M38527/04-010


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

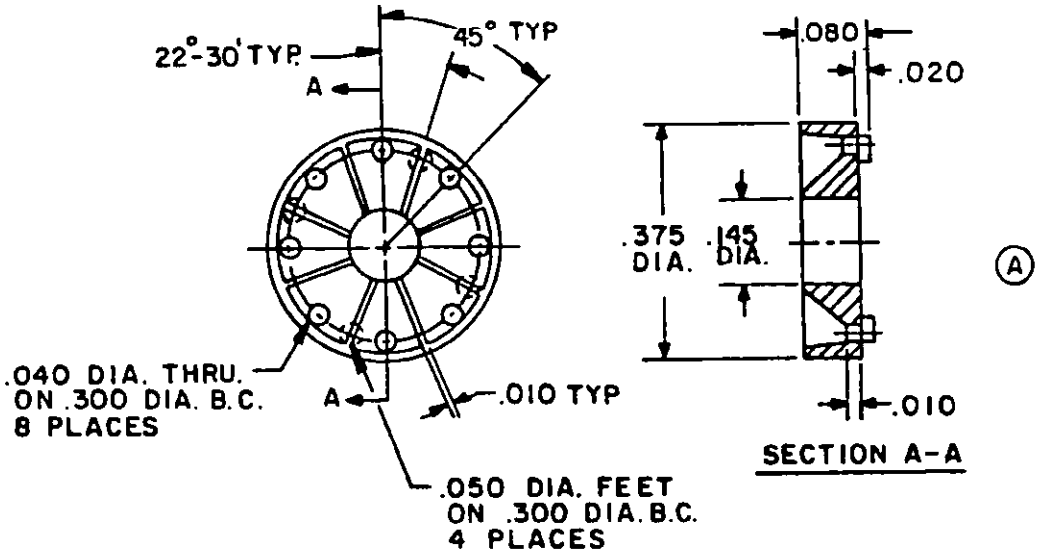

INCHES	MM
.010	0.25
.020	0.51
.040	1.02
.050	1.27
.080	2.03
.145	3.68
.300	7.62
.375	9.53

M38527/04-011

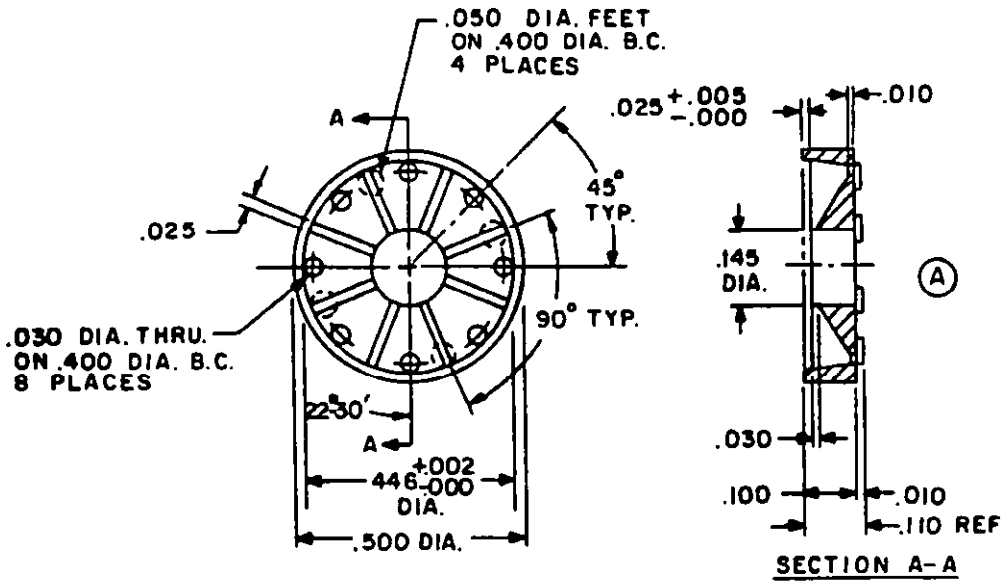


INCHES	MM
.002	0.05
.005	0.13
.010	0.25
.025	0.64
.030	0.76
.050	1.27
.100	2.54
.110	2.79
.145	3.68
.400	10.16
.446	11.33
.500	12.70

M38527/04-012


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

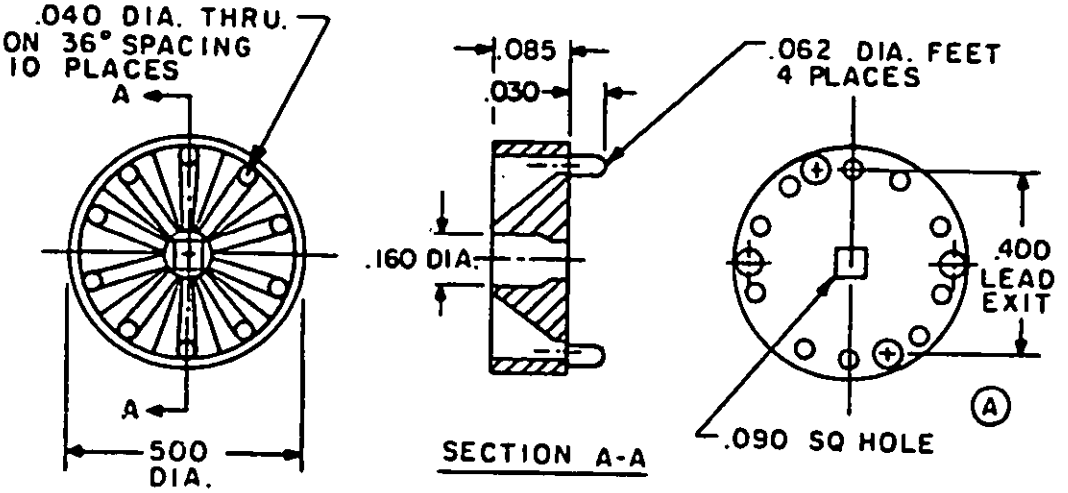

INCHES	MM
.030	0.76
.040	1.02
.062	1.57
.085	2.16
.090	2.29
.160	4.06
.400	10.16
.500	12.70

M38527/04-013

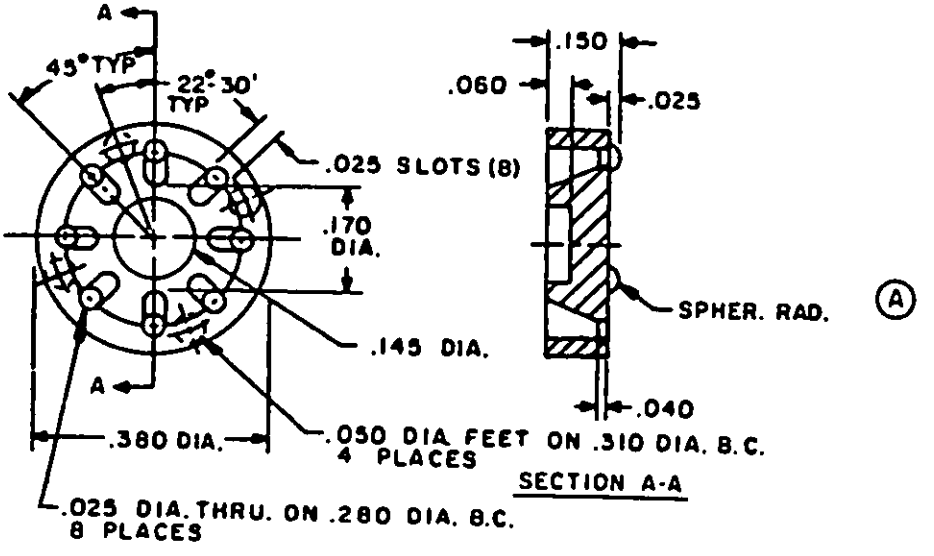


INCHES	MM
.025	0.64
.040	1.02
.050	1.27
.060	1.52
.145	3.68
.150	3.81
.170	4.32
.280	7.11
.310	7.87
.380	9.65

M38527/04-014

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

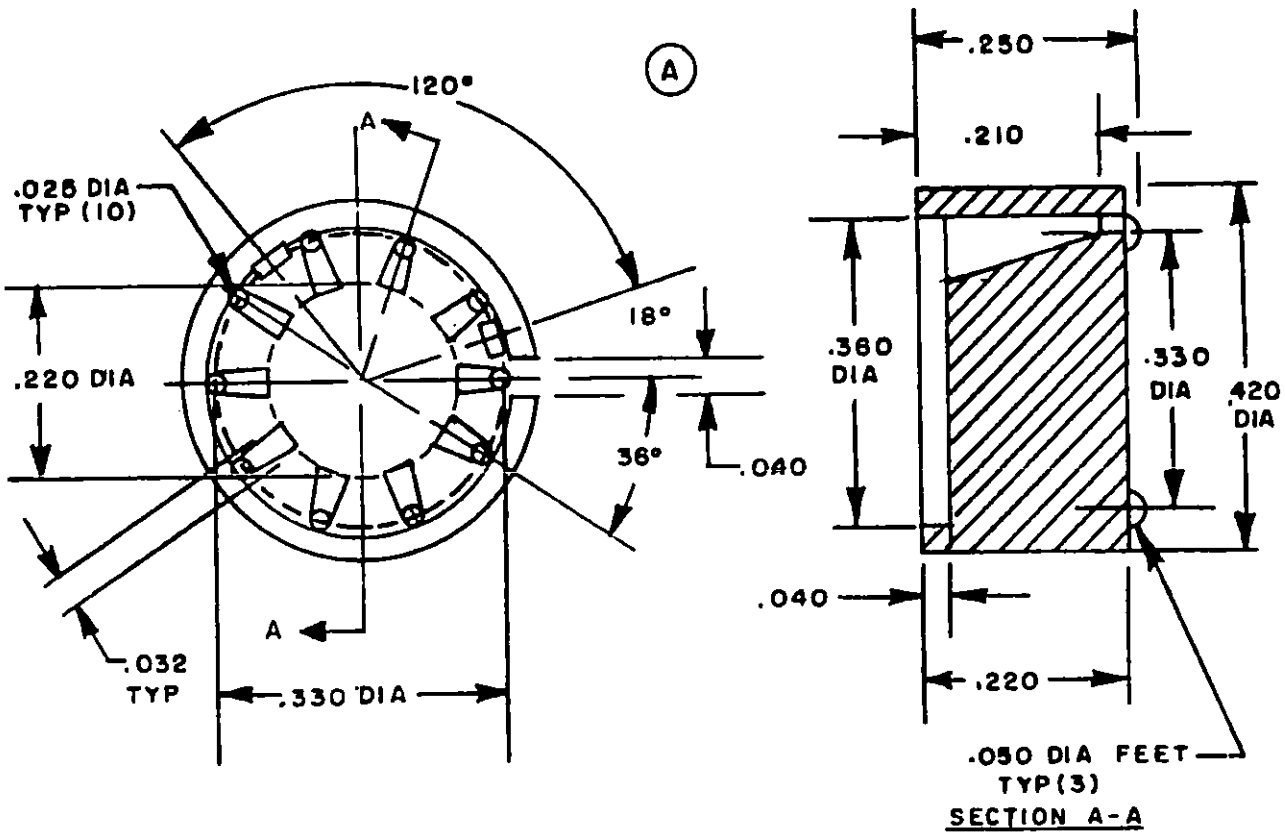


M38527/04-015

INCHES	MM
.025	0.64
.032	0.81
.040	1.02
.050	1.27
.210	5.33
.220	5.59
.250	6.35
.330	8.38
.360	9.14
.420	10.67

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

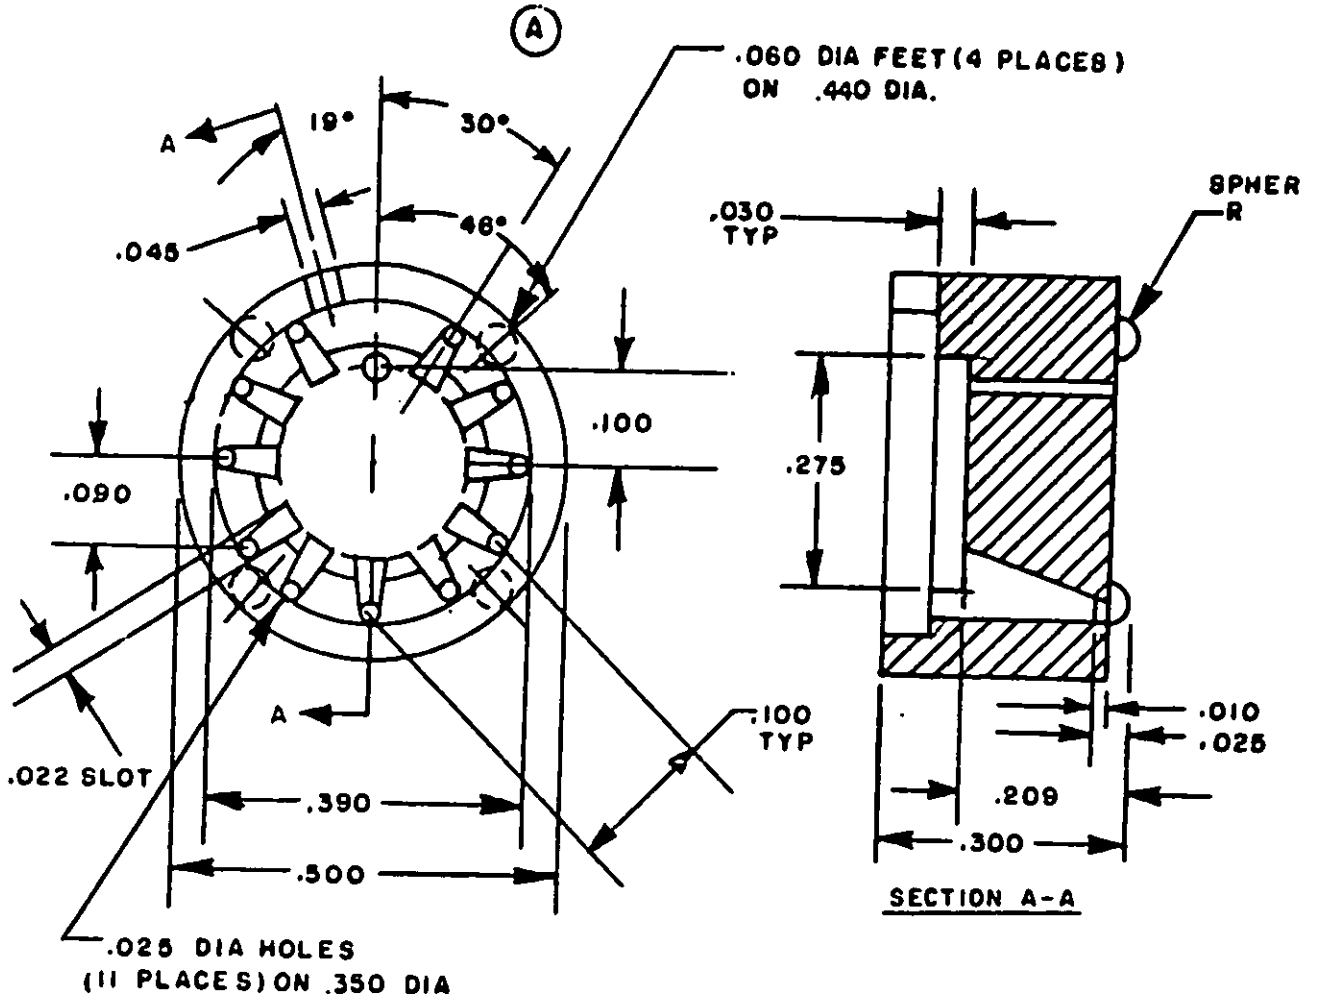


M38527/04-016

INCHES	MM
.010	0.25
.022	0.56
.025	0.64
.030	0.76
.045	1.14
.060	1.52
.090	2.29
.100	2.54
.275	6.99
.300	7.62
.350	8.89
.390	9.91
.440	11.18
.500	12.70


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

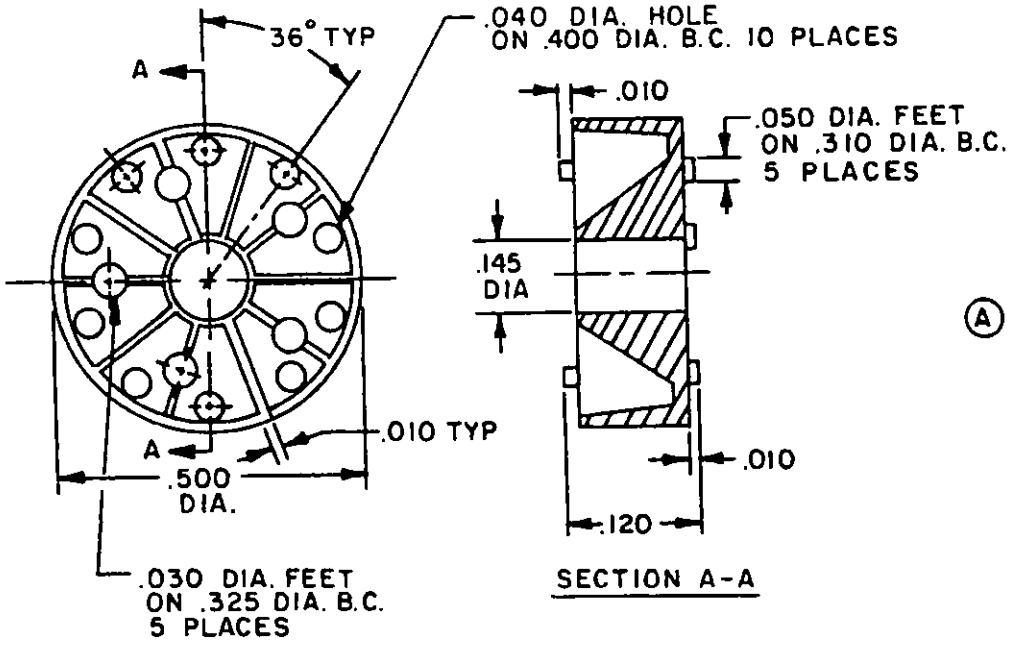

INCHES	MM
.010	0.25
.030	0.76
.040	1.02
.050	1.27
.120	3.05
.145	3.68
.310	7.87
.325	8.26
.400	10.16
.500	12.70

M38527/04-017

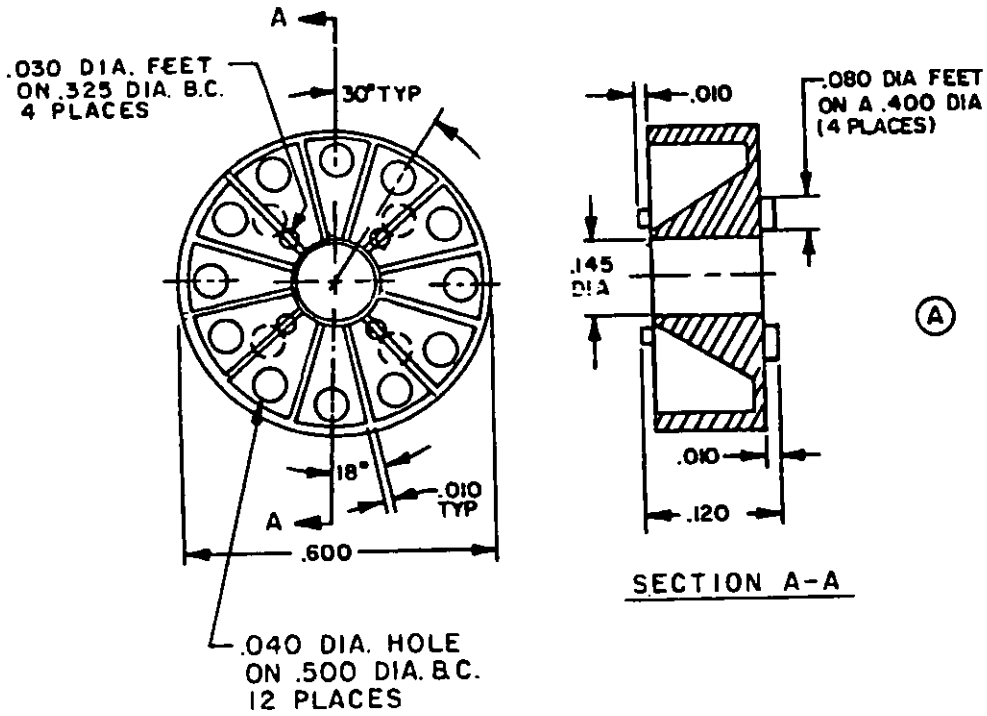


INCHES	MM
.010	0.20
.030	0.76
.040	1.02
.080	2.03
.120	3.05
.145	3.68
.325	8.26
.400	10.16
.500	12.70
.600	15.24

M38527/04-018

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

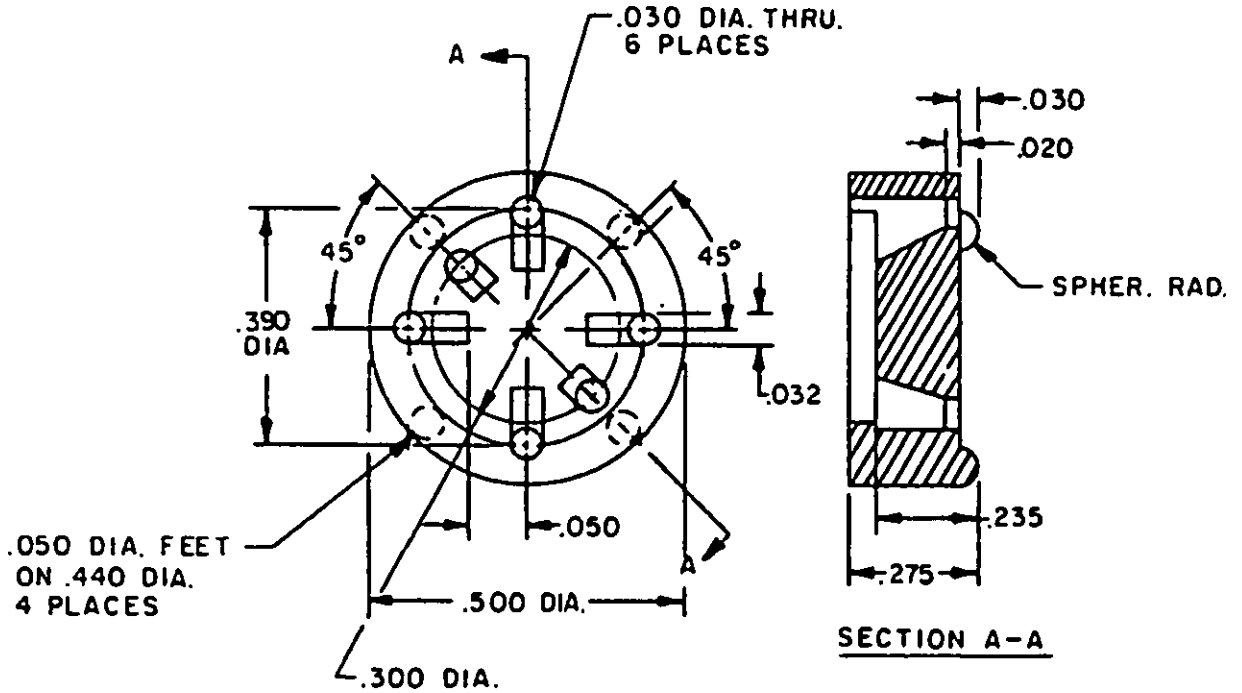

M30527/04-019

INCHES	MM
.020	0.51
.030	0.76
.032	0.81
.050	1.27
.235	5.97
.275	6.99
.300	7.62
.390	9.91
.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals, ±1° on angular, a .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is permitted on the side.

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Material: Diallyl phthalate or nylon.

Part number: M38527/04- (and dash number from table I).

A TABLE I. Supersession information.

Dash number 1/ M38527/04-	Superseded part number per MIL-M-38527/1 1 April 1972 2/	Superseded part number per MIL-M-38527 11 February 1974
001N	---	M38527-08N
001D	---	M38527-08D
002N	M38527/1-26x2	M38527-09N
002D	---	M38527-09D
003N	---	---
003D	---	---
004N	---	M38527-10N
004D	---	M38527-10D
005N	---	---
005D	---	---
006N	---	---
006D	M38527/1-27x1	---
007N	M38527/1-28x2	---
007D		---
008N	---	---
008D	---	---
009N	---	---
009D	M38527/1-29x1	---
010N	---	---
010D	---	---
011N	---	---
011D	---	---
012N	---	---
012D	---	---
013N	---	---
013D	---	---
014N	---	---
014D	---	---
015N	---	---
015D	---	---
016N	---	---
016D	---	---
017N	---	---
017D	---	---
018N	---	---
018D	---	---
019N	---	---
019D	---	---

1/ Complete dash number example: M38527/04-001N.

2/ "x" represents any of the color codes in the previous part numbers (i.e., N,B,R,C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 99
DLA - ES

User activities:
Navy - AS, CG, MC, SH

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5999-0129-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:08Z
Check the source to verify that this is the current version before use.