[INCH-POUND]


MIL-M-38527/5D
10 Sep 1990
SUPERSEDING
MIL-M-38527/5C
15 December 1988

MILITARY SPECIFICATION SHEET

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 OR .230 DIAMETER PIN CENTER TO A GRID PATTERN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-M-38527.

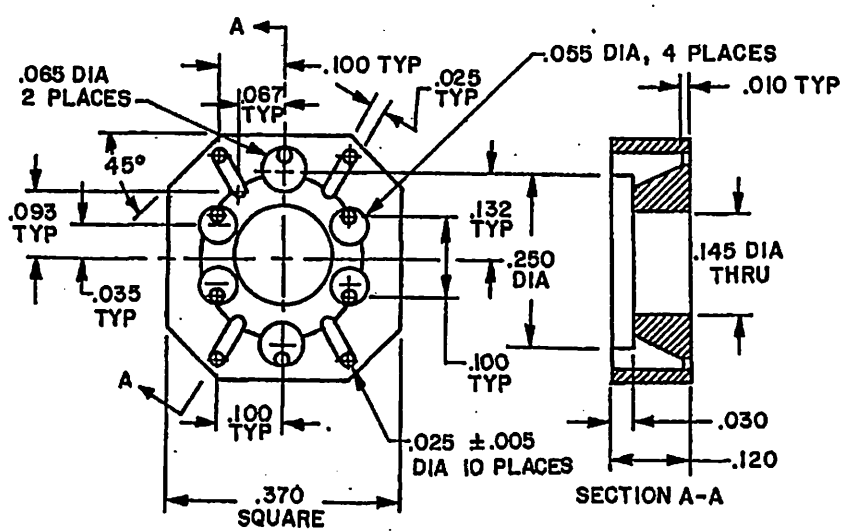

Inches	mm
.005	0.13
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.055	1.40
.065	1.65
.067	1.70
.093	2.36
.100	2.54
.120	3.05
.132	3.35
.145	3.68
.250	6.35
.370	9.40


M38527/05-001

FIGURE 1. Mounting pads.

Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

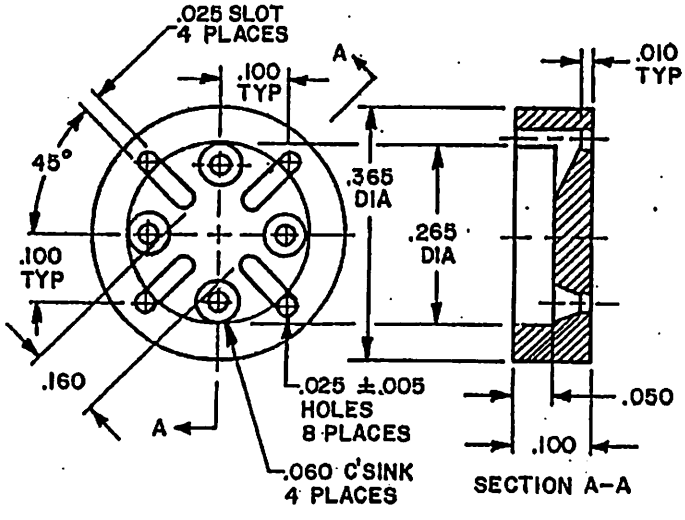


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.050	1.27
.060	1.52
.100	2.54
.160	4.06
.265	6.73
.365	9.27

M38527/05-002


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.

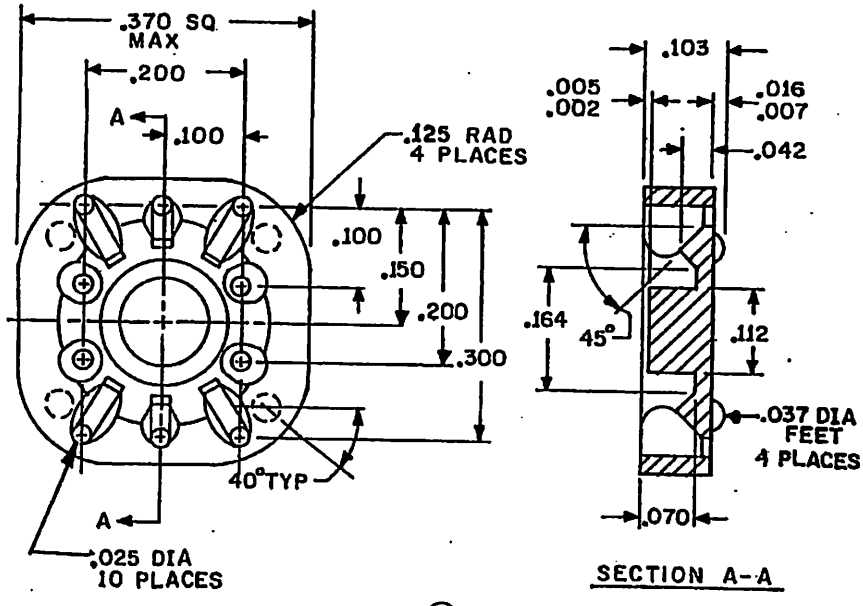

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40

Ⓓ M38527/05-003

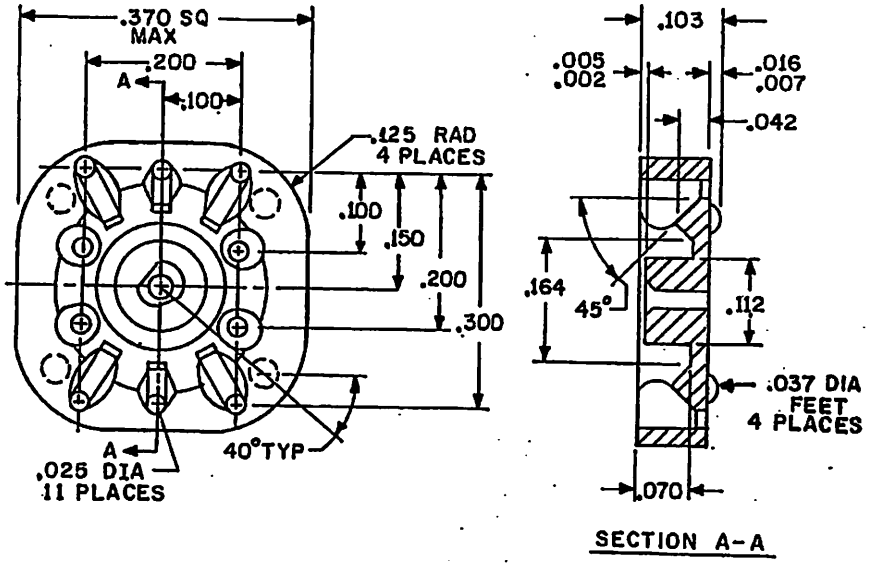


Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40

Ⓓ M38527/05-004


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the currentversion before use.

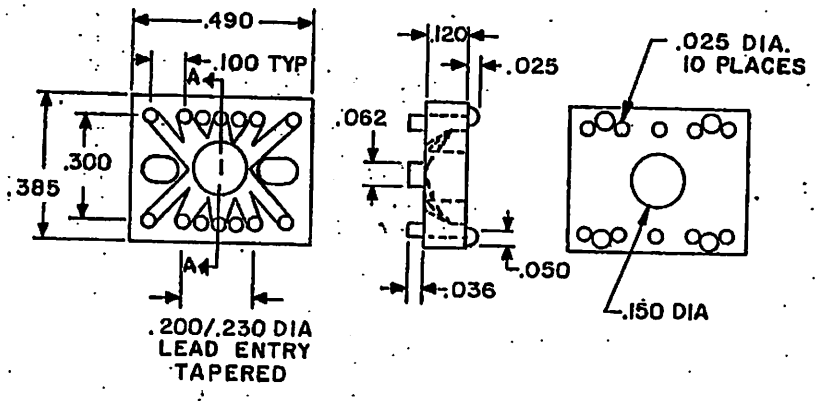


Inches	mm
.025	0.64
.036	0.91
.050	1.27
.062	1.57
.100	2.54
.125	3.18
.150	3.81
.200	5.08
.230	5.84
.300	7.62
.385	9.78
.490	12.45

M38527/05-005

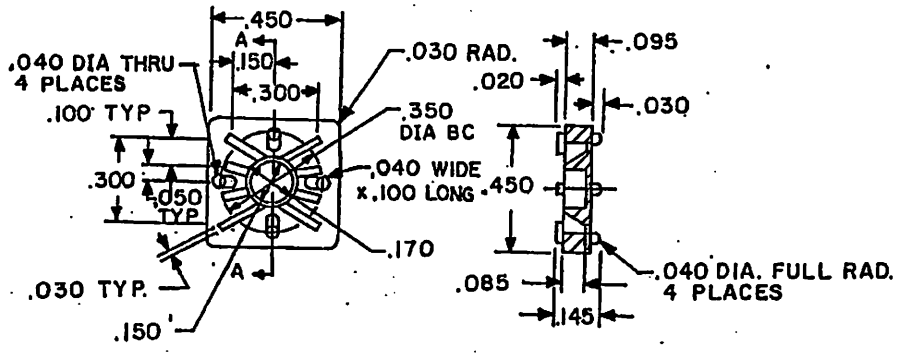

Inches	mm
.020	0.51
.030	0.76
.040	1.02
.050	1.27
.085	2.16
.095	2.41
.100	2.54
.145	3.68
.150	3.81
.170	4.32
.300	7.62
.350	8.89
.450	11.42

M38527/05-006

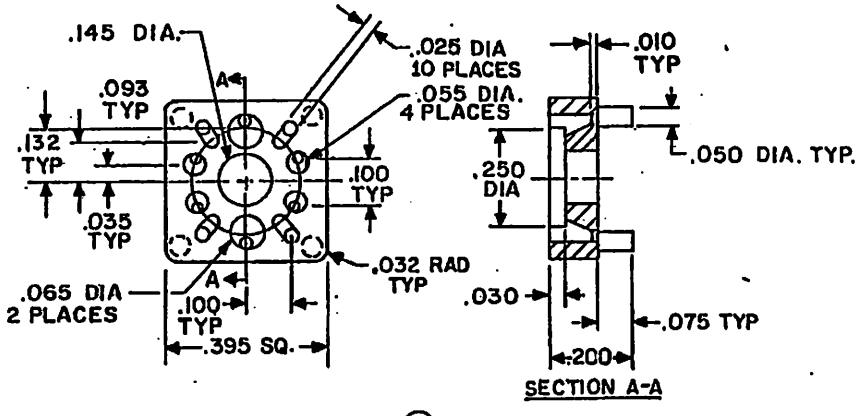


Inches	mm
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.065	1.40
.075	1.91
.093	2.36
.100	2.54
.145	3.68
.152	3.86
.200	5.08
.250	6.35
.395	10.03

Ⓓ M38527/05-007


FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.

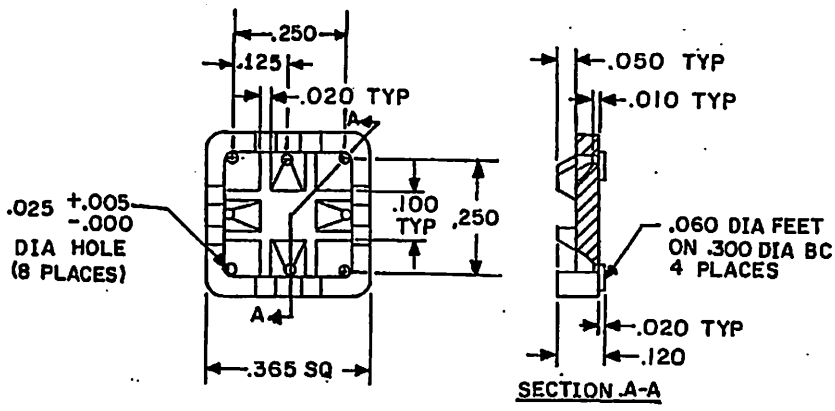

Inches	mm
.010	0.25
.020	0.51
.050	1.27
.100	2.54
.120	3.05
.365	9.27

Ⓓ M38527/05-008

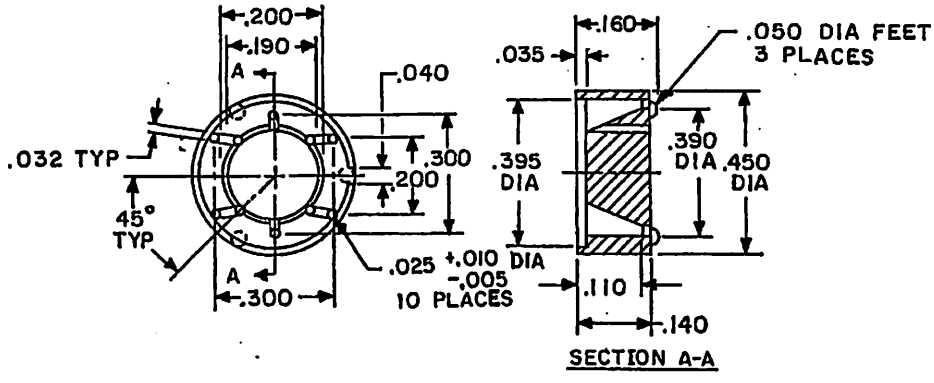


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.032	0.81
.035	0.89
.040	1.02
.050	1.27
.110	2.79
.140	3.56
.160	4.06
.190	4.83
.200	5.08
.300	7.62
.390	9.91
.395	10.03
.450	11.43

M38527/05-009

FIGURE 1. Mounting pads - Continued.


Source: https://assist.dla.mil -- Downloaded: 202640-21T15:09Z
Check the source to verify that this is the current version before use.

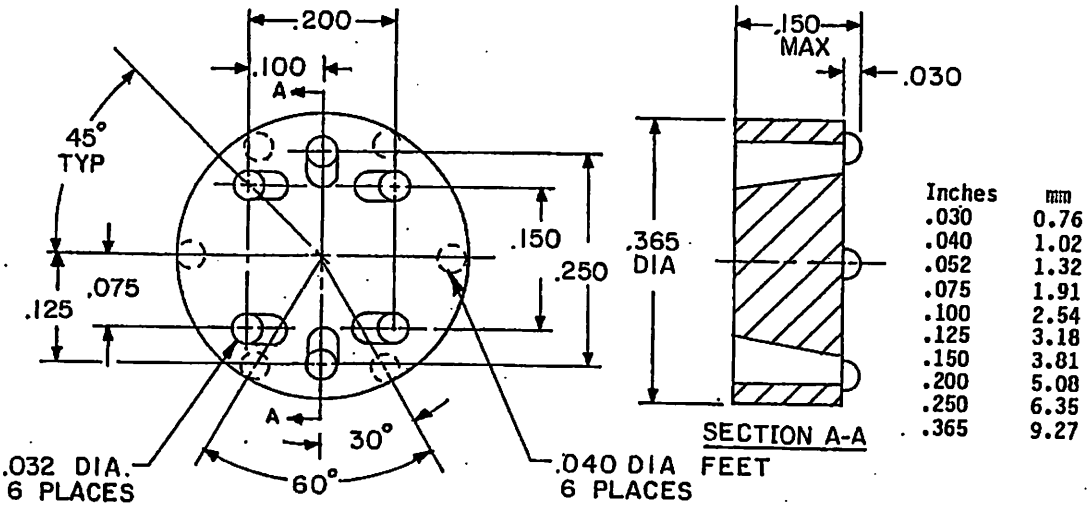

M38527/05-010

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

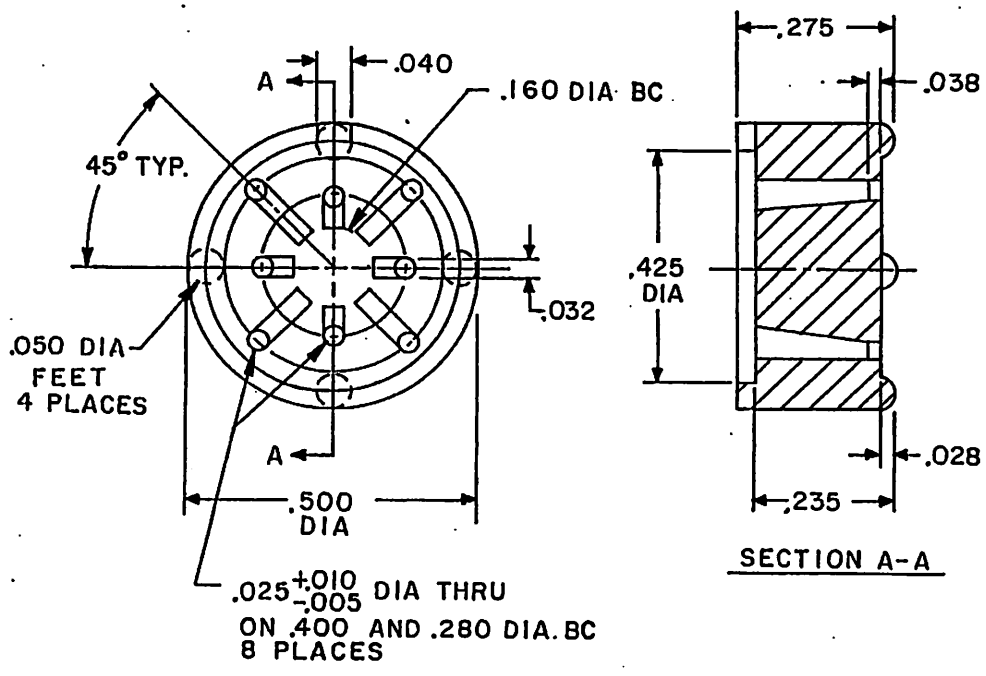


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.028	0.71
.032	0.81
.038	0.97
.040	1.02
.050	1.27
.160	4.06
.235	5.97
.275	6.99
.280	7.11
.400	10.16
.425	10.80
.500	12.70

M38527/05-011

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.

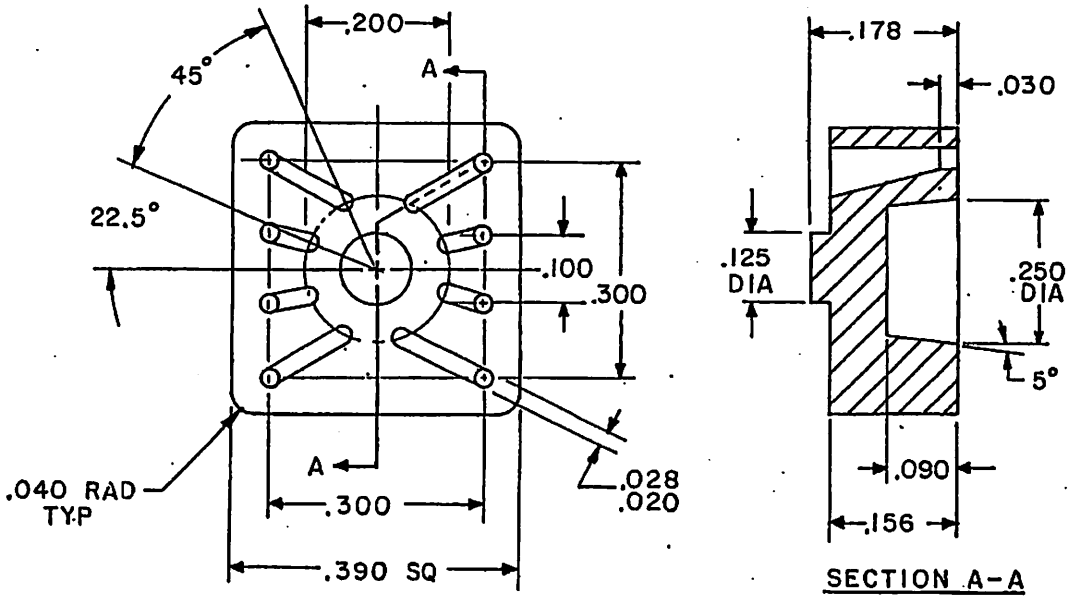


Inches	mm
.020	0.51
.028	0.71
.030	0.76
.040	1.02
.090	2.29
.100	2.54
.125	3.18
.156	3.96
.178	4.52
.200	5.08
.250	6.35
.300	7.62
.390	9.91

M38527/05-012

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.

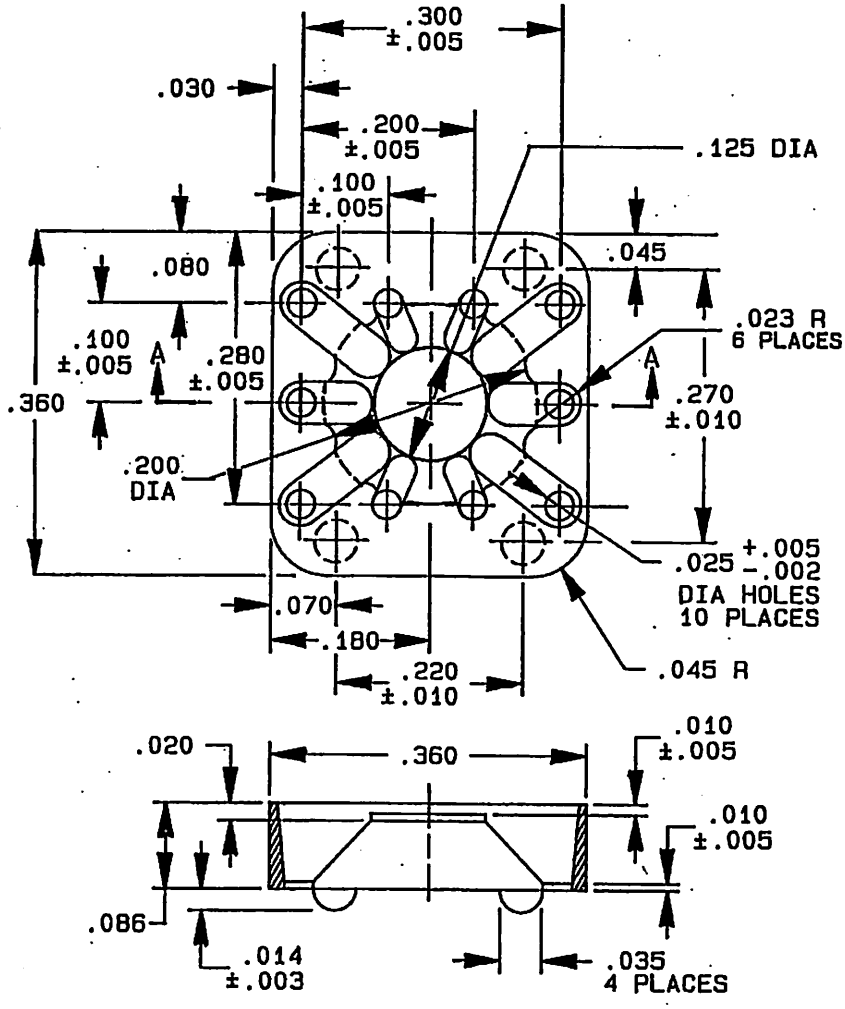


Inches	mm
.002	0.05
.003	0.08
.005	0.13
.010	0.25
.014	0.36
.020	0.51
.023	0.58
.025	0.64
.030	0.76
.035	0.89
.045	1.14
.070	1.78
.080	2.03
.086	2.18
.100	2.54
.125	3.18
.180	4.57
.200	5.08
.220	5.59
.270	6.86
.300	7.62
.360	9.14

SECTION A-A

Ⓓ M38527/05-013

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.

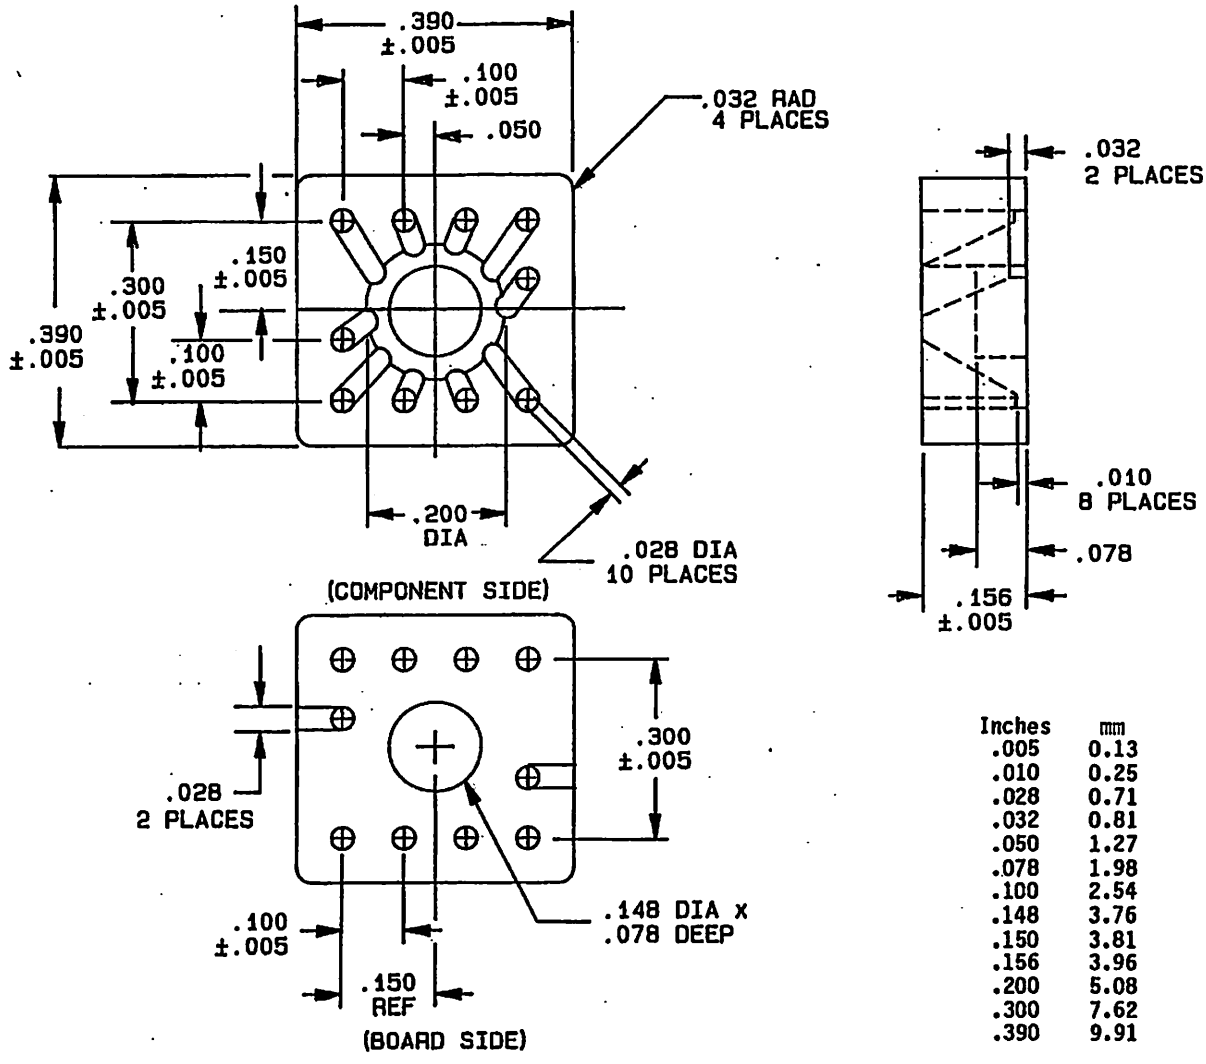

Inches	mm
.005	0.13
.010	0.25
.028	0.71
.032	0.81
.050	1.27
.078	1.98
.100	2.54
.148	3.76
.150	3.81
.156	3.96
.200	5.08
.300	7.62
.390	9.91

Ⓓ M38527/05-014

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals, ±1° on angular, a .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is permitted on the side.

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-21T15:09Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Design and configuration: See figure 1.

Ⓓ Material: Diallyl phthalate (D), nylon (N), or polyphenylene sulfide (S).

Ⓓ Part or Identifying Number (PIN): M38527/05- (plus dash number from figure 1 and material letter as shown above). Example: M38527/05-001D.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 19, 99
DLA - ES

User activities:
Navy - AS, CG, MC, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0277)

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:09Z
Check the source to verify that this is the current version before use.