[INCH-POUND]


MIL-M-38527/6D
27 Jan 1992
SUPERSEDING
MIL-M-38527/6C
27 December 1989

MILITARY SPECIFICATION SHEET

MOUNTING PAD, ELECTRICAL-ELECTRONIC COMPONENT, RELAY AND DISCRETE COMPONENT

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-M-38527

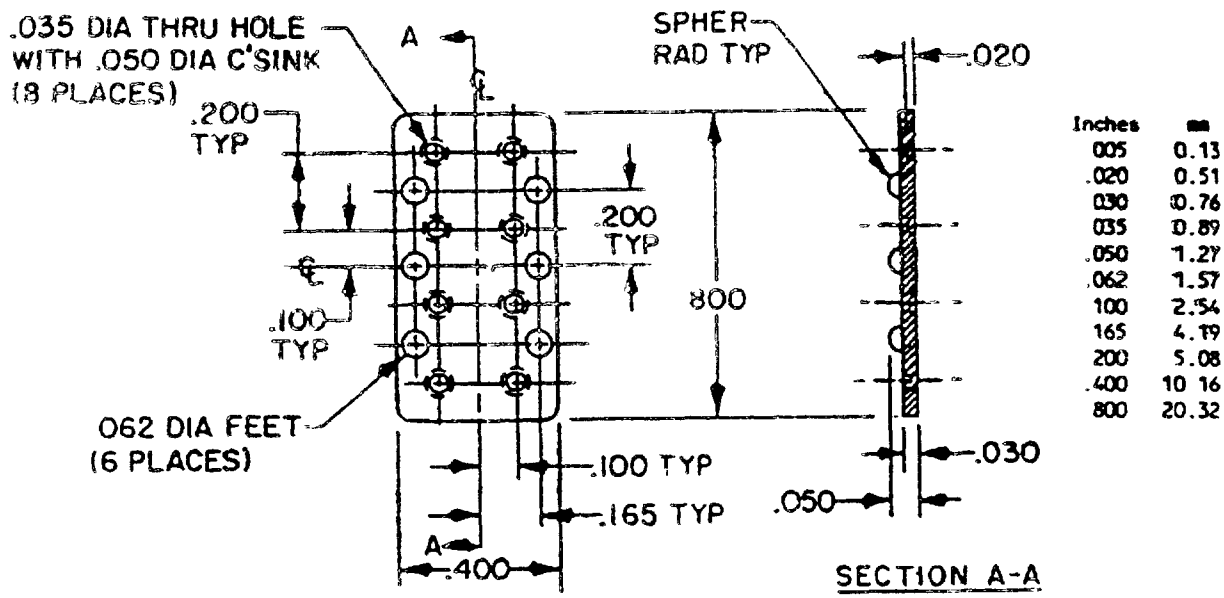

Inches	mm
005	0.13
.020	0.51
030	0.76
035	0.89
.050	1.27
.062	1.57
100	2.54
165	4.19
200	5.08
.400	10 16
800	20.32


M38527/06-001


FIGURE 1 Mounting pads

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

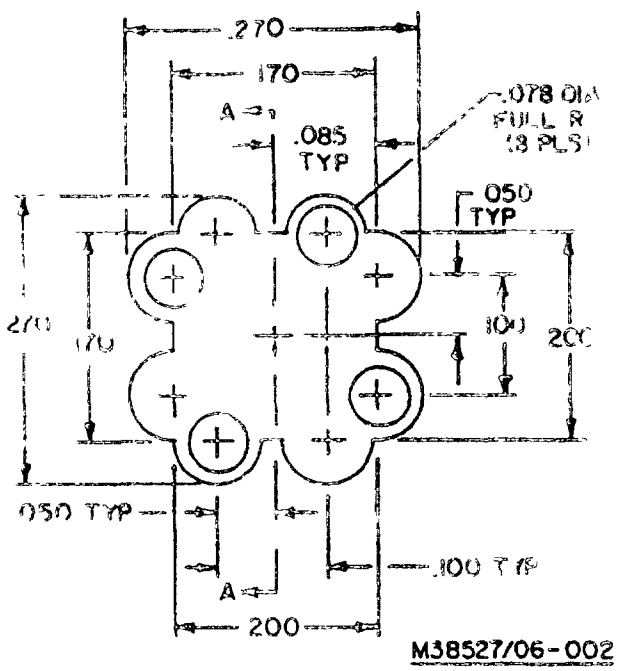


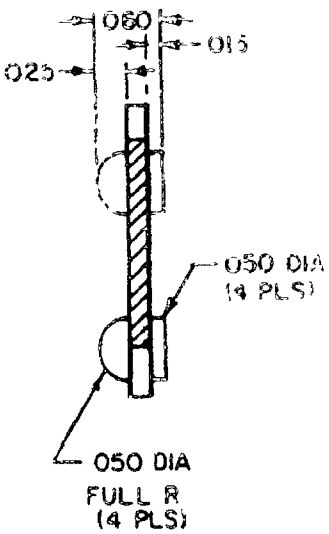


Inches	mm
.015	0.38
.025	0.64
.050	1.27
.060	1.52
.078	1.98
.085	2.16
.100	2.54
.170	4.32
.200	5.08
.270	6.86

FIGURE 1 Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

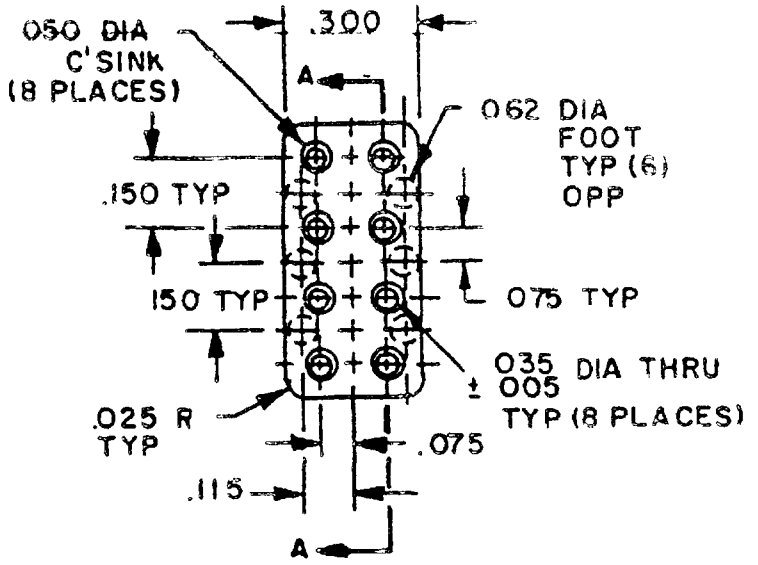

Ⓓ M38527/06-003

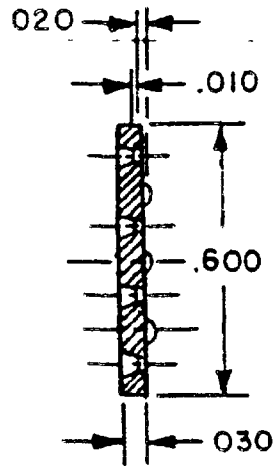


Ⓓ SECTION A-A

Inches	mm
.005	0.13
010	0.25
020	0.51
.025	0.64
030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.90
115	2 92
150	3.81
.300	7.62
.600	15.24

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

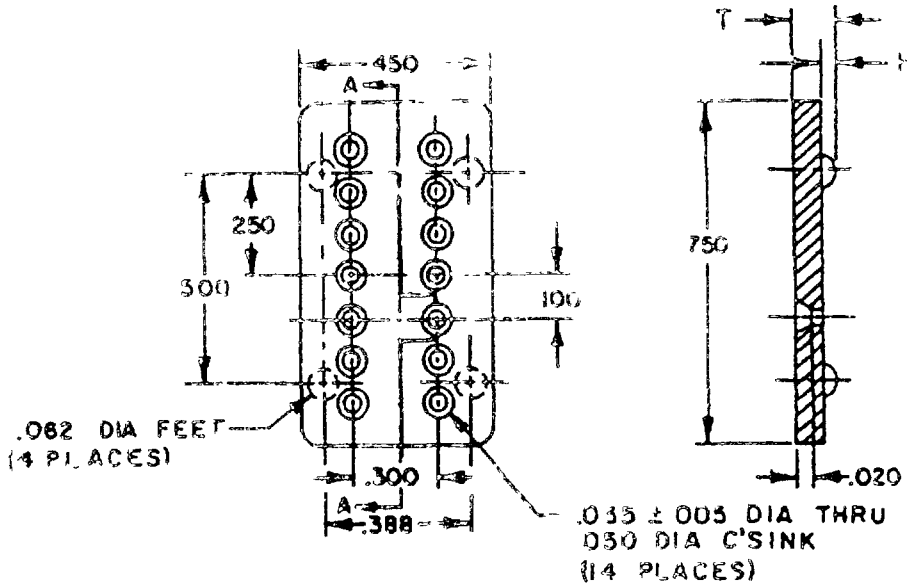


Part number M38527/06-	H	T
004	—	.030 (0.76)
005	.020 Min (0.51)	.065 Max (1.65)
006	050 (1 27)	080 (2.03)

Inches	mm
020	0 51
025	0.64
.035	0.89
040	1.27
.062	1.57
100	2.54
.250	6.35
.300	7.62
388	9.86
450	11 43
750	19 05

FIGURE 1. Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.


Inches	mm
025	0 64
030	0 76
035	0 89
050	1 27
062	1 57
075	1.91
.100	2.54
300	7.62
450	11.43
.600	15 24
850	21 59

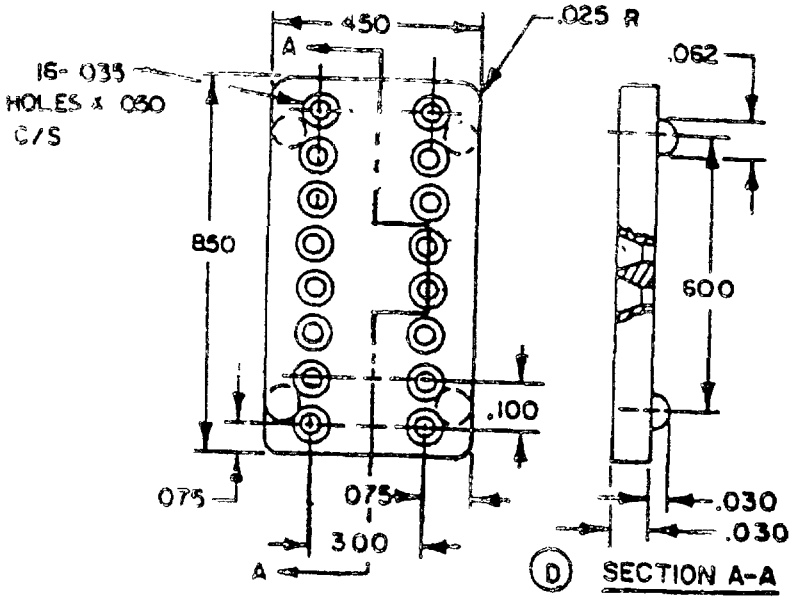

M38527/06-007

FIGURE 1. Mounting pads - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

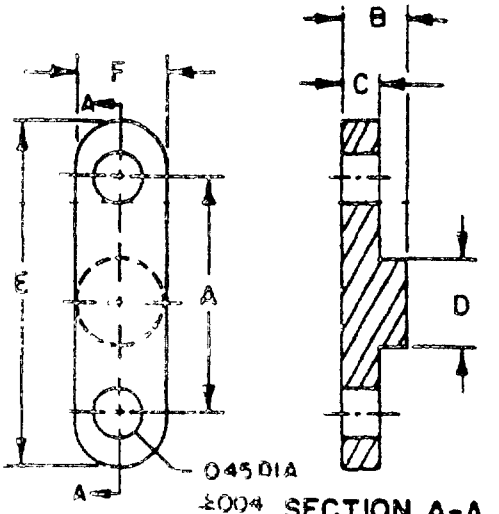

Part number M38527/06-	A	B	C	D	E	F
008	100 (2 54)	045 (1.14)	.022 (.54)	050/ 070 (1 27)(1 78)	180 (4 57)	090 (2.29)
009	.150 (3.81)	.045 (1.14)	.022 (.54)	090/ 125 (2 29)(3 18)	.270 (6 86)	.125 (3 18)
010	.200 (5.08)	.045 (1.14)	.022 (.54)	090 (2 29)	.290 (7.37)	.090 (2.89)
017	.250 (6.36)	.045 (1.14)	.026 (.82)	090 (2 29)	.340 (8.89)	.090 (2.29)
018	.300 (7.62)	.045 (1.14)	.026 (.82)	.140 (3 81)	.390 (9.91)	.090 (2.29)
019	.350 (8 90)	.045 (1.14)	.030 (.76)	.140 (3 81)	.440 (11.18)	.090 (2.29)
020	.400 (10.16)	.045 (1.14)	030 (76)	190 (4 82)	490 (12 45)	.090 (2.29)
021	500 (12.7)	.045 (1.14)	030 (.76)	190 (4.82)	590 (14.99)	.090 (2.29)


FIGURE 1. Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

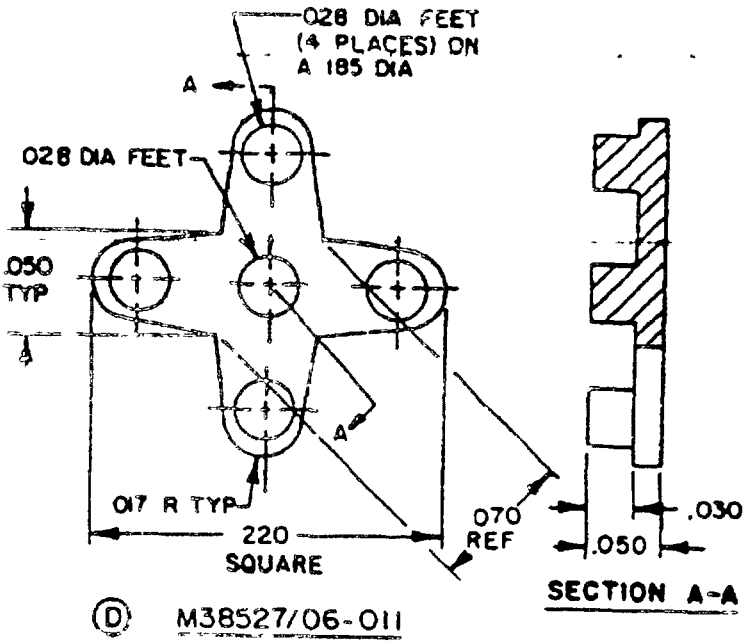

Inches	mm
.017	0.43
.028	0.71
.030	0.76
.050	1.27
.070	1.78
.185	4.70
.220	5.59

Ⓓ M38527/06-011

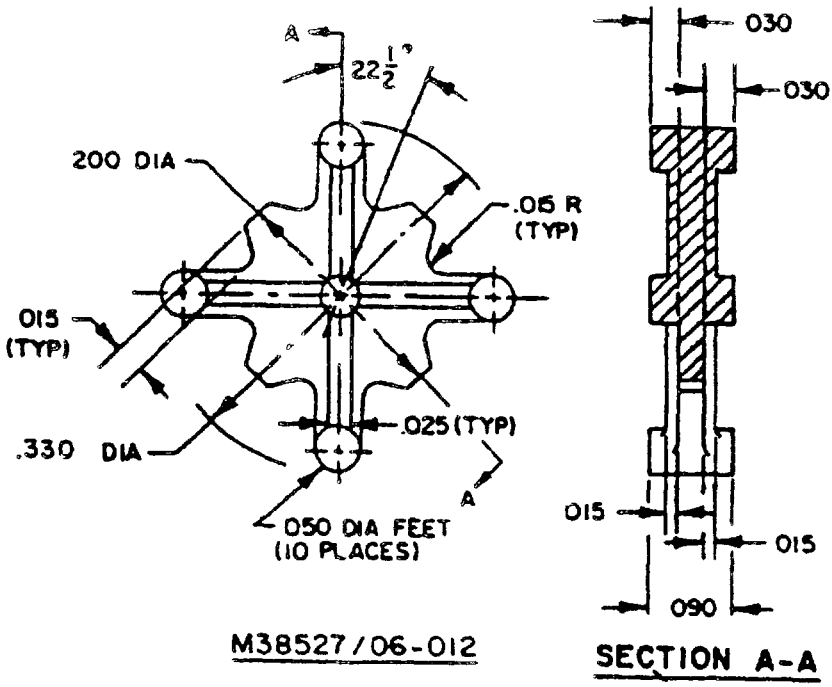


Inches	mm
.015	0.38
.025	0.64
.030	0.76
.050	1.27
.090	2.29
.200	5.08
.330	8.38


M38527/06-012

FIGURE 1. Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

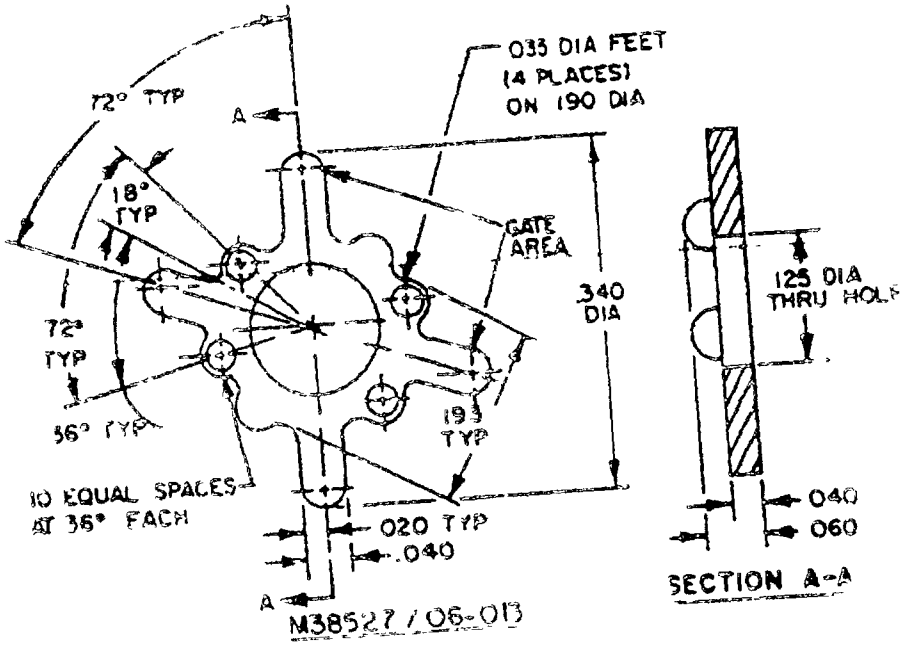


Inches	mm
.020	0.51
035	0.89
040	1.02
060	1 52
125	3 18
190	4 83
193	4 90
345	8 64

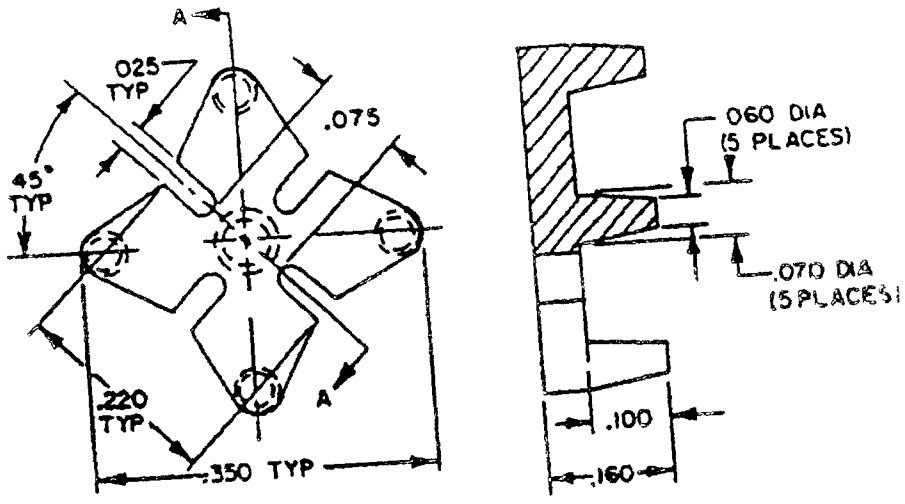


Inches	mm
025	0.64
.060	1.52
.070	1.78
.075	1.91
.100	2.54
.160	4.06
220	5.59
.350	8.89

FIGURE 1 Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

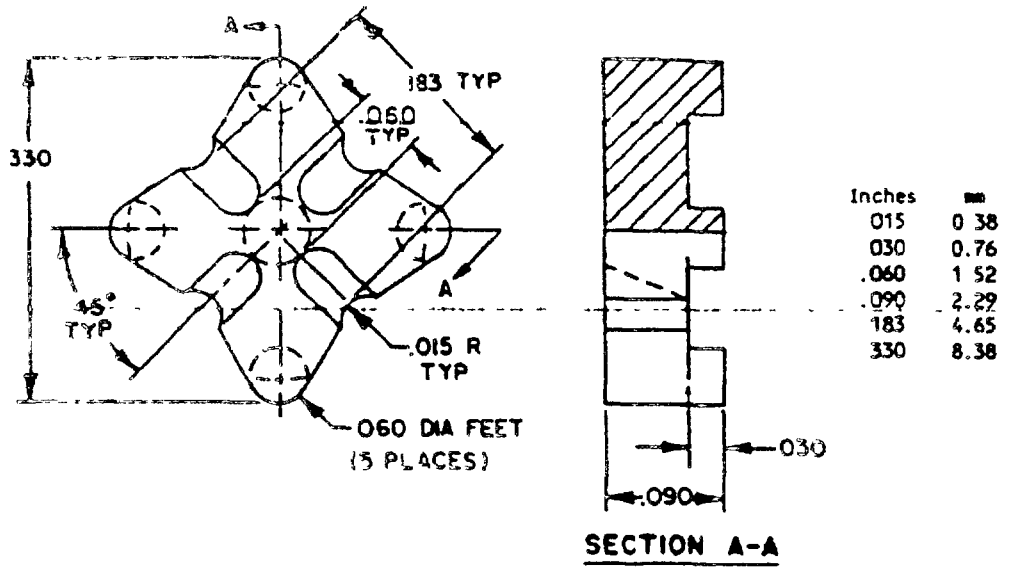


M38527/06-015

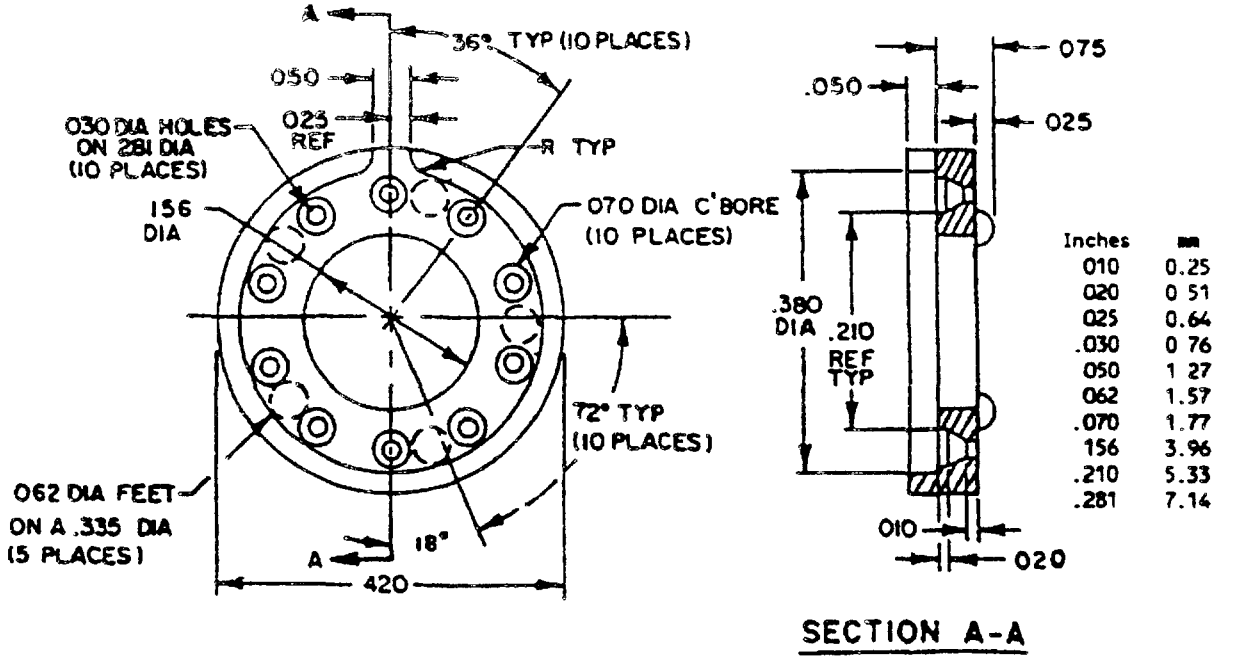

M38527/06-016

FIGURE 1. Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

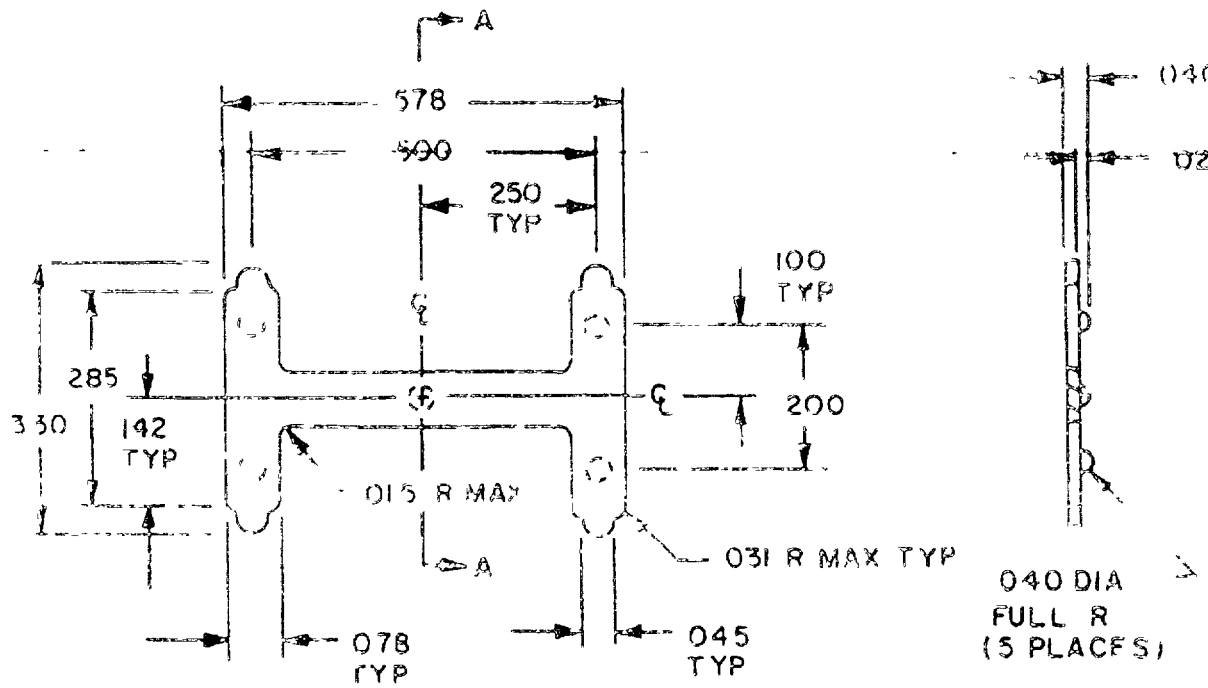


M38527/06-022

SECTION A-A

Inches	mm
.015	0.38
020	0.51
031	0.71
.040	1.02
.045	1.14
.078	1.98
100	2.54
142	3.61
.200	5.08
250	6.35
285	7.24
330	8.38
500	12.70
578	14.60

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

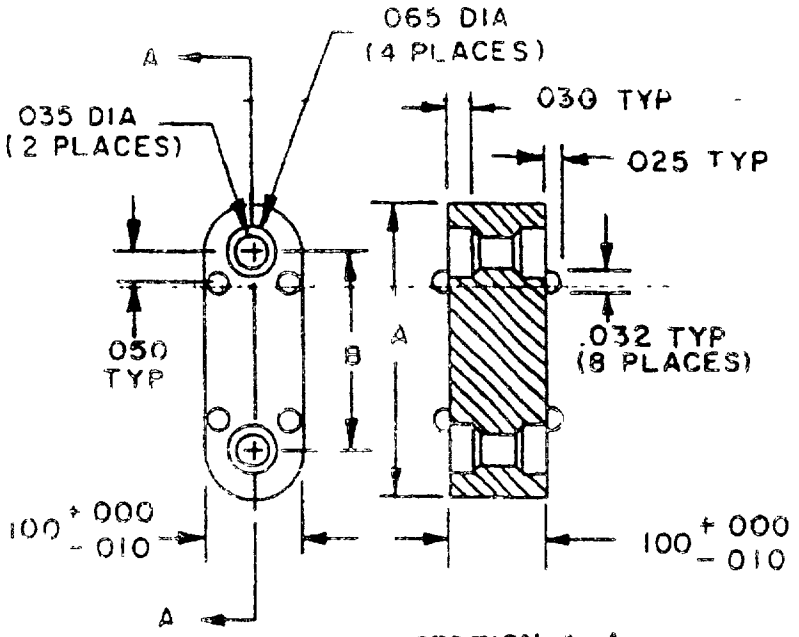


SECTION A-A

Part number M38527/06-	A	B
023	.300 (7.62)	200 (5.08)
024	350 (8.89)	250 (6.35)
025	400 (10.16)	300 (7.62)
026	450 (11.43)	350 (8.89)
027	500 (12.70)	400 (10.16)
028	600 (15.24)	500 (12.70)

Inches	mm
.025	0.64
030	0.76
.032	0.81
035	0.89
050	1.27
065	1.65
100	2.54

FIGURE 1. Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

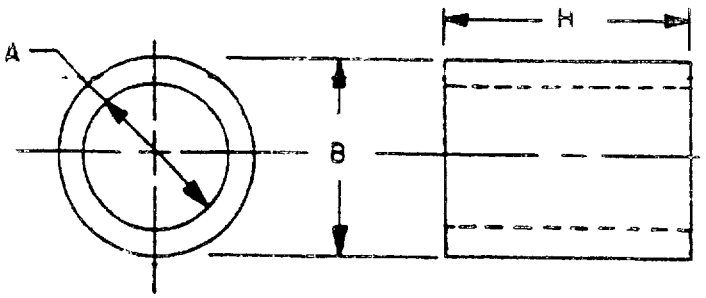


Part number M38527/06-	"A" dimension ± 005 (0 13 mm)	"B" dimension ± 005 (0 13 mm)	"H" dimension*
029	028 (0 71)	085 (2 16)	030 - 1 250 (0 76)-(31 75)
030	032 (0 81)	085 (2 16)	030 1 250
031	032 (0.81)	125 (3.18)	030 - 1 250
032	047 (1.19)	125 (3 18)	030 1 250
033	085 (2.16)	148 (3 76)	030 - 1 250
034	047 (1 19)	.156 (3.96)	030 - 1 250
035	105 (2.67)	167 (4 24)	030 - 1.250
036	063 (1 60)	187 (4 75)	.030 - 1.250
037	091 (2 31)	187 (4 75)	030 - 1.250
038	120 (3 05)	187 (4.75)	030 - 1 250
039	091 (2.31)	.250 (6 35)	030 - 1.250
040	115 (2.92)	.250 (6.35)	030 - 1 250
041	.147 (3.73)	.250 (6.35)	.030 - 1.250
042	.171 (4.34)	250 (6.35)	030 - 1.250

* The following tolerances apply to dimension H.
030 (0.76 mm) -.500 (12 70 mm) ± 005 (0 13 mm).
.505 (12.83 mm) - 750 (19.05 mm) ± 008 (0 20 mm)
755 (19.18 mm) -1.250 (31.75 mm) ± 015 (0.38 mm)
Specific height (dimension H) shall be specified on the acquisition document. These heights are available in increments of 005 inch (0 13 mm)

(D) FIGURE 1 Mounting pads - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

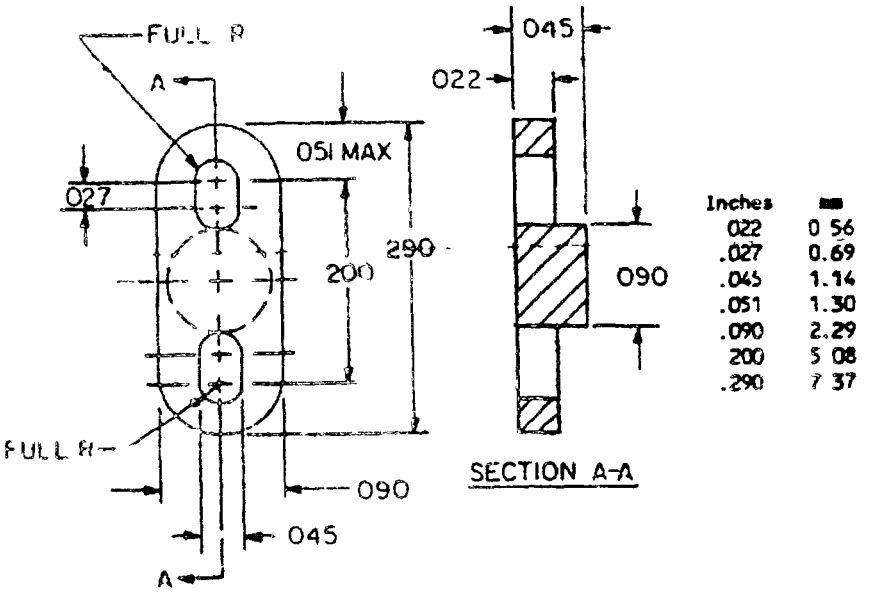

M38527/06-043


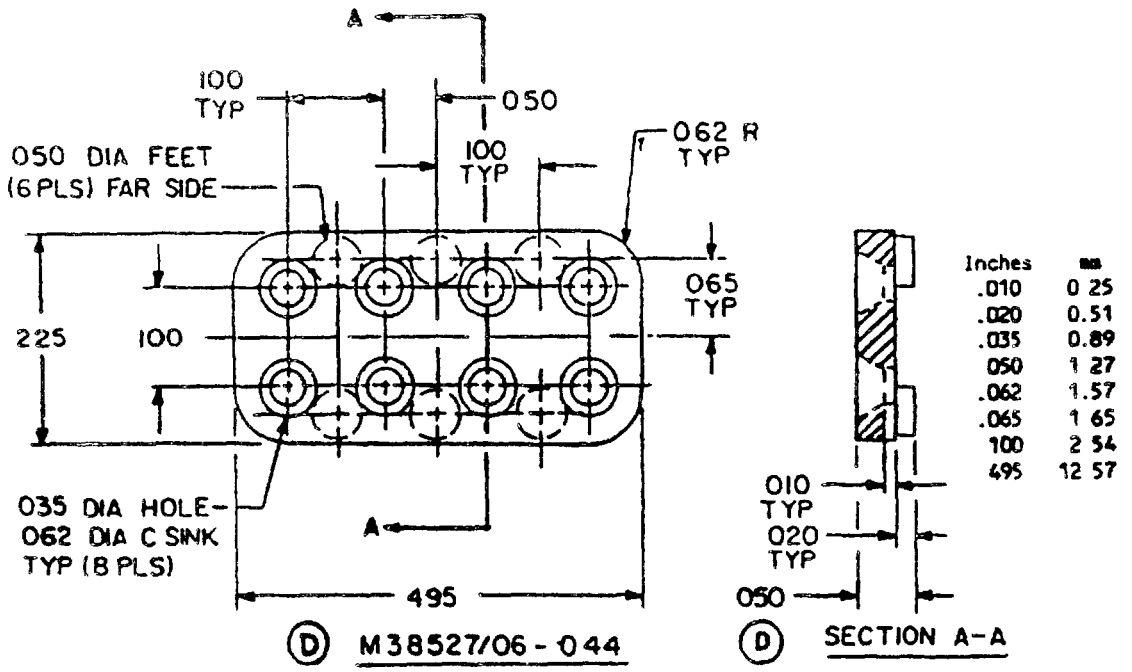


FIGURE 1. Mounting pads - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

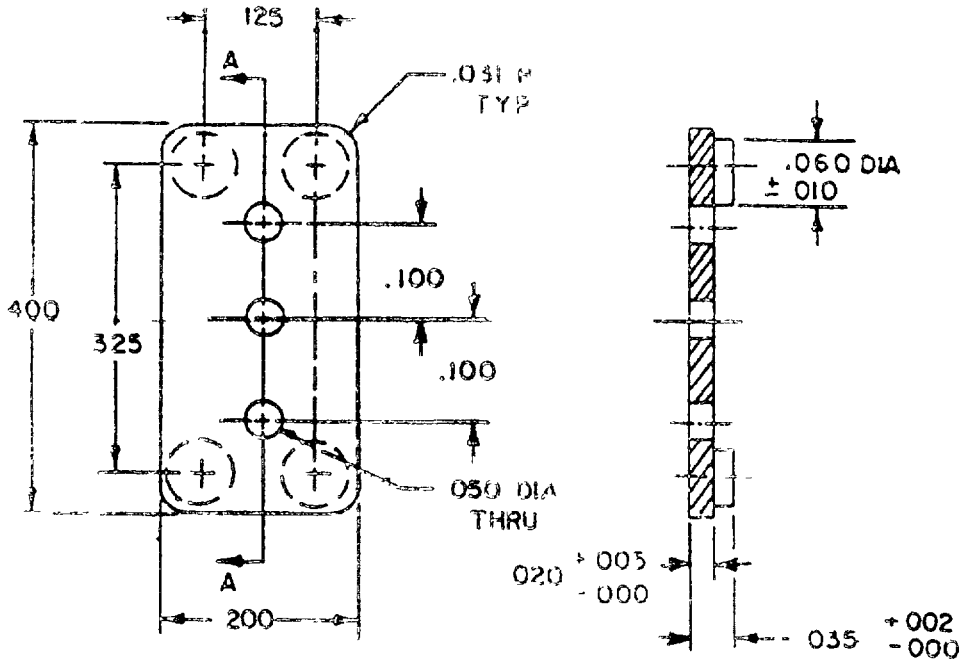

Inches	mm
002	0 05
005	0.13
020	0.51
.031	0.79
035	0 89
050	1.27
060	1.52
100	2 54
125	3.18
200	5.08
325	8 26
400	10 16

Ⓓ SECTION A-A

M38527/06-045

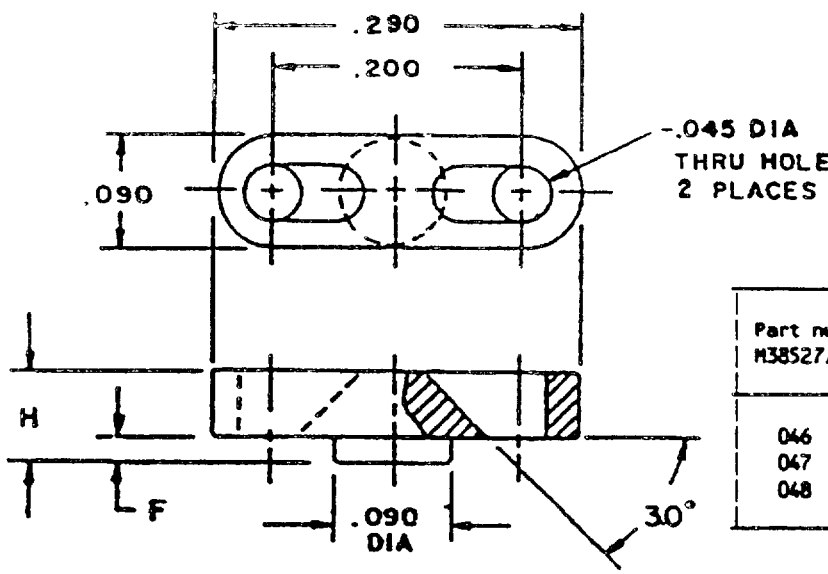

Inches	mm
022	0.56
.035	0.89
.045	1 14
050	1 27
072	1 83
085	2 16
090	2.29
200	5 08
290	7 37

Part number M38527/06-	H	F
046	.072	.022
047	050	.000
048	085	.035

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Tolerance on height of pads shall be ± 015 (0.38 mm)
Ⓓ 4. Unless otherwise specified, tolerances are ± 010 (0 25 mm) for decimals and ±1° on angles
5. A .010 (0 25 mm) radius is permissible on corners and edges and a 1° draft is permitted on sides

Ⓓ FIGURE 1 Mounting pads - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and configuration: See figure 1

(D) Material: Polyterephthalate thermoplastic (C), diallyl phthalate (D), or nylon (N)

(D) Part number: M38527/06- (plus dash number from figure 1 and material letter as shown above)

(D) Complete part number example: M38527/06-001N

Supersession information: Part number M38527/1-16X1 in accordance with MIL-M-38527/1, dated 1 April 1972, has been superseded by part number M38527/06-0010. "X" represents any of the color codes in the previous part numbers (i.e., N, B, R, C).

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 19, 99

User activities:
Navy - AS, CG, MC, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0288)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:09Z
Check the source to verify that this is the current version before use.