MIL-M-45122(Ord)
24 June 1958
SUPERSEDING
FA(FC)-PD-16A
21 April 1958
FA(FC)-PD-211
3 December 1957

MILITARY SPECIFICATION

MOUNT, TELESCOPE, M30

1. SCOPE

1.1 Scope. - This specification covers one me of telescope mount which is used to support a panoramic telescope to provide azimuth correction and sighting for laying artillery weapons employing indirect fire procedures.

2. APPLICABLE DOCUMENTS

2.1 Applicable documents.- The following documents of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal.

NN-P-515	Plywood, Container Grade
UU-T-106	Tape, Masking, Paper (Pressure-Sensitive)
UU-T-111	Tape, Paper Gummed (Sealing and Securing)
LLL-F-291	Fiberboard; Corrugated, Single Face, (Flexible)
PPP-B-601	Boxes, Wood, Cleated - Plywood
PPP-B-621	Boxes; Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-T-60	Tape, Pressure Sensitive Adhesive, Waterproof - For Packaging and Sealing
PPP-T-76	Tape, Pressure Sensitive Adhesive, Water Resistant
PPP-T-0097b	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Military

MIL-P-116	Preservation, Methods of
MIL-B-117	Bags, Interior Packaging
MIL-B-121	Barrier Material, Greasproofed, Flexible (Waterproofed)
MIL-L-3150	Lubricating Oil; PReservative, Medium

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

MIL-C-11796 Corrosion Preventive, Petrolatum, Hot Application
MIL-F-13926 Fire Control Materiel; General Specification Governing the Manufacture and Inspection of

STANDARD

Military

MIL-STD-105 Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-129 Marking For Shipment and Storage

DRAWING

Ordnance Corps

90-91-1 Mount, Telescope, M30

(Copies of specifications, standards, and drawings required by contractors n connection with procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Applicable requirements.- Applicable requirements and associated tests common to all fire control instruments as specified in Specification MIL-F-13926 shall apply insofar as they are applicable.

3.2 Design and fabrication.- Design and fabrication of the telescope mount shall be in accordance with Ordnance Drawing 90-91-1, Mount, Telescope, 30.

3.3 Materials.- Shall be in accordance with the applicable drawings and specifications forming part of this specification.

3.4 Vibration.- With the telescope mount mounted in its normal operating position with all components properly secured as in normal operation, there shall have no visible damage or loosening of assembled parts and the mount shall not be rendered unserviceable as a result of vibration in a vertical plane at a constant frequency of 30 cycles per second with an amplitute of 1/16 inch (1/8 inch maxnum excursion) for a period of 5 minutes plus or minus 15 seconds. Subsequent vibration the telescope mount shall meet all other requirements of this specification.

3.5 With the mount positioned as shown on Drawing 90-91-2 with the mounting surface of the housing in a vertical plane, the leveling pads of the actuating m horizontal, and the axis of the telescope socket vertical, the mount shall et the following requirements:

3.5.1 Elevation level vial.- The elevation bubble shall be central within e half the amount of space between graduation lines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

3.5.2 Cross level vial. - The cross level bubble shall be central within one-half the amount of space between graduation lines.

3.5.3 Alinement.- With a calibrated Panoramic Telescope M12 type set to zero azimuth and secured in the mount, the adjusting screws in the telescope socket shall be adjusted to bring the line of sight parallel to the mounting surface of the housing. In this position, the locating lug of the panoramic telescope shall be centered within plus or minus 5 mils of total adjustment.

3.5.3.1 The top surface of the telescope socket shall be in a horizontal plane within 0.3 roil. (This surface is made horizontal to provide means of adjusting the level vials in the field.)

3.5.4 Plumb travel.- With the mount positioned in accordance with 3.5 and 3.5.3 the line of sight of the telescope shall follow plumb line within 0.5 mil when the vertical travel of the mount is accomplished by means of the elevation knob through the limits of the elevation movement.

3.6 Extension.- The line of sight as obtained in 3.5.3 shall remain parallel to the vertical mounting surface of the housing within 1 mil when the extension is placed in the socket and the telescope properly mounted.

3.7 Azimuth correction.- With the mount positioned in accordance with 3.5 and 3.5.3, the mount shall correct for azimuth error as a result of elevation within the tolerances and conditions specified in the following table:

Cross Level Angle Right or Left Degrees (Mils)	Elevation Angle (Mils)	Azimuth Correction (Mm)	Tolerance on Azimuth Correction (Mm)
5° (88.89 mils)	300	26.9	±0.7
5° (88.89 mils)	600	59.2	±1.1
9° (160 mils)	300	48.3	± 0.9
9° (160 mils)	600	106.0	±1.6

3.8 Operating temperatures.- The telescope mount shall meet the requirements of 3.9 when exposed and stabilized at amibient temperatures of minus 40°F and plus 150°F and the telescope locking mechanism shall be operable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

3.9 Torque. - The running torque required to rotate the elevation and cross levelings throughout the limit of travel shall not exceed 9 inch pounds at room temperature (60°F to 90°F) and the torque shall not change from the value obtained at room temperature by more than 6 inch pounds when subjected to the temperatures of 3.8.

3.10 Workmanship.- Standards of workmanship shall be such that the mount shall meet all requirements herein and shall be in accordance with applicable workmanship requirements as specified in Specification MIL-F-13926.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 Contractor inspection.- Unless otherwise specified herein, the inspections required by this specification will be performed by the contractor.

4.1.2 Contractor quality assurance system.- The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. Results of all examinations and tests performed under the quality assurance system shall be made available to the Government. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by the specification and other documents referenced in this specification. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that the substitute procedures will provide, as a minimum, the quality assurance required in the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced therein.

4.1.3 Government verification.- All quality assuz-ante operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed upon procedures, or instances of poor practices which might have an affect upon the quality of the product will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection provisions. - Applicable quality assurance provisions common to all fire control instruments as specified in Specification MIL-F-13926 shall apply.

4.2.1 Lot formation. - Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.2.2 Examination. - The classification of defects in tables I, II and III shall constitute the minimum inspection requirements to be performed prior to acceptance.

4.2.2.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrected action taken, the lot shall be resubmitted for acceptance inspection as outlined in Standard MIL-STD-105.

TABLE I - CLASSIFICATION OF DEFECTS
(Use Inspection Level II, and Sampling Plantable IV-A of Standard MIL-STD-105)

Major	AQL - 1.5	Reg. Para.	Q.A. Para.	Test Method
1.	Elevation Level Vial	3.5.1	4.3.3	Device, special testing
2.	Cross Level Vial	3.5.2	4.3.4	DST
3.	Alinement	3.5.3	4.3.5	DST
4.	Top Surface Socket	3.5.3.1	4.3.5.1	DST
5.	Plumb Travel	3.5.4	4.3.6	DST
6.	Extension	3.6	4.3.7	DST
7.	Torque	3*9	4.3.10	DST

TABLE II - CLASSIFICATION OF DEFECTS
(Use Inspection Level 1, and Sampling plan Table IV-A of Standard MIL-STD-105)

Major	AQL - 1.0 per cent	Req. Para.	Test Method
	Incorrect marking	3.5	visual
	Illegible marking	3.5	visual
Minor	AQL - 2.5 per cent		
	Improper closure of interior packages	5.3.1.5.1	visual
	Inadequate strapping or nailing	5.4.4	visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

Minor AQL - 2.5 per cent	Req. Para.	Test Method
Improper packing (container over-size; indequate or excessive cushioning material; etc.)	5.3.2.3	Visual
Non-adherence to the requirement of prescribed shipping container specification	5.4.1.1	Visual
Immobilized items and interior packages	5.3.1.5.2.4	Manual - visual

TABLE III - CLASSIFICATION OF DEFECTS
(Use Inspection Level L7, and Sampling Plan Table IV-A of Standard MIL-STD-105)

Major AQL - 2.5 per cent	Req. Para.	Q.A. Para.	Test Method
Heat Seal (Level A)	5.3. 1.5.1.2	4.3.13	visual
Quick Leak (Level A)	5. 3.1.5.1.2	4.3.13	visual

4.2.3 Inspection Equipment.- The test methods and procedures outlined in 4.3 shall be used as standards for determining the adequacy of the contractor's inspection equipment and methods utilized for inspecting the characteristics in Table I. Unless otherwise specified in the contract, the contractor shall provide and maintain gages and other measuring and testing devices considered necessary for inspection of supplies for conformance to contracted requirements. The Government reserves the right to certify all such equipment and to use this equipment for Government verification inspection.

4.3 Test methods and procedures.

4.3.1 Orientation.- To determine compliance with the requirements herein, the telescope mount shall be positioned on a suitable device, special testing, in compliance with the requirements of 3.5.

4.3.2 Vibration.- The mount shall be positioned on a vibrating device in accordance with 3.4 and vibrated at the frequency, amplitude, and time period designated in 3.4.

4.3.3 Elevation level vial. - The elevation level vial bubble shall be located in compliance with 3.5.2 when mounted as specified in 3.5.

4.3.4 Cross level vial.- The cross level vial bubble shall be located in compliance with 3.5.2 when mounted as specified in 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

4.3.5 Alinement. - The mount shall be ohecked for alinement in compliance with the requirements of 3.5.3.

4.3.5.1 Horizontal. - Horizontal alinement of the plane containing the top surface of the telescope socket shall not exceed the tolerance set forth in 3.5.3.1.

4.3.6 Plumb travel. - The mount shald be checked for plumb travel in compliance with 3.5.4 shall not exceed the tolerance as set forth t4erein through the limits of the elevation movement.

4.3.7 Extension.- Parallelism between the mount and line of sight shall be checked with the extension correctly located and the telescope properly mounted in compliance with 3.5.3 and shall not exceed the tolerance as set forth in 3.6.

4.3.8 Azimuth correction. - The mount shall be mounted on a device, special testing, in compliance with 3.5 and 3.5.3 and shall compensate for azimuth errors induced by elevation and cross level adjustments. The accuracy tests shall be in accordance with the table contained in 3.7 and shall not exceed the tolerances specified therein.

4.3.9 Operating temperatures.- The mounts shall be checked for operational defects in compliance with 3.8 and 3.9 and as specified in table 6.3.1 of Specification MIL-F-13926.

4.3.10 Torque. - The elevation and cross leveling knobs of the mount shall be checked for torque in compliance with 3.8 and 3.9.

4.3.11 Workmanship. - Shall be checked for compliance with the requirements of workmanship as set forth in Specification MIL-F-13926.

4.3.12 Rough handling test. - The pilot pack only shall be subjected to the rough handling test in accor=e with the requirements of Specification MIL-P-116. Applicable only to Level A.

4.3.13 Packaging tests. - Each package in the applicable sample shall. be subjected to the pertinent packaging tests of Specification MIL-P-116.

4.3.14 Determination of cleanliness test. - Periodically, the applicable surfaces of one or more unit shall be subjected to the “Determination of Cleanliness” test in accordance with Specification MIL-P-116.

4.4 Inspection of components and subassemblies. - Components and subassemblies shall be inspected in accordance with Table IV. The acceptance and rejection numbers are expressed in terms of defective units. One or more defects on any unit shall constitute a defective unit. The sampling plans listed in Table IV me not intended to preclude 100% inspection by the contractor if the contractor so desires.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

TABLE Iv

Sampling Plans for Component Inspection

Lot Size (inclusive)	Sample Size	Accept Lot	Reject Lot
0-25	100% Inspection	o	1
26-35	20	0	1
36-50	25	0	1
51-150	30	0	1
151-over	30	1	2

5. PREPARATION FOR DELIVERY

5.1 Materials and methods. - The materials, methods and procedures used n the packaging be in accordance with this specification. materials and methods not covered by a specification shall be suited to the intended use and subject to the approval of the contracting officer. Unless otherwise specified, the contractor shall provide the Government inspector vertification of adherence to the required material specifications.

5.1.1 Materials.- The following shall apply wherever packaging materials are referred to in this specification by name only:

REFERENCE	FULL IDENTIFICATION
Pressure sensitive tape	Type I or II of Specification UU-T-106
Greaseproofed barrier material	Type I, grade A, class 2 of Specification MIL-B-121
Greaseproof, waterproof bag	Type I, class c of Specification MIL-B-117
Waterproof pressure sensitive tape	Type III, class 2 or 3 of Specification PPP-T-60

5.2 Size of containers.- Bags, interior containers and exterior containers shall be a minimum size that will adequately contain the items.

5.3 Presentation and packaging.

5.3.1 Level A.

5.3.1.1 Disassembling.- A tag containing a precaution note (see 5.5.1) shall be attached to the telescope socket, then the socket shall. be disassembled from the mount. The socket shall be used only with the mount from which it was disassembled, and it shall not be interchanged with a socket from another mount.

5.3.1.2 Cleaning. - Cleaning process C-1 of specification MIL-P-116 shall be followed to clean all surfaces of the mount, instrument lights, and loose items.

8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

5.3.1.3 Drying. - Immediately after cleaning, items shall be dried thoroughly in accordance with an applicable procedure specified in Specification MIL-P-116 that will not damage the items.

5.3.1.4 Preservative application.- Preservative conforming to Specification MIL-L-3150 (P-7 of Specification MIL-P-116) shall be applied on the mounting hardware (screws, nuts, and washers) and pin. Preservative conforming to class of specification MIL-C-11796 (P-4 of @edification MIL-P-116) shall be applied on the exposed unprotected metal surfaces of the mount, socket and extension assembly. Preservative shall be applied by the brushing procedure specified in Specification MIL-P-116. Prese~ative shall be applied on the hardware and pin by any applicable procedure specified in Specification MIL-P-116. Excess presenative shall be removed.

5.3.1.5 Unit packaging.

5.3.1.5.1 Mount without two instrument lights, box end wrench, cover and extension assembly. The mount without the equipment =m=ti= package=s specified herein, which is in conformance with Method I for the mount and Method IC-1 for the mounting hardware, pin, and socket of Specification MIL-P-116.

5.3.1.5.1.1 Wrapping and covering preservative coated surfaces. - The preservatuve coated pin shall be wrapped with greaseproofed barrier material. The preservative coated mounting hardware (screws, nuts and washers) and the wrapped pin shall be placed together and wrapped with greaseproofed barrier material. The wrap shall be secured in place with pressure sensitive tape. The socket shall be wrapped with greaseproofed barrier material and the wrap secured in place with pressure sensitive tape. The elevation knob shall be turned counter clockwise to stop position. All. preservative coated surfaces shall be covered or wrapped with greaseproofed barrier material. The greaseproofed barrier material shall. be secured in place with waterproof pressure sensitive tape.

5.3.1.5.1.2 Bagging the wrapped socket, pin and mounting hardware. - The wrapped socket, pin and hardware shall be placed in greaseproofed waterroof bag . The bag shall be heat sealed, exhausting entrapped air prior to the final closure.

5.3.1.5.1.3 Securing bagged items. - The bagged items shall be secured to the surface of the leg bearing the name plate with filament tape conforming to type IV of Specification PPP-T-0097b.

5.3.1.5.1.4 Level vial. assemblies.- The metal covers on the level vial assemblies shall be positioned to cover the faces of the level vials and the covers shall be secured with waterproof pressure sensitive tape.

5.3.1.5.1.5 Securing the mount top base. - The mount shall be secured to a plywood base with step bolts. The base shall be constructed in accordance with Figure 1, except that the dimension 13. inches shall. apply in

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T02:24Z
Check the source to verify that this is the currentversion before use.

lieu of the 18$ inches referenced in Figure 1. Greaseproofed barrier material. shall be placed between the mounting surfaces and the plywood base. Plain washers and lock washers shall be added under the nuts. Unthinned paint shall be applied on the exposed threads above the nuts. The step bolts, nuts and washers shall be zinc or cadmium coated.

5.3.1.5.2 Packaging the mount, two instrument lights, box end wrench, cover and extension assembly.- The mount with equipment items shall be packaged as specified herein, which is in conformance with the methods listed below of specification MIL-P-116.

Item	Packaging Method
Telescope Mount	I
Socket with mounting hardware and pin	IC-1
Each Instrument light	IA-8
Extension assembly with box end wrench	IC-1
Cover.	IC-5

5.3.1.5.2.1 Mount, socket, hardware and pin.- The mount, socket, hardware and pin shall be packaged as specified in 5.3.1.5.1.1 to 5.3.1.5.1.5 inclusive, except as follows:

a. The bagged socket, hardware and pin shall not be secured to the mount.

b. The dimension l8 inches in Figure I shall apply.

5.3.1.5.2.2 Instrument lights.- Each instrument light shall be wrapped with flexible single face corrugated fiberboard conforming to type I of Specification LLL-F-291 and secured with gummed tape conforming to class 2 of Specification UU-T-111. Each wrapped instrument light shall be placed in a bag conforming to type I or II, class e of Specification MIL-B-117. The bag shall be heat sealed, exhausting entrapped air prior to final closure.

5.3.1.5.2.3 Extension assembly and box end wrench.- The extension assenibly and box end wrench shall each be wrapped with greaseproofed barrier material. Each wrap shall be secured in place with pressure sensitive tape. The wrapped extension assembly and wrapped wrench shall be placed together in a greaseproof-waterproof bag. The bag shall be heat sealed, exhausting entrapped air prior to final. closure.

5.3.1.5.2.4 Cover and bagged items immobilized in a fiberboard box.- The cover and bagged items specified in 5.3.1.5.2.1, 5.3.1.5.2.2 and 5.3.1.5.2.3 sha1l be immobilized in a fiberboard box conforming to class 2 or 3, any compliance symbol and any style except FTC, TS, OPF amd FPF of Specification PPP-B-636. The inside dimensions of the box shall be I-2. inches by 8. inches by 8. inches. The fiberboard box shall be closed with pressure sensitive tape

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T02:24Z
Check the source to verify that this is the currentversion before use.

conforming to Specification PPP-T-76 as specified in the appendix of Specification PPP-B-636.

5.3.2 Level C.

5.3.2.1 Disassembling, cleaning and drying. - Disassembling, cleaning and drying shall be as specified in 5.3.1.1, 5.3.1.2 and 5.3.1.3.

5.3.2.2 Preservative application. - The pin and mounting hardware shall not be coated with a preservative. Preservative conforming to Specification MIL-L-3150 (P-7 of Specification MIL-P-116) shall be applied on the unprotected metal surfaces of the mount, socket and extension assembly. Preservative shalJ. be applied by the brushing procedure specified in Specification MIL-P-116. Excess preservative shall be removed.

5.3.2.3 Unit packaging.

5.3.2.3.1 Mount without two instrument lights, box end wrench, cover and extension assembly. - The mount without the equipment items shall be packaged as specified herein, which is in conformance with Method I for the mount and Method III for the mounting hardware, pin and socket, Specification MIL-P-116.

5.3.2.3.1.1 Mount. - The mount shall be packaged as specified in 5.3.1.5.1.1 to 5.3.1.5.1.5 inclusive, except that the bag specified in 5.3.1.5.1.2 shall be omitted and the step bolts, nuts and washers specified in 5.3.1.5.1.5 shall not be zinc or cadmium coated. The dimension 13. inches shall apply, in lieu of the $18\frac{1}{2}$ inches referenced in Figure 1.

5.3.2.3.2 Mount with two instrument lights, box end wrench, cover and extension assembly. - The mount with equipment items shall be packaged as specified herein, which conforms to the methods listed below of Specification MIL-P-116:

Item	Packaging Method
Telescope Mount	I
Socket	I
Hardware and pin (secured to socket)	III
Each instrument Light	III
Box end wrench (secured to extension assembly)	III
Cover	III

5.3.2.3.2.1 Mount, socket, hardware and pin. - The mount, socket, hardware and pin shall be packaged as specified in 5.3.2.3.1.1, except that the wrapped socket, hardware and pin shall not be secured to the mount, and a plywood base

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

all be constructed as shown in Figure 1. The dimension 18½ inches in Figure shall apply.

5.3.2 .3.2.2 Instrument lights.- Each instrument light shall be packaged specified in 5.3.1.5.2.2, except that the bag shall be omitted.

5.3.2.3.2.3 Extension assembly and box end wrench.- The extension sembly and box end wrench shall be packaged as specified in 5.3.1.5.2.3, cept that the bag shall be omitted.

5.3.2.3.2.4 Cover and wrapped items immobilized in a fiberboard box.- e cover and wrapped items specified in 5.3.2.3.2.1, 5.3.2.3.2.2 and 5.3.2.3.2.3, all be immobilized in a fiberboard box conforming to class 1, either type and y style, except FTC, TS, OPF and FPF of Specification PPP-B-636. The fiber- ard box shall be closed as specified in the appendix of Specification PPP-B-636.

5.4 Packing.

5.4.1 Level A.

5.4.1.1 Shipping container.- Each mount, bolted to a plywood base, shall immobilized in a shipping container by nailing a hold-down cleat in each corner of the container as shown in Figure 6. If the fiberboard box containing the equipment items is to be packed in the shipping container, the width of the mid-down cleats shall be such that the fiberboard box will fit between them. The fiberboard box shall be immobilized in the container by nailing a hold-down the container as shown in Figures 1 and 6. The shipping container shall conform to either of the following Specifications:

PPP-B-601 - Style A or B (overseas type) - type II or III, class 2 Plywood
PPP-B-621 - Class 2 (overseas), style 2 or 4

5.4.2 Level B.- The requirements of 5.4.1.1 shall apply, except that the container shall conform to the following:

PPP-B-601 - Any style under domestic type
PPP-B-621 - Class 1 (domestic) style 2 or 4

5.4.3 Level C.- The requirements of 5.4.1.1 shall apply, except that the container shall conform to the following:

PPP-B-601 - Any style under domestic type
PPP-13-621 - Class 1 (domestic) any style except 1, 5 and 6.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:24Z
Check the source to verify that this is the current version before use.

5.4.4 Strapping. - Metal strapping sha1l be applied on each shipping container. The type of strapping and the method of applying it shall be as specified in the applicable container specification.

5.5 Marking.

5.5.1 Interior packages.- Marking of interior packages shall be in accordance with Standard MIL-STD-129 and Specification MIL-P-116. Each pocket shall have a tag secured to it containing the following:

CAUTION

This socket must not be separated
from Mount, Telescope, M30
Serial No. _____

The serial number of the mount shaU be included in the identification marking of each bag containing a socket. Each fiberboard box containing a socket shall have a caution note added, as follows:

CAUTION

The socket contained in this box must not be separated from Mount, Telescope, M30, Serial No. _____ .

5.5.2 Shipping container.- Each shipping container shall be marked in accordance with Standard MIL-STD-129. The serial number shall be added in identification data on a Level A or B shipping container and omitted on a Level container.

5.5.3 Stock number.- The stock number to be added in the identification data shall be obtained from the contracting officer.

5.6 Pilot pack.- Prior to quantity production, a pilot pack, consisting of a complete and packed shipping container, shall be inspected to determine conformance with the applicable requirements of this specification for Level A. rough handling test is required.

5.7 Workmanshipp.- Adequate controls shall be utilized to maintain clean packaging material and to check for contamination of cleaning solvents. Wraps shall be neat, conforming and firmly secured. Tapes shall be uniformily applied to interior packages. Shipping containers shall be free of protruding staples, ails, etc. Strapping shall be applied perpendicular to the sides of the con-ainer just prior to shipment and shall not cover any container marking. irreleant marking shall be neatly obliterated. Visual observation shall indi-ate that the application of specified materials and methods are practical and will not result in packaging deficiencies.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T02:24Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of packsging and packing.

6.2 Dimensions, cubage and weight of shipping containers.

6.2.1 Mount without equipment items.- The following inside dimensions, page and gross weight are approximate for one unit packaged mount without equipment items packed in a nailed wood box for Level A:

Inside dimensions - 16½ inches long x 13+ inches wide x 15. inches deep
Cubage - 2.5 cubic feet
Gross weight - 95. pounds

6.2.2 Mount with equipment items.- Size and weight of packed shipping container packed in a nailed wood box for Level A:

Inside dimensions - 19. inches long x 16½ inches wide x 15. inches deep
Cubage 3.6 cubic feet
Gross weight - 108. pounds

6.3 Equipment items.- The following are the equipment items and are shipped with the mount only when specified:

1 Box End Wrench
1 Cover M426
1 Extensions Assembly
1 Instrument Light M22
1 Instrument Light M35

6.4 Definitions.

6.4.1 Gage: A gage includes all precision standards and applicable acessories which me calibrated to one basic size to provide an accurate reference dimension.

6.4.2 Device, Special Testing (DST): Special. testing devices are designed check function of an assembled unit.

6.4.3 Standard Measuring Equipment (SME): Standard measuring equipment ME) includes the common hand type measuring devices which are usuaLly stocked commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of Items under procurement. This category also includes commercial testing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

NOTICE: This specification, together with specifications and drawings pertaining to it and bearing a "Notice" of similar restrictions, is intended for use only in connection with procurement by the United States Government; and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance, Department of the Army.


Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

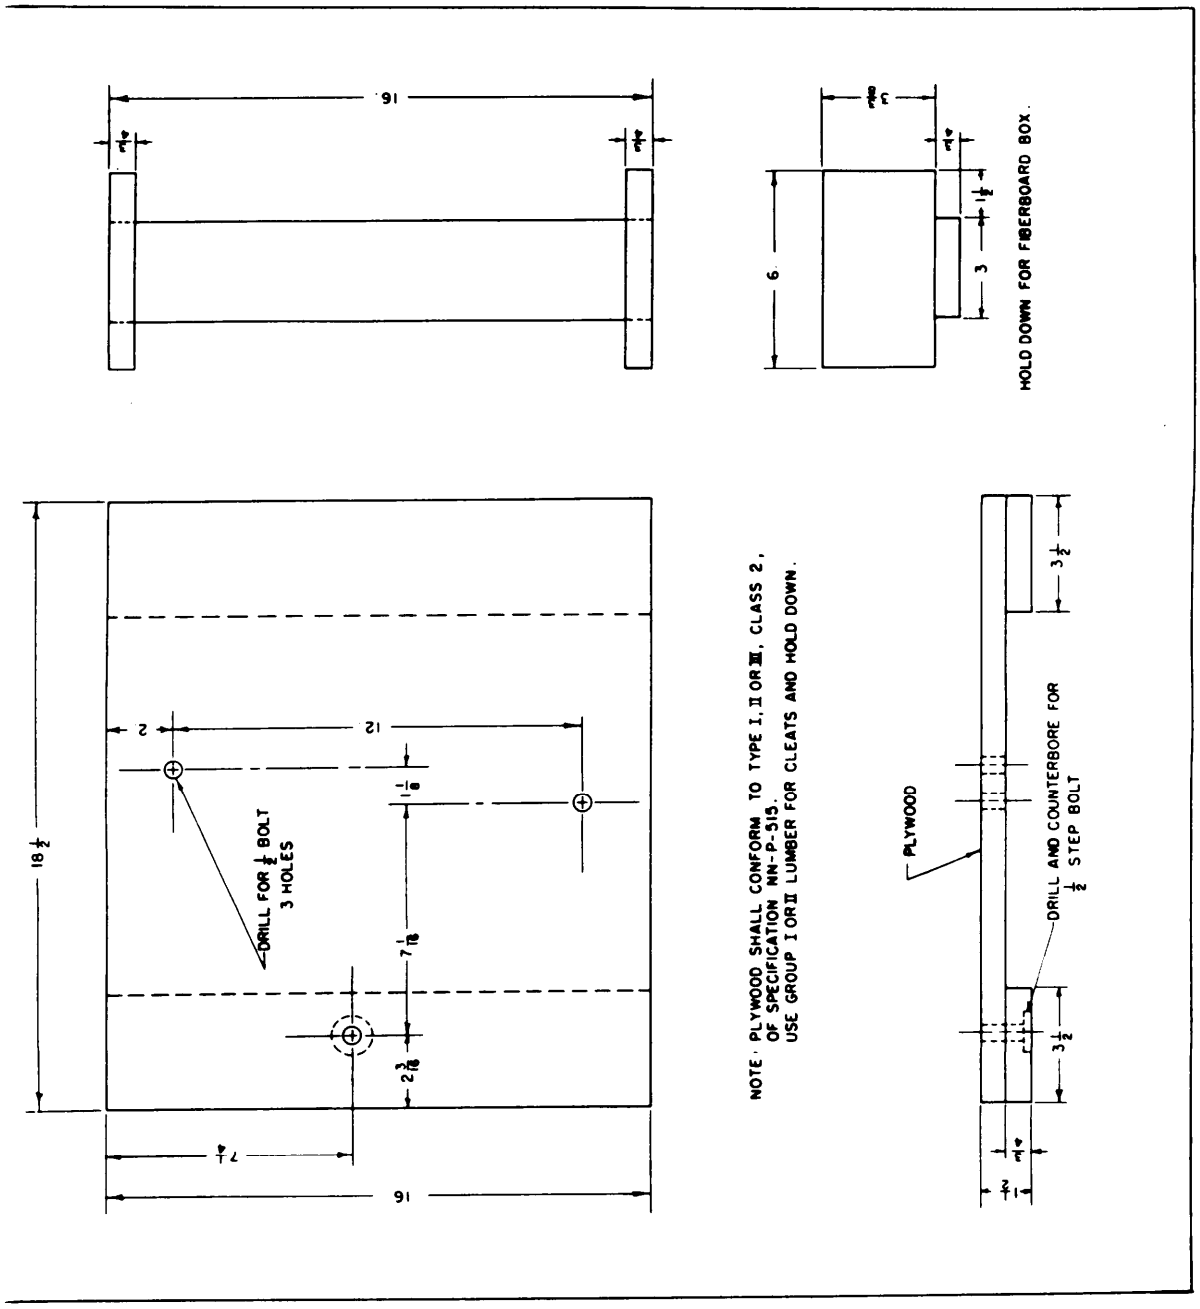

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T02:24Z
Check the source to verify that this is the currentversion before use.

TELESCOPE MOUNT M30 - Prepared mount, mounting hardware, locating pin and socket. Note Caution tag.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.



TELESCOPE MOUNT M30 - Cover and prepared mount, mounting hardware, locating pin, W/ASSOCIATED ITEMS socket, extension, wrench and 2 instrument lights.
FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:24Z
Check the source to verify that this is the current version before use.

TELESCOPE MOUNT M30 - S-ii , prepared mount and bagged loose items.
W/ASSOCIATED ITEMS

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:24Z
Check the source to verify that this is the currentversion before use.



TELESCOPE MOUNT M30 - Mount bolted to plywood base and fiberboard box containing the cover W/ASSOCIATED ITEMS and bagged loose items.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:24Z
Check the source to verify that this is the currentversion before use.

TELESCOPE MOUNT M30 - Plywood base (containing the mount and fiberboard box) immobilized in W/ASSOCIATED ITEMS shipping container with hold down cleats; also hold down for the fiberboard box.

FIGURE 6

GPO 944910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:24Z
Check the source to verify that this is the current version before use.