
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC, DOUBLE LAYER, CARBON, (POLARIZED),

STYLE DL02 (METRIC)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and the latest issue of DOD-C-29501.

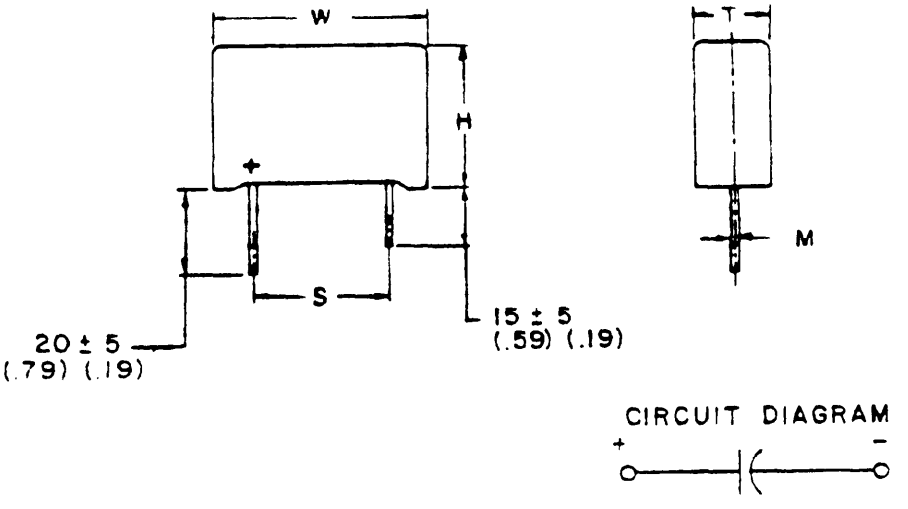

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.
3. Inch equivalents are in parentheses.

FIGURE 1. Style DL02 dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Glass reinforced polybuthylene-terephthalate with epoxy end sealed.

Leads: Solder-coated metal.

DC rated voltage: 5.5 volts.

Operating temperature: -40°C to +70°C.

DC leakage (DCL): See table I.

TABLE I. Style DLO2 dimensions and characteristics.

Military part number 1/	Capacitance	Capacitance tolerance	Rated dc voltage	DC leakage (max)	R_C	ESR	W ±1.0	T ±1.0	H ±1.0	S ±0.5	M ±0.05
D29501A02	Farads	Percent	Volts	µA	Ohms	Ohms	mm	mm	mm	mm	mm
B104V	0.10	-20,+80	5.5	120	100	8.0	25.0	9.0	28.0	17.5	0.7
B334V	0.33	"	"	180	100	5.0	29.0	10.0	31.5	22.5	0.7
B105V	1.00	"	"	280	10	5.0	42.5	15.0	32.5	32.5	0.8
B335V	3.30	"	"	820	10	2.5	42.5	15.0	42.5	32.5	0.8

1/ The complete part will be D29501A02B104V.

Capacitance: See table I.

Capacitance tolerance: -20, +80 percent.

ESR: See table I.

Thermal shock:

DCL: In accordance with DOD-C-29501.
ESR: In accordance with DOD-C-29501.

Resistance to soldering heat:

CAP: In accordance with DOD-C-29501.
ESR: In accordance with DOD-C-29501.

Moisture resistance:

CAP: In accordance with DOD-C-29501.
ESR: In accordance with DOD-C-29501.

Stability at low and high temperatures:

Step 1 (+25°C):

DCL: See table I.
CAP: Within tolerance.
ESR: See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:26Z
Check the source to verify that this is the current version before use.

Step 2 (-40°C):

DCL: Shall change not more than -200 percent from the initial step 1 measured value.
CAP: Shall change not more than -50 percent from the step 1 measured value.
ESR: Shall change not more than 400 percent from the table I measured value.

Step 3 (+25°C):

DCL: See table I.
CAP: Shall change not more than ±20 percent from the step 1 measured value.
ESR: See table I.

Step 4 (+70°C):

DCL: Shall change not more than 300 percent from the table I measured value.
CAP: Shall change not more than +150 percent from the step 1 measured value.
ESR: See table I.

Step 5 (+25°C):

DCL: See table I.
CAP: Shall change not more than ±20 percent from the step 1 measured value.
ESR: See table I.

Surge voltage: In accordance with DOD-C-29501.

DCL: Shall change not more than ±20 percent.
CAP: Within 20 percent of the initial measured value.
ESR: See table I.

Life: In accordance with DOD-C-29501.

DCL: Shall change not more than 200 percent of the table I value.
CAP: Shall change not more than -30 percent of the initial measured value.
ESR: Shall change not more than 200 percent of the table I value.

Resistance to solvents:

DCL: In accordance with DOD-C-29501.
ESR: In accordance with DOD-C-29501.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AV
Navy - SH
Air Force - 17, 85, 99
DLA - ES

User activities:
Army - MI
Navy - AS, CG, MS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1449-2)

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:26Z
Check the source to verify that this is the current version before use.