MIL-C-29450A(MC)
7 April 1988
SUPERSEDING
MIL-C-29450(MC)
21 December 1987

MILITARY SPECIFICATION

CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT, EMPTY

This specification is approved for use within the U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for one type of Gasoline Lantern Chest used by the Marine Corps.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplements thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

TT-V-121	- Varnish, Spar, Water Resisting
MMM-A-121	- Adhesive, Bonding Vulcanized Synthetic Rubber to Steel
MMM-A-188	- Adhesive, Urea-Resin Type, (Liquid and Powder)
A-A-2335	- Sealer, Surface (Varnish Type, Wood and Cork Floors)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (LMA-2), Marine Corps Research, Development and Acquisition Command, Washington, D.C. 20380-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6260

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-46168 - Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-P-53022 - Primer, Epoxy Coating, Corrosion Inhibiting, Lead and Chromate Free

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

MARINE CORPS

641B1	- Chest, Equipment, Illuminating (Details and Assembly).
1534C1	- Bolt, Trunk.
1F6	- Corner, Trunk, with Knob.
1F7	- Corner, Clamp.
1F8	- Keeper, Special.
1F29	- Corner, Chest, Lid, Small.
87027A0000	- Edge, Brace.
87031A0000	- Cushion.
87032A0000	- Lid, Position, Cushion.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicita-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

tion. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A153 - Zinc Coating (Hot-Dip) on Iron and Steel Hardware

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Nongovernment standards are normally available from the organizations which prepare or which distribute the documents. These documents may be available through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. The chest shall be made from materials specified herein and in applicable drawings (see 2.1.2).

3.1.1 Lumber. The lumber used in making the battens shall be "D" select ponderosa pine or its equal in suitability and strength. The lumber shall be thoroughly and uniformly dried without honeycombing or case hardening to a moisture content of 8 to 12 percent at time of fabrication and shall be free from decay, checks, loose knots, holes or other defects which might affect the strength, wear or serviceability of the chest. Sound, tight knots not exceeding 1/2 inch in greatest width will be permitted provided such knots are located more than 3/4 inch from any edge of a piece.

3.1.2 Plywood. The plywood shall be 5 ply construction, commercial douglas fir, exterior type, sanded two sides, commercial standard GS-45, grade A-B or better. The plywood shall be 1/2 inch thick

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

for tops, bottoms, ends, sides and blocks and 3/8 inch for partitions.

3.1.3 Metal parts. All metal parts including nails and rivets shall be made of steel and located as shown on applicable drawings.

3.1.4 Adhesive. Adhesives shall conform to MMM-A-121 and MMM-A-188 as applicable.

3.1.5 Pretreatment coating material. Pretreatment coating material for metal surface shall conform to ASTM A153 or equivalent.

3.1.6 Wood sealer. Wood sealer shall conform to A-A-2335 or an equivalent suitable for the purpose specified therein.

3.1.7 Varnish. Varnish shall conform to TT-V-121.

3.1.8 Primer. Primer shall conform to MIL-P-53022.

3.1.9 Coating. Coating shall conform to MIL-C-46168; Color shall be green 383, Chip No. 34094 of FED-STD-595.

3.1.10 Lantern packing instructions. Each chest shall be provided with an instruction sheet for packing the lanterns. The instruction sheet shall be enclosed in an open end envelope and shall be printed with the following: "INSTRUCTIONS FOR PACKING LANTERNS". The information on the sheet shall be a clear legible copy of Figure 1.

3.2 Construction and design. Construction, design, dimensions and finish of the chest and component parts shall be as shown on applicable drawings and as specified herein. Battens shall be made of lumber specified in 3.1.1, and all wood components of the chest shall be made of plywood specified in 3.1.2. Multiple piece construction in any wood member of the chest is not permitted.


3.2.1 Nails and rivets. All nails shall be inserted so as not to be driven out of the wood; all rivets shall be neatly and securely set with heads flush with metal surfaces.

3.2.2 Rubber pads. A pad of synthetic rubber, 3/4 inch in thickness by 3 inches square, with a 7/8 inch diameter hole cut through center of pad, shall be securely cemented on the inside of the chest top. The hole in the pad shall be located on the top as specified by drawing 641B1. The cement shall be rubber base, MMM-A-121, or equal, and shall be applied to the smooth side of the pads and to a 3 inch square area around the top of chest. In addition, each chest shall be furnished with two pads of synthetic rubber 1/2 inch thick by 7-1/2 inches square, one pad placed in the bottom of each of the two lantern compartments.

3.3 Finish

3.3.1 Pretreatment

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:13Z
Check the source to verify that this is the current version before use.

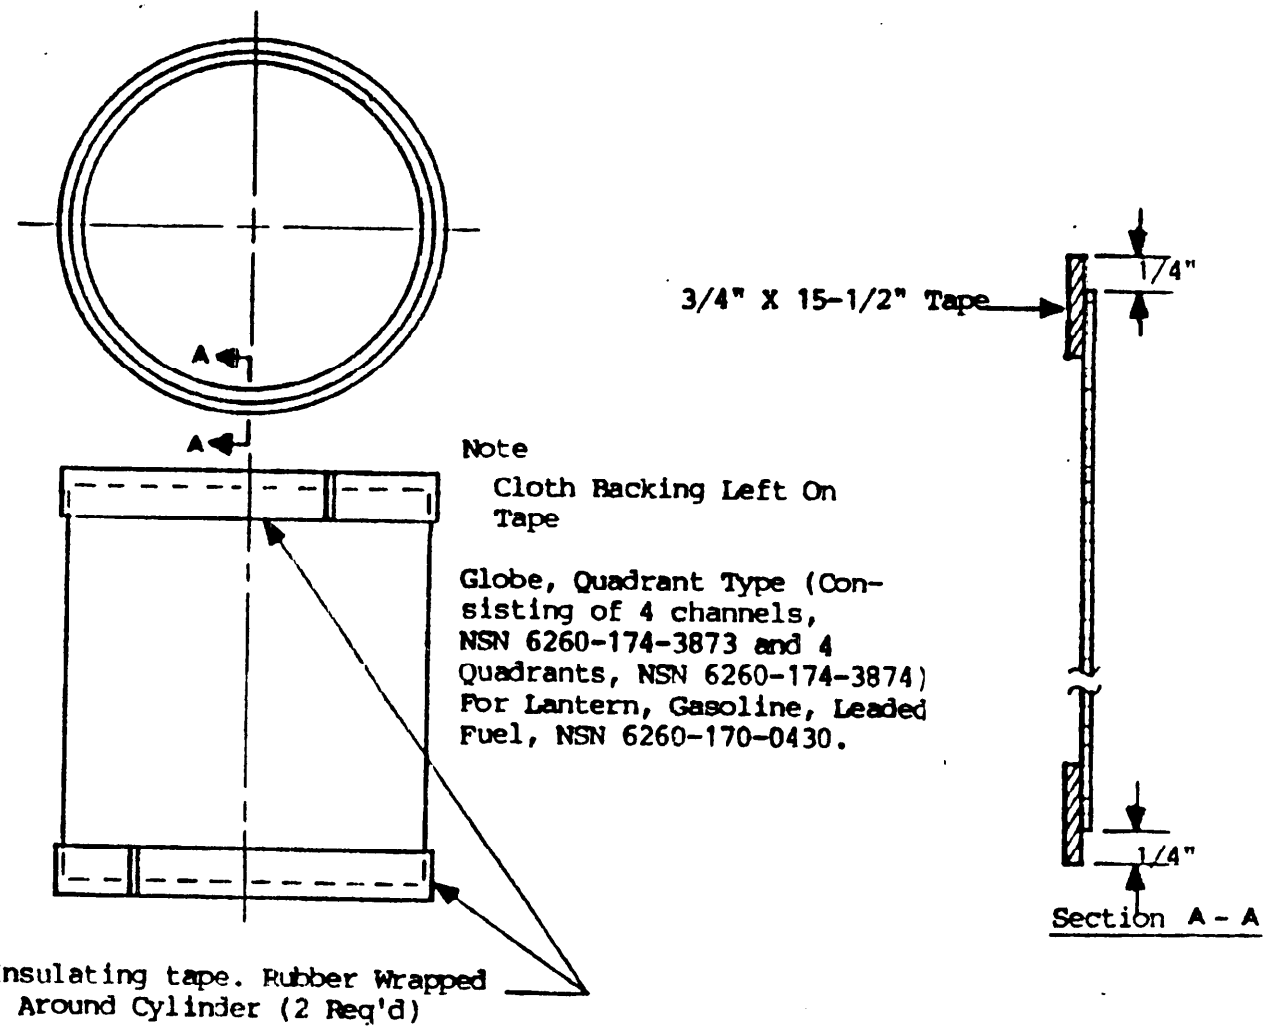

INSTRUCTIONS FOR PACKING LANTERNS

Unscrew knurled nut from top of Lantern and remove top.

Remove glass globe and apply strips of cloth backed rubber tape as shown above, the 1/4 inch protrusion above and below edges of globe to act as a cushion between globe and metal frame, leaving cloth backing on outside of tape, the rubber side placed next to the glass.

Replace glass globe in frame. Replace top of Lantern and turn down knurled nut hand tight.

Place Lanterns in chest with rubber pads in place at bottom of compartments, and when closing lid make certain that nut at top of Lantern is in center of hole in lid.

CAUTION

REMOVE STRIPS OF TAPE FROM GLOBE BEFORE LIGHTING LANTERNS.

FIGURE 1. CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.3.1.1 Metal Surfaces. Metal surfaces to be coated shall be thoroughly cleaned, degreased and given one coat of pretreatment material specified in 3.1.5.

3.3.1.2 Wood Surfaces. All wood surfaces of chest shall be given a coat of sealer (see 3.1.6). Before sealing, all surfaces shall be smooth, dry and thoroughly clean.

3.3.2 Varnishing. All inside surfaces of chest shall be given a coat of the varnish specified in 3.1.7.

3.3.3 Priming and Painting. The outside surfaces of chest and exposed surfaces of metal parts on the outside of chest shall be given a coat of primer, and a finish coat of paint as prescribed in 3.1.8 and 3.1.9, respectively.

3.4 Workmanship. The finished chest shall be clean, well made and free of any defect which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Inspection Lot. All chests offered for delivery at one time shall be considered a lot for the purpose of sampling and inspection.

4.3 Sampling for Acceptance Inspection. From each lot, in containers ready for shipment, sample chests shall be selected in accordance with MIL-STD-105 at Inspection Level II for the inspection specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4.4 Inspection

4.4.1 Visual and dimensional inspection. Each sample chest selected in accordance with 4.2 shall be visually and dimensionally inspected to determine completeness of manufacture, assembly, dimensions, finish, workmanship and appearance. If any sample item is defective, it shall be rejected and if the number of defective items in the sample exceeds the acceptance number specified the lot represented by the sample shall be rejected.

4.4.2 Rejected lots. Rejected lots may be offered again for Government inspection provided the contractor has satisfactorily reworked all rejected items. The Government inspector shall again select and examine samples from lots resubmitted to verify compliance with the requirements of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Not applicable.

5.2 Packing

5.2.1 Level A. Chests shall be packed in snug-fitting wood wirebound, wood-cleated plywood, wood-cleated solid fiberboard, nailed wood, or fiberboard boxes. Shipping containers shall be provided with waterproof case liners and sealed.

5.2.2 Level B. Each chest shall be packed in snug-fitting wood wirebound, wood-cleated plywood, wood-cleated fiberboard, nailed wood, corrugated or solid fiberboard boxes. Closure of shipping containers shall be in accordance with the applicable box specification.

5.2.3 Level C. Each chest shall be packed in a container of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Uniform Freight Classification Rules, (see 2.2) or regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or orders, shipping containers shall be marked for shipment in accordance with MIL-STD-129.

6. NOTES

6.1 Intended Use. Chest is used as a container and carrier for two gasoline lanterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) The issue in effect of applicable documents (2.1).
(c) Level of packing required (5.2).

6.3 Color chips. Color chips for Marine corps green No. 383 may be obtained from the Commandant of the Marine Corps (Code LPP-3), Headquarters U. S. Marine Corps, Washington, D.C. 20380.

6.4 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.5 Subject term key word listing. The following subject term (key word) listing is furnished for retrieval searches.

Chest
Gasoline Lantern

Preparing Activity:
Navy-MC
Project No. 6260-N053

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29450A(MC)	CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT,EMPTY

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command (Code:PSI-G)
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.