MIL-C-29450B(MC)
31 October 1989
SUPERSEDING
MIL-C-29450A(MC)
7 April 1988

MILITARY SPECIFICATION

CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT, EMPTY

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for one type of Gasoline Lantern Chest used by the Marine Corps.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

TT-V-121	- Varnish, Spar, Water-Resisting.
MMM-A-188	- Adhesive; Urea-Resin-Type, (Liquid and Powder).
TT-E-527	- Enamel, Alkyd, Lustreless.
TT-P-664	- Primer Coating, Synthetic, Rust-Inhibiting Lacquer Resisting.
MMM-A-1617	- Adhesive, Rubber Base, General Purpose.
A-A-2335	- Sealer, Surface (Varnish Type, Wood and Cork Floors).

Beneficial comments (recommendations, additions, deletions) and any pertinent data, which may be of use in improving this document should be addressed to: Commanding General (PSE-C), Marine Corps Research, Development and Acquisition Command, Washington, D.C. 20380-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6260

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Unless otherwise indicated, copies of federal specifications and standards are available from the Naval Publications and Forms Center (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government drawings. The following other Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

MARINE CORPS

641B1	- Lantern Chest Assembly.
1534C1	- Bolt, Trunk.
1F6	- Corner, Trunk with Knob.
1F7	- Corner, Clamp.
1F8	- Keeper, Special.
1F29	- Corner, Chest, Lid Small.
1F63	- Handle, Chest.
87027A0000	- Brace, Edge.
87031A0000	- Cushion.
87032A0000	- Position Cushion, Lid.

(Copies of other Government drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A153 - Zinc Coating (Hot-Dip) on Iron and Steel Hardware

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. The chest shall be made from materials specified herein and in applicable drawings (see 2.1.2).

3.1.1 Lumber. The lumber used in making the battens shall be "D" select ponderosa pine or its equal in suitability and strength. The lumber shall be thoroughly and uniformly dried without honeycombing or case hardening to a moisture content of 8 to 12 percent at time of fabrication and shall be free from decay, checks, loose knots, holes or other defects which might affect the strength, wear or serviceability of the chest. Sound, tight knots not exceeding 1/2 inch in greatest width will be permitted provided such knots are located more than 3/4 inch from any edge of a piece.

3.1.2 Plywood. The plywood shall be 5 ply construction, commercial douglas fir, exterior type, sanded two sides, commercial standard GS-45, grade A-B or better. The plywood shall be 1/2 inch thick for tops, bottoms, ends, sides and 3/8 inch for partitions.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

3.1.3 Metal parts. All metal parts including nails and rivets shall be made of steel and located as shown on applicable drawings.

3.1.4 Adhesive. Adhesives shall conform to MMM-A-1617 and MMM-A-188 as applicable.

3.1.5 Pretreatment coating material. Pretreatment coating material for metal surface shall conform to ASTM A153 or equivalent.

3.1.6 Wood sealer. Wood sealer shall conform to A-A-2335 or an equivalent suitable for the purpose specified therein.

3.1.7 Varnish. Varnish shall conform to TT-V-121.

3.1.8 Primer. Primer shall conform to TT-P-664; Composition G.

3.1.9 Coating. Coating shall conform to TT-E-527; Composition G, Chip No. 34079 to FED-STD-595.

3.1.10 Lantern packing instructions. Each chest shall be provided with an instruction sheet for packing the lanterns. The instruction sheet shall be enclosed in an open end envelope and shall be printed with the following: "INSTRUCTIONS FOR PACKING LANTERNS". The information on the sheet shall be a clear legible copy of Figure 1.

3.2 Construction and design. Construction, design, dimensions and finish of the chest and component parts shall be as shown on applicable drawings and as specified herein. Battens shall be made of lumber specified in 3.1.1, and all wood components of the chest shall be made of plywood specified in 3.1.2. Multiple piece construction in any wood member of the chest is not permitted.


3.2.1 Nails and rivets. All nails shall be inserted so as not to be driven out of the wood; all rivets shall be neatly and securely set with heads flush with metal surfaces.

3.2.2 Rubber pads. A pad of synthetic rubber, 3/4 inch in thickness by 3 inches square, with a 7/8 inch diameter hole cut through center of pad, shall be securely cemented on the inside of the chest top. The hole in the pad shall be located on the top as specified by drawing 641B1. The cement shall be rubber base, MMM-A-1617, or equal, and shall be applied to the smooth side of the pads and to a 3 inch square area around the top of chest. In addition, each chest shall be furnished with two pads of synthetic rubber 1/2 inch thick by 7-1/2 inches square, one pad placed in the bottom of each of the two lantern compartments.

3.3 Finish

3.3.1 Pretreatment

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

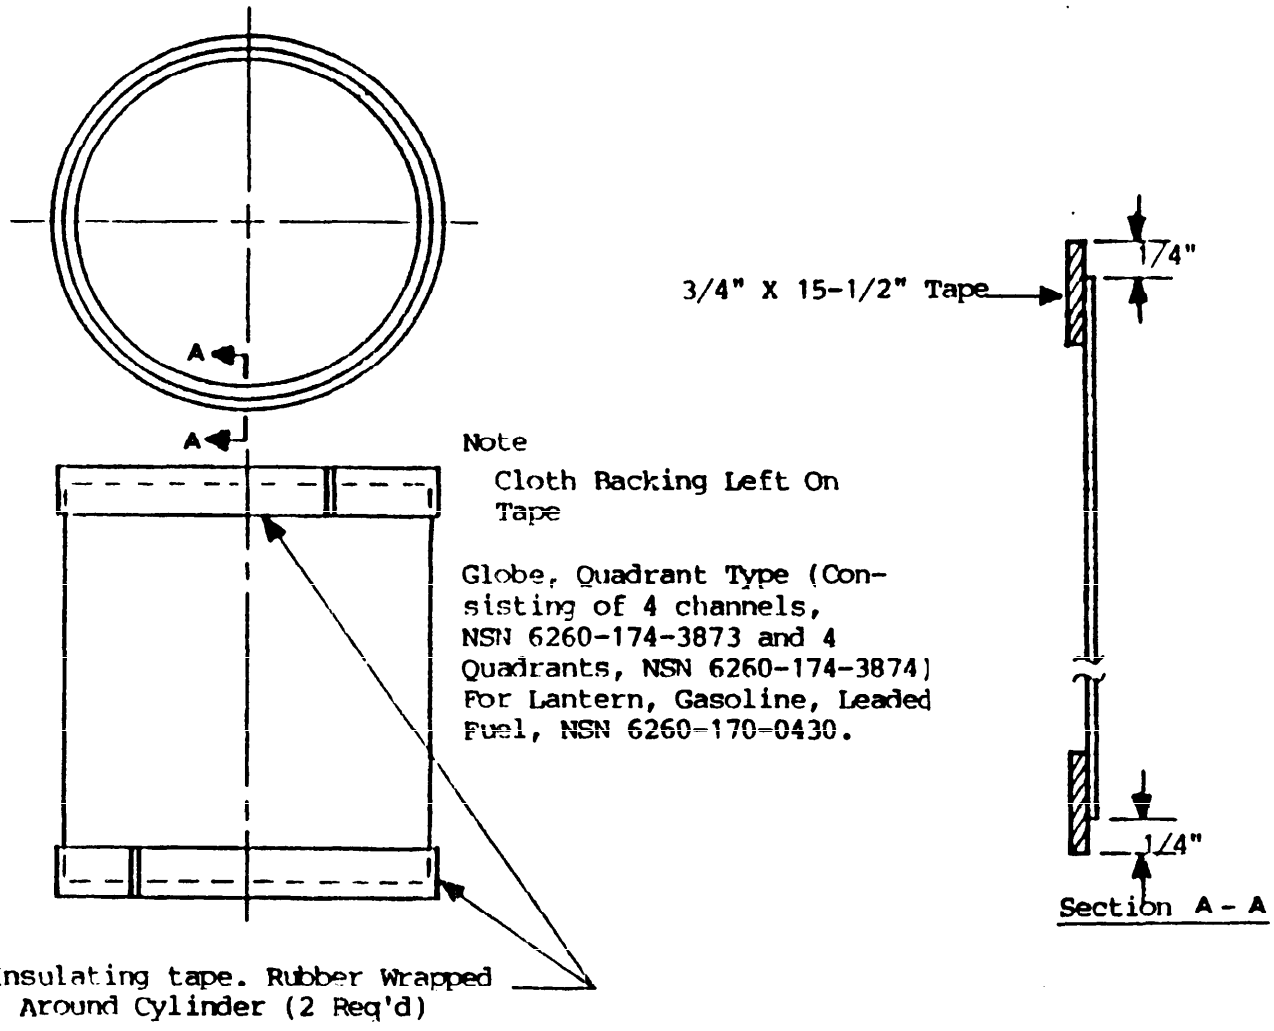

INSTRUCTIONS FOR PACKING LANTERNS

Unscrew knurled nut from top of Lantern and remove top.

Remove glass globe and apply strips of cloth backed rubber tape as shown above, the 1/4 inch protrusion above and below edges of globe to act as a cushion between globe and metal frame, leaving cloth backing on outside of tape, the rubber side placed next to the glass.

Replace glass globe in frame. Replace top of Lantern and turn down knurled nut hand tight.

Place Lanterns in chest with rubber pads in place at bottom of compartments, and when closing lid make certain that nut at top of Lantern is in center of hole in lid.

CAUTION

REMOVE STRIPS OF TAPE FROM GLOBE BEFORE LIGHTING LANTERNS.

FIGURE 1. CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT

Source: https://assist.dla.mil - Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

3.3.1.1 Metal Surfaces. Metal surfaces to be coated shall be thoroughly cleaned, degreased and given one coat of pretreatment material specified in 3.1.5.

3.3.1.2 Wood Surfaces. All wood surfaces of chest shall be given a coat of sealer (see 3.1.6). Before sealing, all surfaces shall be smooth, dry and thoroughly clean.

3.3.2 Varnishing. All inside surfaces of chest shall be given a coat of the varnish specified in 3.1.7.

3.3.3 Priming and Painting. The outside surfaces of chest and exposed surfaces of metal parts on the outside of chest shall be given a coat of primer, and a finish coat of paint as prescribed in 3.1.8 and 3.1.9, respectively.

3.4 Workmanship. The finished chest shall be clean, well made and free of any defect which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptance practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Inspection Lot. All chests offered for delivery at one time shall be considered a lot for the purpose of sampling and inspection.

4.3 Sampling for Acceptance Inspection. From each lot, in containers ready for shipment, sample chests shall be selected in

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

accordance with MIL-STD-105 at Inspection Level II for the inspection specified in 4.4.1.

4.4 Inspection

4.4.1 Visual and dimensional inspection. Each sample chest selected in accordance with 4.2 shall be visually and dimensionally inspected to determine completeness of manufacture, assembly, dimensions, finish, workmanship and appearance. If any sample item is defective, it shall be rejected and if the number of defective items in the sample exceeds the acceptance number specified the lot represented by the sample shall be rejected.

4.4.2 Rejected lots. Rejected lots may be offered again for Government inspection provided the contractor has satisfactorily reworked all rejected items. The Government inspector shall again select and examine samples from lots resubmitted to verify compliance with the requirements of this specification.

5. PACKAGING

5.1 Preservation and packaging. Not applicable.

5.2 Packing

5.2.1 Level A. Chests shall be packed in snug-fitting wood wirebound, wood-cleated plywood, wood-cleated solid fiberboard, nailed wood, or fiberboard boxes. Shipping containers shall be provided with waterproof case liners and sealed.

5.2.2 Level B. Each chest shall be packed in snug-fitting wood wirebound, wood-cleated plywood, wood-cleated fiberboard, nailed wood, corrugated or solid fiberboard boxes. Closure of shipping containers shall be in accordance with the applicable box specification.

5.2.3 Level C. Each chest shall be packed in a container of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Uniform Freight Classification Rules, (see 2.2) or regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase orders, shipping containers shall be marked for shipment in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil - Downloaded: 2026-10-20T23:12Z
Check the source to verify that this is the current version before use.

6.1 Intended Use. Chest is used as a container and carrier for two gasoline lanterns.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of the specification.

(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

(c) Level of packing required (see 5.2).

6.3 Color chips. Color chips for Marine Corps Green No. 34079 may be obtained from the Commandant of the Marine Corps (LPP-3), Headquarters, U.S. Marine Corps, Washington, D.C. 20380-0001.

6.4 Subject term key word listing. The following subject term (key word) listing is furnished for retrieval searches.

Chest
Gasoline Lantern

6.5 Marginal notations. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing Activity:
Navy-MC
Project No. 6260-N054

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-29450B(MC)	CHEST, GASOLINE LANTERN: ILLUMINATING EQUIPMENT, EMPTY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*
—	

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-02-12T23:12Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:12Z
Check the source to verify that this is the current version before use.