INCH-POUND

MIL-J-29451A(MC)

23 May 1994

SUPERSEDING
MIL-J-29451(MC)
29 December 1987

MILITARY SPECIFICATION

JACKET, MEN'S; INTERMEDIATE WEIGHT, POLYESTER/WOOL

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a male lightweight jacket.

1.2 Classification. The jacket shall be one type in the following sizes as specified (see 6.2):

Short	Regular	Long
30	30	30
32	32	32
34	34	34
36	36	36
38	38	38
40	40	40
42	42	42
44	44	44
46	46	46
48	48	48

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications, and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-50198	- Thread, Gimp, Cotton, Buttonhole
A-A-50199	- Thread, Polyester Core, Cotton or Polyester Covered
A-A-52106	- Cloth, Twill or Plain Weave, Polyester or Polyester Blend
V-B-871	- Buttons, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fastener, Slide, Interlocking
DDD-L-20	- Label for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-C-10176	- Cloth, Gabardine, Wool, Polyester and Wool
MIL-C-21852	- Cloth, Taffeta, Nylon
MIL-C-44296	- Cloth, Fusibles
MIL-T-3530	- Thread and Twine, Mildew Resistant or Water Repellent Treated

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T23:13Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Defense (DoD) Standard Shades for Buttons, 1966

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads, 1968

(Application for copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. The guide sample is furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample jackets for first article inspection and approval.

3.3 Materials.

3.3.1 Basic fabric. The basic fabric shall be cloth gabardine, polyester/wool, 10.6 ounce, pewter shade 2246 conforming to type II, class 12 of MIL-C-10176. The fabric shall have a durable water resistant finish.

3.3.2 Knit fabric for cuffs, collar and waistband. The yarn used shall be single ply 100% polyester. The knitted cloth shall be constructed on a circular or flat bed knitting machine using a 1 X 1 rib stitch. The cloth shall weigh a minimum of 11 ounces per square yard. The minimum wales per inch shall be 18 and the minimum courses per inch shall be 28. The color of the dyed and finished cuffs, collar, and waistband cloth shall match pewter shade 2246 and shall show colorfastness to light, perspiration, wet-dry cleaning and crocking equal to or better than the standard sample. When a standard sample is not available, the cloth shall show a Munsel value for crocking no lower than 8.5. Testing shall be performed as specified below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

Characteristic	Fed-Std-191 Test Method	
Colorfastness to:		
Light	5660	
Perspiration	5680	1/
Wet-dry Cleaning	5622	
Crocking	5651	

1/ On the color transfer cloth, only the stain on the polyester fiber shall be evaluated.

3.3.3 Lining. The material for the lining shall be nylon taffeta cloth, pewter shade 2246 (see 6.3), 1.9 ounce, conforming to type IV of MIL-C-21852.

3.3.4 Fusible interlining. The fusible interlining for the front, shoulder straps, pocket welts, center back and waist extension shall be cloth nonwoven, fusible, nylon and polyester, polyamide conforming to type V,
class 1, style B of MIL-C-44296.

3.3.5 Polyester twill. The material for the front pockets, inside breast pocket stay and inside breast pocket shall be polyester twill, natural shade conforming to class 1 of A-A-52106.

3.3.6 Slide fastener. The slide fastener for the front closure shall conform to type IV, style 8, size LM of V-F-106, with a short tab pull. The tape shall be cotton warp and nylon filling, 5/8 to 3/4 inch wide, and color shall be shade Y Taupe Cable No. 66525. All the components of the slide fastener shall be brass, and from the same supplier.

3.3.7 Buttons. The buttons for the shoulder straps, shall conform to type II, class D, style 20 or 21, size 24 line of V-B-871. The buttons shall have a glossy finish, green shade AF Cable No. 62017 (see DoD Standard Shades for Buttons 1966).

3.3.8 Thread. The thread shall be polyester, cotton covered, conforming to A-A-50199 as follows. The thread for seaming and stitching the outer shell shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

Use	Ticket No.	Ply
Seaming, stitching, buttonhole making and bartacks	50 70	2/3 2
Sewing on buttons	30	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.3.8.1 Color and colorfastness. The thread shall be dyed Taupe A Cable No. 66030. The dyed thread shall show fastness to light laundering (after three cycles), and wet (dry) cleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to light laundering (after three cycles), and wet (dry) cleaning.

3.3.9 Gimp. The buttonhole gimp shall be cotton, No. 8 soft or glazed finished, conforming to type I or II of A-A-50198. The color of the gimp shall be taupe A, Cable No. 66030. See DoD Standard Color Card of Official Standardization Shades for Sewing Thread 1968). The dyed gimp shall show fastness to laundering (after three cycles) and wet (dry) cleaning equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show good fastness to laundering (after three cycles) and wet (dry) cleaning.

3.3.10 Labels. Each jacket shall have a combination identification size and instruction label conforming to type VI, class 14 of DDD-L- 20. The printing shall show fastness to dry cleaning and shall have the following inscription:

Nomenclature: Jacket Men's, Intermediate Weight
Size: 40 Regular (Example)
Fiber Content: 55% Polyester, 45% Wool (Example)
Contract No: DLA 100-00-0-0000 (Example)
Name of Contractor:
Dry Clean Only:

3.3.10.1 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The label shall consist of the numerical size designation specified in 1.2 followed by the letters S, R, L or XL for Short, Regular, Long and Extra Long as shown by the following example:

40R

3.3.11 Hangar loop. The hangar loop shall be cotton or rayon braid that conforms to type IX, Class 1 of MIL-B-371. The color shall approximate the shade of the basic fabric.

3.4 Design. The jacket shall be the U. S. Marine Corps design shown on Figures 1 and 2, single breasted with covered slide fastener front closure, knitted collar, waistband and cuffs, two inverted slash pockets, two inside pockets, set-in sleeves, a strap with a button and buttonhole on each shoulder, bi-swing back and full-lined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used as a guide for cutting the contractor's working patterns. The contractor's working patterns shall be identical to the standard patterns. The standard patterns provide 3/8 inch allowance for seams, and the joining of knit cuffs, collar and waist bands; 1/4 inch for shoulder strap construction; zipper to be set in accordance with notches on pattern and 1/4 inch seams for setting pocket welts. Standard patterns show size, seam allowances, directional lines for cutting, and are marked or notched for proper placement and assembly of the component parts.

3.5.1 Pattern parts. Jackets shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern Nomenclature	No. of cut parts
	Material: Basic Polyester/Wool	
1.	Front	2
2.	Center Back	1
3.	Side Back	2
4.	Sleeve	2
5.	Shoulder Strap (Top)	2
6.	Shoulder Strap (Bottom)	2
7.	Front Facing	2
8.	Pocket Welt (Top)	2
9.	Pocket Welt (Bottom)	2
10.	Waistband Extension Facing	2
11.	Front Pocket Facing	2
	Material: Cloth, Knit	
12.	Sleeve Cuff	2
13.	Collar	1
14.	Waistband	1
	Material: Cloth, Polyester, Twill	
15.	Lower Front Pocket	4
16.	Inside Breast Pocket Stay	2
17.	Inside Breast Pocket	2
	Material: Interlining (Fusible)	
18.	Shoulder Strap	2
19.	Waistband Extension Facing	2
20.	Center Back (Bi-Swing Stay)	2
21.	Front Facing	2
22.	Pocket Welt (Top)	2
23.	Pocket Welt (Bottom)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

Material: Lining		
24.	Front	2
25.	Back	1
26.	Sleeve	2
27.	Facing, Inside Pockets	2

3.6 Construction. The jacket shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The manufacturer will not be required to follow the exact sequence of operations as listed, but all operations must be performed. The thread and the fabric shall not be lubricated by any means prior to or during the seaming. The stitch, seam, and stitching type specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. If two or more methods or seams or stitch types are given for the same part of an operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the jacket. The ends of all seams and stitchings not caught by other seams and stitchings shall be backtacked not less than 1/2 inch. Thread breaks of stitch type 301 shall be secured by stitching back of the break not less than 1/2 inch. Thread breaks or skipped stitch type 401 shall be backstitched not less than 1 inch with the stitching superimposed and anchoring the ends of the break.

3.6.1 Shade marking. The component parts of the jacket cut from one piece of basic material and lining material shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Adhesive type tickets which show discoloration or the use of an adhesive mass which adheres to the material upon removal of the tickets.

3.6.2 Fusing. The fusible interlining cloth shall be fused to the basic material in accordance with the following conditions:

(a) Temperature between pressing surfaces of 300° F minimum and 320° maximum, at the fuseline (not the temperature at the clock).

(b) Pressure between pressing surfaces of 6-pounds force per square inch (lb_f/in^2) minimum and 7-lb_f/in^2 maximum.

(c) Pressing time of 12 seconds minimum and 14 seconds maximum.

(d) Heat-dry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting. a. Cut the jacket in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by the directional lines on the pattern. The patterns have markings for placement of pockets and buttonholes, and notches for proper assembly of all parts. c. Unless otherwise specified herein cut all parts that are made of the basic fabric specified in 3.3.1 from the same piece of material. The underside of the shoulder straps, and front facing, may be cut from ends. The parts cut from ends shall approximate the shade of the outer shell. d. The body lining and sleeves of the jacket shall be cut from the same piece of the nylon lining material. e. Cut fusible interlining in accordance with pattern. f. The waistband, collar and cuffs shall be cut from the same piece of nylon knitted fabric.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Replacement of damaged parts. a. Replace at time of cutting any parts of jacket containing holes or serious weakening defects such as smashes, multiple floats, loose or weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc., affecting appearance. b. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissors or knife cuts, tears, holes, mends or burns in the material affecting appearance.					
3	Shade marking. a. Mark or ticket (see 3.6.1) all component parts to insure a uniform shade throughout the jacket and the proper assembling of all parts. b. If shade marking is used, the marking shall not show through and be visible on the outside of the jacket. c. The use of tickets with any metal fastening devices or sew-on shade tickets is prohibited.					
4	Fusing operation for parts. a. Position the respective fusible interlining material part on the underside of the front, waistband extension facing, back at bi-swing area of each shoulder, top and bottom pocket welt, and shoulder straps and fuse as specified in 3.6.2.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5	Make knit cuffs.					
	a. The cuffs shall be made from one ply of the nylon knit. The side edges of the cuff shall be joined with a 3/8 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Press the seam open with a heated steam iron and fold the cuff in half on the length. The finished cuff length shall be 2-1/2 inches ± 3/16 inch.					
	c. Pre-knitted cuffs may be used in lieu of piece goods, provided established dimensions are adhered to.					
6	Make shoulder straps.					
	a. The shoulder strap shall be made from two plies of basic material and one ply of fusible interlining.					
	b. Position the fusible interlining material on the underside of the top strap and fuse as specified in 3.6.2.					
	c. Position top strap and under strap face to face so that when shoulder strap is stitched and turned, the fusible interlining will be on the underside of top strap. Join all plies along the side edges and the pointed end with a 1/4-inch seam.	301	Sse-2 (a)	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make shoulder straps. (cont'd)					
	d. Trim and turn the shoulder strap, forcing out the edges and pointed end. Top stitch the shoulder strap 1/8 inch from the outer edge. The shoulder strap shall be 2-1/4 inches wide at the armhole and 1-3/4 inches wide at the neck.	301	SSe-2 (b)	10-12	70	70
7	Make sleeves.					
	a. Join the underarm seam of the sleeve with a 3/8-inch seam.	301	SSa-1	10-12	70	70
	b. Press the underarm seam open.					
8	Attach label.					
	a. Sew the identification label or combination identification and instruction label on all four sides to the lower opening of the right inside breast pocket. If the combination identification and instruction label is not used, sew the instruction label on all four sides, below the identification label.	301	SSa-1	10-12	70	70
9	Make slash pockets.					
	Finished appearance. Make a double welt inverted pocket in each front at the pattern marks. The top welt shall be 7/8 inch ± 1/8 inch wide. The bottom welt shall be 1/2 inch ± 1/8 inch wide. The depth at the center of each pocket shall be in accordance with the patterns. The opening of each pocket shall be not less than 6-1/2 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make slash pockets. (cont'd)					
	a. The top and bottom welts shall be made from one ply of basic material and one ply of fusible interlining.					
	b. Position the fusible interlining material on the underside of the top and bottom welts and fuse as specified in 3.6.2.					
	c. Fold in half lengthwise and press the top welt (with interlining).					
	d. Fold in half lengthwise and press the bottom welt.					
	e. Mark fronts for position of the pocket in accordance with mark in the pattern.					
	f. Position the facing on the pocket material at the back portion of pocketing. Fold under the front edge of facing 1/4 inch and stitch to the pocket 1/8 inch from the folded edge. A selvage edge need not be turned.	301	LSa-1	10-12	70	70
	g. Position the top welt on the outside of fronts with the mark, and with the folded edge of the welt toward the back. Position one ply of pocketing over the welt with the raw edges even and notches matching. Seam the pocketing through all plies 1/4 inch from the raw edge.	301	SSa-1	10-12	70	70
	h. Position the bottom welt and pocketing at the pocket mark and follow the same operation as 9f.	301	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Make slash pockets. (cont'd)					
	i. Cut the opening for the pocket. Tongue notch the corners.					
	j. Turn the pocketing through the opening to inside.					
	k. Raise stitch the bottom lower (bottom) welt through the front and the pocketing with a single row of stitching 1/16 inch from the edge.	301	LSg-2 (b)	10-12	70	70
	l. Fold the top welt over the inside welt.					
	m. Sew tongues at the corners to the welts on the inside with a single row of stitching.	301	SSa-1	10-12	70	70
	n. Raise stitch the seam joining the top welt and the end of the opening through the pocket with a single row of stitching 1/16 inch from the edge.	301	LSq-2 (b)	10-12	70	70
	o. Stitch around the pocketing with a single row of stitching 1/2 inch from the raw edge.	301	SSa-1	10-12	70	70
	p. Secure the corners of each end of the pockets at the base of the tongue at the underside with a 1/2 inch to 5/8-inch per bartack. The front and bottom of pockets shall hang free.	Bartack		28 stitches per bartack	70	70
10	Join back.					
	Finished appearance. The center and side back parts are joined to form a bi-swing back. The seams shall be made without puckers, pleats or distortions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10	Join back. (cont'd)					
	a. Join side back to respective side of center back with a 3/8 inch seam.	301 or 401	LSq-2 (a)	10-12	70	70
	b. Fold the joining seam toward the center back and topstitch from bottom of jacket to the point where the curved/rounded parts of bi-swing back begins, through all plies with 1/8 inch topstitch. Continue the 1/8 inch topstitch through the fold of center back to notch at shoulder catching only the 2 ply fold of the back on each side of the back forming the bi-swing back.	301	LSq-2 (b)	10-12	70	70
	c. The formed pleats of the bi-swing back shall be tacked across the shoulder outer raw edge with a 1/8 inch stitch.	301	SSa-1	10-12	70	70
	d. The pleat of the side back shall be sewn with 1/8 inch seam across the top of shoulder for a distance of 1 inch down the fold of pleat through all plies.	301	SSa-1	10-12	70	70
11	Join elastic to bi-swing pleat.					
	a. With the wrong side up and the back assembly laying flat, position a 1 inch wide strip of elastic 1/2 inch above the curved part of bi-swing pleat from left to right side. Tack the elastic to each side of pleat 1/8 inch from the finished seam of the pleat. The elastic and back assembly shall lay flat without twists, puckers or fullness.	301	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Join side seams.					
	a. Join the fronts and back with a 3/8 inch seam.	301 or 401	SSa-1	10-12	70	70
	b. Press the side seams open with a hot steam iron or press.					
13	Join front facing to lining.					
	a. The front facing shall be joined to the front lining with a 3/8 inch seam.	301	SSa-1	10-12	70	70
	b. The joining seam shall be pressed toward the side seam with a hot steam iron or press.					
14	Assemble inside pocket on lining and facing.					
	a. The inside pocket shall be made of one piece of polyester twill cloth with a facing of rayon lining at the horizontal double piped pocket opening.					
	b. Position the rayon facing on the pocket material with notches matching. Turn under the top and bottom edges, respectively, of the facing and seam the facing to the pocket 1/16 to 1/8 inch from the folded edges. Selvage edge need not be turned under.	301	LSd-1 (each turned edge) SSa-1 (each selvage edge)	10-14 10-12	A	A
	c. Sew the combination label to the outside of the right pocket facing, centered, 1/2 inch below pocket opening, with a single row of stitching 1/16 inch from each edge. Stitch the label to pocket 1/16 inch from each edge.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Assemble inside pocket on lining and facing. (cont'd)					
	d. Mark the right facing and the front lining, with the pocket marker furnished, for the position of the pocket opening.					
	e. Position the pocket at the mark with the pocket facing next to the lining material. Place the polyester twill stay piece on the underside of the lining, with the diagonal extension of the stay extending to the armhole edge of lining.					
	f. Stitch the pocket to the lining and facing through the stay piece with one row of stitches 3/16 to 1/4 inch on each side of the mark for the pocket opening.	301	SSv-2	10-14	A	A
	g. Cut the opening for the pocket midway between the two rows of stitches joining the pocket and pocket stay to the lining and facing, tongue notching each end of the opening.					
	h. Turn the pocket through the opening to the inside with the front and the back of the pocket toward the bottom and top edges, respectively, of the lining. Form the piping at the top and bottom edge of the opening. Topstitch the upper and lower edges of the pocket opening adjacent to the seamed outer edge of the piping.	301	BSp-2	10-14	A	A
	-or-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BO LI
14	Assemble inside pocket on lining and facing. (cont'd)					
	i. Accomplish the pocket opening with a double piped pocket machine which stitches, cuts and turns in one operation. When this machine is used, the piping piece may be trimmed to permit insertion into the machine. The joining seam of the top and bottom piped edges shall be raise stitched through lining and coat facing prior to pocket closing and top edgestitched through all plies. Tack ends of pocket opening.	101 or 301			A A	A A
	j. Turn down the back part of the pocket and seam the front and back together approximately 1/2 inch from raw side and bottom edges, catching the tongue notch at each end of the tongue notch. Continue to stitch across top of pocket adjacent to top piping seam, catching twill stay in stitching and closing top of pocket.	301	SSa-1	10-14	A	A
	k. Stitch the lining, on the outside, to the diagonal extension of the pocket stay from the armhole end of the pocket opening to the armhole.	301	SSv-1	10-14	A	A
	l. Notch top of polyester twill pocket at front edge of the full width of seam allowance and blindstitch inner ply of pocket to facing.	103 or 306	SSm-1 SSm-1	4-6 4-6	A A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
14	Assemble inside pocket on lining and facing. (cont'd)					
	m. In the finished coat, the width of the pocket opening shall be 5-1/2 ± 1/4 inches for all sizes and shall not extend into the facing more than 1 inch nor extend into the armhole. The depth of the pocket shall be not less than 6 inches.					
15	Join the back lining.					
	a. Tack a 1 inch pleat at center back of neck and bottom of lining in accordance with the notches. The folded pleat shall be pressed toward the wearer's left.	301	SSa-1	10-12	70	70
16	Join lining side seam.					
	a. Join the lining fronts and back with a 3/8 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the side seams together.	503 or 504	EFd-1	10-14	70	70
	c. Press the side seams toward the back with a hot steam iron or press.					
	-or-					
	d. The lining fronts and back may be seamed and overedged together in one operation.	515 or 516 or 517 or 518	SSa-2	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
17	Join lining shoulder seam.					
	a. Position the front shoulder lining to the back shoulder lining with the raw edges even and join with a 3/8 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the front and back shoulder linings together.	503 or 504	EFd-1	8-10	70	70
	- or -					
	c. The front and back shoulder linings may be seamed and overedged together in one operation.	515 or 516 or 517 or 518	EFd-2	8-10	70	70
18	Make sleeve lining.					
	a. Join the sleeve underarm seam with a 3/8 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Overedge stitch the raw edges of the underarm seam together.	503 or 504	EFd-1	8-10	70	70
	-or-					
	c. The sleeve underarm may be seamed and overedged together in one operation.	515 or 516 or 517 or 518	EFd-2	10-14	70	70
	d. The sleeve seam shall be pressed toward the back with a hot steam iron or press.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19	Set sleeve lining.					
	a. Position the respective sleeve lining to the armhole lining and seam with a 3/8 inch seam.	301 or 401	SSa-1	10-12	70	70
	b. Overedge stitch the raw edges of the sleeve and armhole together.	503 or 504	EFd-1	8-10	70	70
	-or-					
	c. The lining sleeve and armhole armhole may be seamed and overedged together in one operation.	515 or 516 or 517 or 518	EFd-2	10-14	70	70
20	Make waistband assembly.					
	a. Sew a shell extension facing piece to each end of the knit waistband with a 3/8 inch seam. The seams shall face front edge.	301	SSa-1	10-12	70	70
	b. Fold the waistband assembly in half lengthwise and press flat with a heated steam iron or press.					
	Note: The waistband shall measure 3 inches in width after joining to the jacket.					
21	Join shoulder seams.					
	a. Position the front to the back with the raw edges even at the shoulders and join with a 3/8 inch seam.	301 or 401	SSa-1	10-14	70	70
	b. Press the shoulder seams toward the front with a hot steam iron or press and topstitch front 1/8 inch from shoulder seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
22	Set shoulder strap.					
	a. Position the shoulder strap with the pointed end of the strap facing toward the edge of the neck and with the raw edge in line with the armhole. The back finished edge of the strap shall be 1/2 inch behind and in line with the shoulder seam. Correct position of the button to be in alignment with shoulder strap buttonhole and when buttoned, there shall be no distortion of strap or shoulder.					
	b. Seam the shoulder strap to the jacket 1/8 inch from the armhole edge.	301 or 401	SSa-1	10-12	70	70
23	Attach hanger braid and size label.					
	a. Position the hanger braid and the size label to the inside center back of jacket at the lower edge of the collar and seam to the knit collar with a 1/8 inch seam.	301 or 401	SSa-1	10-12	70	70
	b. The finished hanger shall measure 2-1/2 ± 1/4 inches long when measured along the lower edge of collar.					
24	Set sleeves.					
	a. Join the sleeves to the respective armhole with a 3/8 inch seam. The underarm seam of the sleeve shall match the side seam of the jacket.	301 or 401	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
25	Join waistband assembly to jacket.					
	a. Sew one side of the waistband to the bottom of the outer shell with a single row of stitching 3/8 inch from the edge.	301	SSa-1	10-14	70	70
	b. Attach the opposite edge of waistband to the bottom of the lining with a single row of stitching 3/8 inch from the edge.	301	SSa-1	10-14	70	70
	c. With the jacket turned inside out, join the outer shell, lining and waistband between the extension pieces with a single row of stitching 3/8 inch from the edge.	301 or 401	SSa-1	10-12	70	70
26	Join knit cuffs to sleeves.					
	a. Position knit cuff between sleeve and sleeve lining, with seams matching and all raw edges even and stitch together with a 3/8 inch seam. Stretch knit so that sleeve and lining fullness is equally distributed during sewing operation.	301 or 401	SSa-1	10-12	70	70
27	Make the collar.					
	a. The collar shall be made of one ply of knit material, cut in accordance with the pattern, folded in half lengthwise and pressed with a hot steam iron or press.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
28	Join slide fastener to facing.					
	a. Join the left and right slide fastener to the respective facings with a single row of stitching 1/4 inch from the edge of the chain. The top of the slide fastener tape shall be even with the raw edge of the neck opening and the bottom shall be 3/8 inch from the bottom ± 1/8 inch.	301	SSa-1	10-12	70	70
29	Attach collar.					
	a. The knit collar shall be sewn to the neck opening of the basic fabric from notch to notch with the outside edges of the front corners turned at the notch, over and onto the knit and caught in the stitching with a 3/8 inch seam.	301	SSa-1	10-12	70	70
	b. The knit collar shall be joined to the lining neck opening, with the lining facing set back 1/4 inch from the turned in edge of the front. The finished dimensions of the back collar shall finish 2-1/2 ± 3/16 inches.	301	SSa-1	10-12	70	70
30	Tack armhole.					
	a. The armhole lining and shell shall be joined together across the shoulder with a 2 inch seam and the underarm seams shall be joined with a 1 inch seam. Note: The sleeve or armhole shall not be distorted or twisted in any way.	301 or 401	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
31	Close jacket front.					
	a. Join the outer shell to the lining assembly at the front opening with a 7/16 inch seam from the folded edge. When the jacket is closed, the slide fastener shall not be visible.	301	SSa-1	10-12	70	70
	b. Raise stitch around the collar on the shell with a 1/8 inch seam from the collar joining seam.	301	SSak-1	10-12	70	70
32	Mark and make buttonholes.					
	a. Mark and make one horizontal 5/8 inch eyelet-end taper-bar buttonhole to fit a 24 line button, 3/4 inch from the pointed end and centered in each shoulder strap.	Buttonhole		52-54 stitches per buttonhole		
33	Sew buttons.					
	a. Sew one button on each shoulder to correspond with the buttonhole in the shoulder strap. The stitching shall go through all plies of fabric and lining but shall not distort the shoulder.	301 or 101 or Hand		14-16 20-22 4-6 Per button		
34	Clean jacket.					
	a. Trim all thread ends and remove loose threads from jacket.					
	b. Remove all spots, stains and shade tickets without damage to the fabric.					
35	Press jacket.					
	a. The jacket shall be pressed throughout with a heated steam iron or pressing machine. All marks shall be removed from the jacket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.7 Finished measurement. Finished measurements of jacket shall be as listed in Table II.

TABLE II. Finished measurements. 1/

Size	Chest 2/	Back length 3/			Sleeve length 4/		
		Short	Reg	Long	Short	Reg	Long
30	38	22 1/4	23 1/4	24 1/4	19	20	21
32	40	22 1/2	23 1/2	24 1/2	19	20	21
34	42	22 3/4	23 3/4	24 3/4	19	20	21
36	44	23	24	25	19	20	21
38	46	23 1/4	24 1/4	25 1/4	19	20	21
40	48	23 1/2	24 1/2	25 1/2	19	20	21
42	50	23 3/4	24 3/4	25 3/4	19	20	21
44	52	24	25	26	19	20	21
46	54	24 1/4	25 1/4	26 1/4	19	20	21
48	56	24 1/2	25 1/2	26 1/2	19	20	21
	± 1 in	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

1/ All measurements and tolerance are expressed in inches.

2/ Measure the chest with the slide fastener closed from folded edge to folded edge at the base at the armhole. Tolerance on full chest dimension is ± 1 inch.

3/ Measure the back length at the center back from the base of the knit collar, at the joining seam to the bottom edge of the knit waistband.

4/ Measure the sleeve length along the underarm seam from the armhole seam to the bottom edge of the knit cuff.

3.8 Workmanship. The finished jackets shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable point of value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certification of compliance. When certification of compliance are submitted, the Government reserves the right to check test such items to determine the validity of certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated jacket for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in FED-STD-191, wherever applicable, shall be followed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4.5.1.1 Sampling. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.5.3 Examination of the end item. The end item shall be visually examined for defects in 4.5.3.1 through 4.5.3.3. The applicable inspection levels and acceptable quality levels (AQL's) shall be as contained in the contract/purchase order. The sample unit for the examination shall be one jacket. Defects found during this examination shall be classified as specified below except defects with an asterisk in the classification column shall be classified as major defects if the defects seriously affect the appearance or serviceability and as minor A defects if the defects affect appearance and serviceability but not seriously.

4.5.3.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Material defects and workmanship damage	a. Any hole.	1		
	b. Any weakening defect such as smash, multiple float, or loose slub that might develop into holes.	2		
	c. Shade bar or unsightly slub on outside of jacket.	3		
	d. Shade bar or unsightly slub on inside of jacket (except sleeve linings).		201	
	e. Shade bar or unsightly slub on sleeve linings.			202

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Material defects and workmanship damage (cont'd)	f. Needle chews that might develop into holes.	4		
	g. Scissor or knife cut, tear, mend, pull, snag or burn.	5		
	h. Drill holes.	101		
	NOTE: If the condition of the material defects or the workmanship damage is nonweakening and inconspicuous and has a negligible effect on serviceability, the material defects or the workmanship damages shall not be classified as defects. If the condition of the material defects or the workmanship damages is definitely weakening and conspicuously located the material defects or the workmanship damages shall be classified as specified herein.			
Shaded parts	a. Any shaded parts on outside of jacket.	6		
	b. Any sleeve lining parts badly shaded.		203	
Cleanness	a. Any spot or stain clearly noticeable on outside of jacket.		204	
	b. Any spot or stain clearly noticeable on inside of jacket.			205
	c. Thread ends not trimmed throughout major portion of jacket or two or more shade tickets not removed.			206
	d. One or more bastings not removed.			207

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Component and assembly	a. Any defective components or defect of assembly (not classified herein).	7		
	b. Any component or required operation omitted (not classified herein).	8		
	c. Any component not cut in accordance with direction lines on patterns or specified requirements.	9		
Seam and stitching	a. Seam twisted, puckered, or pleated.	10		
	b. Part of jacket caught in any unrelated operation or stitching.	11		
	c. Threads used on outside of jacket not same shade or not satisfactorily matching shade of jacket.		208	
	d. Thread breaks or ends of stitching (if not caught in other seams or stitchings) not securely backtacked.		209	
	e. Looper thread of stitch type 401 exposed on outside of jacket.		210	
	f. Gage of stitching (edge, top, or raise stitching) irregular, i. e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance.		211	
	g. Gage of stitching (edge,top or raise stitching) not within range of gage specified or varying more than 1/16 inch if range is not specified.			212

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seam and stitching (cont'd)	h. Open seam over 1/8 inch but not over 1/4 inch. 1/			213
	i. Open seam over 1/4 inch. 1/		214	
	j. Stitches skipped or broken more than 1/4 inch but not more than 1/2 inch (on edge, top, or raised stitching when seam is seamed, turned and stitched. 1/		215	
	k. Stitches skipped or broken more than 1/2 inch (on edge, top, or raised stitching when seam is seamed, turned and stitched). 1/		216	
	l. Raw edges more than 1/8 inch but not more than 1/4 inch on outside of jacket. 2/			217
	m. Raw edges more than 1/4 inch on outside of jacket. 2/		218	
	n. Raw edges more than 1/2 inch but not more than 1 inch on inside of jacket. 2/			219
	o. Raw edges more than 1 inch on inside of jacket. 2/		220	
	1/ A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top, or raised stitching) shall be classified as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Seam and stitching (cont'd)	2/ A raw edge shall be classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, it shall be classified as an open seam.			
	p. Run offs more than 1/2 inch but not more than 1 inch on edge, top or raised stitchings is not resulting in open seam (outside only). 3/		221	
	q. Run offs more than one inch on edge top, or raised stitching if not resulting in open seam (outside only). 3/		222	
Tight tension	a. Stitches per inch on major portion of jacket one or two less than specified.			223
	b. Stitches per inch on major portion of jacket three less than specified.		224	
	c. Stitches per inch on major portion of jacket four or more than specified.	102		
	NOTE: Puckering is evidence of tight tension. If puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam or stitching. Tight tension shall be classified as an open seam.			
Buttonholes	a. One or more buttonholes omitted.	103		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttonholes (cont'd)	b. Buttonhole too small, not permitting button to enter buttonhole.	104		
	3/ Run offs on joining seams, if resulting in an open seam, shall be classified as open seams.			
	c. Buttonholes too large, i.e., 3/8 inch or more longer than diameter of button.		225	
	d. Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric.	105		
	e. One or more broken stitches in one buttonhole.			226
	f. One or more broken stitches in two buttonholes.		227	
	g. Buttonholes with ragged edges, affecting appearance.			228
	h. Buttonhole not specified type, uncut buttonhole.		229	
	i. Gimp not pulled through to underside on one or more buttonholes.			230
	j. Gimp omitted on one or more buttonholes.		231	
	k. One or two stitches per buttonhole less than specified.		232	
	l. Three or four stitches per buttonhole less than specified.		233	
	m. Five or more stitches per buttonhole less than specified.	106		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Buttons	a. One or more buttons defective, missing, loose, or blistered.		234	
	b. Buttons not specified type, size or finish.		235	
Fusible lining/ interlining	a. Bubbling or delamination.	107		
	b. Strike through of adhesive.		236	
	c. Peeling.	108		

4.5.3.2 Defects applicable to specific parts. Defects applicable to specific parts shall be classified as follows:

Cuffs (knit)	a. Cuffs twisted, affecting appearance.		237	
	b. Cuff not specified shade/ color.	109		
	c. Cuff length less than 2-1/4 inches or more than 2-3/4 inches.	110		
Collar (knit)	a. Collar twisted, affecting appearance.	111		
	b. Neckline puckered, twisted or pleated by collar joining seam.		238	
Hanger	a. Hanger omitted or ends of hanger not securely backstitched or tacked.		239	
	b. Length of hanger between tacks at ends less than 2-1/4 inches or more than 2-3/4 inches.			240
	c. Width of hanger less than 1/4 inch or more than 1/2 inch.			241

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Hanger (cont'd)	d. Hanger off center 1 inch or more with center of collar.			242
Label	a. Label missing or size marking omitted, incorrect, or illegible.	112		
	b. Information (except size) missing, incorrect, or illegible.		243	
	c. Label not stitched on four sides to inside of pocket.		244	
Slash pockets	a. Left and right slash pockets not in corresponding diagonal position, affecting appearance.	113		
	b. Slash pockets 1/2 inch or more out of alignment.		245	
	c. Length of slash pocket opening less than 6-1/2 inches or more than 6-3/4 inches.		246	
	d. Width of top welt less than 3/4 inch or more than 1 inch.		247	
	e. Width of bottom welt less than 3/8 inch or more than 5/8 inch.		248	
Sleeves	a. Sleeve sagging, twisted, bulging or short caused by shortness, tightness, or lining not correctly positioned.	12		
	b. Sleeve fullness misplaced or concentrated in one area.		249	
	c. Sleeve lining too long, causing lining to sag at bottom.		250	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Shoulder straps	a. Upper side of shoulder strap full or twisted, affecting appearance.		251	
	b. Shoulder strap poorly shaped, affecting appearance.		252	
	c. Shoulder strap misplaced so that it will not lie flat when buttoned, causing bulge or twist on shoulder strap.	13		
	d. Shoulder strap misplaced so that shoulder seam is exposed.	114		
	e. Shoulder strap misplaced, i.e., one shoulder strap further forward or back from position of other shoulder strap, affecting appearance.		253	
	f. Shoulder strap misplaced, i.e., one shoulder strap further forward or back from position of other shoulder strap, affecting appearance.		254	
	g. Shoulder strap long, i.e., point extending beyond collar creasing.	115		
	h. Shoulder strap interlining omitted.		255	
	i. Width of shoulder strap at neck less than 1-5/8 inches or more than 1-7/8 inches.		256	
	j. Width of shoulder strap at armhole less than 2-1/8 inches or more than 2-3/8 inches.		257	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Shoulder straps (cont'd)	k. Button not aligned with buttonhole, causing bulge or twist on shoulder strap or puckers on shoulder, affecting appearance.		258	
	l. Finished buttonhole with purling on reverse side.	116		
	m. Buttonhole more than 1/8 inch but not more than 1/4 inch off center with width of shoulder strap.		259	
	n. Buttonhole more than 1/4 inch off center with width of shoulder strap.	117		
Side seams, fronts and front closure	a. Back overlapping front at side seams.			260
	b. Length of closed fronts uneven at neck 1/4 inch or more or at bottom 1/4 inch or more.	118		
	c. Slide fastener tape set on too loosely or too tightly causing excessive bulging on opening, affecting appearance open or closed.			261
	d. Slide fastener not specified type, size, or style or any part of assembly omitted, bent, or broken.			262
	e. Slide fastener exposed more than 1/16 inch or gaping more than 1/16 inch closed.		263	
	f. Jacket part stitched too close to metal chain not permitting slider to pass.	119		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECTS	CLASSIFICATION MAJOR	MINOR A	MINOR B
Side seams, fronts and front closure (cont'd)	g. Top end of slide fastener chain less than 1/2 inch from raw edge of neckline.		264	
Back	a. Bi-swing twisted, affecting appearance.		265	
	b. Bi-swing pleat does not lay flat.		266	
	c. Bi-swing pleat poorly constructed, affecting appearance.		267	

4.5.3.3 Examination of finished measurements. Any finished measurement deviating from the finished measurements specified in 3.7 or sleeve length of any jacket uneven by 1/2 inch or more shall be classified as a finished measurement defect.

5. PACKAGING

5.1 Preservation and packaging. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each jacket shall be folded in accordance with good commercial practice. The folded jacket shall be placed in a box conformin to type CF, class domestic, style RSC, minimum bursting strength 200 pound per square inch of PPP-B-636. The box shall be closed with tape conformin to PPP-T-45.

1/ One package from each container in the sample shall be examined for thi defect.

5.1.2 Commercial. Commercial preservation shall be in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Four jackets of one size packaged as specified in 5.1, shall be packed in a box that is constructed, closed, and reinforced to conform to type CF or SF, class weather-resistant, grade V3c or V3s, style RSC of PPP-B-636. Toward the end of the contract or if the quantity of jackets of the same size is less than the quantity required per box, mixed sizes (see 5.3.1) may be packed within the same box.

5.2.3 Commercial. Jackets preserved in accordance with 5.1.2 shall be packaged in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container packed with mixed sizes (see 5.2.1) shall have white paper labels, 5 X 4 inches in size, securely attached to the end and side. The words "mixed sizes" shall be plainly printed on the labels. Under these words, the sizes and quantities of each size of jackets contained therein shall be legibly printed.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The jacket covered by this specification is intended to be worn by personnel of the U. S. Marine Corps.

6.2. Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification
(b) Size required (see 1.2)
(c) When first article is not required (see 3.2)
(d) Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2)

6.3 Guide sample. The guide sample and color sample may be obtained from the procuring activity or as directed by the acquiring officer.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Jacket
Polyester Wool
Men's

6.6 Figures. Figures 1 and 2 show general design of the jacket and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

Preparing activity
Navy - MC
Project No. 8405-N236

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

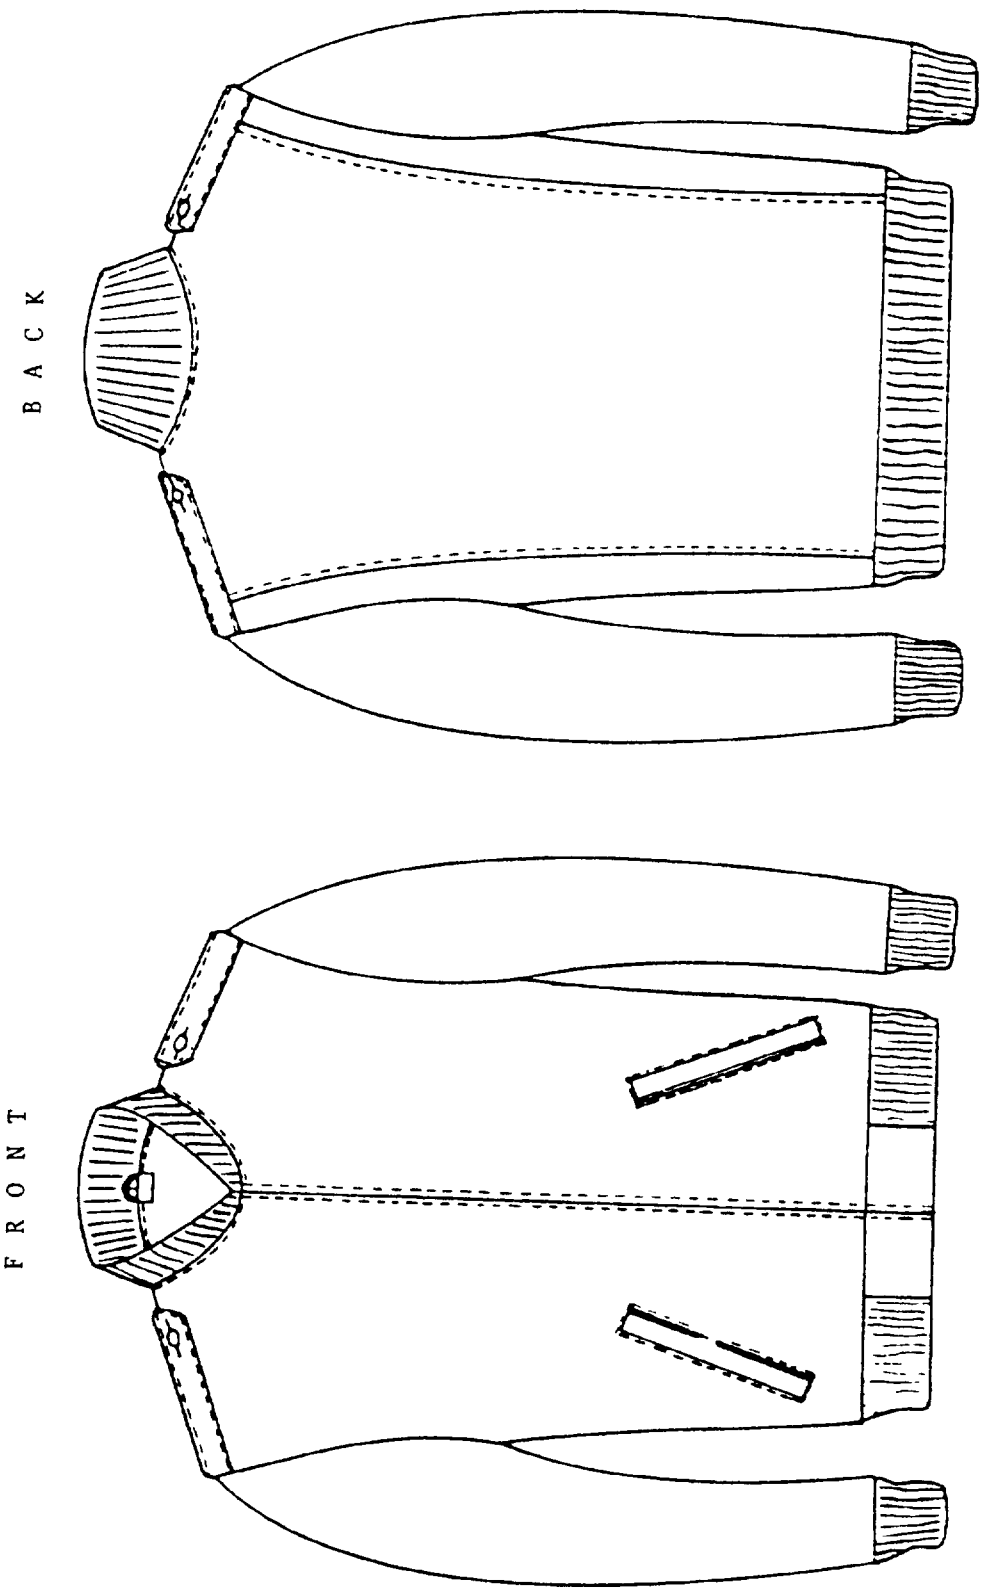


FIGURE 1 JACKET, MEN'S; INTERMEDIATE WEIGHT, POLYESTER/WOOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

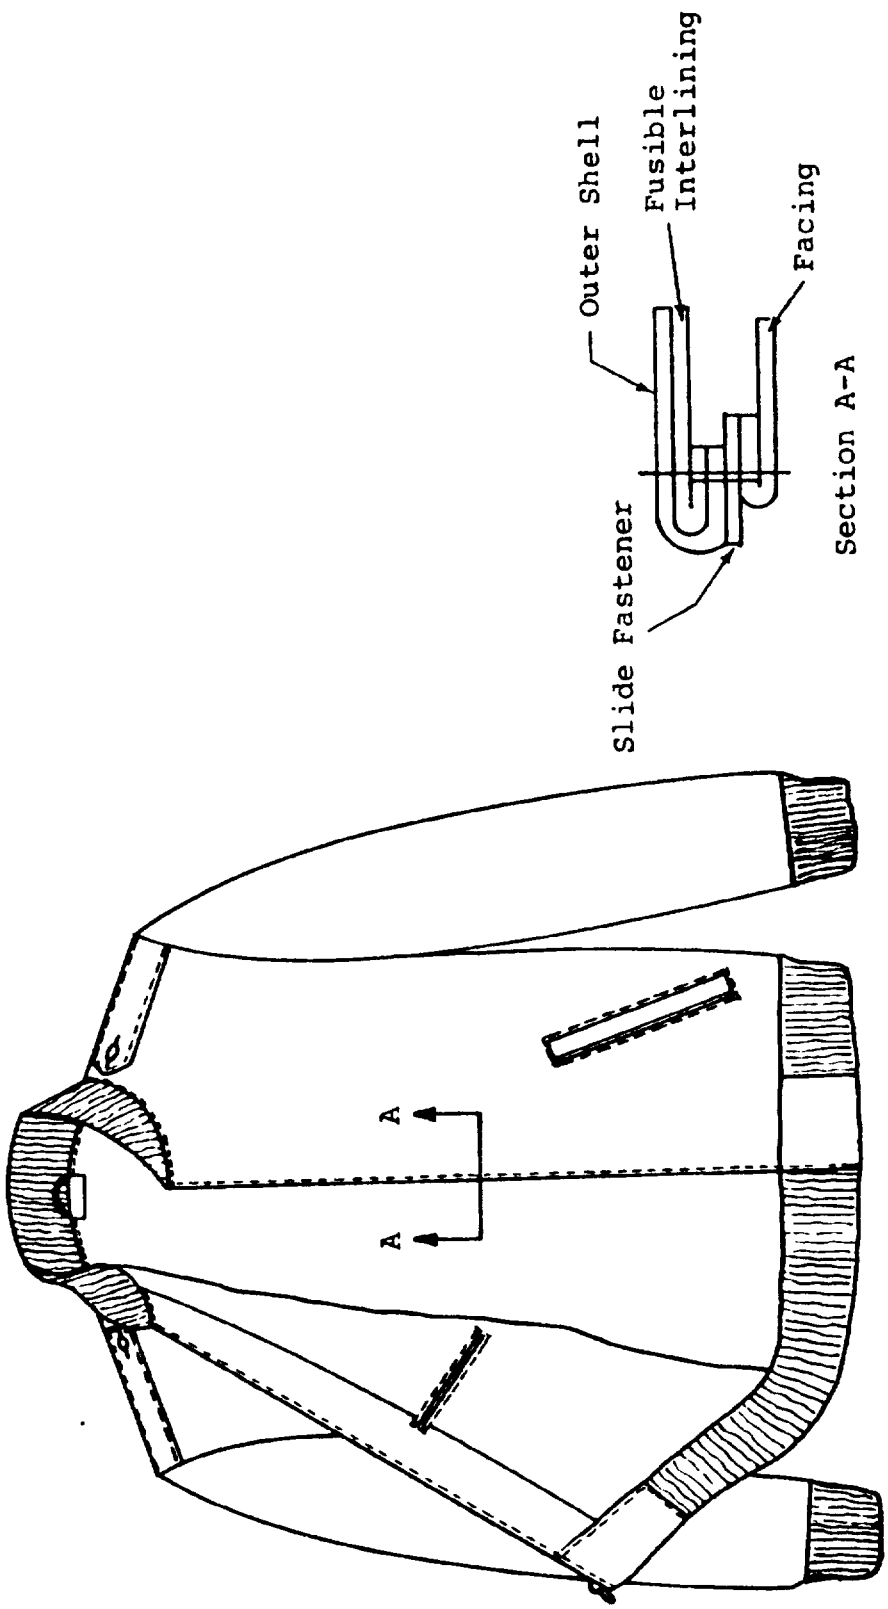


FIGURE 2 JACKET, MEN'S; INTERMEDIATE WEIGHT, POLYESTER/WOOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-J-29451A(MC)	2 DOCUMENT DATE (YYMMDD) 23 May 1994

3 DOCUMENT TITLE
JACKET, MEN'S; INTERMEDIATE WEIGHT, POLYESTER/WOOL

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c ADDRESS *(Include Zip Code)*	d TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8 PREPARING ACTIVITY

a NAME COMMANDER	b TELEPHONE *(Include Area Code)* (1) Commercial: (703) 640-4584 (2) AUTOVON: 278-4584
c ADDRESS *(Include Zip Code)* PROGRAM SUPPORT DIRECTORATE, PSE-C/S, MARCORSYSCOM, 2033 BARNETT AVE SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike Suite 1403 Falls Church VA 22041-3466 Telephone (703) 756 2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that these documents are current before use.