INCH-POUND
MIL-DTL-29451C(MC)
w/AMENDMENT 1
13 June 2022
SUPERSEDING
MIL-DTL-29451C(MC)
18 January 2022

DETAIL SPECIFICATION

JACKET, MEN'S – INTERMEDIATE WEIGHT, POLYESTER/WOOL

This specification is approved for use by the United States Marine Corps and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a polyester/wool, intermediate weight, men's jacket. For the purpose of this specification, a finished jacket consists of a jacket outer shell and a removable liner.

1.2 Classification. The jacket is of one type in the following sizes and lengths, as specified (see 6.2).

1.2.1 Sizes. 30, 32, 34, 36, 38, 40, 42, 44, 46, and 48.

1.2.2 Lengths. Short, Regular, and Long.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50198 - Thread, Gimp, Cotton, Buttonhole

A-A-50199 - Thread, Polyester Core, Cotton and Polyester-Covered

A-A-52106 - Cloth, Twill or Plain Weave, Polyester and Polyester Blend

A-A-55126 - Fastener Tapes, Hook and Loop, Synthetic

A-A-55634 - Zippers (Fasteners, Slide Interlocking)

A-A-59994 - Button, Sewing Hole, and Button, Staple, (Plastic)

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-371	-	Braid, Textile, Tubular
MIL-DTL-10176	-	Cloth, Gabardine: Wool, Polyester and Wool
MIL-C-21852	-	Cloth, Taffeta, Nylon
MIL-DTL-32075	-	Label: For Clothing, Equipage, and Tentage, (General Use)
MIL-C-44296	-	Cloth, Fusibles

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC EP1	-	Gray Scale for Color Change
AATCC EP2	-	Gray Scale for Staining
AATCC EP8	-	AATCC 9-Step Chromatic Transference Scale
AATCC EP9	-	Visual Assessment of Color Difference of Textiles
AATCC TM8	-	Colorfastness to Crocking: Crockmeter Method
AATCC TM15	-	Colorfastness to Perspiration
AATCC TM16.3	-	Test Method for Colorfastness to Light: Xenon-Arc
AATCC TM20	-	Test Method for Fiber Analysis: Qualitative
AATCC TM132	-	Colorfastness to Drycleaning

(Copies of these documents are available online at www.aatcc.org.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at www.asq.org.)

ASTM INTERNATIONAL

ASTM D1777	-	Standard Test Method for Thickness of Textile Materials
ASTM D3776/D3776M	-	Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
ASTM D6193	-	Standard Practice for Stitches and Seams
ASTM D8007	-	Standard Test Method for Wale and Course Count of Weft Knitted Fabrics

(Copies of these documents are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.2.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.3.

3.2 Standard sample. The finished jacket is furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.3 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.4 Design. The jacket shall be the United States Marine Corps design described in table I and as shown in figure 1, figure 2, and figure 3.

TABLE I. Jacket design.

Design Feature	Detail
Front closure	Single-breasted with covered slide fastener front closure
Collar, waistband, and sleeve cuffs	Knitted
Long sleeves	Set-in sleeves with knitted cuffs
Pockets (right and left)	Two angled double welt (overlapped) slash pockets on outside
	Two horizontal double welt chest pockets on inside
Shoulder strap	Strap on each shoulder with button and buttonhole
Back design	By-swing back design
Lining	Sleeves and body fully lined
Removable liner	Sleeveless
	Attached by hook and loop fastener tape along facing and collar edge

3.4.1 Figures. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Materials and components.

3.5.1 Basic material. The basic material shall be a polyester/wool, gabardine cloth treated with a water repellent finish conforming to MIL-DTL-10176, type II, class 13 when tested as specified in 4.4.1. The color shall be Pewter, shade 2246.

3.5.2 Knit cloth for collar, waistband, and cuffs. The knit cloth used for the collar, waistband, and cuffs shall meet the requirements of table II when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE II. Knit cloth characteristics and requirements.

Characteristic	Requirement
Color	A good match to the basic material
Fiber	100% continuous filament/texturized polyester
Yarn ply	Single ply
Knit construction	1 by 1 rib stitch constructed on a circular or flatbed machine
Weight (minimum)	11 ounces per square yard
Yarns per inch (minimum)	
Wales	18
Courses	28
Colorfastness	
Crocking (wet and dry)	Equal to or better than 3.5
Perspiration (acid and alkaline)	3–4
Light after 40 AATCC Fading Units (AFU) or 170 kJ/(m^2nm) 1/ at 420 nm	3–4
Dry cleaning	Equal to or better than 4
FOOTNOTE: 1/ Kilojoules (kJ) per square meter per nanometer (m^2nm).	

3.5.2.1 Cuffs. The cuffs shall be made from the material specified in table II and shall conform to the requirements of table III when tested as specified in 4.4.1.

TABLE III. Cuff requirements.

Characteristic	Requirement
Construction (made on a circular knitting machine)	One piece without seams
Ends of cuff	Tapered with a tuck or expanding stitch
Size range	One size cuff for all jacket sizes
Weight per dozen pairs of cuffs (ounces) (minimum)	9
Dimensions (inches)	
Height of top rib	1-1/8±1/8
Height of bottom rib	2±1/8
Total height of finished cuff	3-1/8±1/8
Width at the bottom of the cuff (folded edge to folded edge)	3±1/8

3.5.3 Lining. The lining material for the sleeves, body, breast pocket stays, and inside pocket facings shall be nylon taffeta of Pewter, shade 2246 and 1.9 ounces per square yard, conforming to MIL-C-21852, type IV when tested as specified in 4.4.1.

3.5.4 Removable liner. The quilted removable liner shall be made of the materials detailed in 3.5.4.1 through 3.5.4.5.

3.5.4.1 Outer plies. The outer plies (front and back) shall conform to the lining material specified in 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.5.4.2 Batting. The material for the liner insulation shall be a white polyester or polyester/olefin blend nonwoven batting made of microfibers. The batting shall be needle-punched and heat-set to activate binder fibers. The weight shall be 3.1±0.1 ounces per square yard, and the thickness shall be not less than 0.3 inch when tested as specified in 4.4.1.

3.5.4.3 Quilting. The outer plies and batting shall be quilted along the warp with rows of stitching of 6 to 8 stitches per inch. The rows shall be spaced 4 inches apart. The thread shall be a good match to the shade of the lining material (see 3.5.3) and shall conform to A-A-50199, type I, 31–35 or 36–45 Tex, 2 ply when tested as specified in 4.4.1.

3.5.4.4 Binding. The binding for all edges of the fronts, back, and armholes shall conform to the lining material specified in 3.5.3. The binding shall be cut on the bias and shall be 3/4 to 1-1/4 inches wide when tested as specified in 4.4.1.

3.5.4.5 Hook and loop fastener tape. The hook portion of the fastener tape shall conform to A-A-55126, type I or type II, class 1 when tested as specified in 4.4.1. The loop portion of the fastener tape shall conform to A-A-55126, class 1 when tested as specified in 4.4.1. The color of the tape shall be a good match to the shade of the basic material (see 3.5.1). The tape shall measure 1 inch wide by 1-1/2±1/8 inches long.

3.5.5 Fusible interfacing. The fusible interfacing for the fronts, front facings, shoulders straps, pocket welts (top and bottom), center back bi-swing stays, and waist extension facing shall be white or dark grey nonwoven cloth, nylon and polyester, conforming to MIL-C-44296, type V, class 1 when tested as specified in 4.4.1.

3.5.6 Pocket material. The material for the front pockets, inside pocket stays, and inside breast pockets shall be polyester twill, natural shade, conforming to A-A-52106, class 1 when tested as specified in 4.4.1.

3.5.7 Slide fastener. The slide fastener for the front closure shall conform to A-A-55634, type III, style 8, size LM with a short tab pull when tested as specified in 4.4.1. The tape shall be cotton warp and nylon filling, 5/8 to 3/4 inch wide, and the color shall be a good match to the shade of the basic material (see 3.5.1 and 6.5). All metal components of the slide fastener shall be brass and from the same supplier.

3.5.8 Buttons. The buttons for the shoulder straps shall conform to A-A-59994, type I, class 1, style 20 or 21, size 24-ligne when tested as specified in 4.4.1. The buttons shall have a glossy finish, and the color shall be a good match to the shade of the basic material (see 3.5.1 and 6.6).

3.5.9 Thread. The thread shall be polyester core, cotton-covered thread conforming to A-A-50199, type I and shall also show a colorfastness to drycleaning rating equal to or better than 4 when tested as specified in 4.4.1. The color shall be a good match to the shade of the basic material (see 3.5.1 and 6.7). The threads used to construct the jacket and removable liner shall conform to the requirements specified in table IV.

TABLE IV. Thread requirements.

Use	Tex No.	Ply
Seaming, stitching, buttonhole, and bartacks	36–45	2
	31–35	2
Buttons	61–70	3

3.5.10 Buttonhole gimp. The buttonhole gimp shall conform to A-A-50198, type I or II, Tex 180 or 210 when tested as specified in 4.4.1. The color of the gimp shall be a good match to the shade of the shade of the basic material (see 3.5.1 and 6.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.5.11 Labels. A combination size, identification, and instruction label shall be attached to the jacket. A size label shall be attached to both the jacket and the removable liner. A barcode label shall be attached to the jacket.

3.5.11.1 Combination label. The combination size, identification, and instruction label shall conform to MIL-DTL-32075, type VI, class 14 when tested as specified in 4.4.1. The label shall have the following inscription:

NOMENCLATURE: Jacket Men's - Intermediate Weight

SIZE: 40 Regular (Example)

FIBER CONTENT: 55% Polyester, 45% Wool (Example)

CONTRACT NUMBER: DLA 100-00-0-0000 (Example)

NAME OF CONTRACTOR: XYZ Apparel (Example)

DRY CLEAN ONLY

3.5.11.1.1 Alternate label. As an alternate, the combination label may be separated into an instruction label and a size/identification label.

3.5.11.2 Size label. The separate size labels for the jacket and for the removable liner shall conform to MIL-DTL-32075, type VI, class 2 when tested as specified in 4.4.1. The label shall consist of the numerical size designation specified in 1.2.1 followed by the letters S, R, or L for Short, Regular, and Long. For example, 40 Regular is depicted on the label as 40R.

3.5.11.3 Barcode label. Each jacket shall be individually barcoded with a paper label/tag conforming to MIL-DTL-32075, type VIII, class 17 when tested as specified in 4.4.1. The tag shall be attached to the item by a fastener. The label's location and attachment method shall cause no damage to the item. The barcoding element shall be a 13-digit National Stock Number (NSN) and the appropriate 12-digit Universal Product Code (UPC) assigned to the NSN by the Government. The initials "UPC" shall appear beneath the code. The barcodes for the NSN and UPC shall be a medium to high density and shall be located so that they are completely visible on the item when the item is folded or packaged as specified herein.

3.5.12 Hanger loop. The hanger loop shall be a cotton braid conforming to MIL-DTL-371, type IX, class 1 when tested as specified in 4.4.1. The color shall be a good match to the shade of the basic material.

3.5.13 Bi-swing elastic. The knit elastic for the bi-swing back shall be 1 inch wide, 60 percent polyester and 40 percent latex with 140±10 percent elongation when tested as specified in 4.4.1 (see 6.9).

3.6 Pattern parts. Standard patterns will be furnished by the Government (see 6.2). Government patterns show size and directional lines for cutting and are marked or notched for the proper placement and assembly of component parts. Unless otherwise indicated on the patterns, the directional lines indicate the warp direction of the cloth. Patterns provide a seam allowance of 3/8 inch for single needle seams and the joining of knit cuffs, collar, and waistband; 1/4 inch for shoulder strap construction; and 1/4 inch for setting pocket welts. The zipper shall be set in accordance with the notches on the patterns. The list of pattern parts is provided to ensure that the pattern set provided is complete. The working patterns shall be used to cut and manufacture jackets that meet the dimensional requirements of 3.9. When specified (see 6.2), the contractor shall submit the working pattern file to the Government for review prior to cutting. Additional notching is permitted if needed to facilitate manufacture. Minor modifications are permitted where necessary to accommodate the manufacturer's processes and the use of automated equipment provided the modifications do not alter the dimensional, serviceability, or appearance requirements cited in this document or governed by the Government pattern. Component parts shall be cut from the materials and the number of parts specified in table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE V. List of jacket pattern parts.

Material	Piece Name	Cut Parts
Basic material (see 3.5.1)	FRONT	2
	CENTER BACK	1
	SIDE BACK	2
	TOP SLEEVE	2
	UNDER SLEEVE	2
	SHOULDER STRAP (TOP)	2
	SHOULDER STRAP (BOTTOM)	2
	FRONT FACING	2
	BACK NECK FACING	1
	POCKET WELT (TOP)	2
	POCKET WELT (BOTTOM)	2
	WAISTBAND EXTENSION FACING	2
	FRONT POCKET FACING	2
Knit cloth (see 3.5.2)	COLLAR	1
	WAISTBAND	1
Pocket material (see 3.5.6)	FRONT TOP POCKET	2
	FRONT UNDER POCKET	2
	INSIDE BREAST POCKET STAY	2
	INSIDE BREAST POCKET	2 1/
Fusible interfacing (see 3.5.5)	FRONT	2
	SHOULDER STRAP	2
	WAISTBAND EXTENSION FACING	2
	CENTER BACK (BI-SWING STAY)	2
	FRONT FACING	2
	POCKET WELT (TOP)	2
	POCKET WELT (BOTTOM)	2
Lining (see 3.5.3)	FRONT	2
	BACK	1
	TOP SLEEVE	2
	UNDER SLEEVE	2
	BREAST POCKET STAY	2
	FACING, INSIDE POCKETS	2
Removable liner (quilted) (see 3.5.4)	FRONT	2
	BACK	1

FOOTNOTE:

1/ As an alternate, a two piece inside breast pocket is allowed. Cut 4 pattern parts and seam pocket plies together.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.7 Construction requirements. End item construction and appearance shall conform to the requirements in table VI and table VII, figure 1 through figure 3, and the finished dimensions cited in 3.9 to maintain end item configuration as verified in 4.4.3 and 4.4.4. Following the exact sequence of operations of table VII is not required, provided the finished jacket meets the finished form, fit, and function requirements as those produced by following the sequence of operations specified in table VII. Any additional underpressing to facilitate manufacture is permissible.

TABLE VI. Construction requirements.

Construction feature	Requirement
1. Thread	
a. Type and size	(1) See table IV.
b. Tension	(1) Maintained so that there is no tight, loose, or unbalanced stitching.
c. Shade on outside of jacket	(1) Consistent thread shade on the outside of the jacket. Multiple shades of thread on the outside of the jacket are not allowed.
d. Breaks (all stitches types)	(1) Secured by stitching back of the break not less than 1/2 inch.
	(2) If 401 stitch type, repaired using 301 stitch type.
2. Stitches and Seams	
a. Stitches and seam types	(1) ASTM D6193.
b. Stitches per inch	(1) See table VII.
c. Overedging	(1) Knife set to trim loose threads and raveled edge without cutting the material.
d. Seams and seam allowances	(1) Maintained with seam uniformly sewn so that no raw edges, runoffs, twists, pleats, gathers, other distortions, or open seams result.
e. Beginning and ending of seams	(1) Start and finish evenly.
f. Joined components	(1) Lie flat.
g. Ends of seams and stitching - 301 stitch type	(1) If not caught in another line of stitching: backstitched not less than 1/4 inch.
	(2) If the end of a continuous line of stitching (except label): overlapped not less than 1/2 inch.
	(3) If label stitching: overlapped not less than 3 stitches.
h. Skipped stitches (301 or 401)	(1) Repaired by using 301 stitch type.
i. Additional bastings	(1) Acceptable provided the basting thread does not show on the outside of the finished item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
1. CUTTING AND MARKING					
a. Cutting	(1) Components cut as indicated by Government patterns from the material specified in 3.5.1.	-	-	-	-
	(2) All components of the shell cut from one piece of basic material. The underside of the shoulder straps and the front facing may be cut from ends.	-	-	-	-
	(3) All components of the lining cut from one piece of lining material.	-	-	-	-
	(4) The waistband, collar, and cuffs match in shade.	-	-	-	-
b. Replacing defective parts	(1) Defective or damaged components replaced.	-	-	-	-
c. Shade marking	(1) All components cut from one piece of basic material marked, ticketed, or bundled to ensure uniform shade and size throughout.	-	-	-	-
	(2) Any method of shade marking may be used except: (a) corrosive metal fastening devices, (b) sewn-on shade tickets, or (c) adhesive type tickets that leave traces of paper or adhesive on material after removal of the tickets.	-	-	-	-
2. FUSING					
	(1) Interlining positioned on the respective basic material component part (see 3.5.1).	-	-	-	-
	(2) Applied in accordance with the supplier's recommendation for time, temperature, and pressure.	-	-	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
3. LINING CONSTRUCTION					
a. Lining: facing	(1) Front facing joined to the front lining.	3/8 inch	301	SSa-1	10–12
	(2) Joining seam pressed toward the side seam.	-	-	-	-
b. Lining: inside pockets	(1) Inside pocket made of one piece of polyester twill cloth with a facing of lining cloth at the horizontal double piped pocket opening.	-	-	-	-
	(2) Facing positioned on the pocket material with notches matching. Top of the facing turned under and seamed to the pocket 1/16 to 1/8 inch from each edge. Selvage edge need not be turned.	-	301	LSd-1 (turned edge)	10–14
				SSa-1 (selvage edge)	10–12
	(3) Combination label centered 1/2 inch below the pocket opening and all four sides stitched to the outside of the right pocket facing with a single row of stitching 1/16 inch from the raw edge. When the alternate label is used, position the instruction label below the size/identification label.	-	301	SSa-1	10–14
	(4) Pocket opening positioned on the right facing and front lining in accordance with the pocket marker.	-	-	-	-
	(5) Pocket positioned at the mark with the pocket facing next to the lining material. Polyester twill stay piece positioned on the underside of the lining with the diagonal extension of the stay extending to the armhole edge of lining.	-	-	-	-
	(6) Pocket stitched to the lining and facing through the stay piece with one row of stitches 3/16 to 1/4 inch on each of the marks for the pocket opening.	-	301	SSv-1	10–14
	(7) Pocket opening cut midway between the two rows of stitches joining the pocket and pocket stay to the lining and facing. Tongues notched at each end of the opening.	-	-	-	-
	(8) Pocket turned through the opening to the inside. Piping formed at the top and bottom edge of the opening and topstitched along the upper and lower edges of the pocket opening adjacent to the seamed outer edge of the piping.	-	301	BSp-2	10–14

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
	(9) As an alternate, the processes above can be accomplished with automated stitching machines where multiple operations can be conducted at the same time.	-	-	-	-
	(10) Back part of the pocket turned down and the front and back seamed together 1/2 inch from the side and bottom edges, catching the tongue notch at each end. Stitching continued across the top of the pocket adjacent to the top seam, catching stay in the stitching and closing the top of the pocket.	-	301	SSa-1	10–14
	(11) Lining stitched to the diagonal extension of the pocket stay from the armhole end of the pocket opening to the armhole.	-	301	SSv-1	10–14
	(12) Inner ply of pocket blindstitched to facing.	-	103 or 306	SSm-1	4–6
	(13) Finished pocket opening is 5-1/2±1/4 inches for all sizes. The depth of the pocket is not less than 6 inches. The pocket does not extend into the facing more than 1 inch nor extend into the armhole.	-	-	-	-
c. Lining: back pleat	(1) One-inch pleat tacked at center back of neck and bottom of lining in accordance with the notches.	-	301	SSa-1	10–12
	(2) Folded pleat pressed towards the wearer's left.	-	-	-	-
d. Lining: seams	(1) Fronts and back joined at the side seams. Shoulder seams joined. Sleeve underarm seams joined. Sleeves set to armholes.	3/8 inch	301 or 401	SSa-1	10–14
			and 503 or 504	EFd-1	8–10
			OR 515 or 516 or 517 or 518	EFd-2	10–14 (straight stitch) and 8–10 (overedge)
	(2) Side seams and sleeve underarm seams pressed toward the back.	-	-	-	-
e. Lining: loop fastener tape	(1) Positioned in accordance with marks on patterns (2 pieces on neck facing and 3 pieces on each front facing).	-	-	-	-
	(2) Stitched on all four sides 1/16 to 1/8 inch from edge of tape.	-	301	SSa-1	10–12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
4. OUTER SHELL CONSTRUCTION					
a. Shoulder straps	(1) Made from two plies of basic material and one ply of fusible interlining and applied to the underside of the top ply of the strap.	-	-	-	-
	(2) All plies joined along the side edges and the pointed end. Trimmed and turned with edges forced out. Topstitched 1/4 inch from edge.	1/4 inch	301	SSe-2 (a) and (b)	10–12
	(3) Measures 2-1/4±1/8 inches wide at the armhole and 1-3/4±1/8 inches wide at the neck.	-	-	-	-
b. Sleeves	(1) Joined at the underarm seam and pressed open.	3/8 inch	301	SSa-1	10–12
c. Front pockets	(1) Double welt inverted pocket positioned on each front in accordance with marks on patterns.	-	-	-	-
	(2) Top and bottom welts made from one ply of basic material and one ply of fusible material, positioned on the underside of each welt.	-	-	-	-
	(3) Pocket opening not less than 6-1/2 inches.	-	-	-	-
	(4) Top welt 7/8±1/8 inch wide.	-	-	-	-
	(5) Bottom welt 1/2±1/8 inch wide.	-	-	-	-
	(6) Facing positioned on the pocket material at the back portion of pocketing with the edges of the facing folded under 1/4 inch and stitched 1/8 inch from folded edges. A selvage edge need not be turned.	-	301	LSd-1 (turned edge) or SSa-1 (selvage edge)	10–12
	(7) Top welt, bottom welt, and pocketing positioned according to marks on patterns and stitched. Pocket opening cut and corners tongue notched. Pocketing turned through the opening to the inside. Bottom welt raisestitched through the front and pocketing 1/16 inch from the edge.	-	301	SSa-1	10–12
	(8) Top welt positioned over the bottom welt. Tongues at the corners sewn to welts on the inside.	-	301	SSa-1	10–12
	(9) Seam joining the top welt and end of the opening raisestiched 1/16 inch from the edge through the pocket.	-	301	SSa-1	10–12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
	(10) Pocket bag closed with a single row of stitching.	1/2 inch	301	SSa-1	10–12
	(11) Corners of each end of the pockets at the base of the tongue at the underside secured with a 1/2- to 5/8-inch bartack. The front and bottom of the pockets hang free.	-	Bartack	-	28 stitches per bartack
d. Backs	(1) Center and side back parts joined to form a bi-swing back.	3/8 inch	301 or 401	LSq-2 (a)	10–12
	(2) Joining seams folded toward the center back and topstitched 1/8 inch from the bottom of the jacket to the point where the curved/rounded parts of the bi-swing back begin. Topstitching continued through the fold of the center back to notch at shoulder, catching only two-ply fold of the back on each side of the back forming the bi-swing back.	-	301	LSq-2 (a)	10–12
	(3) Formed pleats of the bi-swing back tacked across the shoulder outer raw edge with a 1/8-inch stitch.	-	301	SSa-1	10–12
	(4) Pleat of the side back sewn with 1/8-inch seam across the top of the shoulder from a distance of 1 inch down the fold of the pleat through all plies.	-	301	SSa-1	10–12
e. Elastic at bi-swing pleat	(1) One inch-wide strip of elastic positioned 1/2 inch above the curved part of bi-swing pleat from left to right side, tacked to each side of pleat 1/8 inch from the finished seam of the pleat.	-	301	SSa-1	10–12
	(2) Elastic, pleat, and back lay flat without twists, puckers, or fullness.	-	-	-	-
f. Side seams	(1) Fronts and backs joined at side seams.	3/8 inch	301 or 401	SSa-1	10–12
	(2) Side seams pressed open.	-	-	-	-
g. Waistband extension	(1) Extension facing piece stitched to each end of the knit waistband with the seams facing the front edge.	3/8 inch	301	SSa-1	10–12
	(2) Waistband assembly folded in half lengthwise and pressed flat.	-	-	-	-
	NOTE: In the finished jacket, the waistband shall measure 3-1/4±1/8 inches wide.	-	-	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
h. Shoulder seams	(1) Fronts joined to the back at the shoulders.	3/8 inch	301 or 401	SSa-1	10–14
	(2) Shoulder seams pressed toward the front and topstitched 1/8 inch from the shoulder seam.	-	301	SSa-1	10–14
i. Shoulder straps	(1) Shoulder strap attached at the armhole edge with the pointed end of the strap facing toward the edge of the neck and with the raw edge in line with the armhole. The back finished edge of the strap is 1/2 inch behind and in line with the shoulder seam.	1/8 inch	301 or 401	SSa-1	10–12
	(2) In the finished jacket, the strap button is aligned with the strap buttonhole, and, when buttoned, neither the strap nor the shoulder is distorted.	-	-	-	-
j. Hanger loop and size label	(1) Hanger loop and size label positioned on the inside center back of jacket at the lower edge of the collar and seamed to the knit collar.	1/8 inch	301 or 401	SSa-1	10–12
	(2) Finished hanger loop opening measures 2-1/2±1/4 inches long when measured along the lower edge of collar.	-	-	-	-
k. Sleeves	(1) Sleeves joined to the respective armhole.	3/8 inch	301 or 401	SSa-1	10–12
	(2) Underarm seam of the sleeve matches the side seam of the jacket.	-	-	-	-
5. OUTER SHELL ATTACHED TO LINING CONSTRUCTION					
a. Waistband assembly to jacket	(1) Each side of waistband attached to the respective bottom of the outer shell with a single row of stitching.	3/8 inch	301	SSa-1	10–14
	(2) With jacket turned inside out, outer shell, lining, and waistband joined between the extension pieces.	3/8 inch	301 or 401	SSa-1	10–12
b. Knit cuff to sleeves	(1) Knit cuff positioned between sleeve and sleeve lining with the seams matching and all edges even and stitched together.	-	301 or 401	SSa-1	10–12
	(2) Sleeve and lining fullness is equally distributed along cuff.	-	-	-	-
	(3) Finished cuff length: 2-1/2±3/16 inches.	-	-	-	-
c. Slide fastener to facing	(1) Left and right slide fastener attached to respective facings with a single row of stitching 1/4 inch from folded edge.	-	301	SSa-1	10–12
	(2) Top of the slide fastener tape is even with the raw edge of the neck opening and the bottom is 3/8±1/8 inch from the bottom.	-	-	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
d. Collar to neck	(1) Collar is one piece of knit material, cut in accordance with the pattern, folded in half lengthwise, and pressed with a hot steam iron or press.	-	-	-	-
	(2) Collar is attached to the neck opening of the outershell from notch to notch with outside edges of the front corners turned at the notch over and onto the knit and caught in the stitching.	3/8 inch	301	SSa-1	10–12
	(3) Collar is attached to the lining neck opening, with the lining facing set back 1/4 inch from the turned edge of the front. The back collar finishes 2-3/8 to 2-1/2 inches wide.	-	301	SSa-1	10–12
e. Tack armhole	(1) Armhole lining and shell joined together across the shoulder with a 2-inch long row of stitching and the underarm seams joined with a 1-inch long row of stitching.	301 or 401	SSa-1	10–12	31–35
	NOTE: The sleeve or armhole is not to be distorted or twisted in any way.	-	-	-	-
f. Close jacket front	(1) Outershell joined to the lining assembly at the front opening with a 7/16-inch seam from the folded edge. When the jacket is closed, the slide fastener is not visible.	-	301	SSa-1	10–12
	(2) Outershell raisestitched along the collar 1/8 inch from the collar joining seam.	-	301	SSa-1	10–12
6. REMOVABLE LINER CONSTRUCTION					
a. Quilting	(1) Batting quilted between front and back plies of lining material with rows of vertical stitching 4±1/8 inches apart.	-	301	-	6–8
b. Seaming	(1) Fronts and back joined at the side seams. Shoulder seams joined.	3/8 inch	301 or 401	SSa-1	10–14
			and 503 or 504	EFd-1	8–10
			or 515 or 516 or 517 or 518	EFd-2	10–14 (straight stitch) and 8–10 (overedge)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE VII. Manufacturing operations – Continued.

Operation	Requirements	Seam Allowance	Stitch Type	Seam Type	Stiches per Inch
c. Binding	(1) Outer edges bound with both edges turned under and stitched 1/16 to 1/8 inch from the folded edge.	-	301	BSc-2	8–10
	(2) Binding finishes 1/4±1/16 inch wide.	-	-	-	-
d. Hook tape	(1) Positioned in accordance with marks on patterns (2 pieces on back and 3 pieces on each front).	-	-	-	-
	(2) Stitched on all four sides 1/16 to 1/8 inch from edge of tape.	-	301	SSa-1	8–10
e. Size label	(1) Top of the size label attached to the liner at the center back, facing the wearer. The label may be attached during binding, may be attached with a separate row of stitching superimposed on the binding stitching, or may be caught in the bottom of the manufacturer's label, if used.	-	301	SSa-1	10–12
7. FINISHING					
a. Buttonholes	(1) One horizontal 5/8-inch, eyelet end, taper-bar buttonhole is positioned 3/4 inch from the pointed end and centered in each shoulder strap.	-	Button-hole	52–54 stitches per buttonhole	-
b. Buttons	(1) One 24-ligne button is positioned on each shoulder to correspond with the buttonhole in the shoulder strap without distortion to the shoulder or strap.	-	301	14–16	-
			or 101	20–22	
			or hand	4–6 per button	
	(2) Stitching is through all plies of fabric including the lining.	-	-	-	-
c. Attach removable liner	(1) All hook and loop tapes engaged, attaching the removable liner to the jacket without any distortion.	-	-	-	-
d. Cleaning	(1) All thread ends trimmed and loose threads removed.	-	-	-	-
	(2) All spots, stains, and shade tickets removed without damage to the fabric.	-	-	-	-
e. Pressing	(1) Jacket thoroughly pressed. All pressing marks removed from the jacket.	-	-	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

3.8 Finished dimensions. The finished jacket and removable liner shall conform to the measurements shown in table VIII and table IX, as defined in table X when measured as specified in 4.4.4.

TABLE VIII. Jacket – finished dimensions (inches).



Size	Chest (A)	Back Length (B)			Sleeve Length (C)		
		Short	Regular	Long	Short	Regular	Long
30	39	24-3/4	25-3/4	26-3/4	19-1/2	20-1/2	21-1/2
32	41	25	26	27	19-1/2	20-1/2	21-1/2
34	43	25-1/4	26-1/4	27-1/4	19-1/2	20-1/2	21-1/2
36	45	25-1/2	26-1/2	27-1/2	19-1/2	20-1/2	21-1/2
38	47	25-3/4	26-3/4	27-3/4	19-1/2	20-1/2	21-1/2
40	49	26	27	28	19-1/2	20-1/2	21-1/2
42	51	26-1/4	27-1/4	28-1/4	19-1/2	20-1/2	21-1/2
44	53	26-1/2	27-1/2	28-1/2	19-1/2	20-1/2	21-1/2
46	55	26-3/4	27-3/4	28-3/4	19-1/2	20-1/2	21-1/2
48	57	27	28	29	19-1/2	20-1/2	21-1/2
Tolerance:	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2

TABLE IX. Removable liner – finished dimensions (inches).

Size	Half Chest (D)	Back Length		
		Short	Regular	Long
30	18-1/2	21-3/4	22-3/4	23-3/4
32	19-1/2	22	23	24
34	20-1/2	22-1/4	23-1/4	24-1/4
36	21-1/2	22-1/2	23-1/2	24-1/2
38	22-1/2	22-3/4	23-3/4	24-3/4
40	23-1/2	23	24	25
42	24-1/2	23-1/4	24-1/4	25-1/4
44	25-1/2	23-1/2	24-1/2	25-1/2
46	26-1/2	23-3/4	24-3/4	25-3/4
48	27-1/2	24	25	26
Tolerance:	±1/2	±1/2	±1/2	±1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE X. Methods of measure.

Letter	Measurement	Method	Measurement Depiction
JACKET – laid flat on a table with the slide fastener closed.			
A	**Chest**	Twice the measurement from folded edge to folded edge across the chest at the base of the armhole.	
B	**Back length**	At the center back from the base of the knit collar at the joining seam to the bottom edge of the knit waistband.	
C	**Sleeve length**	Along the underarm seam from the arm joining seam to the bottom edge of the knit cuff.	
REMOVABLE LINER – Removed from the jacket and laid flat on a table with the front bound edges superimposed upon each other.			
D	**Half chest**	Taken from the bound front edge to the center back at the base of the armhole.	
E	**Back length**	At the center back from the bound neck edge to the bound bottom of the liner.	

3.9 Workmanship. The jacket shall conform to the quality of product established by this document, be uniform, and be free from defects specified in 4.4.3 and those defects that adversely affect form, fit, or function. Defects shall not exceed the established Acceptance Quality Limits (AQLs) (see 6.2) and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. Unless otherwise specified in the contract (see 6.2), the first article, in accordance with 3.1.1, shall be examined in accordance with 4.4.1 through 4.4.4 for compliance with the design, configuration, workmanship, dimensional, and testing requirements as specified in this document.

4.2.1 First article samples and acceptance criteria. Unless otherwise specified in the contract (see 6.2), first article samples shall be provided. The sample size shall be as specified (see 6.2); the sample unit shall be one finished jacket; the lot size shall be expressed in units of jackets; and the presence of excessive defects or failure of any testing shall be cause for rejection of the first article.

4.3 Conformance inspection. Unless otherwise specified in the contract (see 6.2), conformance inspection, in accordance with 3.1.2, shall consist of the examinations and tests as specified in 4.4.1 through 4.4.4. The Government reserves the right to inspect and test all components, materials, and end items to determine conformance to stated requirements.

4.3.1 Material and component sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), material and component sampling shall be in accordance with table XI. The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable referenced document and table XII. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document.

TABLE XI. Material and component sampling.

Lot Size	Sample Size (Sample Unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

TABLE XII. Component sampling.

Component	Lot Size Expressed As	Sample Unit for Testing
Knit material	Yards	2 yards full width
Knit cuff	Cuffs	1 dozen
Liner insulation material	Yards	1 yard full width

4.3.2 End item sampling and acceptance criteria. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4; the lot size shall be expressed in units of finished jackets, the sample unit shall be one finished jacket, and the presence of excessive defects or failure of any testing as specified shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4.4 Inspection methods.

4.4.1 Material and component examinations and tests. Unless otherwise excluded, amended, or modified in this document or applicable procurement documents (see 6.2), materials and components shall be examined and tested in accordance with specified examinations and tests referenced in table XIII, table XIV, and table XV in accordance with 3.5.

TABLE XIII. Component and material verification.

Material	Requirement	Verification
Basic material	3.5.1	MIL-DTL-10176
Knit cloth	3.5.2	As listed in table XIV
Cuffs	3.5.2.1	Visual
Lining	3.5.3	MIL-C-21852
Batting	3.5.4.2	As listed in table XV
Binding	3.5.4.4	Visual
Hook and loop fastener tape	3.5.4.5	A-A-55126
Fusible interfacing	3.5.5	MIL-C-44296
Pocket material	3.5.6	A-A-52106
Slide fastener	3.5.7	A-A-55634
Buttons	3.5.8	A-A-59994
Threads	3.5.4 and 3.5.9	A-A-50199
Colorfastness to drycleaning	3.5.9	AATCC TM132
Buttonhole gimp	3.5.10	A-A-50198
Labels	3.5.11.1, 3.5.11.2, 3.5.11.3	MIL-DTL-32075
Hanger loop	3.5.12	MIL-DTL-371
Bi-swing elastic	3.5.13	1/

FOOTNOTE:
1/ See 6.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE XIV. Knit cloth verification.

Characteristic	Requirement	Verification
Color	3.5.2	AATCC EP9, option C [1/]
Fiber identification	3.5.2	AATCC TM20 [2/]
Yarn ply	3.5.2	Visual
Knit construction	3.5.2	Visual
Weight	3.5.2	ASTM D3776/D3776M
Yarns per inch	3.5.2	
Courses		ASTM D8007
Wales		ASTM D8007
Colorfastness to crocking	3.5.2	AATCC TM8 and AATCC EP8
Colorfastness to perspiration:	3.5.2	
Color change		AATCC TM15 and AATCC EP1
Staining		AATCC TM15 and AATCC EP2
Colorfastness to light	3.5.2	AATCC TM16.3 and AATCC EP1
Colorfastness to dry cleaning:	3.5.2	
Color change		AATCC TM132 and AATCC EP1
Staining		AATCC TM132 and AATCC EP2

FOOTNOTES:

[1/] Sources shall simulate artificial daylight D65 illuminant (see 6.11.1) with a color temperature of 6500±200 Kelvin (with illumination of 100±20 foot candles). Under these conditions, the color shall be a good match to the standard sample under incandescent lamplight at 2856±200 Kelvin (see 6.11).

[2/] See 6.10.

TABLE XV. Batting.

Characteristic	Requirement	Verification
Fiber identification	3.5.4.2	AATCC TM20 [1/]
Weight	3.5.4.2	ASTM D3776/3776M
Thickness	3.5.4.2	ASTM D1777

FOOTNOTE:

[1/] See 6.10.

4.4.2 In-process examination. Visual examinations shall be made at any point or during any phase of the manufacturing process to determine whether material or construction details, which cannot be examined in the finished product, are in accordance with the requirements specified herein. Materials and components that contain defects and damages, as defined in the visual examination of 4.4.3, shall be removed from production. Any in-process nonconformance remaining in the finished jacket shall be classified as a defect in accordance with the visual examination of 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

4.4.3 Visual inspection of end items. The end item shall be examined for defects in color, design, material, construction, workmanship, and marking. All defects shall be classified as specified in table XVI except those defects in the "*" column, which shall be scored as a Major defect when seriously affecting appearance or serviceability of the item. All other "*" defects shall be scored as a Minor A. The inspection conditions and AQLs shall be as specified (see 6.2).

TABLE XVI. Visual defects.

Examine	Defects	Classification			
		Major	Minor		*
			A	B	
1. Material defects and workmanship	a. Any hole.				401
	b. Any weakening defect such as smash, multiple float, or loose slub that might develop into holes.				402
	c. Shade bar or unsightly slub on the outside of the jacket.				403
	d. Shade bar or unsightly slub on the inside of jacket (except sleeve linings).		201		
	e. Shade bar or unsightly slub on sleeve linings.			301	
	f. Needle chews that might develop into holes.				404
	g. Scissor or knife cut, tear, mend, pull, snag, or burn.				405
	h. Drill holes.	101			
	NOTE: If the condition of the material defects or the workmanship damage is non-weakening and inconspicuous and has a negligible effect on serviceability, the material defects or the workmanship damages shall not be classified as defects. If the condition of the material defects or the workmanship damages is definitely weakening and conspicuously located, the material defects or the workmanship damages shall be classified as specified herein.				
2. Shaded parts	a. Any shaded parts on outside of jacket.				406
	b. Any sleeve lining parts badly shaded.		202		
3. Cleanness	a. Any spot or stain clearly noticeable on outside of jacket.		203		
	b. Any spot or stain clearly noticeable on inside of jacket.			302	
	c. Thread ends not trimmed throughout major portion of jacket or two or more shade tickets not removed.			303	
	d. One or more bastings not removed.			304	
4. Component and assembly	a. Any defective components or defect of assembly (not classified herein).				407
	b. Any component or required operation omitted (not classified herein).				408
	c. Any component not cut in accordance with direction lines on patterns or specified requirements.				409

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE XVI. Visual defects – Continued.

Examine	Defects	Classification			
		Major	Minor		*
			A	B	
5. Seam and stitching	a. Seam twisted, puckered, or pleated.				410
	b. Part of jacket caught in any unrelated operation or stitching.				411
	c. Threads used on outside of jacket not consistent shade or not satisfactorily matching shade of jacket.		204		
	d. Thread breaks or ends of stitching (if not caught in other seams or stitchings) not securely backtacked.		205		
	e. Looper thread of stitch type 401 exposed on outside of jacket.		206		
	f. Gage of stitching (edge, top, or raise stitching) irregular (i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance).		207		
	g. Gage of stitching (edge, top, or raise stitching) not within range of gage specified or varying by more than 1/16 inch if range is not specified.			305	
	h. Open seam more than 1/8 inch but not more than 1/4 inch.			306	
	i. Open seam more than 1/4 inch.		208		
	j. Stitches skipped or broken more than 1/4 inch but not more than 1/2 inch (on edge, top, or raised stitching when seam is seamed, turned, and stitched).		209		
	k. Stitches skipped or broken more than 1/2 inch (on edge, top, or raised stitching when seam is seamed, turned, and stitched).		210		
	l. Raw edges more than 1/8 inch but not more than 1/4 inch on outside of jacket.			307	
	m. Raw edges more than 1/4 inch on outside of jacket.		211		
	n. Raw edges more than 1/2 inch but not more than 1 inch on inside of jacket.			308	
	o. Raw edges more than 1 inch on inside of jacket.		212		
	p. Run offs more than 1/2 inch but not more than 1 inch on edge, top, or raised stitchings if not resulting in open seams (outside only).		213		
	q. Run offs more than 1 inch on edge, top, or raised stitchings if not resulting in open seams (outside only).		214		
6. Tight tension	a. Stitches per inch on major portion of jacket one or two less than specified.			309	
	b. Stitches per inch on major portion of jacket three less than specified.		215		
	c. Stitches per inch on major portion of jacket four less than specified.	102			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE XVI. Visual defects – Continued.

Examine	Defects	Classification			
		Major	Minor		*
			A	B	
7. Buttonholes	a. One or more buttonholes omitted.	103			
	b. Buttonhole too small, not permitting button to enter buttonhole.	104			
	c. Buttonhole too large (i.e., longer than diameter of button by 3/8 inch or more).		216		
	d. Buttonhole stitching not securely caught in fabric, causing stitching to pull away from fabric.	105			
	e. One or more broken stitches in one buttonhole.			310	
	f. One or more broken stitches in two buttonholes.		217		
	g. Buttonholes with ragged edges, affecting appearance.			311	
	h. Buttonhole not of specified type.		218		
	i. Gimp not pulled through to underside on one or more buttonholes.			312	
	j. Gimp omitted on one or more buttonholes.		219		
	k. Uncut buttonhole.		220		
	l. One, two, or three stitches per buttonhole less than specified.		221		
	m. Four or more stitches per buttonhole less than specified.	106			
8. Buttons	a. One or more buttons defective, missing, loose, or blistered.		222		
	b. Buttons not of specified type, size, or finish.		223		
9. Fusible interfacing	a. Bubbling or delamination.	107			
	b. Strike-through of adhesive.		224		
	c. Peeling.	108			
10. Knit components (Cuff, collar, and waistband)	a. Component twisted, affecting appearance.		225		
	b. Neckline puckered, twisted, or pleated at collar joining seam.		226		
	c. Sleeve twisted or pleated at cuff joining seam.		227		
	d. Body of jacket twisted or pleated at waistband joining seam.		228		
	c. Color not a good match to the shade of the basic material.	109			
	d. All three components (cuffs, collar, and waistband) not consistent shade.	110			
	e. Any dimension not as specified.	111			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE XVI. Visual defects – Continued.

Examine	Defects	Classification			
		Major	Minor		*
			A	B	
11. Hanger loop	a. Hanger loop omitted or ends of hanger loop not securely backstitched.		229		
	b. Length of hanger loop between tacks at ends less than 2-1/4 inches or more than 2-3/4 inches.			313	
	c. Width of hanger loop less than 1/4 inch or more than 1/2 inch.			314	
	d. Hanger loop off center by more than 1/4 inch.			315	
12. Label	a. Label missing or size marking omitted, incorrect, or illegible.	112			
	b. Information (except size) missing, incorrect, or illegible.		230		
	c. Label not stitched on all sides to inside of pocket.		231		
13. Slash pocket	a. Left and right slash pockets not corresponding diagonal position, affecting appearance.	113			
	b. Slash pockets 1/2 inch or more out of alignment.		232		
	c. Length of slash pocket opening less than 6-1/2 inches or more than 6-3/4 inches.		233		
	d. Width of top welt less than 3/4 inch or more than 1 inch.		234		
	e. Width of bottom welt less than 3/8 inch or more than 5/8 inch.		235		
14. Sleeves	a. Sleeves sagging, twisted, bulging, or short caused by shortness, tightness, or lining not correctly positioned.				412
	b. Sleeve fullness misplaced or concentrated in one area.		236		
	c. Sleeve lining too long, causing lining to sag at bottom.		237		
15. Shoulder straps	a. Upper side of shoulder strap full or twisted, affecting appearance.		238		
	b. Shoulder strap poorly shaped, affecting appearance.		239		
	c. Shoulder strap misplaced so that it will not lie flat when buttoned, causing bulge or twist on shoulder strap.				413
	d. Shoulder strap misplaced so that shoulder seam is exposed.	114			
	e. Shoulder strap misplaced (i.e., one shoulder strap further forward or back from position of other shoulder strap), affecting appearance.		240		
	f. Shoulder strap long (i.e., point extending beyond collar creasing).	115			
	g. Shoulder strap interlining omitted.		241		
	h. Width of shoulder strap at neck less than 1-5/8 inches or more than 1-7/8 inches.		242		
	i. Width of shoulder strap at armhole less than 2-1/8 inches or more than 2-3/8 inches.		243		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

TABLE XVI. Visual defects – Continued.

Examine	Defects	Classification			
		Major	Minor		*
			A	B	
	j. Button not aligned with buttonhole, causing bulge or twist on shoulder strap or puckers on shoulder, affecting appearance.		244		
	k. Finished buttonhole with purling on reverse side.	116			
	l. Buttonhole more than 1/8 inch but no more than 1/4 inch off center with width of shoulder strap.		245		
	m. Buttonhole more than 1/4 inch off center with width of shoulder strap.	117			
16. Side seams, fronts, and front closure	a. Slide fastener not of specified type, size, or style.			316	
	b. Length of closed fronts uneven at neck by 1/4 inch or more or at bottom by 1/4 inch or more.	118			
	c. Slide fastener tape set on too loosely or too tightly causing excessive bulging on opening, affecting appearance open or closed.			317	
	d. Any part of slide fastener assembly omitted, bent, or broken.			318	
	e. Slide fastener exposed more than 1/16 inch or gaping more than 1/16 inch closed.		246		
	f. Jacket part stitched too close to metal chain, not permitting slider to pass.	119			
	g. Top end of slide fastener chain less than 1/2 inch from raw edge of neckline.		247		
17. Back	a. Bi-swing pleat twisted, affecting appearance.		248		
	b. Bi-swing pleat does not lay flat.		249		
	c. Bi-swing pleat poorly constructed, affecting appearance.		250		
18. Removable liner	a. Binding not securely attached for a distance of more than 1/4 inch.		251		
	b. Quilted stitching not as specified.		252		
	c. When fastened, hook and loop tape causing bulging, twisting, or other distortion of either the outer shell or removable liner.		253		

4.4.4 Dimensional examination. The jackets shall be examined for conformance to the dimensions specified in table VIII and table IX when measured as specified in table X. Any measurement deviating from dimensions and tolerances specified shall be scored as a measurement defect. The inspection conditions and the AQLs shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The jacket is intended to be worn by U.S. Marine Corps personnel.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Sizes and length required (see 1.2).

c. National stock number.

d. When first article is required (see 3.1.1, 4.2, and 6.3).

e. When conformance inspection is required (see 3.1.2).

f. Applicable Government patterns, drawings, standard samples, and reference samples, including revisions (see 3.6).

g. When Government approval of the contractor's working files is required (see 3.6).

h. AQLs (see 3.9, 4.4.3, and 4.4.4).

i. First article sampling and acceptance criteria, including sample size and sample unit (see 4.2.1).

j. Conformance inspection criteria (see 4.3).

k. Component and material sampling and acceptance criteria (see.4.3.1).

l. End item sampling and acceptance criteria (see 4.3.2).

m. Component and material examination and tests (see 4.4.1).

n. Dimensional examination criteria (see 4.4.4).

o. Packaging requirements (see 5.1).

p. A certificate of compliance, if acceptable for physical requirements (see 6.10).

6.3 First article. When first article inspection (see 4.2) is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be first article sample, a first production item, or a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.2.1. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for pending contract. Bidders should not alternate submit bids unless specifically requested to do so in the solicitation.

6.4 Standard sample. For standard samples, address the procuring activity issuing the invitation for bids or request for proposal.

6.5 Slide fastener shade. Taupe Y, cable no. 66525 of the obsolete Department of Defense (DoD) Standard Color Card, Pewter 886 of AMS-STD-595, Colors Used in Government Procurement, or equivalent are known to meet the slide fastener shade match requirements (see 3.5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

6.6 Button shade. Green shade AF, cable no. 62107 of the obsolete DoD Standard Shades for Buttons, Forrest Green M3712 from Emsig Manufacturing Corporation (www.usbutton.com), or equivalent are known to meet the button shade match requirements (see 3.5.8).

6.7 Thread shade. Taupe, shade A, cable no. 66030 of the obsolete DoD Standard Color Card for Sewing Threads or equivalent is known to meet the thread shade match requirements (see 3.5.9).

6.8 Gimp shade. Taupe, shade A, cable no. 66030 of the obsolete DoD Standard Color Card for Sewing Threads or equivalent is known to meet the buttonhole gimp shade match requirements (see 3.5.10).

6.9 Source of bi-swing elastic. A known source of the bi-swing elastic (see 3.5.13) is State Narrow Fabrics Inc. (www.statenarrow.com), style number L100HS.

6.10 Certificates of compliance. Certificates of compliance may be accepted for selected requirements (see 6.2). It is recommended that vendors verify acceptability prior to using certificates of compliance to address requirements.

6.11 Visual shade matching. In 2019, option A of AATCC EP9 was changed to option C. NOTE: In case of confusion, the viewing geometry should be “The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (±5°) angle relative to the horizontal. The observer will view the specimens at a 90° angle, relative to the plane of the specimens”.

6.11.1 Use of D75 illuminant. The use of D75 illuminant with a color temperature of 7500±200 Kelvin and illumination of 100±20 foot candles in lieu of the specified D65 illuminant (see table XIV) is permitted.

6.12 Subject term (key word) listing.

Coat

Knit cuffs

Knit waistband

Liner

Marine Corps

Uniform

6.13 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

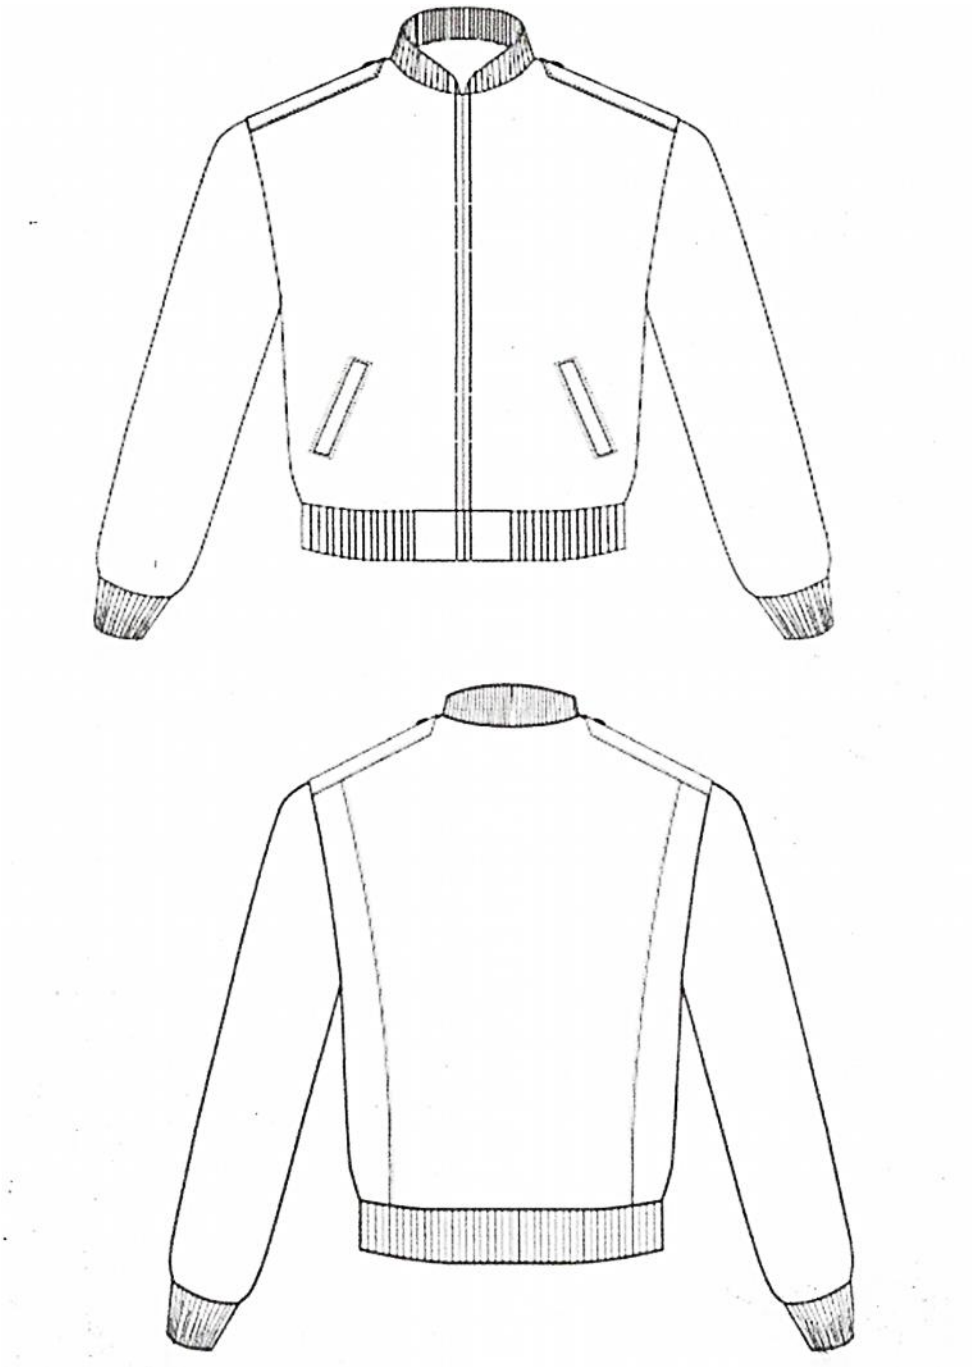


FIGURE 1. Front and back view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

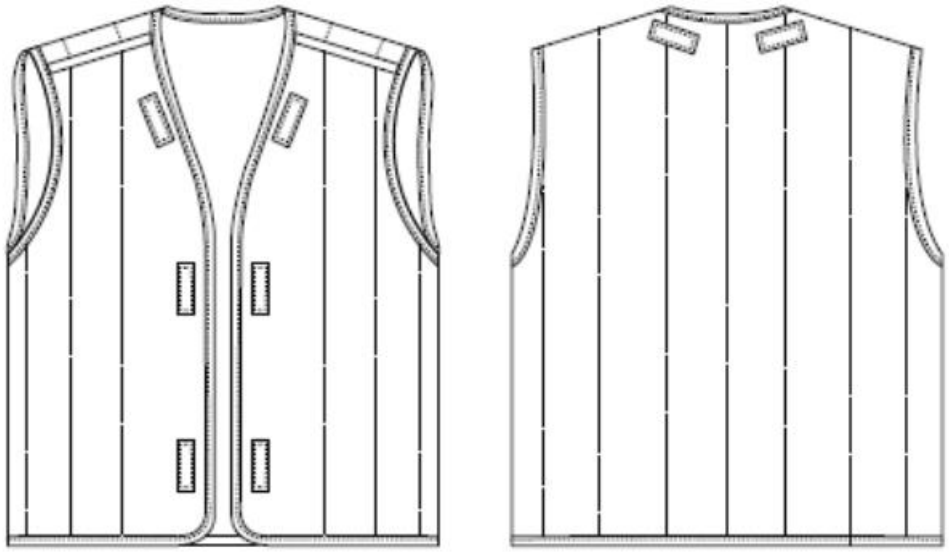


FIGURE 2. Removable liner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

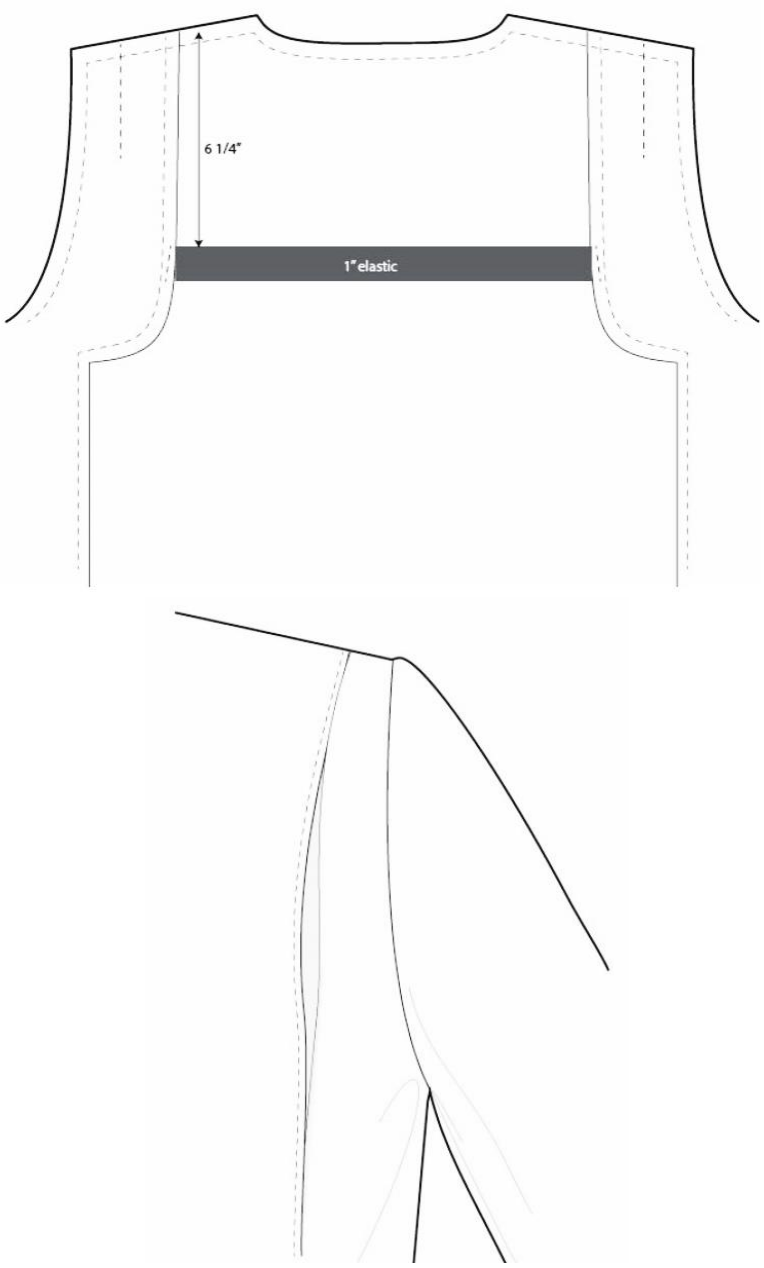


FIGURE 3. Interior and exterior back shoulder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy – MC

Review activity:
DLA – CT

Preparing activity:
Navy – MC
(Project 8405-2022-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:13Z
Check the source to verify that this is the current version before use.