INCH-POUND

MIL-S-29477(MC)
12 JULY 1995

MILITARY SPECIFICATION

SKIRT: WOMAN'S, EVENING DRESS, MUSICIAN, MATERNITY

This specification is approved for use by the U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for maternity skirts for the U. S. Marine Corps Band.

1.2 Classification. The skirts shall be of one type in the following classes and sizes as specified (see 6.2).

Class 1 - Polyester/Wool, Gabardine, Sky Blue Shade 2319
Class 2 - Polyester/Rayon, Gabardine, White Shade 2400
Class 3 - Polyester/Wool, Gabardine, Dark Blue Shade 2312

Schedule of Sizes

Extra Small	(2)
Small	(4-6)
Medium	(8-10)
Large	(12-14)
Extra Large	(16-18)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-C), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A **FSC 8410**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50199	- Thread, Polyester Core, Cotton or Polyester Covered
A-A-52094	- Thread, Cotton
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth Twill Rayon
MIL-T-5237	- Tape, Textile, Webbing, Textile, Rayon
MIL-C-10176	- Cloth, Gabardine, Wool and Polyester/Wool
MIL-C-41820	- Cloth, Gabardine, Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Applications for copies should be addressed to the Color Association of the United States, 409 W. 44th Street, New York, New York 10016-0927.)

AMERICAN SOCIETY OF TESTING MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption had been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Materials.

3.3.1 Basic material. The basic material for each class of skirts shall be as follows: (see 6.3)

3.3.1.1 Class 1. Cloth, polyester/wool, gabardine, 10.6 ounce, sky blue shade 2319, conforming to type II, class 12 of MIL-C-10176.

3.3.1.2 Class 2. Cloth, polyester/rayon, gabardine, 8 ounce, white shade 2400 conforming to type III, class 1 of MIL-C-41820.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.3.1.3 Class 3. Cloth, polyester/wool, gabardine, 10.6 ounce, dark blue shade 2312, conforming to type II, class 12 of MIL-C-10176.

3.3.2 Lining. The material for lining the skirts shall be as follows:

3.3.2.1 Classes 1 and 3. Cloth, twill, rayon, 3.7 ounce, black shade 2604, conforming to class 1 of MIL-C-368.

3.3.2.2 Class 2. Cloth, twill rayon, 3.7 ounce, white, conforming to class 1 of MIL-C-368.

3.3.3 Knitted cloth. The knitted cloth for the front stretch panel shall be 100 percent nylon with a weight of 1 pound per 2.7 yards on 24/25 inch width. The color shall be sky blue for class 1, white for class 2 and dark blue or black for class 3 skirts. Knitted cloth from Prelude, Industries, 301 N. 5th Street, Sunbury, PA 17801 (717) 286-9326, in their style 23-R-3 meets these requirements.

3.3.4 Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-Rol XL 90 or equal and shall be 1 ± 1/16 inch in width. Prior to the use of an "or equal" item, the contractor shall submit the items with supporting data to the contracting officer for approval. Items will be sent to: Commander (Code 855), Marine Corps Logistics Bases, 814 Radford Boulevard, Albany, Georgia 31704-1128.

3.3.5 Finishing tape. The tape for finishing the bottom of the skirt shall be tape, textile, rayon conforming to type I of MIL-T-5237. The color of the tape shall closely match the shade of the basic fabric.

3.3.6 Thread. Cotton thread shall conform to A-A-52094 as follows:

Operation	Type	Ticket No.	Ply
Seams, stitching	I	50	3
Overedging	I	70	2

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to A-A-50199, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

3.3.6.1 Color. The color of the thread shall be Navy blue, shade AT Cable No. 66060 for class 1, white for class 2 and black, shade AA, Cable No. 66043 for the class 3 skirts. (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads)

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T23:19Z
Check the source to verify that this is the currentversion before use.

3.3.7 Labels.

3.3.7.1 Combination label. Each skirt shall have a combination identification, size, and instruction label conforming to type VI, classes 1 and 3 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows:

SKIRT, WOMEN'S EVENING DRESS MATERNITY MUSICIAN'S
FIBER CONTENT: Polyester (55%) and Wool (45%)
(Example)
SIZE: 4-6 (Example)
CONTRACT NO.: DLA-100-95-XXXX(Example)
NAME OF CONTRACTOR
DRY CLEAN ONLY

3.4 Design. The skirt shall be the U. S. Marine Corps design shown in Figure 1 having a three piece skirt and full elastic waistband which has a one piece front with a knitted nylon cloth stretch panel inserted across the upper front and a two piece back with waist darts. The back panels shall be lined from top of waistband to bottom of hem and attached to the side seams from top of waistband on the back panels to the bottom of the knit fabric. The front panel shall be lined from the bottom of knit panel to the bottom of the hem. The lining shall hang loose from the side seams from bottom of front knit panel to bottom of the hem.

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working pattern. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of skirt and 5/8 inch seam allowance for all seams.

3.5.1 Pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts as follows:

Item	Pattern Nomenclature	No. of cut parts
	Material: Basic	
1.	Lower Front	1
2.	Back	2

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

Item	Pattern Nomenclature	No. of cut parts
	Material: Knitted Cloth	
3.	Upper Front Panel	1
	Material: Rayon lining	
4.	Lower Front Lining	1
5.	Back Lining	2

3.6 Construction. The skirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the skirts. Stitch, seam, and stitching types specified shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be as specified in Table I. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/2-inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2-inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2-inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

3.6.1 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine set at a suitable temperature for synthetics.

3.6.2 Shade marking. The component parts shall be marked to insure a uniform shade and size throughout the skirts. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sewn-on shade tickets.
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1	Cutting.					
	a. Cut skirt in strict accordance with patterns furnished by the Government.					
	b. Cut all materials in the direction indicated by directional lines on the pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern.					
	c. Cut all parts of the skirt, except the upper front panel, out of the same piece of basic material.					
	d. The upper front panel shall be cut from knitted stretch material in accordance with patterns furnished.					
	e. Cut elastic waistband stabilizer in lengths as shown below for individual sizes.					
	Size — Length (inches): Extra Small 26; Small 27; Medium 29; Large 31; Extra Large 33					
	f. Cut hem tapes not less than 65 inches long (see operation 11).					

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.

2 APPLICABLE DOCUMENTS

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	SEAM/ STCH TYPE	STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any part damaged during the manufacturing process, by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material.					
3	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.3) cut from one piece of basic material to insure uniform shade and size throughout the skirt.					
4	Join front lining to lower front parts.					
	Finished appearance. The front parts shall be joined without gathers, puckers or pleats.					
	a. Position the front lining to the lower front panel with the finished sides facing out and join	301 or 401	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the currentversion before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
4	Join front lining to lower front parts. (cont'd)					
	together at the waist with a 3/8 inch seam.					
5	Make front.					
	Finished appearance. The front parts shall be joined without gathers, puckers or pleats.					
	a. Join the knitted stretch panel to the lower front assembly with a 3/8 inch seam. The ends of the seam shall start and finish evenly at the seam line.	301 or 401	LSbm-4	10-14	50 50	50 70
	b. Overedge stitch the raw edges of the seam together.	503 or 504	EFd-1	10-14	70	70
	c. Turn the finished seam down and topstitch on the basic fabric 1/4 inch from the joining seam.					
	d. As an option, a and b above the front knitted panel and the lower front panel may be joined in one continuous operation.					
6	Make back.					
	Finished appearance. The back parts shall be joined without gathers, puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6	Make back. (cont'd)					
	a. Position the back panels face to face with edges even and join at the center with a 5/8 inch seam. The ends of the seam shall finish evenly.	301 or 401	SSa-1	10-14	50	50
	b. Spread open center back seam and press smooth and flat with a heated iron or pressing machine.					
7	Make back darts.					
	Finished appearance. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. End of darts need not be bartacked.					
	a. Fold and stitch back waist darts in accordance with marks and notches as indicated on the pattern. The lower ends of the waist darts shall be tapered.	301 or 401	OSf-1	10-14	50 50	50 70
	b. Press the darts smooth and flat with a heated pressing iron, with the inside folded edge of darts toward the center back seam.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8	Join lining back parts.					
	Finished appearance. The lining back part shall be joined without gathers, puckers or pleats.					
	a. Position the lining back parts face to face with edges even and join at the center with a 3/4 inch seam, from bottom of skirt to top of waistband.	301	SSa-1	10-14	50	50
	b. The seam shall be pressed open and pinked on each side.	503 or 504	EFd-1	10-14	70	70
9	Join front and back part assemblies.					
	a. The front assembly shall be placed on the two piece basic fabric assembly face to face with the face of the two piece back lining facing the inside front assembly of the basic fabric, knit and lower front lining.					
	b. Join the front and back part assemblies of the skirt at the side seams with a 5/8 inch seam from the top of the waist to the bottom of the knit front.	301	SSa-1		50	50
	c. From the bottom of the knit front to the bottom of the hem, the basic fabric seams and the lining seams shall be individually seamed					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9	Join front and back part assemblies. (cont'd)					
	separately so that in the finished skirt the lining shall hang free and independent from the top ply of the skirt. The seams of both the basic fabric and lining shall be pressed open and face each other to the inside of the skirt when turned.					
	d. The edges of the basic fabric seams shall be overedged stitched and the lining seams shall be pinked.	503 or 504	EFd-1	10-14	50	70
	e. The side seams from the top of the waist to the top of the lower front panel shall be pressed toward the back.					
	f. Turn the back lining over the entire assembly so that the right side is facing out.					
10	Attach top of lining to top of waist.					
	a. Attach lining at waist with a 1/4 inch seam. Attach the top of lining and basic fabric together at the top raw edge of waist. Overedge stitch the seam allowance at the waist.	301 and 503 or 504	SSa-1 EFd-1	10-1 10-1	50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.

and sizes as remainder of sentence and substitute "classes

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11	Make waistband and insert labels.					
	Finished appearance. The waistband shall finish 1-1/4 ± 1/8 inches wide and shall be uniform in width. The label shall be positioned on the center of back caught in the waistband seam. The stitching shall not be through the label printing.					
	a. Overlap the ends of the elastic waistband stabilizer 1/2 inch, and join the ends of the stabilizer with a single row of stitching forming a box stitch.	301	LSa-1	10-14	50	50
	b. Fold the top edge of the skirt to the inside, forming a 1-1/4 inch hem and enclosing, the elastic waistband stabilizer (11a.) Stitch the hem with a single row of stitching 1/8 to 3/16 inch from the edge forming a tunnel for the stabilizer. The combination label shall be caught in the stitching.	301	EFa-1	10-14	50	50
		or				
		401			50	70
	c. Place a single row of stitching at the upper back seam catching the stabilizer in the stitching.	301	SSa-1	10-14	50	50
		or				
		401			50	70

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Clean skirt.					
	a. All ends of stitching shall be trimmed and the loose threads removed from the skirt.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
13	Press skirt.					
	a. The entire skirt shall be pressed smooth with a heated pressing iron or pressing machine. Press marks and gloss shall be removed.					
14	Prepare for packing.					
	a. Examine skirt.					
	b. An envelope containing the tape for the skirt hem shall be attached to the skirt.					

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished skirts shall conform to the measurements shown in Table II. All measurements and tolerance are expressed in inches.

Table II. Finished measurements

Size	A Waist Relaxed	B Waist Stretched	C Hips	D Length
Extra Small	25	32	41	44
Small	26	34	43	44-1/2
Medium	28	38	47	45
Large	30	42	51	45-1/2
Extra Large	32	46	55	46
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: All measurements shall be taken with skirt smooth and flat. A, B, C and D refer to Figure 1.

(A-B) Waist. Twice the measurement taken in center of waistband from folded edge to folded edge.

(C) Hips. Twice the measurement taken on the skirt 7 inches down from top edge of waistband from folded edge to folded edge.

(D) Length. Measurement taken at center back from top edge of waistband to bottom edge of unhemmed skirt.

3.8 Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.5 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. A certificate of compliance will be acceptable for the elastic waistband stabilizer requirements of 3.3.3.

4.5.2 End item examination. Samplings and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.5.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

4.5.4 Examination of packaging requirements. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1609.

5. PACKAGING

5.1 Preservation. Preservation shall be in accordance with ASTM D 3951.

5.2 Packing. Skirts preserved in accordance with 5.1 shall be packed in accordance with ASTM D 3951.

6. NOTES

(This section contains information of a general or explanatory nature that is helpful, but is not mandatory).

6.1 Intended use. The skirts covered by this specification are intended for wear by female personnel of the U. S. Marine Corps Band and Drum and Bugle Corps as required.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of skirts in first article (see 3.2).

6.3 Standard sample and pattern. For information regarding the availability of standard sample and patterns, address inquiries to the acquiring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 20260-20T23:19Z
Check the source to verify that this is the current version before use.

6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).


6.5 Subject term (keyword) listing.


Evening Dress
Skirt
Women's
Maternity


6.6 Figures. Figures are furnished for information purposes only. In the event of conflict between the figures and the text of this specification, the text of this specification shall govern.

Preparing Activity:
Navy-MC
Project No. 8410-N876

Source: https://assist.dla.mil -- Downloaded: 20261O-20T23:19Z
Check the source to verify that this is the currentversion before use.

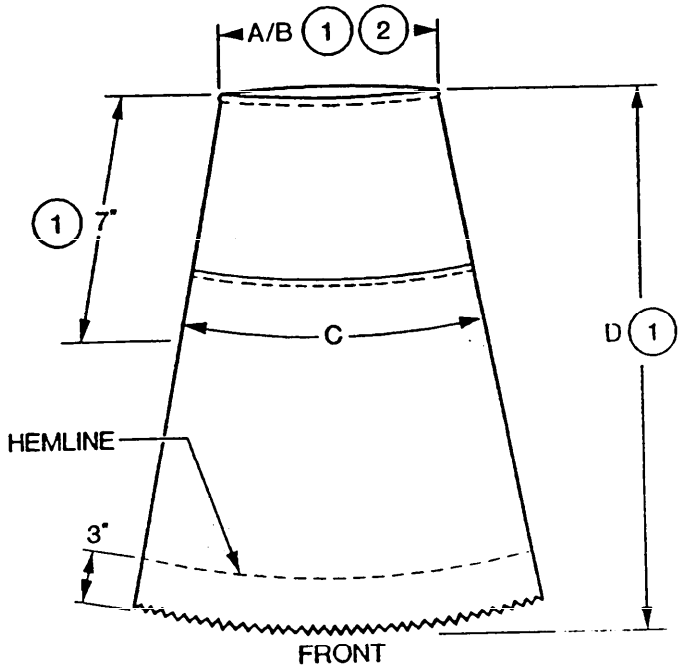

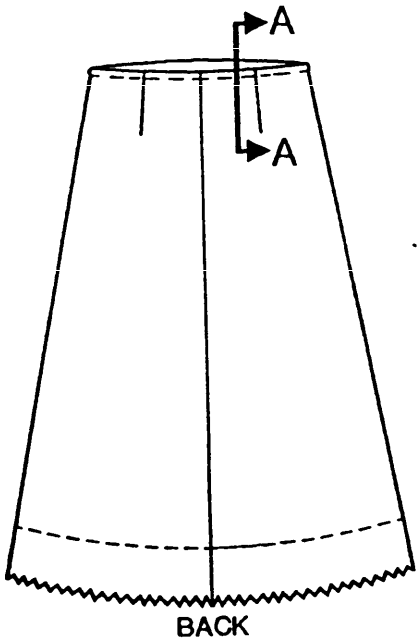

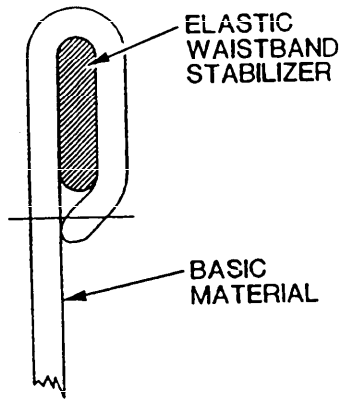

WAISTBAND SECTION A-A

NOTES:

1. SEE TABLE II
2. DIM. A-RELAXED
   DIM. B-STRETCHED

FIGURE 1. SKIRT, WOMAN'S: EVENING DRESS, U. S. MARINE BAND, MATERNITY

//AGW_71/PALMER/6-CLOTHING/SKT1-MAT.G4
25-MAY-1995 11:35

True Size: 42 x 51 picas = 7.0" x 8.5"
Plot Scale Factor: 1.00

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-29477(MC)	950717

3. DOCUMENT TITLE

SKIRT: WOMAN'S, EVENING DRESS, MUSICIAN, MATERNITY

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
COMMANDER	(703)784-4584	278-4584
c. ADDRESS (Include Zip Code) MARCORSYSCOM, ATTN PSE-C/S 2033 BARNETTE AVE SUITE 315 QUANTICO VA 22134-5010	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-20T23:19Z
Check the source to verify that this is the current version before use.