INCH-POUND

MIL-DTL-29477A(MC)
8 October 1997
SUPERSEDING
MIL-S-29477(MC)
12 July 1995

DETAIL SPECIFICATION

SKIRT, WOMAN'S - EVENING DRESS, MUSICIAN, MATERNITY

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers requirements for maternity skirts for the U.S. Marine Corps Band.

1.2. Classification. The skirts will be of one type in the following classes and sizes as specified (see 6.2).

Class 1 - Polyester/Wool, Gabardine, Sky Blue, Shade 2319
Class 2 - Polyester/Rayon, Gabardine, White, Shade 2400
Class 3 - Polyester/Wool, Gabardine, Dark Blue, Shade 2312

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-D), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

Schedule of sizes

Extra small	(2)
Small	(4-6)
Medium	(8-10)
Large	(12-14)
Extra large	(16-18)

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2. Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50199	-	Thread, Polyester Core, Cotton or Polyester Covered
A-A-52094	-	Thread, Cotton
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)

DEPARTMENT OF DEFENSE

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-T-5237	-	Tape, Textile, Webbing, Textile, Rayon
MIL-C-10176	-	Cloth, Gabardine: Wool Polyester and Wool
MIL-C-41820	-	Cloth, Gabardine, Polyester and Rayon

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL
FED-STD-751 - Stitches, Seams, and Stitchings

DEPARTMENT OF DEFENSE
MIL-STD-1609 - Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of the above specifications, standards, handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3. Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 409 W. 44th Street, New York, NY 10016-0927.)

2.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2. First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.3. Materials.

3.3.1 Basic material. The basic material for each class of skirts shall be as follows (see 6.3):

3.3.1.1. Class 1. Cloth, polyester/wool, gabardine, 10.6 ounces, sky blue, shade 2319, conforming to type II, class 12 of MIL-C-10176.

3.3.1.2. Class 2. Cloth, polyester/rayon, gabardine, 8 ounces, white, shade 2400, conforming to type III, class 1 of MIL-C-41820.

3.3.1.3. Class 3. Cloth, polyester/wool, gabardine, 10.6 ounces, dark blue, shade 2312, conforming to type II, class 12 of MIL-C-10176.

3.3.2 Lining. The material for lining the skirts shall be as follows:

3.3.2.1. Classes 1 and 3. Cloth, twill, rayon, 3.7 ounces, black, shade 2604, conforming to class 1 of MIL-C-368.

3.3.2.2. Class 2. Cloth, twill rayon, 3.7 ounces, white, shade 3001, conforming to class 1 of MIL-C-368.

3.3.3 Knitted cloth. The knitted cloth for the front stretch panel shall be 100 percent nylon with a weight of 1 pound per 2.7 yards on 24/25 inch width. The color shall be sky blue for class 1, white for class 2 and dark blue or black for class 3 skirts.

3.3.4 Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-Rol XL 90 or equal and shall be 1 ± 1/16 inch in width.

3.3.5 Finishing tape. The tape for finishing the bottom of the skirt shall be tape, textile, rayon conforming to type I of MIL-T-5237. The color of the tape shall closely match the shade of the basic fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.3.6 Thread. Cotton thread shall conform to A-A-52094 as follows:

Use	Type	Ticket No.	Ply
Seams, stitching	I	50	3
Overedging	I	70	2

As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to A-A-50199, ticket No. 70, 2-ply may be used.

3.3.6.1. Color. The color of the thread shall be Navy blue, shade AT, cable No. 66060 for class 1, white, shade AH, cable No. 66050 for class 2 and black, shade AA, cable No. 66043 for the class 3 skirts (see DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968).

3.3.7 Labels.

3.3.7.1. Combination label. Each skirt shall have a combination identification, size, and instruction label conforming to type VI, classes 1 and 3 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows:

SKIRT, WOMAN'S - EVENING DRESS, MATERNITY, MUSICIAN'S
FIBER CONTENT: Polyester (55%) and Wool (45%) (Example)
Size: 4-6 (Example)
Contract number: DLA-100-95-XXXX (Example)
Name of contractor:
DRY CLEAN ONLY

3.4. Design. The skirt shall be the U.S. Marine Corps design shown in Figure 1 having a three piece skirt and full elastic waistband which has a one piece front with a knitted nylon cloth stretch panel inserted across the upper front and a two piece back with waist darts. The back panels shall be lined from top of waistband to bottom of hem and attached to the side seams from top of waistband on the back panels to the bottom of the knit fabric. The front panel shall be lined from the bottom of knit panel to the bottom of the hem. The lining shall hang loose from the side seams from bottom of front knit panel to bottom of the hem.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.5. Patterns. Standard patterns will be furnished to the contractor by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working pattern. The contractor's working patterns shall be identical to the standard patterns. Standard patterns show size, seam allowances, directional lines for cutting and are marked or notched for proper placement and assembly of the component parts. The patterns provide an allowance of 3 inches for hemming the bottom of skirt and 5/8 inch seam allowance for all seams.

3.5.1 List of pattern parts. The skirts shall be cut from the materials specified herein in accordance with the pattern parts as follows:

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Basic	
1 2	Lower front Back	1 2
	Material: Knitted cloth	
3	Upper front panel	1
	Material: Rayon lining	
4 5	Lower front lining Back lining	1 2

3.6. Construction. The skirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the skirts. Stitch, seam, and stitching types specified shall conform to FED-STD-751. The minimum and maximum number of stitches per inch shall be as specified in Table I. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/2 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.6.1 Pressing. Pressing as required in Table I shall be accomplished with a heated pressing iron or machine set at a suitable temperature for synthetics.

3.6.2 Shade marking. The component parts shall be marked to ensure a uniform shade and size throughout the skirts. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b Sew-on shade tickets.
c Adhesive type tickets which show discoloration or leave traces of paper or adhesive mass to the material upon removal of the tickets.

TABLE I. Manufacturing requirements.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
1	Cutting. a. Cut skirt in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by directional lines on the pattern. The directional line shall be placed in the warp direction of the cloth unless otherwise indicated on the pattern. c. Cut all parts of the skirt, except the upper front panel, out of the same piece of basic material. d. The upper front panel shall be cut from knitted stretch material in accordance with patterns furnished. e. Cut elastic waistband stabilizer in lengths as shown below for individual sizes. Size — Length (inches) Extra small — 26 Small — 27 Medium — 29 Large — 31 Extra large — 33 f. Cut hem tapes not less than 65 inches long (see operation 11).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
2	Replacement of damaged parts.					
	a. Replace at time of cutting any part of the skirt containing holes or seriously weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc.					
	b. Replace any part damaged during the manufacturing process, by needle chews which may develop into a hole, scissor or knife cuts, tear, holes, mends or burns in the material.					
3	Shade marking.					
	a. Mark, ticket or bundle all component parts (see 3.6.3) cut from one piece of basic material to ensure uniform shade and size throughout the skirt.					
4	Join front lining to lower front parts.					
	Finished appearance. The front parts shall be joined without gathers, puckers or pleats.					
	a. Position the front lining to the lower front panel with the finished sides facing out and join together at the waist with a 3/8 inch seam.	301 or 401	SSa-1	10-14	50 50	50 70
5	Make front.					
	Finished appearance. The front parts shall be joined without gathers, puckers or pleats.					
	a. Join the knitted stretch panel to the lower front assembly with a 3/8 inch seam. The ends of the seam shall start and finish evenly at the seam line.	301 or 401	LSbm-4	10-14	50 50	50 70
	b. Overedge stitch the raw edges of the seam together.	503 or 504	EFd-1	10-14	70	70
	c. Turn the finished seam down and topstitch on the basic fabric 1/4 inch from the joining seam.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
5	Make front. (cont'd)					
	d. As an option, a and b above the front knitted panel and the lower front panel may be joined in one continuous operation.					
6	Make back.					
	Finished appearance. The back parts shall be joined without gathers, puckers or pleats.					
	a. Position the back panels face to face with edges even and join at the center with a 5/8 inch seam. The ends of the seam shall finish evenly.	301 or 401	SSa-1	10-14	50	50
	b. Spread open center back seam and press smooth and flat with a heated iron or pressing machine.					
7	Make back darts.					
	Finished appearance. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. End of darts need not be bartacked.					
	a. Fold and stitch back waist darts in accordance with marks and notches as indicated on the pattern. The lower ends of the waist darts shall be tapered.	301 or 401	OSf-1	10-14	50 50	50 70
	b. Press the darts smooth and flat with a heated pressing iron, with the inside folded edge of darts toward the center back seam.					
8	Join lining back parts.					
	Finished appearance. The lining back part shall be joined without gathers, puckers or pleats.					
	a. Position the lining back parts face to face with edges even and join at the center with a 3/4 inch seam, from bottom of skirt to top of waistband.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
8	Join lining back parts. (cont'd)					
	b. The seam shall be pressed open and pinked on each side.	503 or 504	EFd-1	10-14	70	70
9	Join front and back part assemblies.					
	a. The front assembly shall be placed on the two piece basic fabric assembly face to face with the face of the two piece back lining facing the inside front assembly of the basic fabric, knit and lower front lining.					
	b. Join the front and back part assemblies of the skirt at the side seams with a 5/8 inch seam from the top of the waist to the bottom of the knit front.	301	SSa-1	10-14	50	50
	c. From the bottom of the knit front to the bottom of the hem, the basic fabric seams and the lining seams shall be individually seamed separately so that in the finished skirt the lining shall hang free and independent from the top ply of the skirt. The seams of both the basic fabric and lining shall be pressed open and face each other to the inside of the skirt when turned.					
	d. The edges of the basic fabric seams shall be overedged stitched and the lining seams shall be pinked.	503 or 504	EFd-1	10-14	50	70
	e. The side seams from the top of the waist to the top of the lower front panel shall be pressed toward the back.					
	f. Turn the back lining over the entire assembly so that the right side is facing out.					
10	Attach top of lining to top of waist.					
	a. Attach lining at waist with a 1/4 inch seam. Attach the top of lining and basic fabric together at the top raw edge of waist. Overedge stitch the seam allowance at the waist.	301 and 503 or 504	SSa-1 EFd-1	10-1 10-1	50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
11	Make waistband and insert labels.					
	Finished appearance. The waistband shall finish 1-1/4 ± 1/8 inches wide and shall be uniform in width. The label shall be positioned on the center of back caught in the waistband seam. The stitching shall not be through the label printing.					
	a. Overlap the ends of the elastic waistband stabilizer 1/2 inch, and join the ends of the stabilizer with a single row of stitching forming a box stitch.	301	LSa-1	10-14	50	50
	b. Fold the top edge of the skirt to the inside, forming a 1-1/4 inch hem and enclosing the elastic waistband stabilizer (11.a). Stitch the hem with a single row of stitching 1/8 to 3/16 inch from the edge forming a tunnel for the stabilizer. The combination label shall be caught in the stitching.	301 or 401	EFa-1	10-14	50 50	50 70
	c. Place a single row of stitching at the upper back seam catching the stabilizer in the stitching.	301 or 401	SSa-1	10-14	50 50	50 70
12	Clean skirt.					
	a. All ends of stitching shall be trimmed and the loose threads removed from the skirt.					
	b. Any spots, stains and shade tickets or markings shall be removed without injury to the material.					
13	Press skirt.					
	a. The entire skirt shall be pressed smooth with a heated pressing iron or pressing machine. Press marks and gloss shall be removed.					
14	Prepare for packing.					
	a. Examine skirt.					
	b. An envelope containing the tape for the skirt hem shall be attached to the skirt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

3.7. Finished measurements. The finished skirts shall conform to the measurements shown in Table II. All measurements and tolerance are expressed in inches.

Table II. Finished measurements. 1/

Size	A Waist 2/ relaxed (inches)	B Waist 2/ stretched (inches)	C Hips 3/ (inches)	D Length 4/ (inches)
Extra small	25	32	41	44
Small	26	34	43	44-1/2
Medium	28	38	47	45
Large	30	42	51	45-1/2
Extra large	32	46	55	46
Tolerances:	± 1/2	± 1/2	± 1/2	± 1/2

1/ All measurements shall be taken with skirt smooth and flat. A, B, C and D refer to Figure 1.

2/ Waist. Twice the measurement taken in center of waistband from folded edge to folded edge.

3/ Hips. Twice the measurement taken on the skirt 7 inches down from top edge of waistband from folded edge to folded edge.

4/ Length. Measurement taken at center back from top edge of waistband to bottom edge of unhemmed skirt.

3.8. Workmanship. The finished skirts shall conform to the quality and grade of product established by this specification.

3.9. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1. Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2. Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-1609.

4.3. First article inspection. When first article is required, inspection shall be made of a completely fabricated skirt for all provisions of this specification.

4.4. Conformance inspection.

4.4.1 Component and material inspection. Components and materials shall be inspected and tested in accordance with all requirements of referenced specifications and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents.

4.4.2 Examination of the end item. Samplings and examination of the end item shall be performed for dress (D) skirts in accordance with the provisions of MIL-STD-1609.

4.4.3 Dimensional examination. The dimensional examination provisions for the finished skirts shall be as listed in 3.7 and as specified in MIL-STD-1609.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by Department of Defense (DoD) personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's Systems Command. Packaging data retrieval is available from the managing Military Department's or Defense

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Intended use. The skirts covered by this specification are intended for wear by female personnel of the U.S. Marine Corps Band and Drum and Bugle Corps as required.

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. Packaging requirements (see 5.1).
d. Size required (see 1.2).
e. Whether first article is required (see 3.2).
f. Number of skirts in first article (see 3.2).

6.3. Standard sample. For information regarding the availability of standard sample and patterns, address inquiries to the acquiring activity issuing the invitation for bids.

6.4. Figure. Figure 1 is furnished for information purposes only. In the event of conflict between the figure and the text of this specification, the text of this specification will govern.

6.5. Knitted cloth. Knitted cloth from Prelude, Industries, 301 N. 5th Street, Sunbury, PA 17801 in their style 23-R-3 meets the requirements of 3.3.3.

6.6. "Or equal" items. Prior to the use of an "or equal" item, the contractor will submit the items with supporting data to the contracting officer for approval. Items will be sent to: Commander (Code 855), Marine Corps Logistics Bases, 814 Radford Boulevard, Albany, Georgia 31704-1128.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

6.7. Subject term (keyword) listing.

Elastic waistband
Knitted cloth
Stretch panel

6.8. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy - MC
Project No. 8410-N346

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

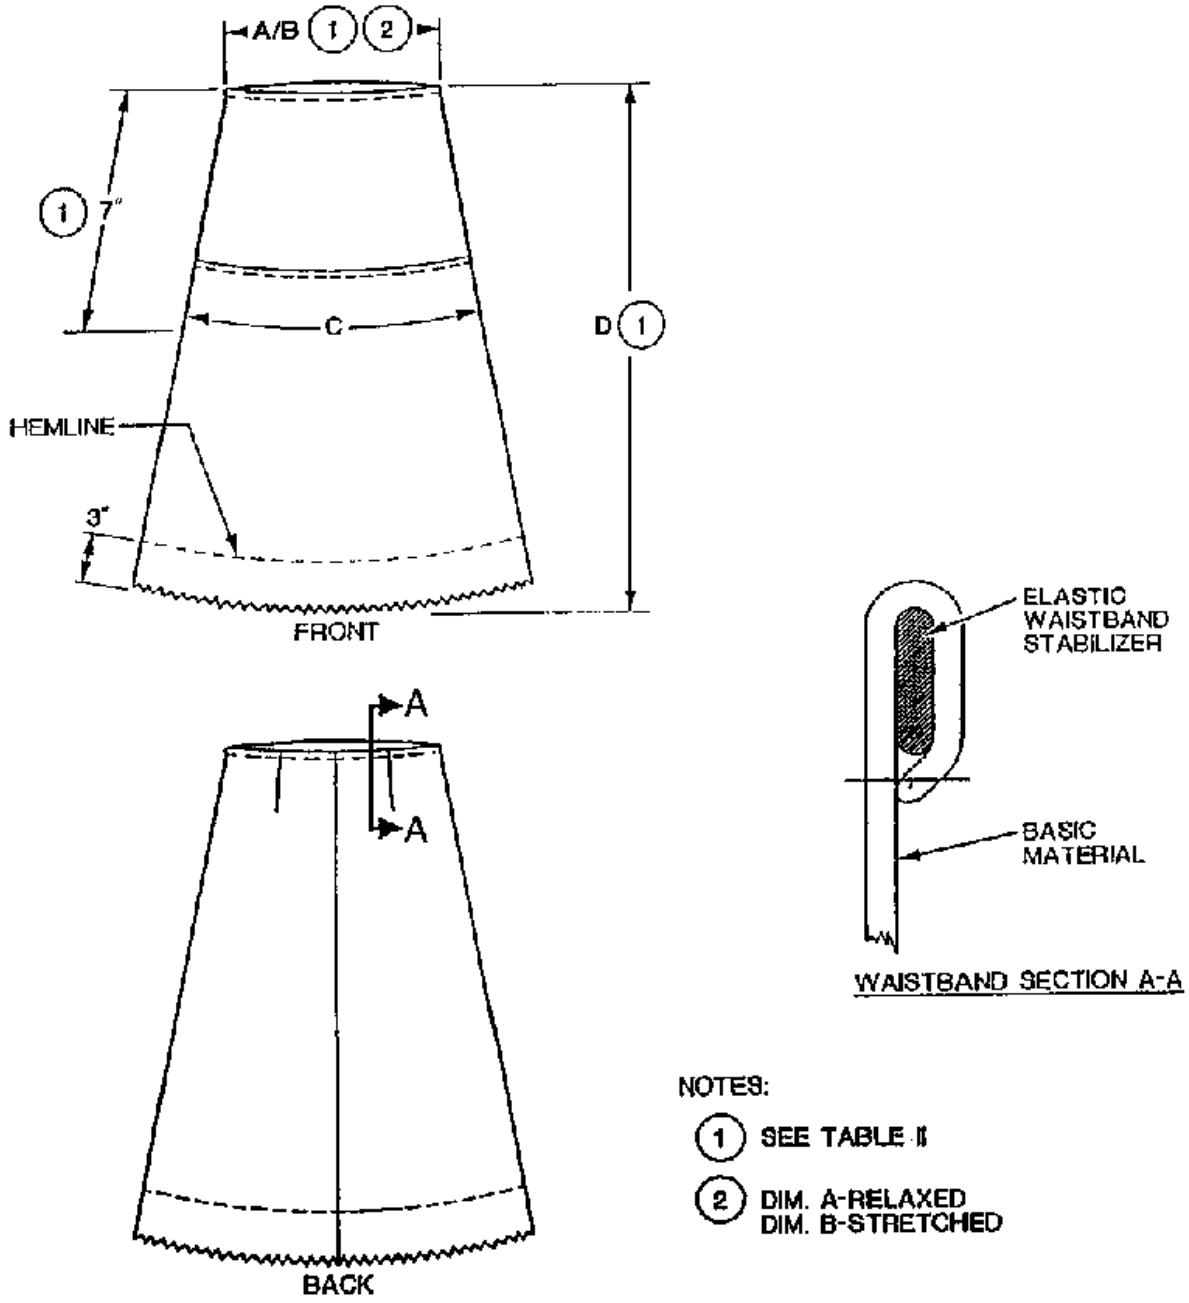


Figure 1. Skirt, Woman's - Evening Dress, Musician, Maternity

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-29477A(MC)	**2. DOCUMENT DATE (YYMMDD)** 971008

3. DOCUMENT TITLE COAT, MAN'S - FULL DRESS, SUMMER AND WINTER, SCARLET U.S. MARINE BAND, DRUM MAJOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, MARCORSYSCOM, PSE-D	b. TELEPHONE *Include Area Code)* (1) Commercial (703)784-4584 (2) AUTOVON 278-4584
c. ADDRESS *(Include Zip Code)* 2033 BARNETT AVE, SUITE 315 QUANTICO, VA 22134-5010	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T23:19Z
Check the source to verify that this is the current version before use.