MILITARY SPECIFICATION

CONVERTERS, AIRCRAFT, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for devices which convert power from a nominal 115/200 volt, 400 Hertz, 3-phase, alternating current (ac) aircraft electric system to nominal 28 volt direct current (dc) power.

1.2 Classification. Converters shall be of the following types and classes, as specified (see 6.1):

Type I. Regulated: Converters which supply regulated output voltage.

Type II. Non-regulated: Converters which supply output voltage dependent on the inherent characteristics of the equipment components.

Class A: Converters which are self-cooled and conform to the ambient altitude-temperature requirements of MS33543, Curve II, except that no operation shall be required below -55°C.

Class B: Converters which are self-cooled and conform to the ambient altitude-temperature requirements of MS33543, Curve I, except that the maximum ambient temperature shall not exceed 85°C and no operation shall be required below -55°C.

Class C: Converters which are blast-cooled and conform to the ambient altitude-temperature and inlet airflow requirements specified in the applicable detail specification and converters which are self-cooled and conform to the altitude-temperature requirements of MS33543, Curve I, except that no operation shall be required below -55°C.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Code 93, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-P-416	Plating, Cadmium (Electrodeposited)

Military

MIL-P-116	Preservation, Methods of
MIL-W-5088	Wiring, Aerospace Vehicle
MIL-C-5541	Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-C-6021	Casting, Classification and Inspection of
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification for
MIL-T-7928	Terminal, Lug and Splice, Crimp-Style Copper
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-P-15024	Plate, Tags and Bands for Identification of Equipment
MIL-S-19500	Semiconductor Device, General Specification for
MIL-A-21180	Aluminum Alloy Castings, High Strength
MIL-R-39015	Resistors, Variable, Wire-Wound (lead screw actuated) Established Reliability, General Specification for
MIL-I-46058	Insulating Compound, Electrical (for coating printed circuit assemblies)
MIL-E-81910	Electrical Power Generating and Control Equipment, Aircraft, General Specification for

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Color

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-794	Part and Equipment, Procedures for Packaging and Packing of
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation of
MIL-STD-889	Dissimilar Metals
MIL-STD-1562	List of Standard Microcircuits
MS14151	Washer, Flat, Round, Corrosion Resisting Steel (for Electrical Applications)
MS33543	Criteria-Temperature and Altitude Range Self-Cooled Electric Equipment
MS35338	Washer, Lock-Spring Helical, Regular (Medium) Series, (m/mm)
MS35650	Nut, Plain - Hexagon, Machine Screw, UNF-2B

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Specification sheets. The individual converter requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between requirements of this specification and the applicable specification sheet, the latter shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

3.2 Classification of requirements. The requirements for converters are classified herein as follows:

Requirement	Paragraph
Qualification	3.3
Materials	3.4
Selection of parts and materials	3.5
Design and construction	3.6
Performance characteristics	3.7
Reliability	3.8
Markings	3.9
Workmanship	3.10

3.3 Qualification. Converters furnished under this specification shall be products which are qualified for listing on the applicable Qualified Products List at the time set for opening of bids (see 4.5 and 6.2). Each unit delivered shall fully meet all the requirements of this specification and the applicable specification sheet and shall be capable of successfully completing the tests required by this specification for quality conformance inspection and for inspections listed for any one of the qualification samples.

3.4 Materials.

3.4.1 Metals. Metals shall be of a corrosion resistant type or suitably processed to resist corrosion.

3.4.1.1 Dissimilar metals. Unless otherwise suitably protected, dissimilar metals, such as brass, copper, or steel, shall not be used in intimate contact with aluminum or its alloys. When protection is used it shall be of such type that a low impedance path is offered to radio-frequency currents. Dissimilar metals are defined in MIL-STD-889.

3.4.1.2 Magnesium alloy parts. Neither magnesium or magnesium alloy parts shall be used.

3.4.1.3 Finishes and protective coatings.

3.4.1.3.1 Aluminum alloy parts. Aluminum alloy parts shall be anodically treated in accordance with MIL-A-8625 or chemically treated in accordance with MIL-C-5541. To provide adequate bonding, the aluminum oxide film formed by this treatment shall be removed from the areas under screws, nuts, etc., used for assembly or mounting purposes.

3.4.1.3.2 Steel parts. Steel parts shall be cadmium plated in accordance with Type II or III of QQ-P-416.

3.4.1.3.3 Color. Equipment shall be finished in a color conforming to FED-STD-595, color number 17875 (white). The finish shall be unaffected by environmental testing required by the applicable specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

3.4.1.4 Castings. Castings shall be in accordance with MIL-C-6021 and shall be Class 2, Grade C or better, aluminum alloy castings shall be in accordance with MIL-A-21180. Defects not materially affecting the suitability of the castings may be repaired at the foundry or during machining by peening, impregnating, welding, or other methods acceptable to the acquiring activity. Inspection of repaired castings shall be governed by quality control techniques subject to the approval of the acquiring activity.

3.4.2 Nonmetallic materials. Nonmetallic materials used shall be nontoxic, fungus inert, flame resistant and shall not support combustion.

3.5 Selection of parts and materials. Specifications and standards for all materials and parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the design and construction of converters complying with the requirements of this specification shall be selected in accordance with MIL-STD-143.

3.5.1 Standard parts. Military standard parts shall be used wherever they are suitable for the purpose, and shall be identified on the applicable drawings by their military part numbers. Any standard part, of the same part number, shall be readily interchangeable as applied within the converter.

3.5.2 Non-standard parts. The use of non-standard parts is permitted in the event that there is no suitable standard part available on the date of invitation for bids, however, approval prior to use shall be obtained from the procuring activity. Request for approval for the use of non-standard parts shall be submitted in writing and shall contain the following information:

a. Designation of equipment and assembly wherein part is used.

b. Reference designation of part (circuit symbol, part number, as applicable).

c. Name and complete detailed technical description of part.

d. Part manufacturer's name and address.

e. Part manufacturer's drawing and part number.

f. Reason for not using standard part including, when applicable, a comparison of characteristics of the non-standard part with the standard part which most nearly possesses the required characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

g. Other information required herein for specific types of parts.

3.5.3 Commercial (hardware) parts. Commercial utility hardware items, such as screws, bolts, nuts and cotter pins may be used without approval provided they possess suitable properties and are replaceable by MS or AN parts without alteration, and provided the corresponding MS or AN part numbers are referenced in the parts list and on the contractor's drawings.

3.5.4 Semiconductor devices. Military standard semiconductor devices shall be chosen, applied and reported in accordance with Requirement 30 of MIL-STD-454 and shall be selected from those meeting MIL-S-19500 and listed in QPL-19500. The reliability level of devices selected shall be in the following order of preference beginning with the most preferred: JANTXV, JANTX, JAN. Requests for approval to use non-standard semiconductors shall be accompanied by substantiating reliability data or proposed testing to assure adequate device reliability for the application.

3.5.5 Microelectronic devices. Microelectronic devices shall be chosen, applied and reported in accordance with Requirement 64 of MIL-STD-454 and shall be listed in MIL-STD-1562. Requests for approval to use devices which do not comply with this requirement shall be submitted as non-standard parts and shall be accompanied by substantiating reliability data or proposed testing to assure adequate device reliability for the application.

3.5.6 Capacitors. Capacitors shall be chosen, applied and reported in accordance with Requirement 2 of MIL-STD-454. Requests for approval to use capacitors which do not comply with this requirement shall be submitted as non-standard parts with substantiating data showing suitability for the application. The use of wet slug tantalum capacitors is prohibited.

3.5.7 Electron tubes. Electron tubes of either the vacuum or gas filled type shall not be used.

3.5.8 Potentiometers and adjustable resistors. Only sealed units conforming to MIL-R-39015 shall be used unless approved as a non-standard part.

3.6 Design and construction. The converter shall be a single package and shall be a completely static solid state unit having no moving parts, except as noted in 3.6.2.6. Dynamic protective devices (fuses, circuit breakers and thermally actuated switches) shall not be used unless specified in the applicable specification sheet.

Source: https://assist.dla.mil --.Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

3.6.1 Electrical.

3.6.1.1 Component derating. All converter electric/electronic components shall be derated as shown in Table I based upon the most severe converter environmental and operational conditions. Stress levels in excess of the above shall be submitted to the qualifying activity for written approval along with the rationale for the use of that stress level in the application.

3.6.1.2 Electric connections.

3.6.1.2.1 External electric connections. The equipment shall be so designed that external connections and wiring can be made in accordance with MIL-W-5088. Equipment structure shall not be used as a current path except for radio noise shielding.

3.6.1.2.1.1 Terminal block design. Where terminals are used for the external connection to converters, they shall be of the stud-type and shall be designed so that the current is conducted by means of surface-to-surface contact and not through the stud threads. All studs shall be steel, corrosion resistant, C-34 Rockwell minimum hardness, and shall be of sufficient length to accommodate two MIL-T-7928 lugs. Nuts and washers used on terminals shall conform to MS35650 for nuts, MS35338 for lockwashers and MS14151 for flat washers. There shall be no dielectric material in the compression buildup. The terminal block shall be so designed that it can be removed and replaced on the converter without the necessity of rebrazing or soldering. Barriers affording a positive separation of leads and terminals shall be provided on the terminal block. Durable, reuseable, nonconductive terminal covers shall be provided. Terminal designations shall be durably, legibly, and prominently marked on the terminal block.

3.6.1.2.2 Internal electric connections. Internal connections shall be made in accordance with MIL-STD-454 requirements 1, 5, 10, 17, 19, 20 and 69.

3.6.1.2.3 Voltage setting. The voltage setting control of Type I, regulated units shall permit the output voltage to be set over the range specified in the applicable specification sheet. The control shall be designed for internal adjustment only using a straight screwdriver. Provisions shall be made for positive locking to preclude unintentional movement.

3.6.2 Mechanical.

3.6.2.1 Maintainability. The converter shall be designed to facilitate assembly, disassembly, location of trouble sources, and maintenance without the aid of special tools. All functional parts shall be readily identifiable, accessible and removable for replacement. When printed circuit boards are utilized, only clear transparent conformal

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

coating conforming to MIL-I-46058, Types UR or XY, shall be used in order to permit identification, location, removal and replacement of functional parts. Functional parts are defined as individual component parts such as resistors, capacitors, semiconductor devices, or replaceable functional assemblies such as active or passive filters, voltage dividers, dual transistors or diodes.

3.6.2.2 Shock mounts. Shock mounts or vibration isolators shall not be used.

3.6.2.3 Interchangeability. Provisions for interchangeability are required to the maximum extent possible and shall be in accordance with Requirement 7 of MIL-STD-454.

3.6.2.4 Screw threads. Screw threads shall conform to the requirements of MIL-S-7742.

3.6.2.5 Safety wiring and staking. Accidental loosening of screws and screw parts, and other connections, shall be prevented by safety wiring (.032 inch minimum OD) where practicable, staking, self locking nuts or other approved methods. Washers and cotter pins, where used, shall be assembled in a manner which prevents rotation of washers and movement of cotter pins under conditions of vibration.

3.6.2.6 Cooling. No conduction cooling to the converter environment shall be allowed. Converters self-cooled by internal fan shall utilize a motor having ball bearings of quality level ABEC-3 or higher and the fan shall be rated for operation at 100°C ambient or higher. Converters which are cooled by an external blast air supply shall meet the requirements of this specification and the applicable specification sheet when supplied with cooling air flow and temperature defined by the applicable specification sheet. Pressure drop through the unit shall meet the requirements of the applicable specification sheet.

3.6.2.7 Ventilation openings. All ventilation or other openings shall be designed to prevent passage of foreign objects of one-fourth inch diameter or larger.

3.6.2.8 Operating position. The converter shall operate in any position.

3.6.2.9 Size and weight. The dimensions and weight shall be as specified in the applicable specification sheet. The weight and dimensions shown on the applicable specification sheet shall include the weight and dimensions of all auxiliary apparatus necessary to make the converter conform to this specification and the applicable specification sheet. Where only maximum and minimum dimensions are shown, the part need not have the shape shown, but the part, including all protrusions, shall be contained within the outline shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

3.7 Performance characteristics. The converter shall deliver power in accordance with the requirements specified herein and the applicable specification sheet.

3.7.1 Electrical.

3.7.1.1 Input power. The converter shall meet the requirements of this specification and the applicable specification sheet when supplied with power as defined herein. Nominal input voltage is three-phase, wye-connected, 115 volts line-to-neutral power at 400 Hz, input phase rotation in the order A, B, C, phase displacement of $120^{\circ} \pm 4^{\circ}$ and waveform and input voltage unbalance having full performance characteristics defined in 3.7.1.1.1.1c. and d. below.

3.7.1.1.1 Steady state input voltage.

3.7.1.1.1.1 Full performance. The converter shall meet full performance output requirements (see 3.7.1.2.1.1) with any combination of the following input characteristics:

a. Steady state input voltage within the range defined in the applicable specification sheet.

b. Steady state input frequency within the range defined in the applicable specification sheet.

c. Input waveform total distortion of 5 percent of the fundamental or less with individual frequency components (including modulation sidebands) within the limits of figure 1, curve A.

d. Input voltage unbalance of 3 volts or less between phase voltages.

3.7.1.1.1.2 Limited performance. The converter shall meet limited performance output requirements (see 3.7.1.2.1.2) when each of the following characteristics is separately substituted for the corresponding characteristic listed for full performance in 3.7.1.1.1.1:

a. (Type I, regulated converters only) Steady state input voltage between zero and the minimum input voltage defined in the applicable specification sheet.

b. (Type I, regulated converters only) Steady state input voltage between the maximum input specified in the applicable specification sheet and 125 volts.

c. Input waveform total distortion of 8 percent of the fundamental or less with individual frequency components (including modulation sidebands) within the limits of figure 1, curve B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

3.7.1.1.2 Transient input voltage.

3.7.1.1.2.1 Transient surge susceptibility. The converter shall not be damaged by input surge voltages from 64 volts to 180 volts (see 4.7.2.14.4.1).

3.7.1.1.2.2 Transient spike susceptibility. The converter shall meet full performance output requirements specified in 3.7.1.2.1.1 when subjected to input spike voltages as shown in figure 6 (see 4.7.2.14.4.2).

3.7.1.1.3 Transient input frequency. The converter shall withstand without damage and shall recover full performance after application of the following frequency transients (see 4.7.2.14.5):

480 Hz for 7 seconds
320 Hz for 7 seconds

The converter output voltage shall remain between 22.5 volts and the maximum voltage allowed by the applicable specification sheet during application of the following frequency transients:

450 Hz for 2 seconds
440 Hz for 15 seconds
360 Hz for 15 seconds
350 Hz for 2 seconds

3.7.1.1.4 Input power factor. The converter input power factor shall be no less than 0.9 lagging when operated from 50 percent to 100 percent (see 4.7.2.5).

3.7.1.1.5 Input current balance. The current input to each phase of the converter shall remain within 5 percent of the average of the three-phase currents from 25 percent rated load to 100 percent rated load (see 4.7.2.6).

3.7.1.1.6 Input starting current (Type I, regulated converters only). Peak input starting current transients upon energizing the converter shall not exceed 500 percent of peak load current as computed from the minimum allowable efficiency specified (see 3.7.1.3.1). The peak current shall return to and stay within 150 percent load value within .1 second after first application of input voltage (see 4.7.2.7).

3.7.1.2 Output power.

3.7.1.2.1 Steady state output voltage. The indicated output characteristics shall apply from zero to full rated output load current.

3.7.1.2.1.1 Full performance. Steady state output voltage characteristics shall be as follows under the conditions listed in 3.7.1.1.1.1:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

a. Steady state output voltage shall be within limits specified in the applicable specification sheet.

b. Peak to mean ripple voltage for either polarity shall not exceed 1.5 volts.

c. Output distortion factor shall not exceed .035 (output distortion factor is the ratio of the RMS value of the ripple to the average dc voltage).

d. Output ripple component frequencies shall not exceed the limits of figure 3, curve A.

3.7.1.2.1.2 Limited performance. Steady state output voltage characteristics shall be as follows under the conditions listed in 3.7.1.1.1.2:

a. (Type I, regulated converters only) with the input specified in 3.7.1.1.1.2a., the output voltage shall remain between zero and the maximum output voltage specified in the applicable specification sheet.

b. (Type I, regulated converters only) with the input specified in 3.7.1.1.1.2b., output voltage shall remain between the maximum output voltage specified in the applicable specification sheet and 30 volts.

c. With input waveform specified in 3.7.1.1.1.2c., peak to mean output ripple voltage for either polarity shall not exceed 2.0 volts nor shall output ripple component frequencies exceed the limits of figure 3, curve B.

3.7.1.2.2 Shock load recovery. When the following loads are applied and removed, output voltage transients shall remain within the limits of figure 2: 100 percent rated load current, 200 percent rated load current, short circuit (see 4.7.2.8).

3.7.1.2.3 Output starting voltage. The output voltage when the converter is initially energized shall be within steady state limits within one second after application of input voltage. During the one second starting period, output voltage transients shall be within the limits of figure 2. For determining compliance of voltage transients to figure 2, the onset of the transient shall be considered to be the time when the output voltage first reaches a value equal to minimum steady state output voltage specified in the applicable specification sheet (see 4.7.2.9).

3.7.1.2.4 Overload and short circuit capacity. Over an input voltage range of 112.5 to 117.5 volts and input frequency range of 393 to 407 Hz, the converter shall have the following performance (see 4.7.2.10):

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

3.7.1.2.4.1 Type I, regulated converters. The converter shall be capable of delivering current, without damage, into any passive load impedance (including a short circuit). After delivering required current within the specified voltage range for the specified duration below, the converter shall be capable of operating 30 additional minutes without damage with the overload or short circuit connected. The output voltage and/or current may drop to any level during the additional 30 minute period. Normal output voltage shall be automatically restored within two seconds after removal of the overload or short circuit and restoration of normal rated loading. Required output currents, output voltage ranges and durations are as follows:

Load	Duration	Required Output Voltage Range (volts)	
110 percent rated current	5 minutes	26.75	28.5
150 percent rated current	15 seconds	23.5	28.5
200 percent rated current	5 seconds	20.0	28.5
Short circuit (300 percent current minimum is required)	5 seconds	_____ rated output	

3.7.1.2.4.2 Type II, nonregulated converters. The converter shall deliver overload and short circuit current, without damage, for the duration specified in figure 4. With loads of 500 percent rated current or less, the converter shall maintain the minimum output voltage specified in figure 5.

3.7.1.2.5 Parallel operation. (See 4.7.2.11.)

3.7.1.2.5.1 Type I, regulated converters. The converter shall operate with its output connected in parallel with one to three other converters of the same manufacturer's part number when each unit is being supplied from a separate power source or the same power source having full performance characteristics specified in 3.7.1.1.1.1. The load carried by each converter shall not differ from another by more than 10 percent of the unit's rating with system loads from 10 percent to rated system load. Rated system load is the sum of the ratings of all individual units. Any interconnections between units shall be defined in the applicable specification sheet. Required output power characteristics shall be the same as for a single converter.

3.7.1.2.5.2 Type II, nonregulated converters. The converter shall operate with its output connected in parallel with one to three other converters of the same manufacturer's part number when each unit is being supplied from the same power source having full performance characteristics specified in 3.7.1.1.1.1. The load carried by each converter shall not differ from another by more than 10 percent of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

unit's rating with system loads from 10 percent to rated system load. Rated system load is the sum of the ratings of all individual units. Required output power characteristics shall be the same as for a single converter.

3.7.1.2.6 Output overvoltage protection (Type I, regulated converters only). The converter shall have protective circuitry to remove output voltage prior to output voltage exceeding the limit of figure 2 or a steady state value of 31.5 volts in the event that an internal failure results in overvoltage. Output voltage shall be restored, in the event of a failure self correction, after removal and reapplication of input voltage (see 4.7.2.12).

3.7.1.3 Efficiency.

3.7.1.3.1 Type I, regulated converters. When supplied from an input power source having full performance characteristics specified in 3.7.1.1.1.1, converter efficiency shall be 75 percent minimum from 25 percent to 50 percent load and 80 percent minimum from 51 percent load to 100 percent load.

3.7.1.3.2 Type II, nonregulated converters. When supplied from an input power source having full performance characteristics as specified in 3.7.1.1.1.1 converter efficiency shall be 80 percent minimum from 25 percent to 50 percent load and 85 percent minimum from 51 percent load to full load.

3.7.1.4 Electromagnetic compatibility. (See 4.7.2.13.)

3.7.1.4.1 Type I, regulated converters. The converter shall meet the electromagnetic susceptibility and electromagnetic interference requirements of MIL-E-81910.

3.7.1.4.2 Type II, nonregulated converters. The converter shall meet the electromagnetic interference requirements of MIL-E-81910.

3.7.1.5 Acoustical noise. When limits are specified by the applicable specification sheet and when tested as specified in 4.7.2.15, the maximum sound level measured at any point shall not exceed the specified limits (see 4.7.2.15).

3.7.1.6 Pressure drop (blast-cooled converters only). Pressure drop through blast-cooled converters shall not exceed the values specified in the applicable specification sheet under the conditions defined therein (see 4.7.2.16).

3.7.2 Environmental.

3.7.2.1 Temperature-altitude. The converter shall meet all performance requirements specified herein throughout the temperature-

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

altitude range specified in 1.2 for the class specified in the applicable specification sheet.

3.7.2.2 Acceleration. The converter shall meet the requirements specified herein when subjected to the acceleration test of MIL-E-81910 (see 4.7.2.18).

3.7.2.3 Humidity. The converter shall meet the requirements specified herein when subjected to the humidity test of MIL-E-81910 (see 4.7.2.19).

3.7.2.4 Shock. The converter shall meet the requirements specified herein when subjected to the shock test of MIL-E-81910. The converter shall be operated during the basic design test. Any output voltage transients resulting from the shock shall remain within the limits of figure 2 (see 4.7.2.20).

3.7.2.5 Vibration. The converter shall meet the requirements specified herein when subjected to the vibration test of MIL-E-81910 (see 4.7.2.21).

3.7.2.6 Fungus. The converter shall meet the requirements specified herein when subjected to the fungus test of MIL-E-81910 (see 4.7.2.22).

3.7.2.7 Salt fog. The converter shall meet the requirements specified herein when subjected to the salt fog test of MIL-E-81910 (see 4.7.2.23).

3.7.2.8 Dust. The converter shall meet the requirements specified herein when subjected to the dust test of MIL-E-81910 (see 4.7.2.24).

3.7.2.9 Explosive atmosphere. When this test is required by the applicable specification sheet the converter shall not cause ignition (see 4.7.2.25).

3.8 Reliability. Type I, regulated converters shall have a minimum observed MTBF (mean-time-between-failure) of 2000 hours, and Type II, non-regulated converters shall have a minimum observed MTBF of 6000 hours when operated under any natural combination of input voltage, load and environmental conditions specified herein (see 4.7.2.26).

3.9 Markings.

3.9.1 Terminals. Markings of external electrical connections shall be as specified on the applicable specification sheet.

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:10Z
Check the source to verify that this is the current version before use.

3.9.2 Identification of product. Equipment, assemblies, and parts shall be marked in accordance with MIL-STD-130.

3.9.3 Nameplate. A nameplate conforming to MIL-P-15024, type A, B, C, G, or H, with the following markings, in addition to the requirements of MIL-STD-130, shall be securely attached to the converter. The nameplate shall contain the following information:

Converter _____ Ampere
Input: _____ Volts AC _____ Amperes/Phase AC
Output: _____ Volts DC _____ Amperes DC

Military Part No.
Federal Stock No.
Manufacturer's Part No.
Manufacturer's Serial No.
Date of manufacture
Contract or Order No.
Manufacturer's name or trademark
Inspector's stamp
US

3.9.4 Airflow. The direction of airflow in blast-cooled or fan-cooled units shall be plainly and permanently marked with an arrow and the word "airflow." When the direction of airflow is marked on the cover, provision shall be made to assure that the cover cannot be installed to indicate a false airflow direction.

3.9.5 Installation instructions. The contractor shall prepare a set of installation instructions with illustrations and diagrams covering installation of the converter in an aircraft. Prior to qualification, these instructions shall be submitted for the approval of the qualifying activity for content and presentation. The instructions shall remain legible following exposure to humidity and fungus defined by 4.7.2.19 and 4.7.2.22. The approved instructions shall be attached to each production converter delivered. The instructions shall be removable prior to installation of the converter in the aircraft.

3.10 Workmanship. The converter shall be manufactured and assembled in accordance with MIL-STD-454, Requirement 9.

3.10.1 Burn-in (Type I, regulated converters only). Each converter shall be subjected to a burn-in test as specified in 4.7.2.28 in order to expose and eliminate workmanship and component quality problems.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. Qualification inspections (see 4.4).

b. Qualification verification inspections (see 4.5).

c. Quality conformance inspections (see 4.6).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

4.4 Qualification inspection.

4.4.1 Qualification tests. Qualification tests shall be conducted at a facility satisfactory to the activity responsible for qualification (see 6.2). Qualification tests shall consist of the examination, inspections and tests specified in Table II, in the order shown unless or as otherwise approved by the qualifying activity.

4.4.2 Qualification samples. The qualification test sample shall consist of at least four units of each part number for which qualification is sought. The sample units shall be produced, to the maximum extent practicable, with equipments and procedures normally used in production, and shall be identified as specified (see 3.9). Any additional information required by the letter of authorization shall be provided (see 6.2). The samples shall have successfully completed the quality conformance inspections shown in Table III.

4.4.3 Data submission.

4.4.3.1 Drawings and instructions. Together with the test samples, the manufacturer shall submit two reproducible copies of outline and detail assembly drawings, schematics, parts lists and three printed copies of simple instructions with illustrations and diagrams, if necessary; covering the installation of the converter into an aircraft. Upon completion of qualification testing and prior to qualification approval, the manufacturer shall again provide two reproducible copies of outline and detail assembly drawings, schematics and parts list. Any changes in the reproducible copies from those submitted with the qualification samples shall be indicated in detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

4.4.3.2 Materials certification. Together with the test samples, the manufacturer shall submit a materials inspection report consisting of a certification, supported by verifying data, such that the materials and finishes specified in 3.4 and used in fabricating the converters are in accordance with the applicable referenced specifications or requirements prior to such fabrication.

4.4.3.3 Component stress level. Together with the test samples, the manufacturer shall submit a report listing all converter electric/electronic components, their maximum rated stress, their applied stress within the converter, and the ratio of applied to rated stress. Data shall be based upon the most severe converter environmental and operational conditions specified herein and the applicable specification sheet.

4.4.4 Disposition of qualification samples and test report. Upon completion of the qualification tests, the test samples shall be identified as required and forwarded to the qualifying activity (see 3.3). The test samples shall be accompanied by three copies of the qualification test report, prepared in accordance with MIL-STD-831.

4.4.5 Retention of qualification. To retain qualification, the manufacturer shall comply with the requirements of 4.5. In the event that no production occurred during a 12-month period, a report shall be submitted certifying that the company still has the capabilities and facilities necessary to produce the item. If during two consecutive 12-month periods there has been no production, the manufacturer may be required, at the discretion of the qualifying activity, to submit a representative product for testing in accordance with the qualification inspection requirements.

4.5 Qualification verification inspections. Each converter of the same part number delivered as a qualified item under this specification shall be numbered sequentially in essentially the order that it is submitted for U.S. Government acceptance regardless of the contract under which it is delivered or by whom it is purchased. To meet the delivery requirements for the first 50 or less converters, the contract delivery requirement plus one additional converter must successfully complete the required quality conformance inspections; the contract delivery of required converters are to be shipped as directed by the applicable contract(s); and the additional converter, selected at random by the Government Inspector, is to be forwarded to the Naval Air Test Center, Electrical Systems Branch (SY60), Patuxent River, MD 20670 (Reference: NATC-4P7-101). To meet the delivery for each succeeding 150 converters, 151 converters must successfully complete the required quality conformance inspections, 150 of which are to be shipped as directed by the applicable contract(s) and one converter selected at random and forwarded as above. The span of serial numbers and the contract numbers of the production units from which each verification sample was selected shall be recorded and this information included with

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

the sample. Quality conformance inspection date shall also be included with the sample. The sample shall be shipped no later than the final unit in the production group from which it is selected. The units forwarded to the qualifying activity will be inspected and tested for conformance to this specification and the applicable specification sheet. Tests will be conducted as shown by Table II for any one of the qualification samples at the discretion of the qualifying activity. All qualification verification samples become U.S. Government property when accepted by the U.S. Government Inspector for shipment to the qualifying activity. This requirement shall apply to all converters procured in accordance with this specification whether procured directly by the U.S. Government or by private industry procuring for end item use by the U.S. Government.

4.5.1 Rejection and retest of qualification and qualification verification samples. Samples which have been rejected or returned to the manufacturer for any reason during qualification or qualification verification tests, may be reworked or have parts replaced to correct defects. Before resubmitting the samples, full particulars concerning the rejection and the corrective action taken by the manufacturer must be submitted in writing by the manufacturer to the qualifying activity. Tests shall not be resumed until such a report is received. Where qualification tests are conducted under the auspices of the manufacturer, the qualifying activity will be advised upon failure of a qualification sample and of the action taken by the manufacturer with regard to the failure. If the manufacturer does not correct and return components rejected during qualification verification testing within ten (10) days after he receives them to the qualifying activity or does not submit a program acceptable to the qualifying activity for the correction of deficiencies noted within ten (10) days, the manufacturer will be notified of the proposed removal of the item from the QPL.

4.6 Quality conformance inspections. Quality conformance inspections shall consist of inspection of the product for delivery. Each converter offered for delivery shall be subjected to the inspection specified in Table III. Data from these inspections shall be recorded and be made available for examination by authorized U.S. Government representatives.

4.6.1 Failure. Any converter failing to comply with specified requirements during the quality conformance inspections shall not be delivered on the contract or purchase order. The manufacturer may take corrective action on the failed converters as appropriate and resubmit for inspection. Reworked units shall be suitably marked to identify them as repaired items. In the event of failure during reinspection, further rework and resubmission shall not be allowed.

4.7 Methods of examination and test.

4.7.1 Test conditions. Unless otherwise specified, tests shall be made under the following conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

4.7.1.1 Ambient temperature. Tests shall be performed at an ambient temperature of 25 ± 15°C.

4.7.1.2 Ambient altitude. Tests shall be run at approximately sea level altitude.

4.7.1.3 Tolerance and accuracy. The tolerance of test conditions, other than room ambient, and the accuracy of test apparatus shall be as specified in MIL-E-81910.

4.7.1.4 Ambient temperature measurement. When tests are required to be conducted at reduced or elevated temperatures, the ambient temperature shall be determined by measurements of the air at several points surrounding, but not above, the converter, and through averaging the results. For units without fans, air temperature measurements shall be taken 1 ± 1/4 inch from the surface of the converter. For units with an internal fan, air temperature measurements taken 1 ± 1/4 inch from the fan inlet shall be considered the ambient temperature.

4.7.1.5 Airflow. For all maximum temperature-altitude tests below 20,000 feet conducted on self-cooled converters without integral cooling fans, the airflow velocity over the converter within the test chamber shall be adjusted to approximate natural convection conditions and shall not exceed 100 feet/minute but shall be adjusted to the minimum velocity consistent with maintaining the required ambient temperature within specified tolerance. Unless otherwise specified inlet airflow during blast-cooled converter tests shall be maintained at nominal conditions as defined in the applicable specification sheet.

4.7.1.6 Stabilization. Stabilization of test conditions based on constant input voltage and ambient temperature, is defined to have occurred when the change, over a ten minute period, is measured to be less than:

a. Output voltage: 0.02 volts

b. Converter critical component temperature: 0.5°C.

4.7.1.7 Voltage measurement. The input and output voltage shall be measured at the terminals of the unit. For three wire input converters with no neutral connection to the converter, the neutral measurement connection is made at the power source.

4.7.1.8 Position. The units shall be mounted base down.

4.7.1.9 Loading. Rated full load shall be applied.

4.7.1.9.1 Definition of full load. Full load shall be the maximum continuous converter output load current specified in the applicable specification sheet for a given temperature-altitude condition.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

4.7.1.10 Input voltage. Nominal input voltage shall be applied.

4.7.2 Methods of inspection.

4.7.2.1 Visual and mechanical inspection. The converter shall be inspected to determine compliance with the requirements of this specification and the applicable specification sheet with respect to materials, design and construction, parts, workmanship, dimensions, weight, markings, and attachment of installation instructions, for which there are no applicable tests.

4.7.2.2 Voltage regulation. The output voltage shall be measured under the conditions specified in 4.7.2.2.1 through 4.7.2.2.5. For each load, input voltage, position, temperature-altitude and for blast-cooled converters inlet airflow condition, output voltage shall remain within the limits specified in 3.7.1.2.1.1. During the course of the tests no components of the converter shall exceed their maximum rated temperatures. Tests may be conducted at any intermediate input voltage, load, or temperature-altitude condition at the option of the activity responsible for qualification.

4.7.2.2.1 Voltage regulation at room ambient temperature-altitude. The following tests, a. through e. below, shall be conducted immediately upon energizing the converter and then repeated after operating the converter at nominal input (see 3.7.1.1) and full load, until output voltage is completely stabilized.

a. With nominal input voltage specified in 3.7.1.1 the load shall be varied from no load to full load in steps of 25 percent rating. When a load between zero and 25 percent is specified on the applicable specification sheet, the converter shall also be tested at this load. Type I (regulated) converters shall be de-energized and re-energized at each load condition to demonstrate their ability to start. For blast-cooled converters only, during this portion of the test at full load, the input airflow conditions shall be varied from nominal conditions throughout the entire range defined by the applicable specification sheet to establish the airflow conditions which result in maximum and then minimum internal component temperatures of the converter when stabilized at full load.

b. The test specified in 4.7.2.2.1a shall be repeated at the maximum input voltage specified by the applicable specification sheet.

c. The test specified in 4.7.2.2.1a shall be repeated at the minimum input voltage specified by the applicable specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

d. Tests specified in 4.7.2.2.1a, b, and c shall be repeated at the maximum input frequency specified by the applicable specification sheet.

e. Tests specified in 4.7.2.2.1a, b, and c shall be repeated at the minimum input frequency specified by the applicable specification sheet.

4.7.2.2.2 Voltage regulation at maximum temperature-altitude conditions. The converter shall be tested under each of the temperature-altitude conditions listed below. Prior to being energized, the converter shall be soaked at the initial maximum temperature, sea level condition for at least one-half hour. Immediately after energizing the converter, the test specified in 4.7.2.2.1 shall be conducted. The test of 4.7.2.2.1 shall then be repeated after operating the converter at nominal input (see 3.7.1.1), full load until converter output voltage and temperature are completely stabilized. For each subsequent temperature-altitude condition, the test of 4.7.2.2.1 shall be conducted only after converter stabilization. Inlet conditions for blast-cooled converters shall be those determined to result in the highest internal component temperatures of the converter during the test of 4.7.2.2.1a.

Class A Converters

Ambient Temperature °C	Altitude (Feet)
+71	Sea Level
+25	15,000
0	30,000
-10	50,000

Class B Converters

Ambient Temperature °C	Altitude (Feet)
+85	Sea Level
+85	17,500
+50	35,000
+20	50,000
+20	65,000

Class C Converters (blast-cooled)

Ambient Temperature °C	Altitude (Feet)
maximum specified on the applicable specification sheet	Sea Level
	25,000
	50,000
	65,000

Class C Converters (self-cooled)

Ambient Temperature °C	Altitude (Feet)
+120	Sea Level
+70	25,000
+20	50,000
+20	65,000

4.7.2.2.3 Voltage regulation at minimum temperature-altitude conditions. The tests specified in 4.7.2.2.2 shall be repeated substituting the following temperature-altitude conditions and increasing the soak time at the initial -55°C sea level condition to two hours. Inlet airflow conditions for blast-cooled converters shall be those determined

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:10Z
Check the source to verify that this is the current version before use.

to result in the lowest internal component temperatures of the converter during the test of 4.7.2.2.1a.

Class A, B, and C Converters

Ambient Temperature °C	Altitude (Feet)
-55	Sea Level
-30	10,000
-55	25,000
-55	65,000

4.7.2.2.4 Operating position. The converter shall be operated at nominal input and full load in the normal base down position until output voltage and critical component temperatures stabilize. Output voltage and critical component temperatures shall be measured as the converter is rotated by increments of 90 degrees from the normal base down position, 360 degrees about each major axis except the vertical axis. Each position shall be held until output voltage and critical component temperatures stabilize.

4.7.2.2.5 Worst condition. The converter shall be operated at the worst indicated conditions determined from the tests specified in 4.7.2.2.1 through 4.7.2.2.4. The conditions from each of these tests resulting in the highest output voltage shall be simultaneously applied. Prior to the test, the converter shall be soaked at the applicable ambient for a minimum of two hours prior to energizing the converter. The converter shall be operated until output voltage and critical component temperatures stabilize. The above test shall be repeated for minimum output voltage and maximum critical component temperature conditions.

4.7.2.3 Efficiency. In conjunction with the test of 4.7.2.2.1, the power output and input of the unit shall be measured. The efficiency shall be calculated under these conditions and shall not be less than specified in 3.7.1.3 under stabilized test conditions as defined in 4.7.1.6.

4.7.2.4 Output ripple. The output peak-to-mean ripple voltage shall be measured for both positive and negative polarities during all tests of 4.7.2.2 and shall not exceed the limit specified in 3.7.1.2.1.1. The output ripple voltage component frequencies and distortion factor shall be measured during the test of 4.7.2.2.1 and shall not exceed the limit specified in 3.7.1.2.1.1.

4.7.2.5 Input power factor. In conjunction with the test of 4.7.2.2.1, the input power factor at half load or greater shall be determined for each condition and shall be as specified in 3.7.1.1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

4.7.2.6 Input current balance. In conjunction with the test of 4.7.2.2.1, the input current balance at 25 percent load or greater shall be determined for each condition and shall be as specified in 3.7.1.1.5.

4.7.2.7 Input starting current (Type I, regulated converters only). The converter shall be tested to verify compliance with 3.7.1.1.6 at zero, 50 percent and full load at nominal input and maximum and minimum input voltages specified by the applicable specification sheet.

4.7.2.8 Shock load recovery. The converter shall be tested to verify compliance with 3.7.1.2.2 at maximum, minimum, and room ambient temperatures for the applicable class converter at sea level altitude. For 100 percent load application and removal, tests shall be conducted at nominal input and minimum and maximum input voltages specified by the applicable specification sheet. For 200 percent load and short circuit application and removal, tests shall be conducted at nominal input voltage, 112.5 volts input and 117.5 volts input.

4.7.2.9 Output starting voltage. The converter shall be tested to demonstrate compliance with output starting voltage requirements of 3.7.1.2.3 at zero, 50 percent and full load at nominal input and maximum and minimum input voltages specified by the applicable specification sheet. Tests shall be conducted at maximum, minimum, and room ambient temperature for the applicable class converter at sea level altitude.

4.7.2.10 Overload and short circuit capacity. The converter shall be tested to demonstrate compliance with the overload and short circuit requirements of 3.7.1.2.4 at maximum, minimum and room ambient temperatures at sea level altitude for the applicable class converter. Tests shall be conducted at nominal input voltage and at the extremes of input voltage and frequency specified in 3.7.1.2.4. Tests on Type II converters shall be conducted at the test points indicated on figure 4. Should the 1200 percent rated current test point not be obtainable because of converter output impedance limitations, a test at the highest current obtainable shall be conducted for the corresponding duration indicated by figure 4.

4.7.2.11 Parallel operation. Two, three and four identical converters shall have their outputs connected in parallel and the load varied from 10 percent of total rated capacity in steps of 10 percent. Type I, converters shall be tested with paralleled converters operating from separate input power sources adjusted to provide all possible combinations of nominal input and maximum and minimum input voltages and maximum and minimum input frequencies specified by the applicable specification sheet. Type II converters shall be tested at nominal input and maximum and minimum input voltages and maximum and minimum input frequencies specified by the applicable specification sheet when supplied by the same input power source. The parallel units shall meet the requirements of 3.7.1.2.5.

Source: https://assist.dla.mil -- Downloaded: 20260-17T08:10Z
Check the source to verify that this is the current version before use.

4.7.2.12 Output overvoltage protection (Type I, regulated converters only). Failure modes of the converter which could result in an uncontrolled increase in output voltage shall be determined. These failures shall be artificially introduced with the converter operating at the maximum input voltage specified in the applicable specification sheet at zero and full load. The converter shall meet the requirements of 3.7.1.2.6. Following the test, the converter shall pass the test of 4.7.2.17.

4.7.2.13 Electromagnetic compatibility. The converter shall be tested to demonstrate compliance with 3.7.1.4 at full and half load with nominal input and maximum and minimum input voltage specified by the applicable specification sheet. During the electromagnetic susceptibility test for Type I, regulated converters, the converter shall pass the test of 4.7.2.17.

4.7.2.14 Input power susceptibility.

4.7.2.14.1 Abnormal steady state input voltage (Type I, regulated converters only). The converter shall be operated at no load and the impedance equivalent of full load at 28 VDC output with the following input voltages: 25, 50, 75, 100 and 125 volts. The converter shall be operated for five minutes under each input voltage/load combination and shall meet the requirements of 3.7.1.1.1.2. Following this test the converter shall pass the test of 4.7.2.17.

4.7.2.14.2 Input voltage unbalance. The test of 4.7.2.2.1a. shall be conducted substituting each of the following six input voltage combinations for nominal input voltage.

Input Voltage (Volts, RMS)

Combination Number	Phase A	Phase B	Phase C
1	113	116	116
2	116	113	116
3	116	116	113
4	113	113	116
5	113	116	113
6	116	113	113

During the test, output voltage, peak to mean ripple voltage, distortion factor and output ripple component frequencies shall meet the requirements of 3.7.1.2.1.1.

4.7.2.14.3 Input waveform distortion. The test of 4.7.2.2.1a. shall be conducted at 50 percent and full rated load under the following conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

a. Using an ac power source which normally provides 3.0 percent total distortion or less while supplying the converter at full load, sufficient input inductance shall be added equally in each line (except the neutral line, if utilized) between the power source and the converter to increase input waveform distortion to the maximum allowed by 3.7.1.1.1.1c. During this test, output voltage, peak to mean ripple voltage, distortion factor and output ripple component frequencies shall meet the requirements of 3.7.1.2.1.1. Input inductance shall then be further increased to obtain the maximum distortion allowed by 3.7.1.1.1.2c. During this test, output voltage, peak to mean ripple voltage and output ripple component frequencies shall meet the requirements of 3.7.1.2.1.1a. and 3.7.1.2.1.2c.

b. Using a variable waveform ac power source, input waveform distortion shall be adjusted to the maximum allowed by 3.7.1.1.1.1c. while maintaining a crest factor of 1.31 to 1.40. This test shall be repeated while maintaining a crest factor of 1.42 to 1.51. During these tests, output voltage, peak to mean ripple voltage, distortion factor and output ripple component frequencies shall meet the requirements of 3.7.1.2.1.1. Distortion shall then be adjusted to the maximum allowed by 3.7.1.1.1.2c. while maintaining a crest factor of 1.26 to 1.38. This test shall be repeated while maintaining a crest factor of 1.44 to 1.56. During these tests, output voltage, peak to mean ripple voltage and output ripple component frequencies shall meet the requirements of 3.7.1.2.1.1a., 3.7.1.2.1.2c., 3.7.1.2.1.2d.

4.7.2.14.4 Transient input voltage.

4.7.2.14.4.1 Transient surge susceptibility. With the converter operating at no load and full load with nominal input voltage, the following positive steps voltages shall be applied to the converter input terminals four times for each condition:

180 volts for 0.1 seconds
162 volts for 0.5 seconds
124 volts for 25.0 seconds
102 volts for 25.0 seconds
64 volts for 0.1 seconds

The converter shall be observed for evidence of flashover or insulation breakdown and shall meet the requirements of 3.7.1.1.2.1. Following the test, the converter shall pass the test of 4.7.2.17.

4.7.2.14.4.2 Transient spike susceptibility. The converter shall be operated at zero, 50 percent and full load at the maximum input voltage specified in the applicable specification sheet. Positive and negative input spike voltages synchronized to the positive peak, negative peak and the zero crossing of each input phase voltage shall be applied to the converter input terminals for 5 minutes for each condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

Spikes shall have a waveform as shown in figure 6 when generated into an open circuit and shall have a source impedance of 50 ± 5 ohms. The spike waveform shall be recorded at the converter terminals during the test and the output of the converter shall be monitored to verify compliance with 3.7.1.1.2.2.

4.7.2.14.5 Transient input frequency. The converter shall be tested to demonstrate compliance with 3.7.1.1.3. Frequency transients shall be applied exponentially with a 0.030 second time constant. Following the test, the converter shall pass the test of 4.7.2.17.

4.7.2.15 Acoustical noise. The acoustical noise of the converter shall be measured in planes one foot from each of the six sides. In each plane, measurements shall be made opposite the center of the converter surface to determine the sound level. The maximum sound level at all points shall be measured using the B weighted scale of an integrating-type sound level meter. Microphone orientation shall be in accordance with the recommendations of the manufacturer of the sound level meter to obtain the required frequency response. The calibrating devices or standards used shall be directly traceable to the National Bureau of Standards. Measurements shall be made under anechoic conditions with the converter supported in a manner to minimize acoustic transmission and reflection by the support structure. Compliance to 3.7.1.5 shall be determined.

4.7.2.16 Pressure drop (blast-cooled converters only). The requirements of 3.7.1.6 shall be verified by test.

4.7.2.17 Performance verification. During and following tests where satisfactory converter operation is to be verified, the test of 4.7.2.2.1 shall be conducted except that both positive and negative peak to mean ripple voltages shall also be measured at each condition. Blast-cooled converters shall be tested with nominal inlet airflow conditions. Output voltage and peak to mean ripple shall meet the requirements of 3.7.1.2.1.1.

4.7.2.18 Acceleration. The converter shall be tested in accordance with MIL-E-81910. The converter shall be operated at nominal input and one fourth load during Procedure II and the output voltage and peak to mean ripple voltage shall be monitored during the test to determine compliance with 3.7.1.2.1.1. At the conclusion of the test, the converter shall be examined for evidence of damage and shall be tested as specified in 4.7.2.17.

4.7.2.19 Humidity. The converter shall be tested in accordance with MIL-E-81910. Periods of operation during the test shall be at nominal input and 10 percent load. During this operation, output voltage and peak to mean ripple voltage shall be monitored and comply with 3.7.1.2.1.1. Following the test, the converter shall pass the test of 4.7.2.17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

4.7.2.20 Shock. The converter shall be tested in accordance with MIL-E-81910 except that the converter shall be operating during the basic design test at full load and nominal input. The output voltage shall be monitored during the test to determine compliance with 3.7.2.4. At the conclusion of the test, the converter shall be inspected for evidence of damage and the unit shall pass the test specified in 4.7.2.17. The converter shall not be operated during the crash safety test.

4.7.2.21 Vibration. The converter shall be tested in accordance with MIL-E-81910. During the test, the converter shall be operated at full load nominal input and the output voltage and peak to mean ripple voltage shall be monitored for compliance with 3.7.1.2.1.1. Following the test, the converter shall pass the test of 4.7.2.17.

4.7.2.22 Fungus. The converter shall be tested in accordance with MIL-E-81910. At the conclusion of the test, the converter shall show no evidence of fungus growth and shall pass the test of 4.7.2.17.

4.7.2.23 Salt fog. The converter shall be tested in accordance with MIL-E-81910. Specified drying shall be defined as allowing the unit to stand base down at room ambient conditions for 24 hours. The converter shall be inspected for evidence of corrosion and related damage. The unit shall then pass the test specified in 4.7.2.17. This test shall be repeated after 48 hours additional exposure at room ambient conditions.

4.7.2.24 Dust. The converter shall be tested in accordance with MIL-E-81910. The converter shall be operated at no load with nominal input voltage when required. At the conclusion of the test, the converter shall pass the test of 4.7.2.17. For units equipped with a cooling fan, proper operation (speed and noise) shall be verified.

4.7.2.25 Explosive atmosphere. When required by the applicable specification sheet, the converter shall be operated at nominal input and full load and tested in accordance with MIL-STD-810, Method 511, Procedure I. The converter shall meet the requirements of 3.7.2.9.

4.7.2.26 Reliability demonstration. The reliability demonstration test shall be structured as a test, analyze and fix (TAAF) program where in any failure (i.e., any operation outside of specified limits) which occurs is analyzed and corrective action implemented by the contractor to prevent recurrence of the failure. For Type I converters, a minimum of 4000 hours total converter operating time on two samples shall be accumulated with two or less failures under the test profile conditions of figure 7 in order to successfully complete the test. For Type II converters, a minimum of 6000 hours total converter operating time on 2 samples shall be accumulated with one or less failures under the test profile conditions on figure 7 in order to successfully complete the test. In the event more than two failures of the Type I converters, or more than one failure of the Type II converters occur, additional converter

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

operating time shall be accumulated until the total converter operating hours divided by the number of failures equals 2000 (Type I) or 6000 (Type II) or higher. When a corrective action has resolved a failure to the satisfaction of the qualifying activity, all but the first occurrence of the resolved failure shall be dropped from consideration. No single converter or the two test samples shall accumulate less than 25 percent of the total test time. During the test, output voltage and ripple shall be monitored for compliance with 3.7.1.2.1.1a. and b. The test is conducted at full rated load except at 500 ± 50 hour intervals when at such times the output load of each Type II, non-regulated test sample shall be increased to 400 percent rated load for 7 seconds during the 71°C portion of the cycle. Type I, regulated samples shall have the output load increased to 200 percent rated load for 5 seconds at the same interval. During these overloads, the converter shall meet the requirements of 3.7.1.2.4. Following the complete test, the converter shall pass the following tests: 4.7.2.2.1, 4.7.2.2.2 (at sea level only), 4.7.2.2.3 (sea level only), 4.7.2.3, 4.7.2.4, 4.7.2.5, 4.7.2.6, and 4.7.2.10.

4.7.2.27 Disassembly and inspection. The converter shall be disassembled and inspected for defects or deterioration which could prevent the converter from meeting the requirements of this specification. Such defects or deterioration shall be sufficient cause for rejection.

4.7.2.28 Burn-in (Type I, regulated converters only). The converter shall be tested in accordance with MIL-E-81910.

5. PACKAGING

5.1 Preservation and packaging. The converters shall be packaged in accordance with MIL-STD-794, level A or C as specified in the contract or order.

5.1.1 Level A. For level A packaging, preservation shall be in accordance with MIL-P-116, Method II, without preservation compounds, using metal reusable containers unless otherwise specified.

5.1.2 Level C. For level C the converter shall be preserved and packaged individually in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be in accordance with MIL-STD-794, level A, B or C as specified in the contract or order.

5.3 Marking. Interior and exterior containers shall be marked in accordance with MIL-STD-794 and MIL-STD-129.

5.3.1 Reinspection dates. Reinspection date marking shall be as specified by the acquiring activity.

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:10Z
Check the source to verify that this is the current version before use.

6. NOTES AND CONCLUDING MATERIAL

6.1 Ordering data. Acquisition documents should specify the following:

6.1.1 Acquisition requirements.

a. Title, number, and date of this specification.

b. Type.

c. Class.

d. Military part number.

e. Required level of packaging and packing.

f. Type of container.

g. Reinspection date marking and any special marking.

h. Installation instructions, handbooks, or manuals when required.

i. That the contractor shall include the cost of units required for verification qualification (see 4.5) in the amount of his bid.

6.2 Qualification. With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the U.S. Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Naval Air Systems Command (AIR-5363), Department of the Navy, Washington, D.C. 20360; however, information pertaining to qualification of products may be obtained from the qualifying activity the Naval Air Test Center, Electrical Systems Branch (SY60), Patuxent River, MD 20670.

6.3 Miscellaneous notes.

6.3.1 Alternating voltage. Alternating voltages used in this specification shall be considered line-to-neutral root mean square (RMS) values for both 3 wire and 4 wire input connections.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

6.3.2 Alternating current. Alternating currents used in this specification shall be root mean square (RMS) values.

6.3.3 Direct voltage and current. Direct voltages and currents used in this specification shall be mean (average) values.

6.3.4 Installation. The aircraft manufacturer shall allow clearance of at least one inch at each surface of the converter (except the mounting surface) in addition to the maximum dimensions shown on the applicable specification sheet for installation and ventilation.

Custodians:
Army - ME
Air Force - 99

Review Activities:
Air Force - 80

Preparing Activity:
Navy - AS
Project No. 6130-0232

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Component derating.

Part Type	Critical Stress	Maximum Allowable Application Stress
MICROCIRCUITS		
Digital	Output Current	.80
	Operating Frequency	.75
Linear	Bias Voltage	.70
	Input Signal Voltage	.70
	Output Current	.75
	Operating Frequency	.75
Voltage Regulator	Input Voltage (Rated Maximum)	.80
	Output Current (Rated Maximum)	.75
	Power Dissipation (Rated Maximum)	.60
TRANSISTORS		
General Purpose	Power	.50
	Current	.75
	Voltage	.75
Power	Power	.30
	Current	.75
	Voltage	.75
Switching	Power	.50
	Current	.75
	Voltage	.75
DIODES		
General Purpose	Power	.50
	PIV	.50
	Surge Current	.50
	FWD Current	.50
Rectifier	Power	.30
	PIV	.50
	Surge Current	.50
	FWD Current	.50

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Component derating (Continued).

Part Type	Critical Stress	Maximum Allowable Application Stress
DIODES		
Switching	Power	.30
	PIV	.50
	Surge Current	.50
	FWD Current	.50
SCR	Power	.30
	PIV	.50
	Surge Current	.50
	FWD Current	.50
Varactor	Power	.50
	PIV	.75
	FWD Current	.75
Zener	Power	.50
	FWD Current	.50
	Zener Current	.5 [I_z max + I_z nom]
Reference	Power	.30
	FWD Current	.50
	Zener Current	.5 [I_z max + I_z nom]
CAPACITORS, FIXED		
Ceramic	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Mica, Dipped	Voltage	.60
	Current	
	AC/Ripple	.70
	Surge	.70
Glass	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Component derating (Continued).

Part Type	Critical Stress	Maximum Allowable Application Stress
CAPACITORS, FIXED		
Porcelain	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Paper	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Plastic	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Tantalum, Foil or Film	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Tantalum, Solid, Dry	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	
	Protection	3 OHMS/VOLT
Aluminum Electrolytic	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
CAPACITORS, ADJUSTABLE		
Ceramic	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Component derating (Continued).

Part Type	Critical Stress	Maximum Allowable Application Stress
CAPACITORS, ADJUSTABLE		
Glass	Voltage	.50
	Current	
	AC/Ripple	.70
	Surge	.70
Air	Voltage	.30
RESISTORS, FIXED		
Carbon Composition	Power	.50
Insulated Film	Power	.50
Wirewound Precision		
1.0% Tol.	Power	.50
.1% Tol.	Power	.25
Wirewound Power	Power	.50
Thermistor	Power	.50
RESISTORS, ADJUSTABLE		
Wirewound	Rated Current	.70
Non Wirewound	Rated Current	.70
RESISTORS, ALL	Voltage	.80
MISCELLANEOUS		
Transformers and Chokes	Flux Saturation Level	.75
	Insulation Breakdown Voltage	.50
	Current	.70

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification inspection.

INSPECTION	CONVERTER SAMPLE				REQUIREMENT PARAGRAPH	TEST METHOD PARAGRAPH
	1	2	3	4		
Visual & mechanical inspection	X	X	X	X	3.4, 3.5, 3.6, 3.9, 3.10	4.7.2.1
Voltage regulation					3.7.1.1.1.1, 3.7.1.2.1.1	4.7.2.2
Room ambient temp-alt	X	X	X	X		4.7.2.2.1
Maximum temp-alt	X	X				4.7.2.2.2
Minimum temp-alt	X	X				4.7.2.2.3
Operating position	X	X				4.7.2.2.4
Worst condition	X	X				4.7.2.2.5
Efficiency	X	X	X	X	3.7.1.3	4.7.2.3
Output ripple	X	X	X	X	3.7.1.1.1.1, 3.7.1.2.1.1	4.7.2.4
Input power factor	X	X	X	X	3.7.1.1.4	4.7.2.5
Input current balance	X	X	X	X	3.7.1.1.5	4.7.2.6
Input starting current	X				3.7.1.1.6	4.7.2.7
Shock load recovery	X		X		3.7.1.2.2	4.7.2.8
Output starting voltage	X		X		3.7.1.2.3	4.7.2.9
Overload & short circuit capacity		X	X		3.7.1.2.4	4.7.2.10
Parallel operation	X	X	X	X	3.7.1.2.5	4.7.2.11
Output overvoltage protection	X				3.7.1.2.6	4.7.2.12
Electromagnetic compatibility	X		X		3.7.1.4	4.7.2.13
Input power susceptibility		X			3.7.1.1.1.2, 3.7.1.1.2, 3.7.1.1.3, 3.7.1.2.1.2	4.7.2.14
Acoustical noise	X				3.7.1.5	4.7.2.15
Pressure drop	X				3.7.1.6	4.7.2.16
Acceleration	X				3.7.2.2	4.7.2.18
Humidity	X				3.7.2.3	4.7.2.19
Shock	X				3.7.2.4	4.7.2.20
Vibration		X			3.7.2.5	4.7.2.21
Fungus				X	3.7.2.6	4.7.2.22
Salt fog		X			3.7.2.7	4.7.2.23
Dust				X	3.7.2.8	4.7.2.24
Explosive atmosphere		X			3.7.2.9	4.7.2.25
Reliability demonstration			X	X	3.8	4.7.2.26
Disassembly & inspection			X	X	--	4.7.2.27

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

TABLE III. Quality conformance inspection.

INSPECTION	REQUIREMENT PARAGRAPH	TEST METHOD PARAGRAPH
Visual and mechanical inspection	3.4, 3.5, 3.6, 3.9, 3.10	4.7.2.1
Burn-in (Type I, regulated converters only)	3.10.1	4.7.2.28
Overload and short circuit capacity (at room ambient conditions, nominal input voltage and frequency only. Type II, non-regulated converters shall be tested at 200% and 500% rated current test points only)	3.7.1.2.4	4.7.2.10
Voltage regulation at room ambient temperature-altitude	3.7.1.2.1.1	4.7.2.2.1 a, b, c only
Efficiency	3.7.1.3	4.7.2.3
Input power factor	3.7.1.1.4	4.7.2.5
Input current balance	3.7.1.1.5	4.7.2.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

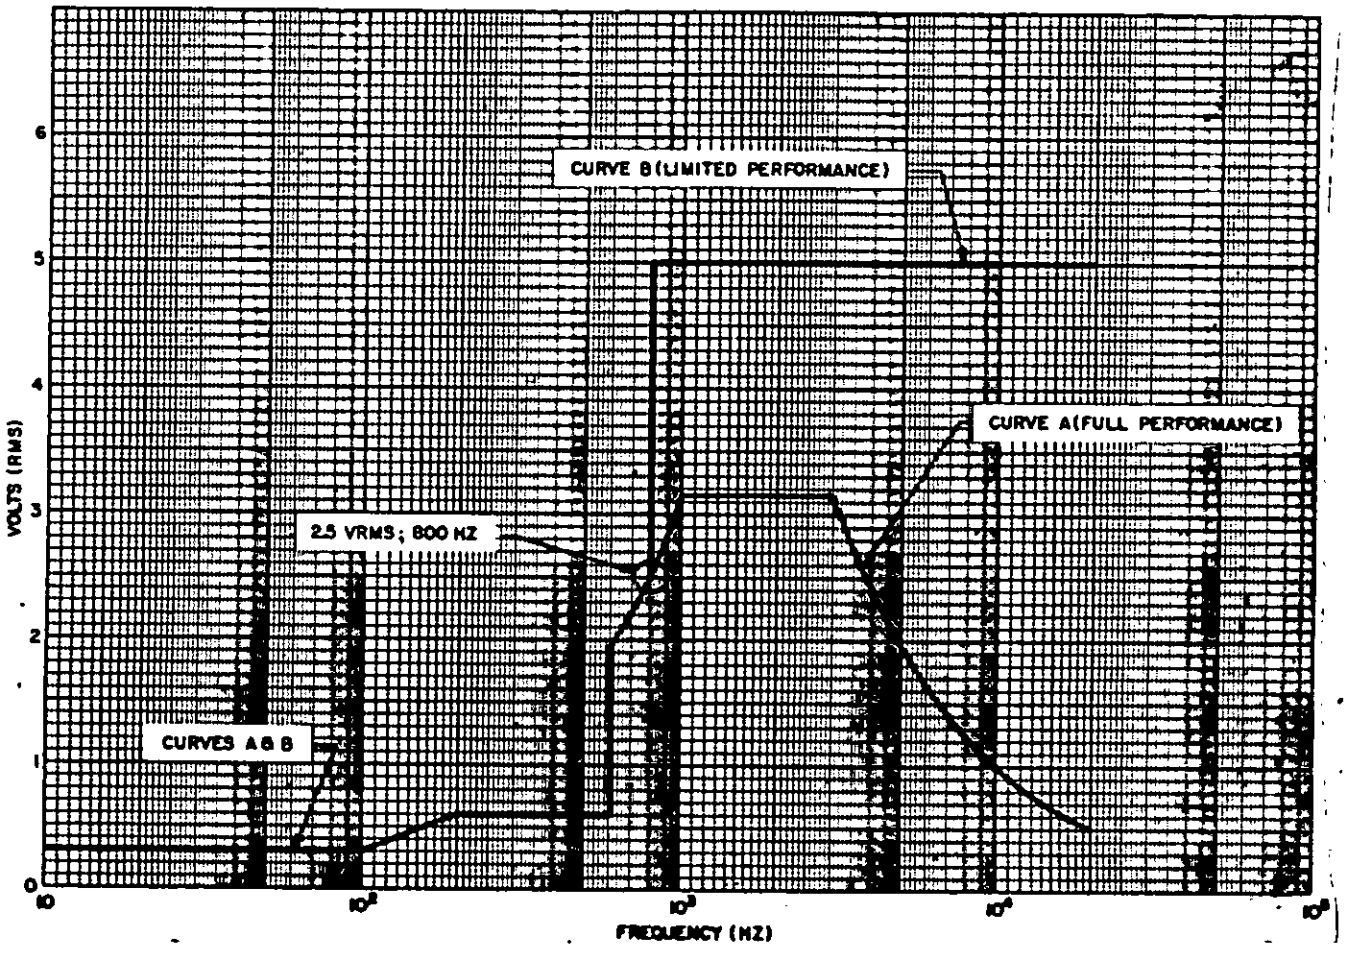


Figure 1. Input waveform distortion.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

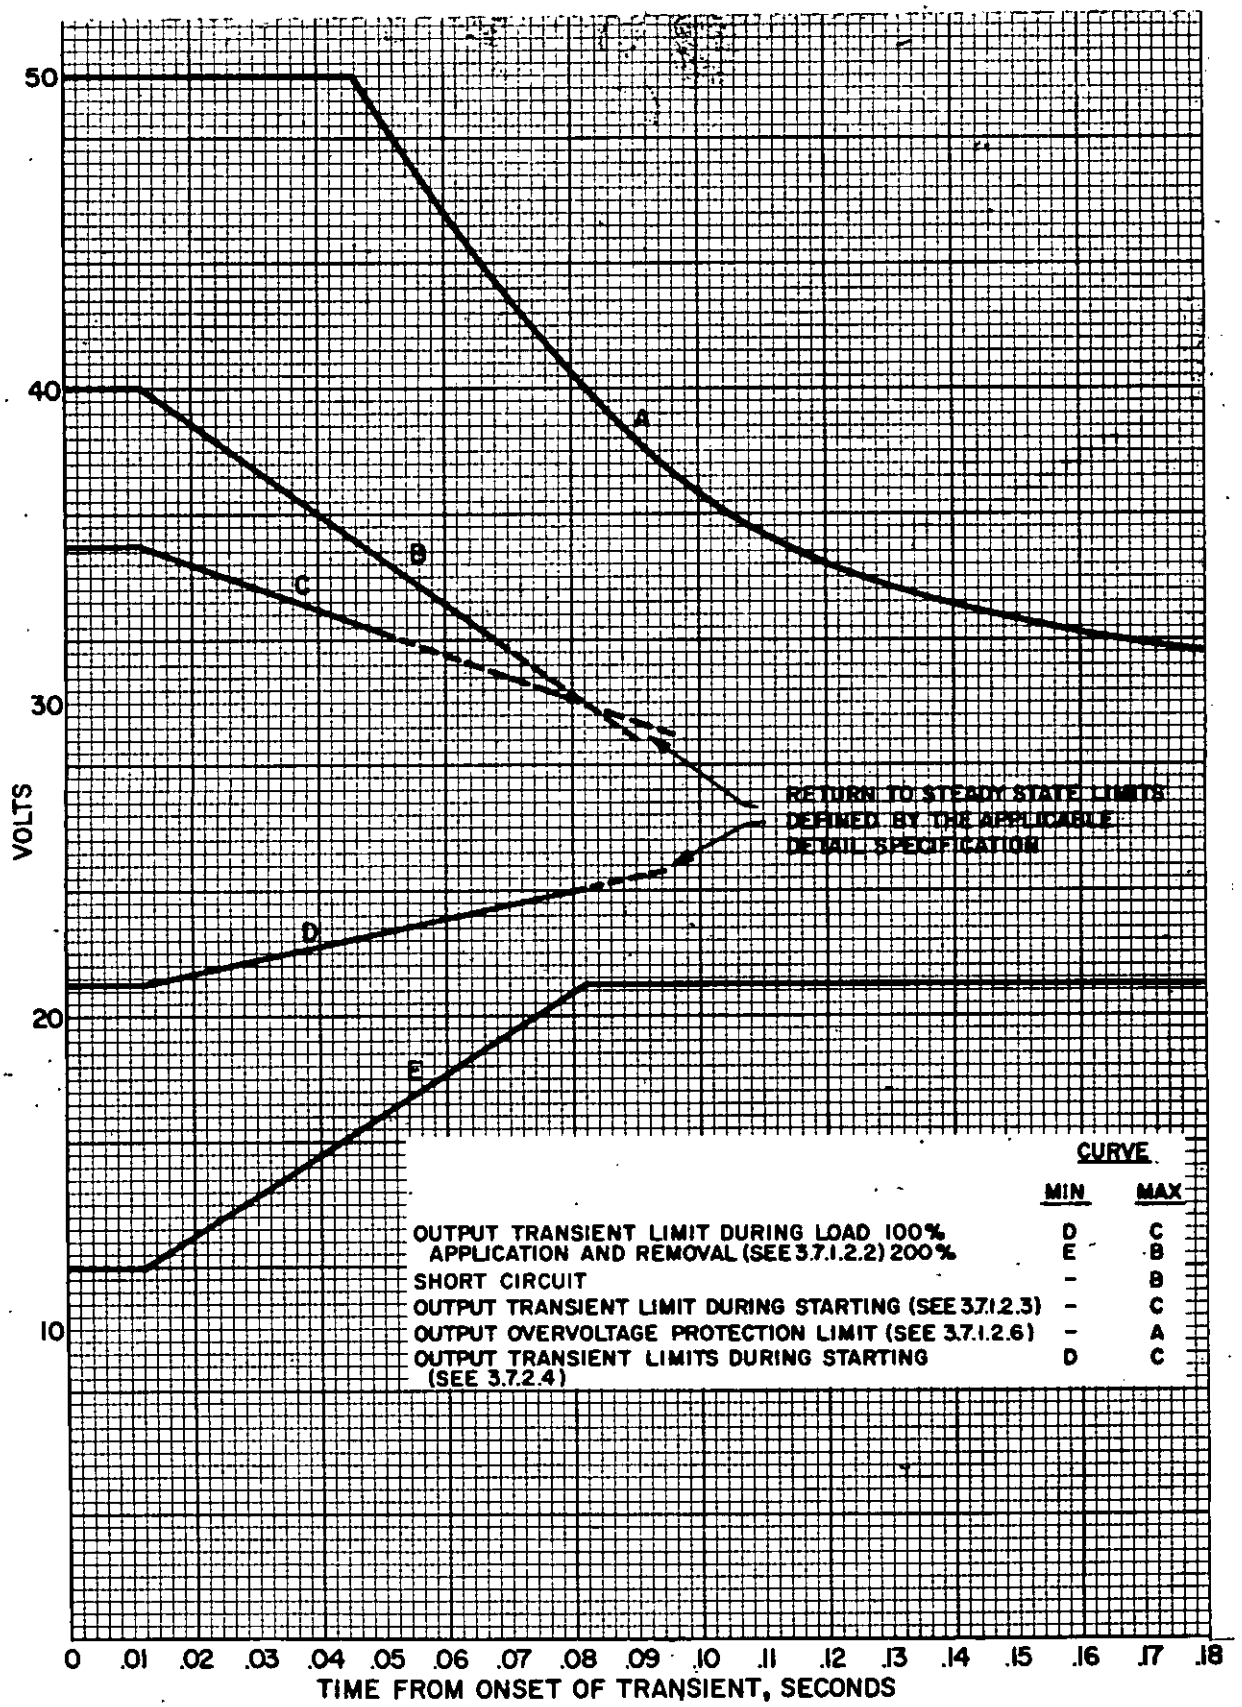


Figure 2. Output voltage transient limits.

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:10Z
Check the source to verify that this is the current version before use.

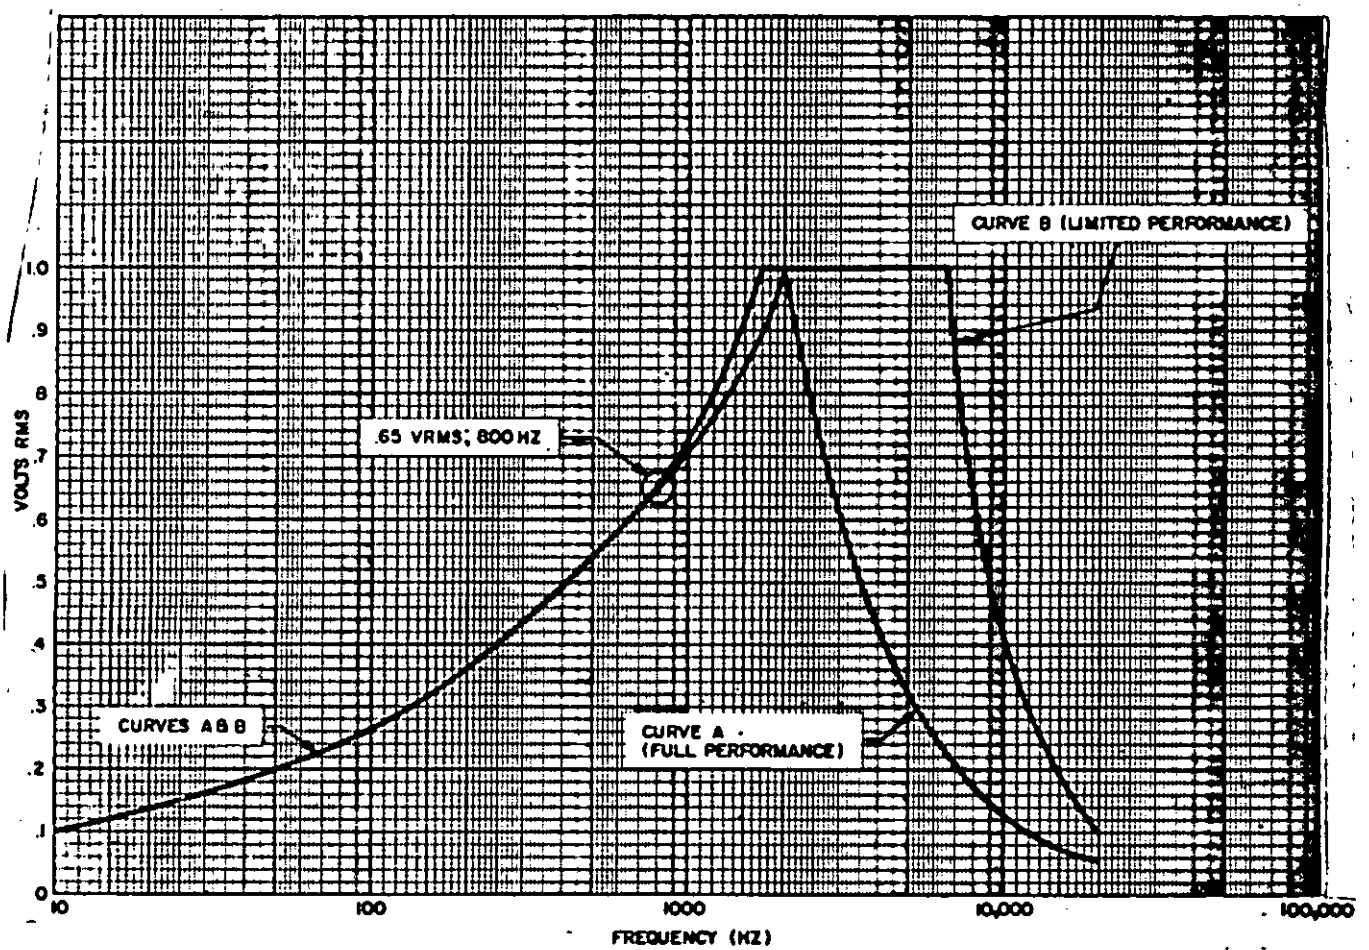


Figure 3. Output ripple frequency spectrum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

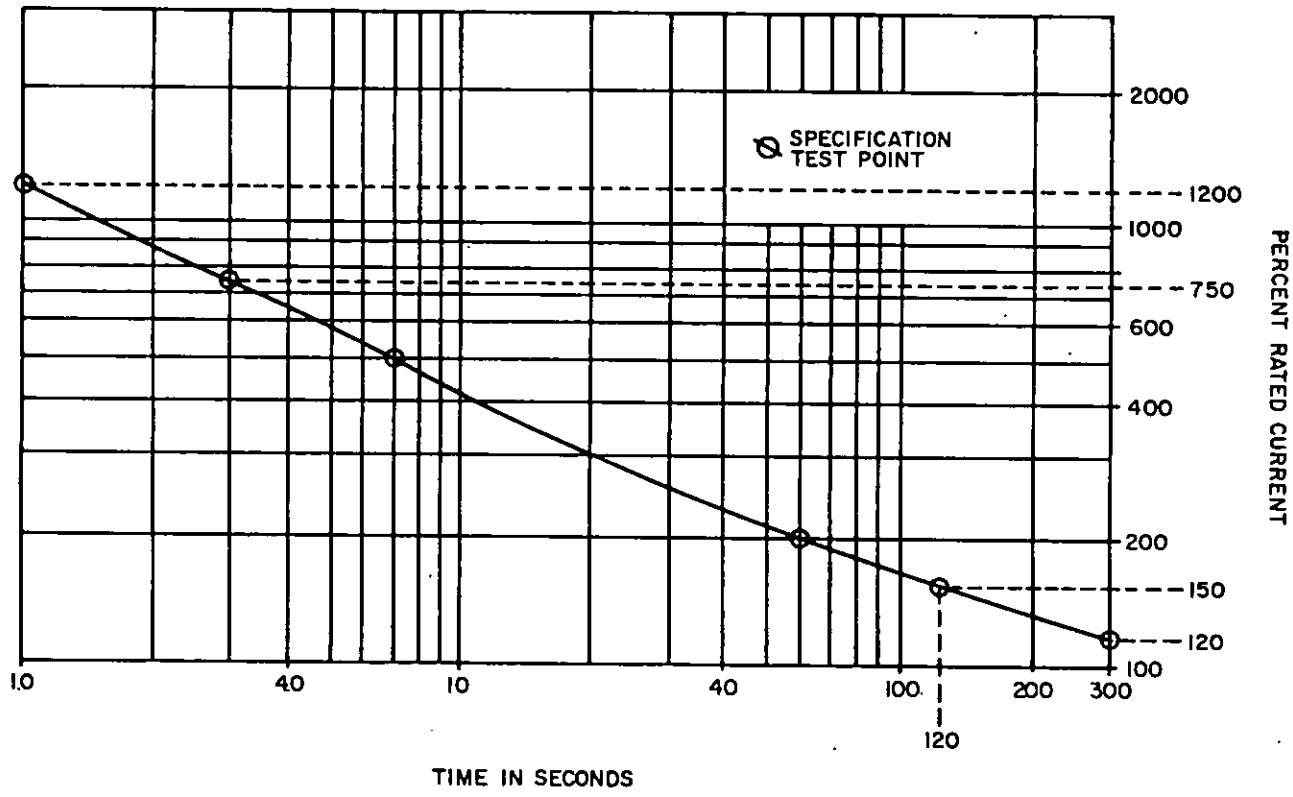


Figure 4. Converter current carrying capacity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

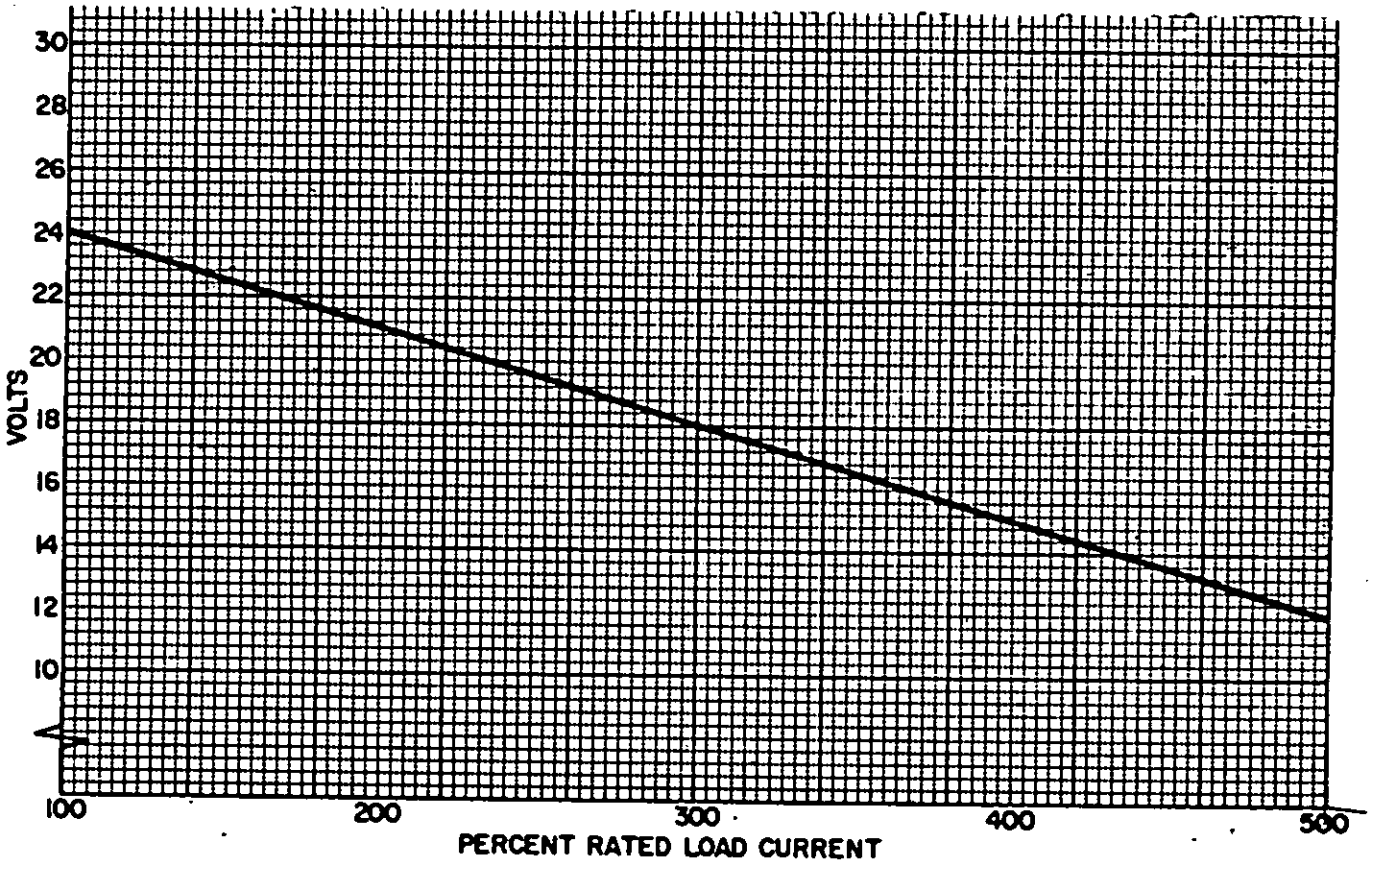


Figure 5. Minimum output voltage vs load.
(112.5 to 117.5 volts imput)

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

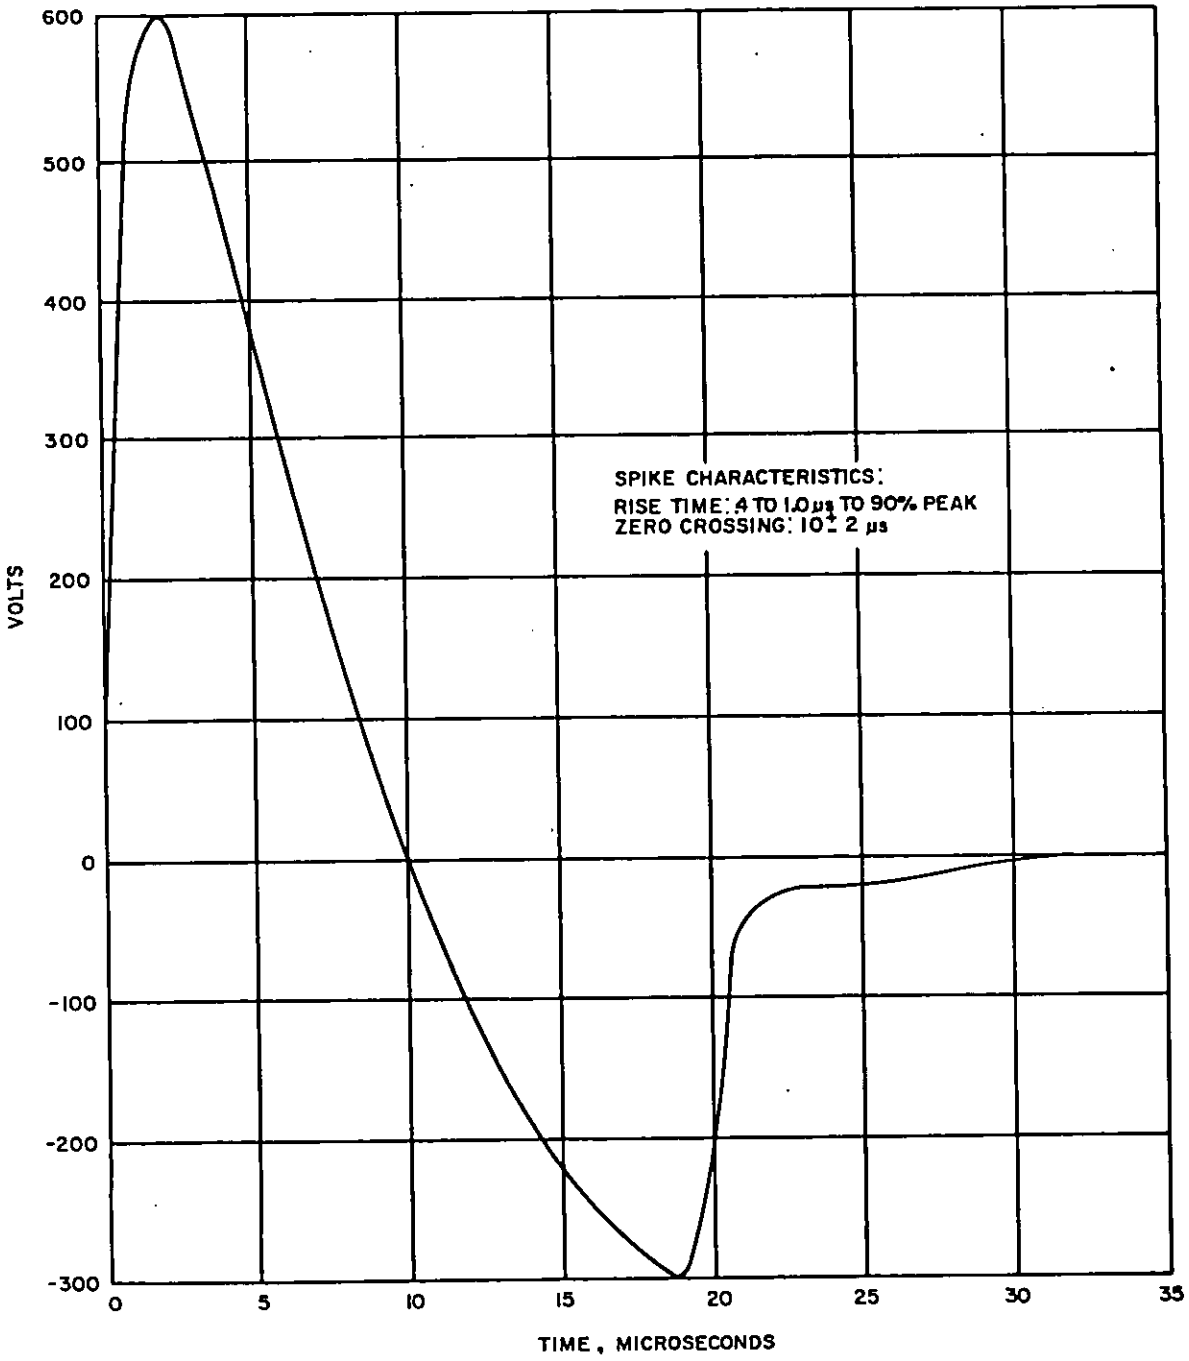
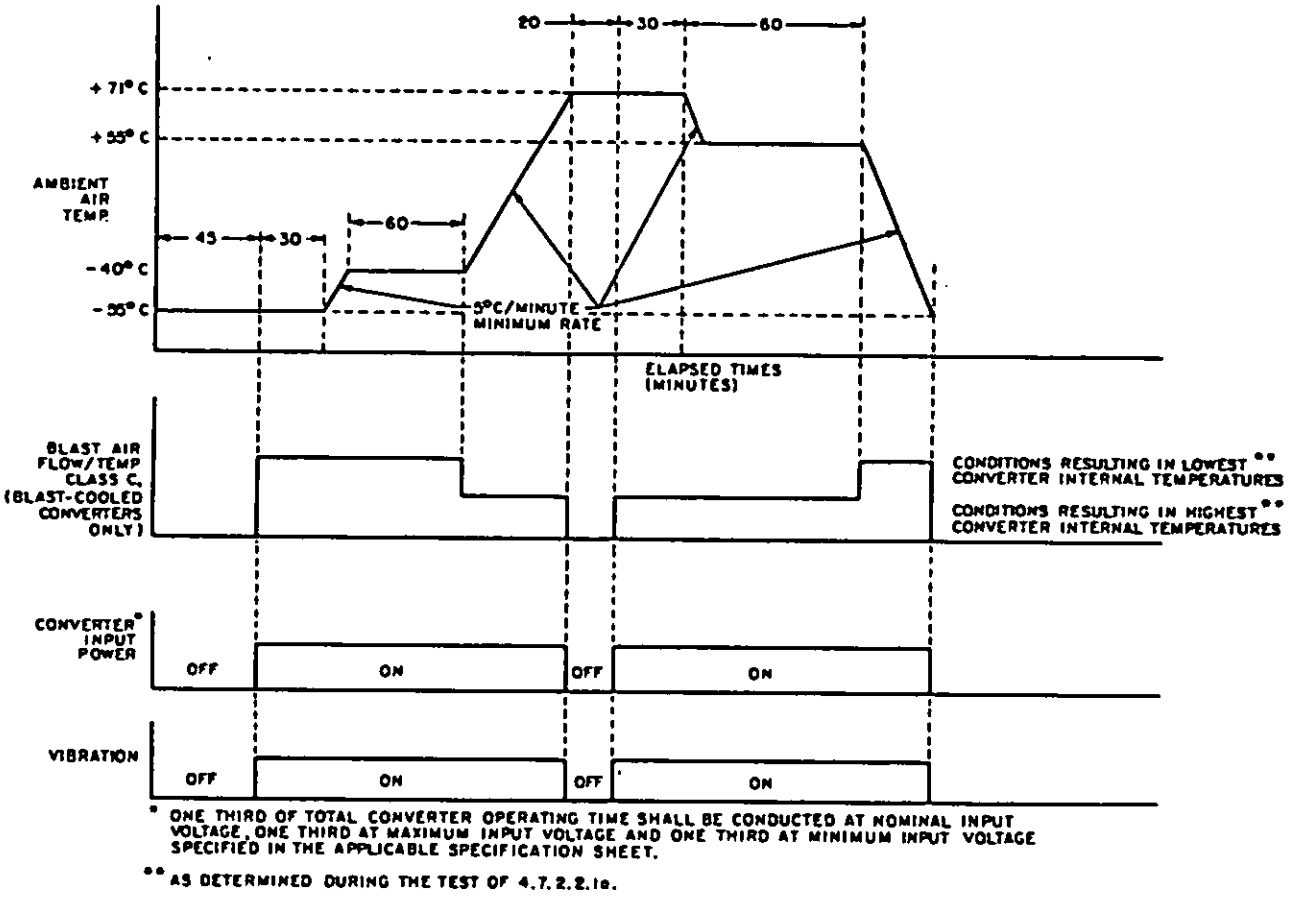


Figure 6. Spike susceptibility test waveform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.



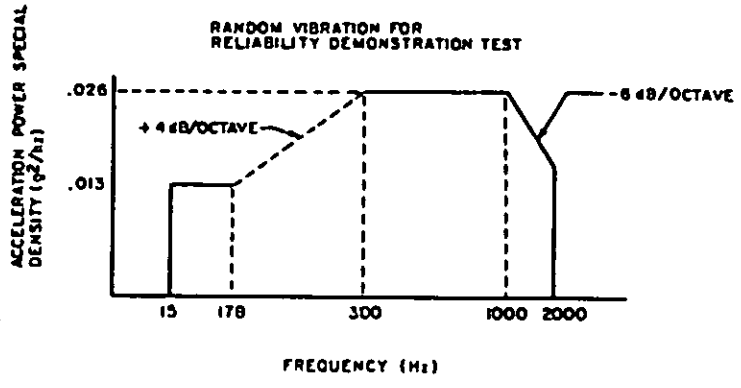


Figure 7. Reliability demonstration test profile.

☆U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/3718

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

Engineering Specifications & Standards Department
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-7115E CONVERTERS, AIRCRAFT, GENERAL SPECIFICATION FOR

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:10Z
Check the source to verify that this is the current version before use.