MILITARY SPECIFICATION SHEET

CONVERTER, 200 AMPERE, AIRCRAFT, TYPE II, CLASS A

This specification is approved for use by the Naval Air Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the converter described herein shall consist of this document and the latest issue of MIL-C-7115.

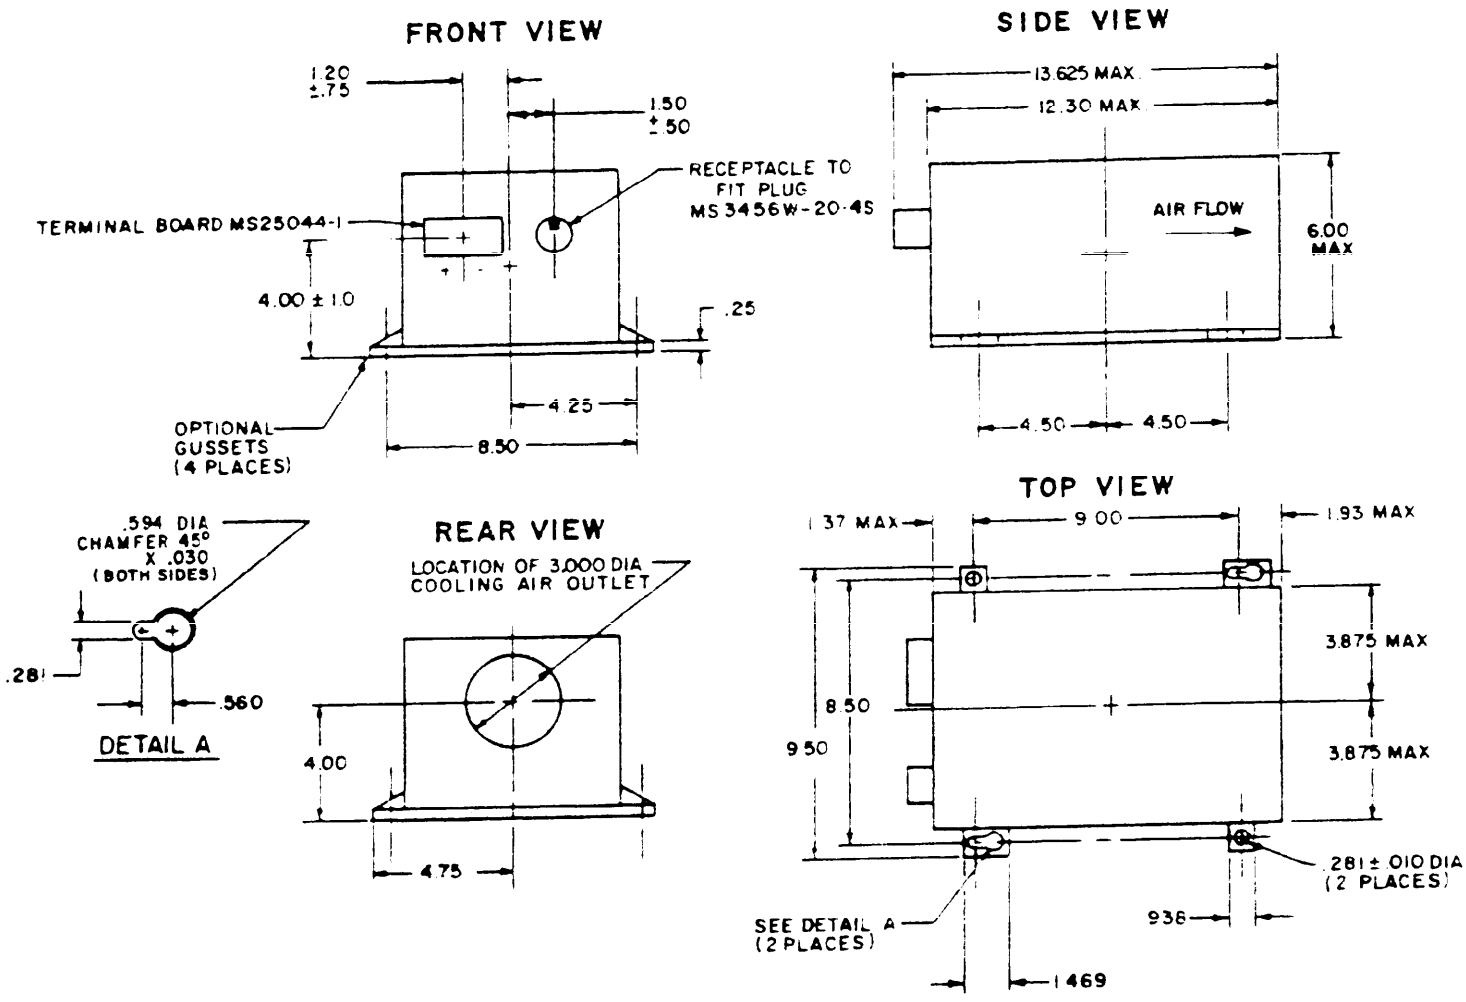


FIGURE 1. Converter P/N M7115/2-1.

FSC 6130

AMSC N/A

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:11Z
Check the source to verify that this is the current version before use.


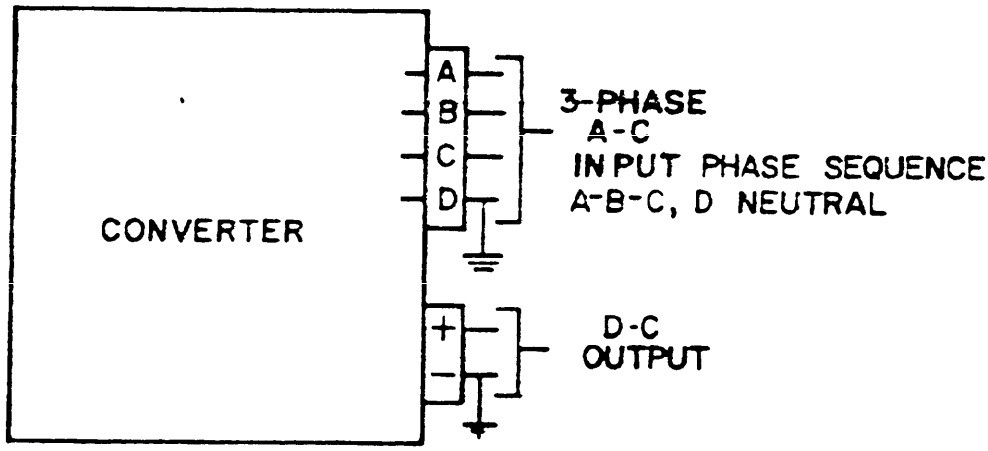


FIGURE 2. Connection diagram.

TABLE 1

AC INPUT:	
Voltage Range	112.5 - 117.5 Volts
Frequency Range	380-420 Hertz
DC OUTPUT:	
Voltage	See Figure 3
Rated Current	200 Amperes
WEIGHT:	17.5 lbs (max)

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:11Z
Check the source to verify that this is the current version before use.

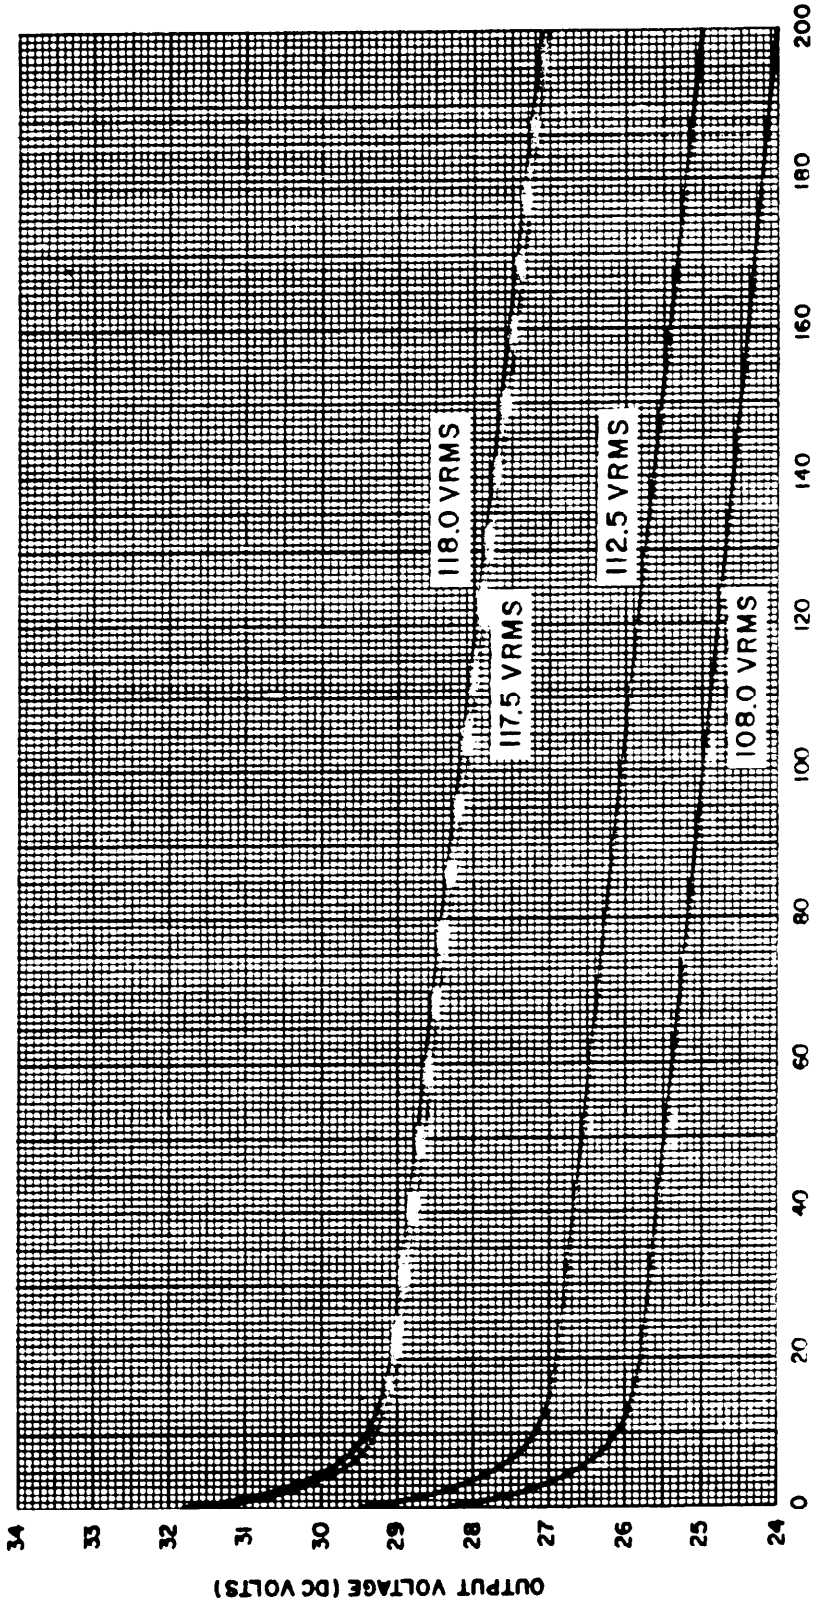

INPUT / OUTPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
	AMPS DC	MIN. VDC	MIN. VDC	MAX. VDC	MAX. VDC
	0.0	28.3	29.5	31.7	31.8
	2.0	27.4	28.5	30.4	30.5
	5.0	26.5	27.6	29.8	30.0
	10.0	26.1	27.2	29.3	29.4
	20.0	25.8	26.9	29.0	29.1
	50.0	25.4	26.5	28.5	28.6
	100.0	24.9	26.0	28.0	28.1
	150.0	24.5	25.5	27.5	27.6
	200.0	24.0	25.0	27.0	27.1

FIGURE 3. Output voltage limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

The converter shall meet the requirements of MIL-C-7115 as modified below (paragraph number refers to MIL-C-7115).

3.4.1.3.3 Color. Delete "color Number 17875 (white)" of first sentence and add "color number 37038 (black)."

3.6.1.1 Component derating. Delete and add: All converter electric/electronic components shall be derated as shown in Table I of MIL-C-7115 based upon the most severe converter environmental and operational conditions except as modified in Table II of this specification sheet below:

TABLE II

Part Type	Critical Stress	Maximum Allowable Application Stress
Capacitors, Fixed		
Plastic	Voltage	.72
Aluminum Electrolytic	Voltage	.55
Miscellaneous		
Transformers and Chokes	Flux Saturation Level	.85
	Current	.90

3.6.2.1 Maintainability. Delete and add "The converter shall be non-repairable. The converter shall be designed to meet the specification requirements without the need for any routine maintenance or servicing. The converter shall not include any provision for the disassembly or interior inspection of the converter.

3.7.1.2.1.1a Delete and add: "Steady state output voltage shall remain within the limits of Figure 3 of this specification sheet."

3.7.1.2.1.1b Delete and add: "Peak to peak ripple voltage shall not exceed 0.40 volts from zero to 100 percent load current."

3.7.1.2.2 Shock load recovery. Delete and add: The output voltage transient limits of Figure 2 of MIL-C-7115 shall apply except for the first 2.5 milliseconds from the onset of the transient. The following transient limits shall apply for the first 2.5 milliseconds from the onset of the transient:

Condition	Output Transient Limit (Volts)
Application of 200% load current	20 (min.)
Removal of 200% load current	36.5 (max.)

3.7.1.2.3 Output starting voltage. Add to second sentence: "except for the first 5 milliseconds from the onset of the transient, when a maximum voltage of 40 volts shall be allowed."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

3.7.1.2.5.2 Parallel operation, Type II, nonregulated converters. Not applicable.

3.7.1.4.2 Electromagnetic Compatibility, Type II, nonregulated converters. Add: "except the conducted emission requirements of CE-03, MIL-STD-461, Notice 1 shall be relaxed 10 db from 150 kHz to 2 MHz.

3.7.2.5 Vibration. Add: "except that the broadband random test is not required."

3.7.2.9 Explosive Atmosphere. Not applicable.

3.7.2.4 Output Ripple. Delete: "Peak-to-Mean" and add "Peak-to-Peak."

3.7.1.5 Acoustical Noise. Sound pressure levels of the converter shall not exceed those listed below.

Octave Band Hz	Sound Pressure Level db (Ref -0.0002 Microbar)
31	91
63	92
125	93
250	94
500	90
1000	87
2000	87
4000	77

3.7.2.2 Acceleration. Not applicable.

3.9.3 Nameplate. Add:

Warranty Expiration Date
Non-Serviceable, Non-Repairable Transformer Rectifier Package
Do Not Attempt to Disassemble

4.7.2.11 Parallel Operation. Not applicable.

4.7.2.15 Acoustical Noise. Sound pressure levels of 3.7.1.5 shall be verified by test at room ambient temperature.

4.7.2.18 Acceleration. Not applicable.

4.7.2.21 Vibration. Add: "except that the broadband random test is not required."

4.7.2.25 Explosive Atmosphere. Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches. Unless otherwise specified. Tolerances: Decimals ±.015.

Preparing Activity:
Navy - AS
(Project No. 6130-N263)

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:11Z
Check the source to verify that this is the current version before use.