INCH-POUND
MIL-PRF-7115/2B(AS)
11 July 2012
SUPERSEDING
MIL-C-7115/2A(AS)
15 August 1986

PERFORMANCE SPECIFICATION SHEET

CONVERTER, AIRCRAFT, AC TO DC, 200 AMPERE, TYPE II, CLASS A

Inactive for new design after 10 May 1999 and is no longer used, except for replacement purposes.

This specification is approved for use by the Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-7115.

SCOPE

1. Converter type. The converter is Type II, non-regulated, designed for a nominal 28 VDC output.

2. Converter class. The converter is class A as modified herein.

3. Part or identifying number (PIN). The converter covered by this specification sheet is identified using the following PIN:

Non-regulated converter – M7115/2-1 (see figure 1)

REQUIREMENTS

1. Dimensions. The dimensions of the converter shall be as shown on figure 1 of this specification sheet.

2. Description. The power characteristics and weight of the converter covered by this specification sheet are shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

TABLE I. Converter description.

AC INPUT: (full performance) Voltage Range Frequency Range	 108 – 118 Volts 380 – 420 Hz
DC OUTPUT: Voltage Full Rated Load Current	 See figure 3 200 Amperes
WEIGHT:	17.5 lbs (max)

3. MIL-PRF-7115 variance: The converter shall comply with MIL-PRF-7115 except as follows:

3.1 The following paragraphs are not applicable:
3.5.1.2.1.1a (Full performance subparagraph for Type I regulated converters)
3.5.1.2.4.1 Type I, regulated converters.
3.5.1.2.5 Parallel operation. (including all subparagraphs)
3.5.1.2.6 Output overvoltage protection (Type I, regulated converters only).
3.5.1.6 Pressure drop (blast-cooled converters only).
3.5.2.2 Acceleration.
3.5.2.9 Explosive atmosphere.
3.8.1 Burn-in (Type I regulated converters only).
4.6.2.13 Parallel operation.
4.6.3.3 Pressure drop (blast-cooled converters only).
4.6.3.4 Acceleration.
4.6.3.11 Explosive atmosphere.
4.6.6 Burn-in (Type I, regulated converters only).

Table VIII Number of burn-in cycles.
Figure 14 Typical burn-in test cycle.

3.2 Modify the following paragraphs of MIL-PRF-7115.

3.4.2.1.1 External electric connections. Add: “Input and output connections shall be as shown on figure 2 of this specification sheet.”

3.4.3.4 Cooling. Add: “Airflow shall exhaust from the end opposite the connectors, as shown on figure 1 of this specification sheet.”

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

3.4.3.7 Size and weight. Add: "The size and dimensions of the converter shall be as shown on figure 1 of this specification sheet. Unless otherwise specified, all dimensions are in inches and tolerances are ± .015 inch. Converter weight shall be as required in table I of this specification sheet."

3.5.1.2.1.1b (Full Performance, sub-paragraph b). Delete sentence and substitute: "For Type II Unregulated Converters, the steady state output voltage shall comply with figure 3, Output voltage limits, of this specification sheet."

3.5.1.2.1.1c (Full Performance, sub-paragraph c). Delete sentence and substitute: "Peak-to-peak ripple voltage shall not exceed 1.5 volts."

3.5.1.5 Acoustical noise. Sound pressure levels of the converter shall not exceed those listed below.

Octave Band Hz	Sound Pressure Level dB (ref -0.0002 Microbar)
31	91
63	92
125	93
250	94
500	90
1000	87
2000	87
4000	77

3.5.2.1 Temperature altitude. The converter is class A.

3.7.1 Terminals. Delete the paragraph in its entirety and substitute: "The input and output connections shall be marked as shown on figures 1 and 2 of this specification sheet (see 4.6.1)."

3.7.3 Nameplate. Delete the second sentence and substitute: "The nameplate shall be located as shown on figure 2 of this specification sheet." Add the following additional information to the nameplate:

"Warranty Expiration Date"
"Non-Servicable, Non-Repairable Transformer Rectifier Package"
"Do Not Attempt to Disassemble"

3.7.4 Airflow. Delete first sentence of the paragraph and substitute: "When an integral cooling fan is used, direction of airflow shall be plainly and permanently marked on the outside of the housing in the direction specified in 3.4.3.4 of this specification sheet."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

VERIFICATION:

4.4.4 Warm-up and stabilization. Add: "The converter full rated load value is shown in table I of this specification sheet."

4.6.1 Examination of product. Add the following sentences to the end of the paragraph: "Converter weight shall be as required in table I of this specification sheet. Converter dimensions and markings shall be as shown on figures 1 and 2 of this specification sheet."

4.6.2.1.1.a (Voltage regulation at room ambient temperature, subparagraph a.) Delete and substitute: "With nominal input voltage specified in 3.5.1.1, the load shall be varied from zero to full load in 25 percent increments. The converter shall meet the output voltage limits on figure 3 of this specification sheet."

4.6.4 Reliability demonstration. Delete first sentence and substitute: "Reliability demonstration testing shall be conducted (see 3.6.1)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

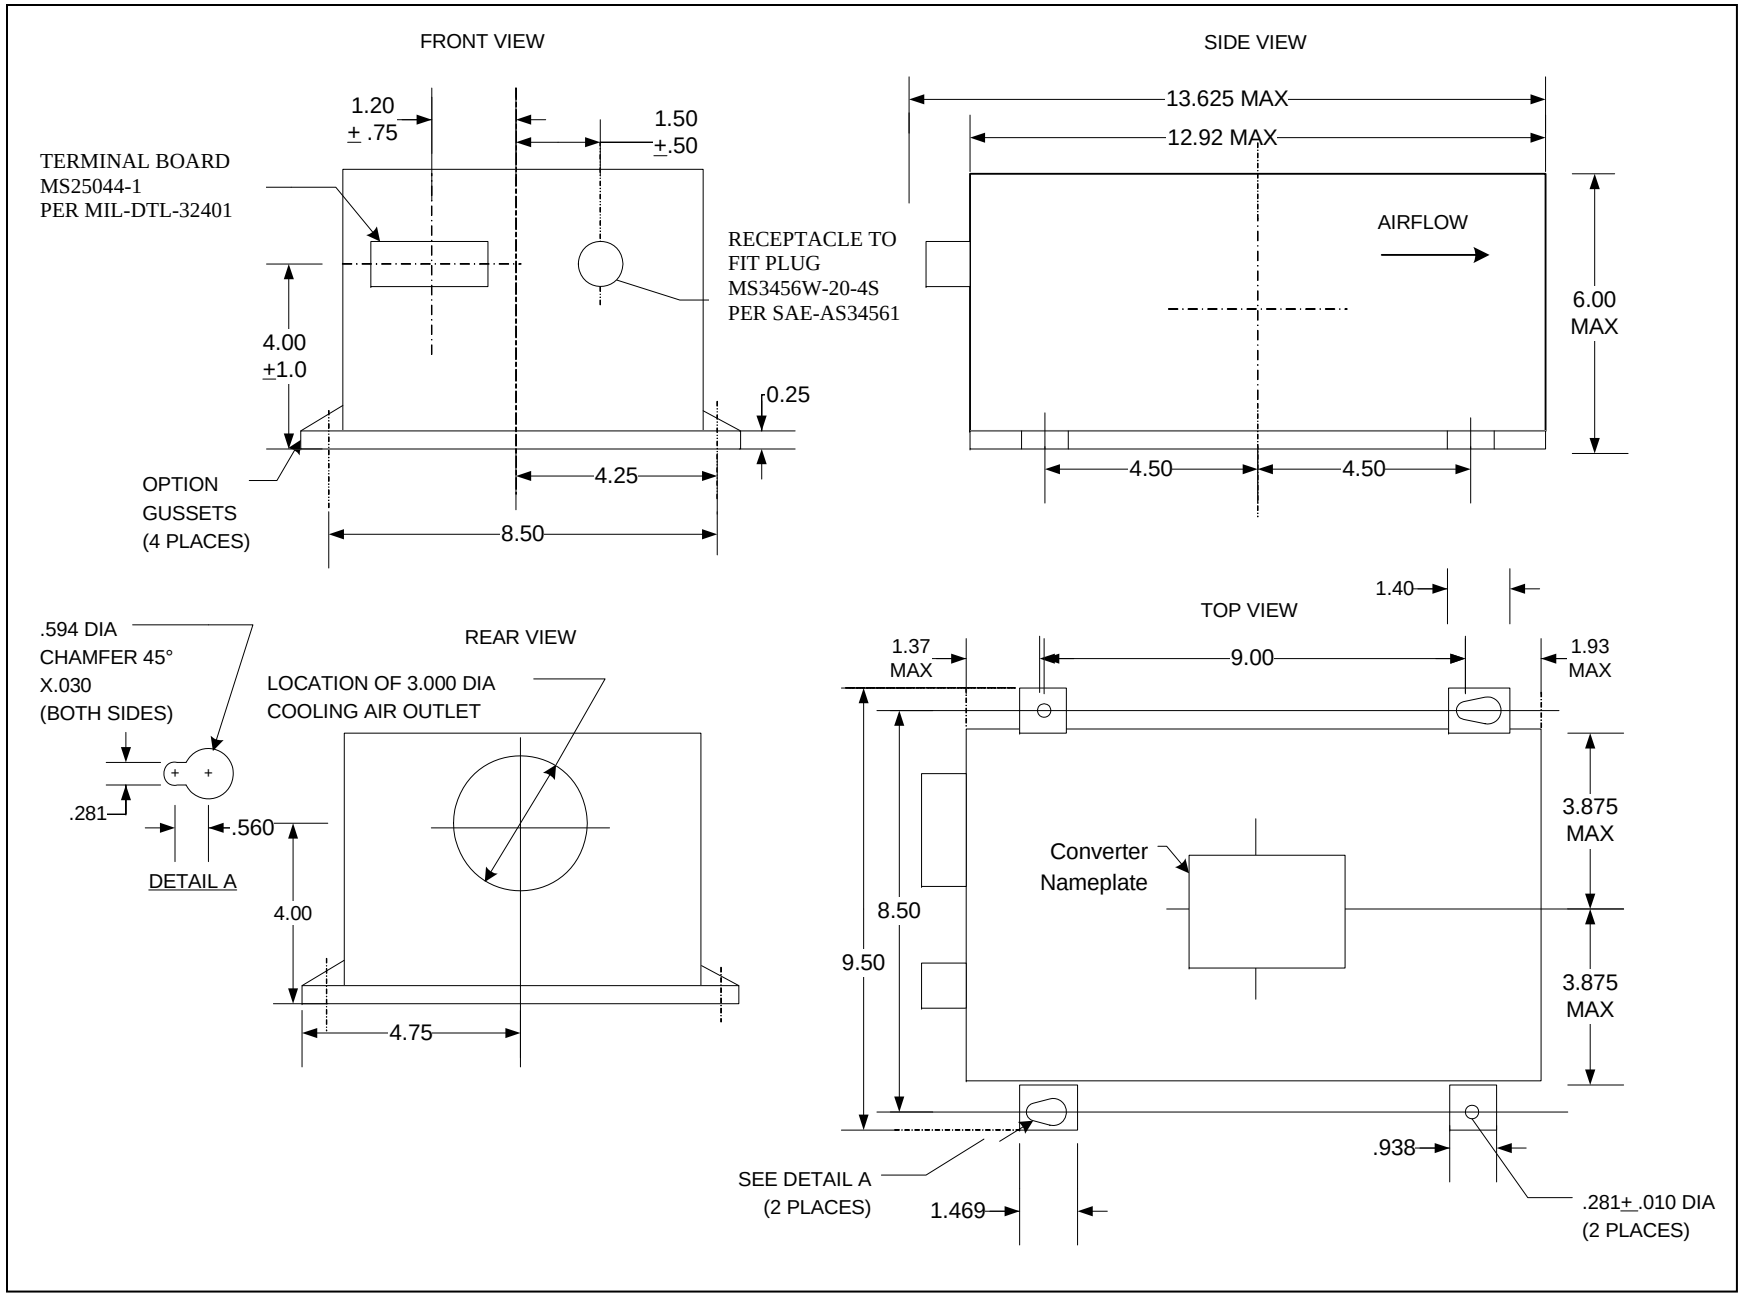


FIGURE 1. Converter P/N M7115/2-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

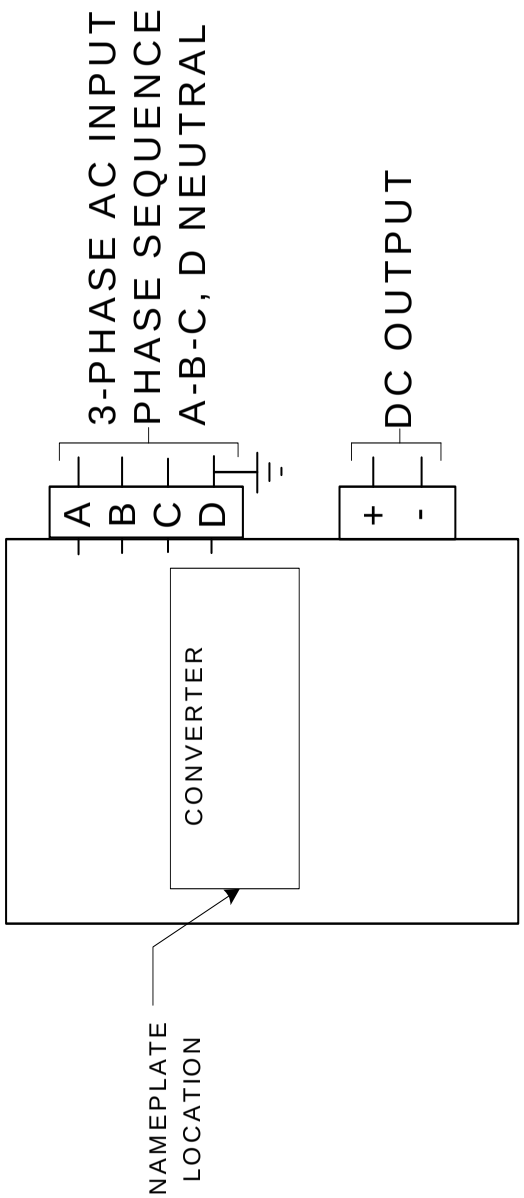


FIGURE 2. Connection diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

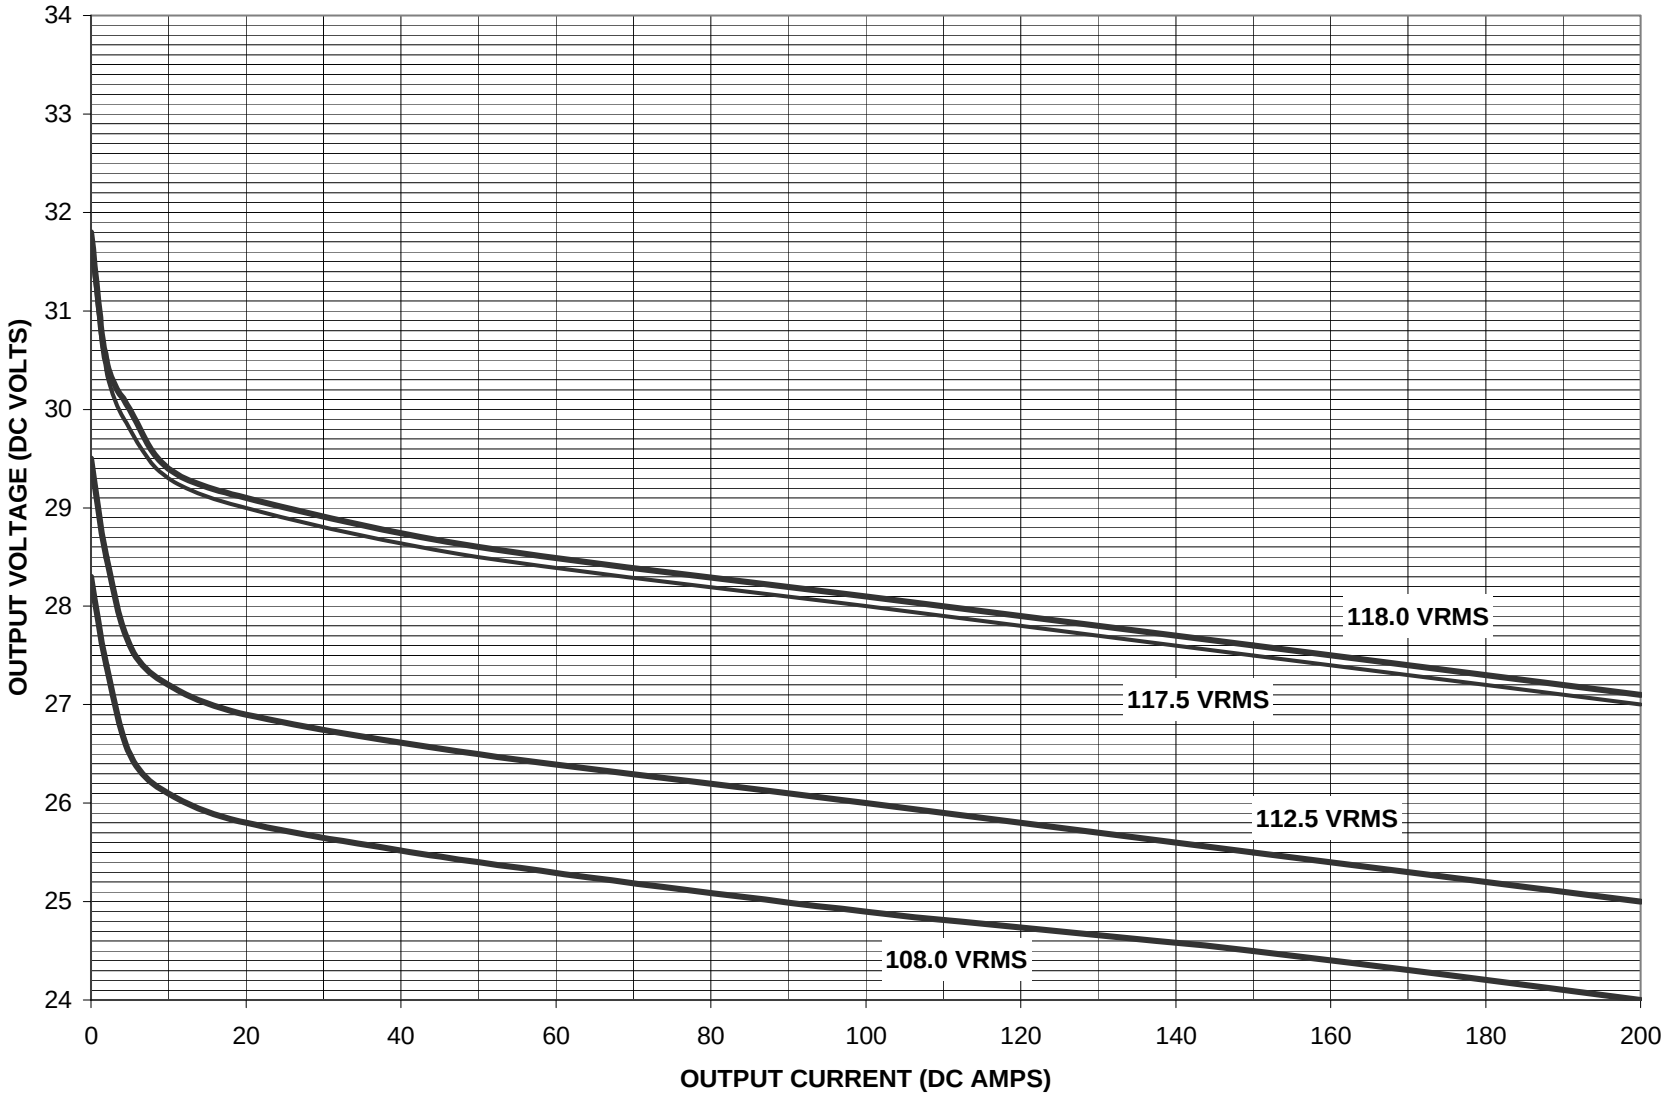


FIGURE 3. Output voltage limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.

INPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
OUTPUT	AMPS DC	MIN. VDC	MIN. VDC	MIN. VDC	MIN. VDC
	0.0	28.3	29.5	31.7	31.8
	2.0	27.4	28.5	30.4	30.5
	5.0	26.5	27.6	29.8	30.0
	10.0	26.1	27.2	29.3	29.4
	20.0	25.8	26.9	29.0	29.1
	50.0	25.4	26.5	28.5	28.6
	100.0	24.9	26.0	28.0	28.1
	150.0	24.5	25.5	27.5	27.6
	200.0	24.0	25.0	27.0	27.1

FIGURE 3. Output voltage limits - Continued.

NOTES:

1. Dimensions are in inches, unless otherwise specified.
2. Tolerances on decimals are ±.015.

Referenced documents. In addition to MIL-PRF-7115, this specification sheet references MIL-DTL-32401 and SAE-AS34561.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy – AS

Review activity:
DLA – GS

Preparing activity:
Navy - AS
(Project 6130-2010-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:11Z
Check the source to verify that this is the current version before use.