NOT MEASUREMENT SENSITIVE


MIL-DTL-3575/42E
22 March 1996
SUPERSEDING
MIL-I-3575/42D
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, OFFICERS, ARMY, AIR FORCE AND AVIATION CADETS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3575 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

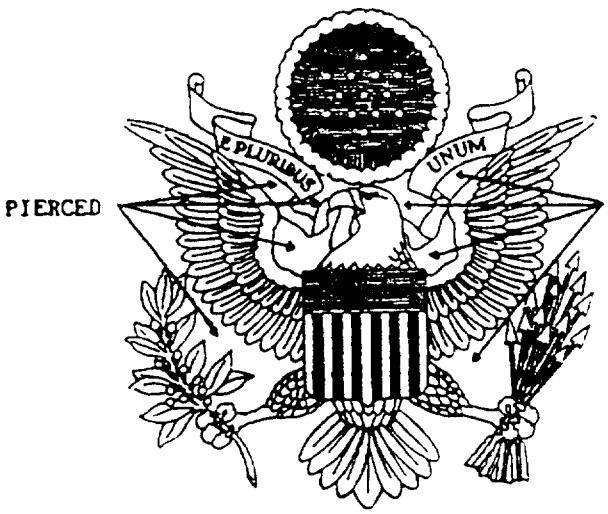

PIERCED

PIERCED

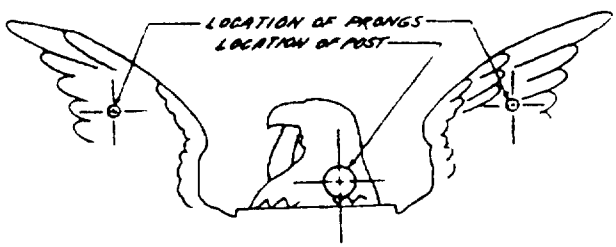

MATERIAL:
-1: Red Brass
-2: Red Brass or Nickel Silver

DASH NO.
-1: Army
-2: Air Force and Aviation Cadet

FINISH:
-1: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-2: Nickel Plated, Antique with Glossy Black Lacquer and Brightly Polished Highlights.

DIMENSIONS:
HEIGHT (Overall): 2-3/8 inch (6.03 cm) (REF)
WIDTH (Overall): 2-3/16 inch (5.56 cm) (REF)
THICKNESS (At Wing Tip and Tail Feather Tips): 0.047 inch + 0.016 inch - 0 (0.119 cm + 0.04 cm -0)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:25Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. A forcer may be used to bring up the design provided the use of the forcer does not result in a thickness through the shield of less than 0.060 inch (0.152 cm).

4. Attaching device for Dash -1 Army and Dash -2 Air Force Male insignia shall be screw post, thumb nut, and registering prongs as shown. The registration prong shall be 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and 0.045 inch ± 0.10 inch (0.114 cm ± 0.005 cm) in diameter.

5. Attaching device for Dash -2 Air Force Female insignia shall be prong and clutch type. The prongs shall be located as shown and be 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm) in length and 0.045 inch ± 0.10 inch (0.114 cm ± 0.005 cm) in diameter.

6. Insignia shall be dapped in the horizontal direction along a 4 inch ± 1/64 inch (10.16 cm ± 0.04 cm) radius.

7. Reverse and edges shall be clean.

8. Insignia for Dash No. -1 may be manufactured for commercial sale only using 22 karat gold plate with nickel underplating, matte finish, polished highlights which shall match TIOH Metal Finish Chip Number 11.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0826)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:25Z
Check the source to verify that this is the current version before use.