NOT MEASUREMENT SENSITIVE

MIL-I-3575/38D
15 February 1990
SUPERSEDING
MIL-I-3575/38C
24 July 1985

MILITARY SPECIFICATION SHEET

INSIGNIA, OFFICER CANDIDATE SCHOOL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

PIERCED

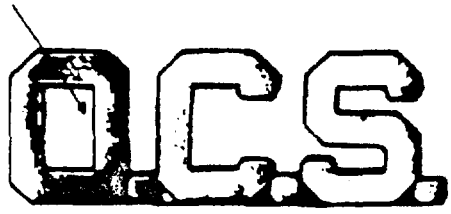

Dash No.:
-1: Regular
-2: Subdued

MATERIAL:
-1: Red brass
-2: Red brass or zinc aluminum

DIMENSIONS:
HEIGHT: 7/16 inch (1.11 cm) (REF)
WIDTH: 1-7/32 inch (3.10 cm) (REF)
THICKNESS: .080 inch ± .005 inch (0.203 cm) ± (0.012 cm)

FINISH:
-1: Gold plated mirror-like polished finish
-2: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end, 1-1/16 ± 1/64 inch (2.70 cm) ± (0.04 cm) apart.
2. Areas around periods shall not be trimmed, but shall be as shown.
3. The enamel for dash no. 2 shall match chip no. 37038 of FED-STD 595.
4. Pierced area shall be as indicated.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activities:
DLA-CT

Project no. 8455-0447

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:24Z
Check the source to verify that this is the current version before use.