NOT MEASUREMENT SENSITIVE


MIL-I-3575/38F
23 May 1995
SUPERSEDING
MIL-I-3575/38E
14 August 1992

MILITARY SPECIFICATION SHEET

INSIGNIA, OFFICER CANDIDATE SCHOOL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

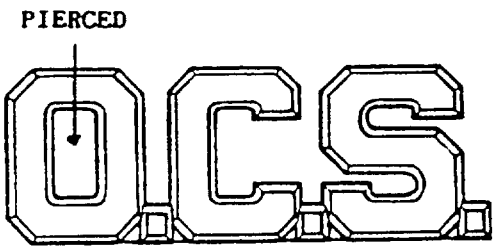

MATERIAL:
-1: Red Brass
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Dull Flat Black Enamel

DIMENSIONS:
HEIGHT: 7/16 inch (1.11 cm) (REF)
WIDTH: 1-7/32 inches (3.10 cm) (REF)
THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:23Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Areas around periods shall not be trimmed, but shall be as shown.

4. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 1-1/16 inch ± 1/64 inch (2.70 cm ± 0.04 cm) apart.

5. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

6. Insignia for Dash No. -1 may be manufactured for commercial sale only using 22 karat gold plate with nickel underplating, mirror-like polished which shall match TIOH Metal Finish Chip Number 9.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0794)

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:23Z
Check the source to verify that this is the current version before use.