NOT MEASUREMENT SENSITIVE

MIL-I-3575/39B
15 February 1990
SUPERSEDING
MIL-I-3575/39A
31 March 1969


MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, ARMY MEDICAL SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.


-1, -7

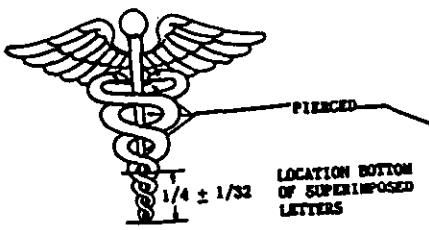

-4, -10


-5, -11


-6, -12


-2, -8


-3, -9

Dash no.:
-1: Medical Corps
-2: Army Nurse Corps
-3: Veterinary Corps
-4: Dental Corps
-5: Army Medical Specialist Corps
-6: Army Medical Service Corps
-7: Medical Corps, Subdued
-8: Army Nurse Corps, Subdued
-9: Veterinary Corps, Subdued
-10: Dental Corps, Subdued
-11: Army Medical Specialist Corps, Subdued
-12: Army Medical Service Corps, Subdued

MATERIAL:
-1: Red brass
-7,-8,-9,-10,-11,-12: Red brass or zinc aluminum
-2,-3,-4,-5,-6: Gilding metal

DIMENSIONS (inches):
CADUCEUS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
THICKNESS (At thickest point): .080 inch + .005 inch (0.203 cm) ± (0.012 cm)
LETTERS:
HEIGHT (Overall):
-2,-3,-4,-5,-8,-9,-10,-11: 3/8 inch (0.95 cm) (REF)
-6,-12: 13/32 inch (1.03 cm) (REF)
THICKNESS (At thickest point): .040 inch + .010 inch -.000 (0.101 cm) + (0.025 cm) -.000

FINISH:
-1,-2,-3,-4,-5: CADUCEUS: Gold plated, matte finish
LETTERS: Hard enameled, gold plated, matte finish
-6: CADUCEUS: Nickel plated, silver plated, oxidized, relieved, matte finish, reverse and edges clean.
LETTERS: Hard enameled, nickel plated, silver plated, oxidized, relieved matte finish
-7,-8,-9,-10,-11,-12: Dull flat black enamel

NOTES:
1. The design of all insignia are the same as dash no.1 except for the superimposed letters.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:24Z
Check the source to verify that this is the current version before use.

2. Black enamel for -2 thru -6 shall match TIOH chip no. 26 or the standard sample.
3. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line of the caduceus, equidistant from each end and 1/2 inch ± 1/64 inch (1.27 cm) ± (0.04 cm) apart.
4. Superimposed letters shall be soft soldered to the caduceus.
5. The enamel for -7 thru -12 shall match chip no. 37038 of FED-STD 595.

Custodian:
Army-IH

Preparing activity:
Army-IH

Review activity:
DLA-CT

Project no. 8455-0447

User activity:
Army-SM

Source: https://assist.dla.mil - Downloaded: 2026-10-16T18:24Z
Check the source to verify that this is the current version before use.