NOT MEASUREMENT SENSITIVE

MIL-I-3575/39D
14 August 1992
SUPERSEDING
MIL-I-3575/39C
9 March 1990

MILITARY SPECIFICATION SHEET


INSIGNIA, BRANCH OF SERVICE, OFFICERS, ARMY MEDICAL SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.



-1, -7

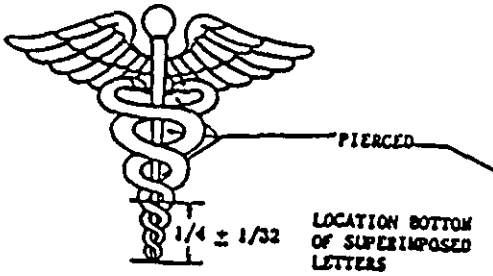



-2, -8



-3, -9



-4, -10



-5, -11



-6, -12

DASH NO.

-1: Medical Corps
-2: Army Nurse Corps
-3: Veterinary Corps
-4: Dental Corps
-5: Army Medical Specialist Corps
-6: Army Medical Service Corps
-7: Medical Corps, Subdued
-8: Army Nurse Corps, Subdued
-9: Veterinary Corps, Subdued
-10: Dental Corps, Subdued
-11: Army Medical Specialist Corps, Subdued
-12: Army Medical Service Corps, Subdued

MATERIAL:

-1: Red Brass
-2, -3, -4, -5, -6: Gilding Metal
-7, -8, -9, -10, -11, -12: Red Brass or Zinc Aluminum

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:24Z
Check the source to verify that this is the current version before use.

FINISH:

-1, -2, -3, -4, -5:	CADUCEUS:	Gold Plated, Highly Polished
	LETTERS:	Hard Enameled, Gold Plated, Highly Polished
-6:	CADUCEUS:	Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish. Reverse and Edges Clean.
	LETTERS:	Hard Enameled, Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish.
-6, -7, -8, -9, -10, -11, -12:		Dull Flat Black Enamel

DIMENSIONS:

CADUCEUS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

LETTERS:
HEIGHT (Overall):
-2, -3, -4, -5, -8, -9, -10, -11: 3/8 inch (0.95 cm) (REF)
-6, -12: 13/32 inch (1.03 cm) (REF)
THICKNESS (At Thickest Point): 0.040 inch ± 0.005 inch (0.102 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.
2. The design of all insignia are the same as Dash No. 1 except for the superimposed letters.
3. Pierced areas shall be as indicated.
4. Enameled colors for Dash No. 2 through 6 shall be black and shall conform to the TIOH chip number 26 or standard sample.
5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.
6. Superimposed letters shall be soft soldered to the caduceus.
7. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line of the caduceus, equidistant from each end and 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) apart.
8. The enamel for Dash No. 7 through 12 shall match FED-STD-595 Chip No. 37038.
9. Insignia for Dash No. 1 through 5 may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:24Z
Check the source to verify that this is the current version before use.