NOT MEASUREMENT SENSITIVE

MIL-I-3575/45C
15 FEBRUARY 1990
SUPERSEDING
MIL-I-3575/45B
24 July 1985

MILITARY SPECIFICATION SHEET

INSIGNIA, WARRANT OFFICER CANDIDATE, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

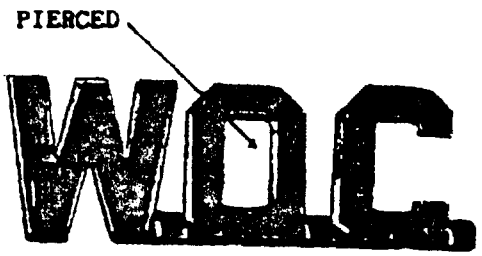

Dash No:
-1: Regular
-2: Subdued

MATERIAL:
-1: Red brass
-2: Red brass or zinc aluminum

DIMENSIONS (inches):
HEIGHT (Overall): 7/16 inch (1.11 cm) (REF)
WIDTH (Overall): 1-9/32 (3.25 cm) (REF)
THICKNESS (On flat of letters): .080 inch ± .005 inch (0.203 cm) ± (0.012 cm)

FINISH:
-1: Gold plated, mirror-like polished finish
-2: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm) ± (0.04 cm) apart.
2. Areas around periods shall not be trimmed, but shall be as shown.
3. The enamel for dash no.2 shall match chip no. 37038 of FED-STD 595.

Custodian:
Army -IH

Preparing Activity:
Army -IH

Review Activity:
DLA-CT

Project no. 8455-0447

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:25Z
Check the source to verify that this is the current version before use.