NOT MEASUREMENT SENSITIVE


MIL-I-3575/50A
15 February 1990
SUPERSEDING
MIL-I-3575/50
31 March 1969

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, CHAIRMAN, JOINT CHIEFS OF STAFF, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

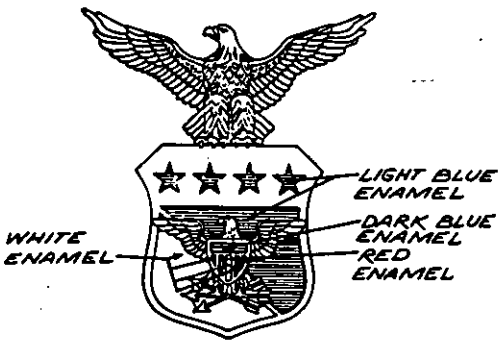

MATERIAL: Gilding metal

DIMENSIONS:
- BASE:
  - HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
  - WIDTH (Overall): 7/8 inch (2.22 cm) (REF)
  - THICKNESS (Thickest point: .065 inch + .010 inch -.000 (0.165 cm) + (0.025 cm) -.000
- DEVICE:
  - HEIGHT (Overall): 9/32 inch (0.71 cm) (REF)
  - WIDTH (Overall): 15/32 inch (1.19 cm) (REF)
  - THICKNESS (On shield): .005 inch (0.139 cm) (REF)

FINISH:
- BASE: Nickel plated, silver plated
  - EAGLE: Oxidized, relieved, matte finish, highlights polished
  - SHIELD: Hard enameled. Chief and edges brightly polished. Reverse and edges clean
- DEVICE: Hard enameled, gold plated, matte finish

NOTES:
1. The device shall be superimposed and secured to the shield by two rivets or soft soldered. When rivets are used, they shall be solid and shall be fabricated from any type brass. The rivets shall be located on and soldered to the vertical center line of the device. The device shall be located as shown.
2. The attaching device shall be prong and clutch type. The prongs shall be located on the vertical centerline, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:27Z
Check the source to verify that this is the current version before use.

3. Enameled areas shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Lt. blue	30
Dk. blue	18
Red	1
White	28

4. The insignia may be made from sterling silver for commercial sale and if so the finish shall be as specified except the nickel and silver plating requirements shall not apply.

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the shield.

Custodian:
Air Force - 11

Preparing Activity:
Army-IH

Review Activities:
Air Force - 11,82,85
DLA-CT

Project no. 8455-0449

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:27Z
Check the source to verify that this is the current version before use.