NOT MEASUREMENT SENSITIVE


MIL-I-3575/53B
14 August 1992
SUPERSEDING
MIL-I-3575/53A
15 February 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, VICE PRESIDENT OF THE UNITED STATES, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

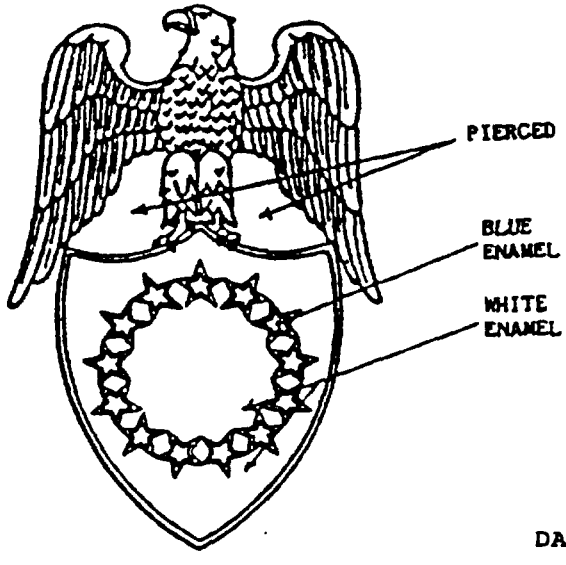

MATERIAL:
-1: Gilding Metal
-2: Red Brass or Zinc Aluminum

DASH NO:
-1: Regular
-2: Subdued

FINISH:
-1: EAGLE: Gold Plated, Matte Finish with Polished Edges and Highlights
SHIELD: Hard Enameled, Gold Plated, Polished Edges
2: Dull Flat Black Enamel

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
THICKNESS (At Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:27Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. Enameled colors for Dash No. 1 shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Blue	20
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

5. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

6. The enamel for Dash No. 2 shall match FED-STD-595 Chip No. 37038.

7. Insignia for Dash No. 1 may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:27Z
Check the source to verify that this is the current version before use.