INCH-POUND

MIL-F-70807 (AR)
AMENDMENT 2
19 October 1988
SUPERSEDING
AMENDMENT 1
17 October 1988

MILITARY SPECIFICATION

FUZE, PD: M745
(LESS BOOSTER AND LEAD)

This amendment forms a part of Military Specification MIL-F-70807 (AR), dated 11 March 1988, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.2, DRAWINGS, Add "9347415 - Packing & Marking of Box Fiberboard for Fuze, Multi-Option, M734 and Fuze, PD, M745" and "9381685 - Packing & Marking of Container, M548 for Fuze, Multi-Option, M734 and Fuze, PD, M745."

PAGE 3

* 3.1.1: Change "458" to read "436," and change "428" to read "406."

PAGE 4

3.1.4: Delete in its entirety and substitute the following:

"3.1.4 Ballistic sample.

3.1.4.1 Initial production lot. Select at random ballistic lot acceptance samples from first production lot. Ballistic lot acceptance test plan is shown in figure 2.

3.1.4.2 Production lot. Select at random ballistic lot acceptance samples from each production lot. Ballistic lot acceptance test plan is shown in figure 3."

3.2: Change "(Figure 3)" to read "(Figure 4)."

PAGE 5

3.3: Change "-25°F" to read "-50°F"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

PAGE 7

3.3.2.4: Line 4, Change "low" to read "low (-50°F)"

PAGE 10

4.4.3.1: Change "Figure 2" to read Figure 2 and 3."

4.4.3.2: Change "Figure 2" to read "Figure 2 and 3."

4.4.3.2: Delete the last sentence of the paragraph.

PAGE 13

4.5.1.1.2.1: Delete the words "high explosive of the."

PAGE 15

4.5.1.2.1.5: Change "Test 101.3, Procedure I" to read "Test 101.2, Procedure II."

4.5.1.2.1.6: Change "Test 102.2" to read "Test 102.1."

4.5.1.2.1.7: Change "Test 103.2" to read "Test 103.1."

PAGE 17

6.2.2: Delete last sentence of paragraph.

PAGE 27

4.4.2.4: Major 102, Change ".040" to read ".042."

PAGE 34

4.4.2.11: Minor 201, Change ".264" to read ".268."

PAGE 36

4.4.2.13: Note A, Add "Special inspection level S-4 shall be applied for selecting sample size.

PAGE 46

4.4.2.22: Delete paragraph in its entirety and substitute new paragraph included.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Cam				11744137
					NEXT HIGHER ASSEMBLY 11737016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Insufficient strength of arm		0.40%	3.1	Force test (Dwg. Note 5)
102	.203 arm height or perpendicularity out-of-tolerance		0.40%	3.1	Gage
103	.140 arm length out-of-tolerance		0.40%	3.1	Gage
Minor					
201	.125 diameter out-of-tolerance		0.65%	3.1	Gage
202	.500 length out-of-tolerance		0.65%	3.1	Gage
203	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

PAGE 55

4.4.2.31: Delete Major 101 in its entirety and substitute "None defined.

PAGE 64

* Delete in its entirety and substitute per included sheet.

PAGE 65

* Delete in its entirety and substitute per included sheet.

PAGE 66

* Delete in its entirety and substitute per included sheet.


PAGE 67

Figure 4: Add new figure per included sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

FIGURE 1


FIRST ARTICLE INSPECTION FLOW CHART

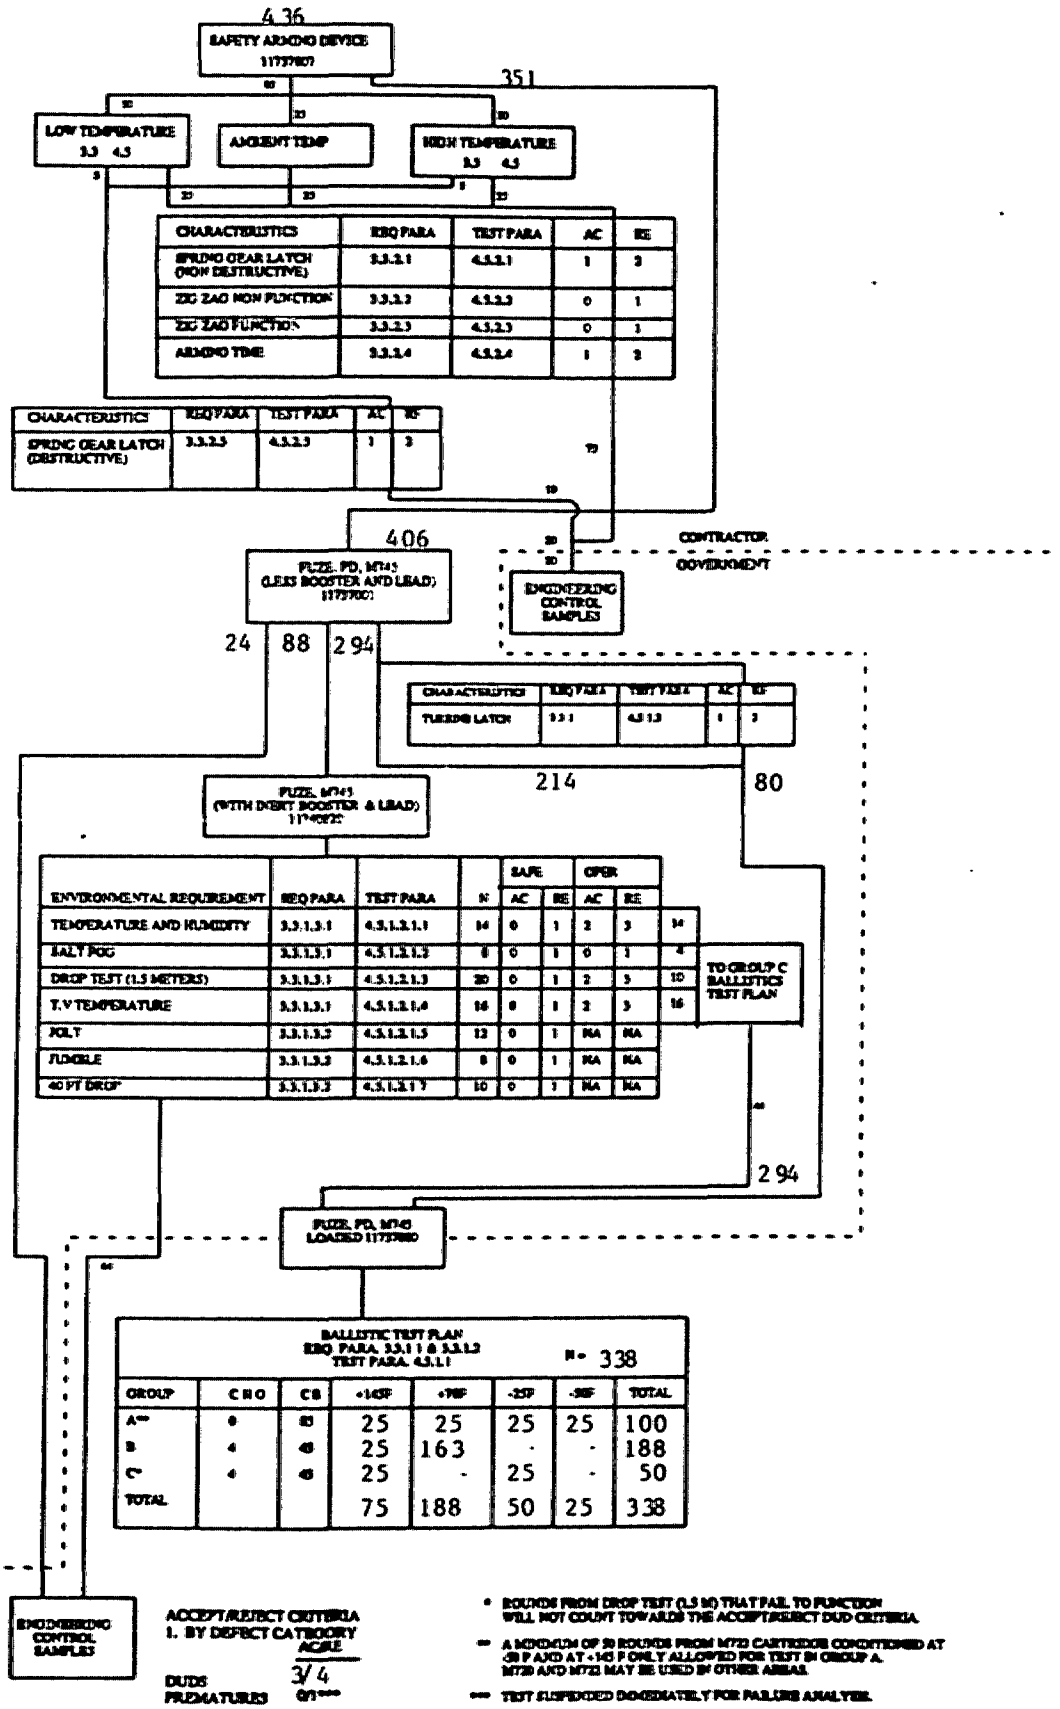

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

FIGURE 2

INITIAL LOT PERFORMANCE INSPECTION FLOW CHART

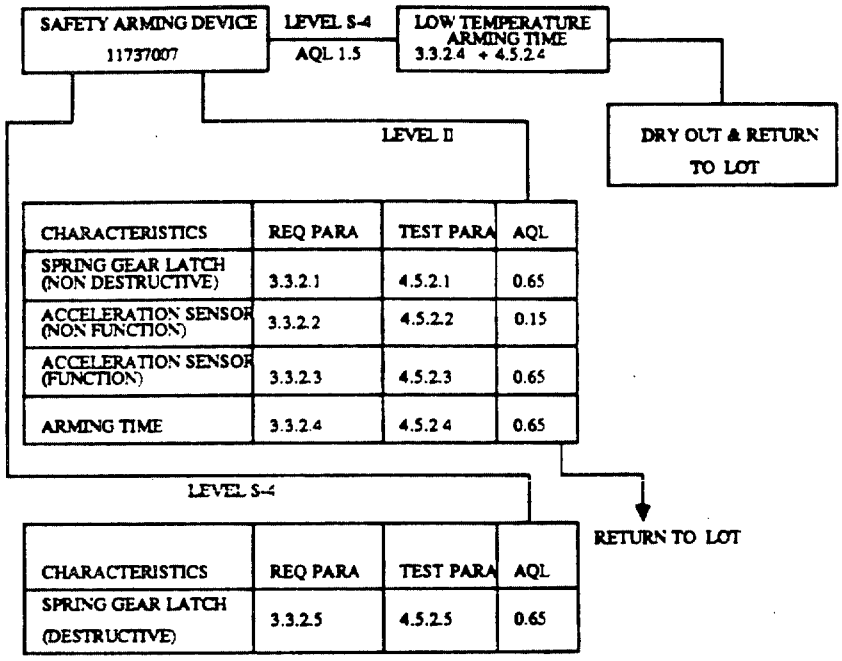

FUZE, PD: M745
LOADED 11737000

BALLISTIC TEST PLAN
REQ PARA 3.3.1.1 & 3.3.1.2
TEST PARA 4.5.1.1
N = 280

GROUP	CHG	CE	+145F	+70F	-25F	-50F	TOTAL	CARTRIDGE
** A	0	85	25	25	25	25	100	M722 OR M720
B	4	45	25	111	-	-	136	
C	4	45	22	-	22	-	44	M722 OR M720
TOTAL	-	-	72	136	47	25	280	

** A MINIMUM OF FIFTY ROUNDS FROM M722 CARTRIDGE CONDITIONED AT -50F AND +145F ARE ONLY ALLOWED FOR TEST IN GROUP A. M720 AND M722 MAY BE USED IN OTHER AREAS

FUZE, PD: M745
LESS BOOSTER & LEAD 11737001

LEVEL II

CHARACTERISTICS	REQ PARA	TEST PARA	AQL
TURBINE LATCH	3.3.1	4.5.1.3	0.65

RETURN TO LOT


OVERALL CRITERIA	N	AC/RE	APPLICABLE PARA
DUDS	280	3/4	4.5.1.1.2.1
PREMATURES	280	0/1*	4.5.1.1.2.2


* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

FIGURE 3

LOT PERFORMANCE INSPECTION FLOW CHART

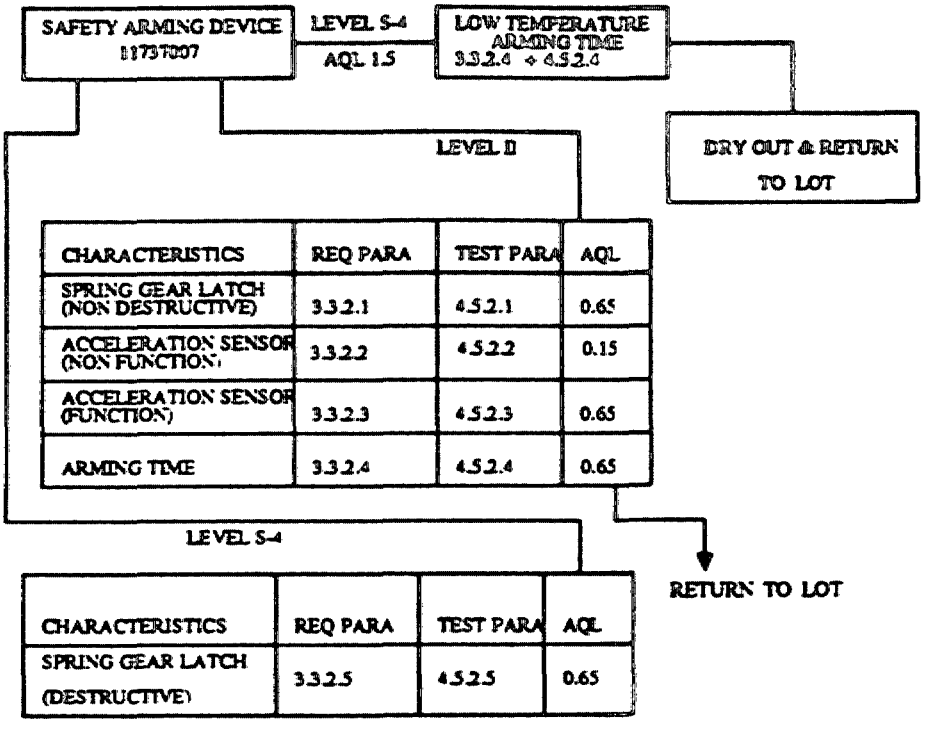


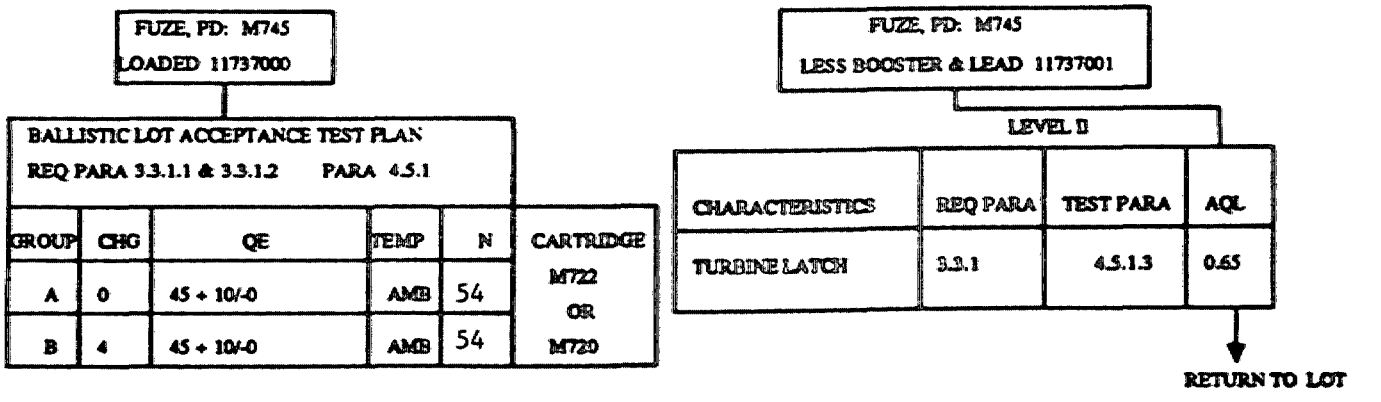

OVERALL CRITERIA	N	AC/RE	APPLICABLE PARA
DUDS	108	2/3	4.5.1.12.1
PREMATURES	108	0/1*	4.5.1.12.2

* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

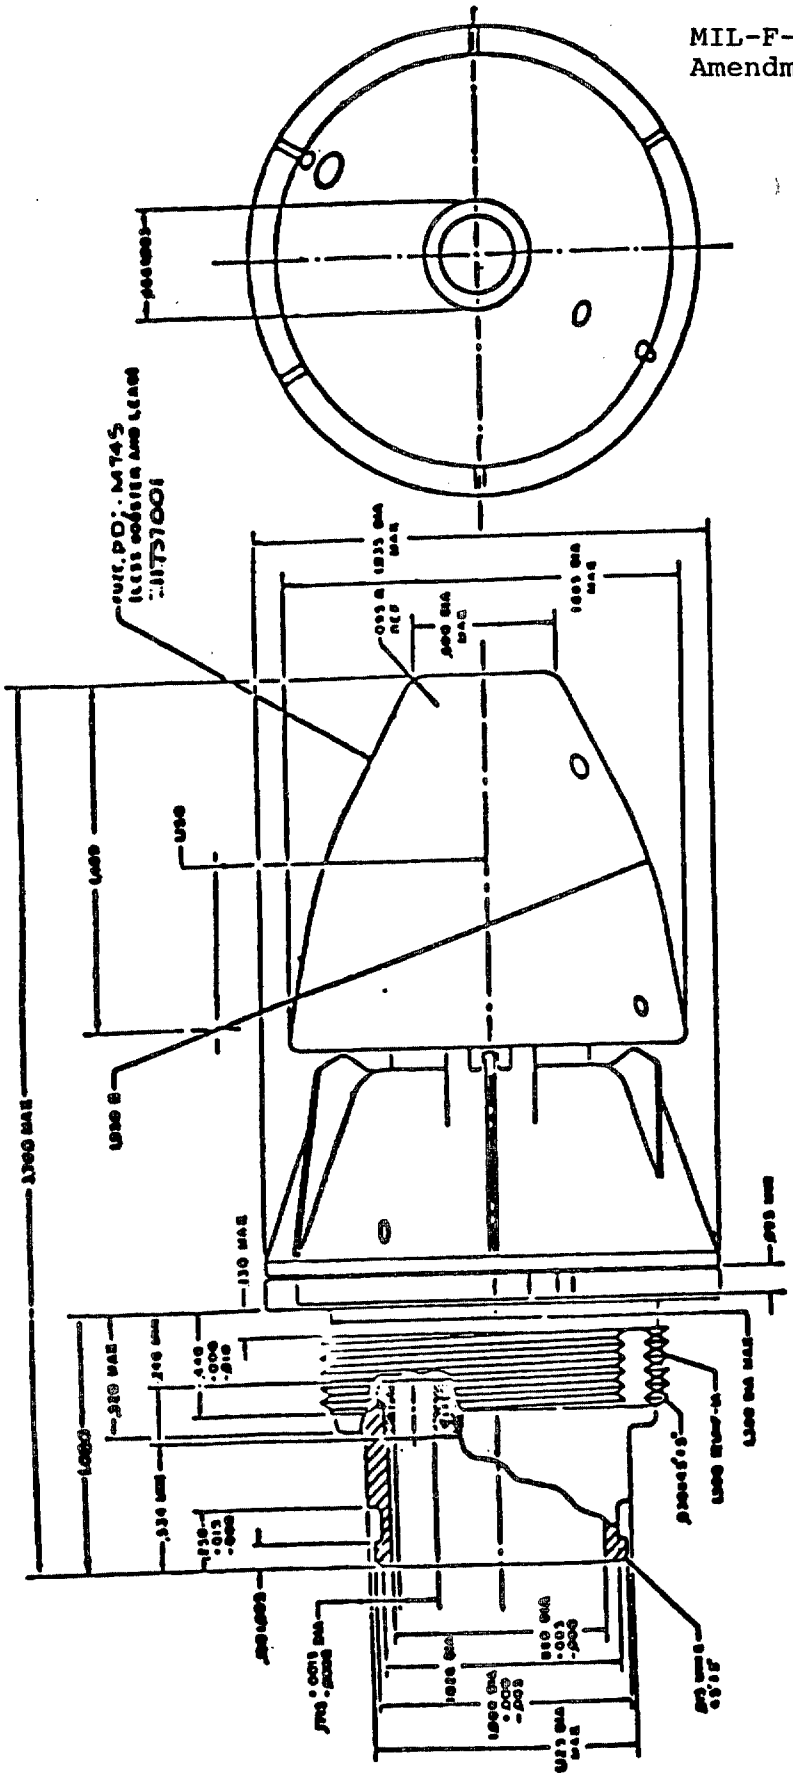

NOTES
1. WEIGHT OF FULLY LOADED FUZE IS 30 ± .02 - 10 LBS
2. .1213 DIA HOLE SHALL BE ADJACENT TO SCALLOP IN BOOSTER CAVITY SUCH THAT LEAD CAN BE INSERTED
3. S & A ROTOR SHALL BE IN SAFE POSITION (DWGS 1173701D AND 1173702) .161 DETONATOR (BRASS) IN PRIMER HOUSING ASSY (1173705) SHALL NOT BE VISIBLE THROUGH BARRIER LEAD HOLE IN AFT END OF FUZE.
4. FUZE SHALL BE PERMANENTLY MARKED PER DWGS 1172019
5. AXIS SHOWN IS FOR FULLY LOADED SEE DWG NO 1173200 FOR LOADED ASSEMBLY AND COMPLETE INTERFACE DIMENSIONS

FIGURE 4 INTERFACE CONTROL DRAWING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity
Army-AR

(Project 1390-A637)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:04Z
Check the source to verify that this is the current version before use.