MIL-D-12313C(ME)
17 June 1971
SUPERSEDING
MIL-D-12313B(ME)
7 June 1966

MILITARY SPECIFICATION

DIMMER, LAMP, 60 WATT, 120 VOLT, MEDIUM SCREW BASE AND SOCKET

1. SCOPE

1.1 This specification covers an incandescent lamp dimmer with a medium screw base and socket.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-M-14	- Molding Plastics and Molded Plastic Parts, Thermosetting.
MIL-E-17555	- Electronic and Electrical Equipment, Accessories, and Repair Parts; Packaging and Packing of.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of U. S. Military Property.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6250

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:41Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNDERWRITERS LABORATORIES, INC.

C-33.40-1967 - Snap Switches, Safety Standards for.
C-33.17-1969 - Edison-Base Lampholders, Safety Standards for. (UL 496)

(Application for copies should be addressed to the Underwriters Laboratories, Inc., 207 East Ohio Street, Chicago, Illinois 60611; 1285 Walt Whitman Road, Melville, L. I., New York 11746; 1655 Scott Boulevard, Santa Clara, California 95050.)

3. REQUIREMENTS

3.1 Description. The dimmer shall be as shown in figure 1 and as specified herein and shall meet the requirements of UL Standard for Edison Base Lampholders.

3.2 First article (preproduction model). The supplier shall furnish one or more dimmers for examination and testing within the time frame specified to prove prior to starting production that his production methods and choice of design detail will produce dimmers that comply with the requirements of this specification. Examination and tests shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Housing. The housing shall be of molded plastic conforming to MIL-M-14, type CFI-10. Color shall be either olive drab or black.

3.3.1 Vent holes. The vent holes shall provide sufficient ventilation so that when dimmers are tested as specified in 4.5.2.2, the temperature rise of the external surface of the dimmer shall not exceed 30° C.

3.4 Resistor. The dimmer shall be furnished with a 300-ohm plus or minus 15 percent, wirewound, vitreous enamel-covered resistor. The resistor shall be mounted inside the dimmer housing and connected in series with the base and socket.

3.5 Switch. A single-pole, single-throw, 3-ampere, 125-volt toggle or slide switch, meeting the requirements of UL Standard for Snap Switches, shall be mounted in the dimmer housing and shall be connected in parallel with the resistor (see 3.4). In the "dim" position, the switch contacts shall be open; in the "bright" position, the switch contacts shall be closed.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T22:41Z
Check the source to verify that this is the current version before use.

3.6 Operation. With 120 volts applied to the dimmer, an installed incandescent lamp, rated at 60 watts, shall provide its rated light intensity when the switch is in the "bright" position and shall provide reduced light intensity when the switch is in the "dim" position.

3.7 Mechanical strength. When subjected to the tests specified in 4.5.2.3, the dimmer shall show no evidence of malfunction, chipping, cracking, or loose parts.

3.8 Identification marking. The dimmer shall be marked for identification in accordance with MIL-STD-130. Identification markings and the words "bright" and "dim" shall be molded, stamped, or otherwise permanently marked on the housing.

3.9 Workmanship. The dimmer shall be free from defects or imperfections that might affect its operation or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction dimmers shall be examined as specified in 4.5.1 Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction dimmers shall be tested as specified in 4.5.2.1 through 4.5.2.3. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the defects specified in 4.5.1. AQL shall be 6.5 percent defective.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1, 4.5.2.2, and 4.5.2.3. AQL shall be 6.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The dimmers shall be examined for the following defects:

101. Dimensions not as specified.
102. Dimmers do not meet UL requirements.
103. Housing material not as specified.
104. Color of housing not as specified.
105. Resistor not as specified.
106. Switches do not meet UL requirements.
107. Workmanship not as specified.
108. Identification marking not as specified.

4.5.2 Tests.

4.5.2.1 Operation. The dimmer shall be installed in a lighting fixture and shall be operated with a 60-watt, 120-volt, incandescent lamp. The switch shall be placed in each of the two positions and the resulting light intensity shall be observed. Failure of the lamp to produce reduced light intensity when the switch is moved from the "bright" position to the "dim" position shall constitute failure of this test.

4.5.2.2 Temperature rise. The dimmer, with a 60-watt lamp installed, shall be operated with the switch in the "dim" position until the temperature of the dimmer is stabilized. A temperature rise at the external surface of the dimmer of more than 30° C. above ambient temperature shall constitute failure of this test.

4.5.2.3 Mechanical strength. The dimmers shall be dropped 10 times from a height of 36 inches onto a concrete floor and then examined and tested as specified in 4.5.2.1. Nonconformance to 3.7 shall constitute failure of this test.

4.6 Inspection of preparation for delivery. The preservation, packaging, packing, and marking shall be examined and tested in accordance with MIL-E-1755

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. The dimmers shall be preserved, packaged, packed, and marked in accordance with MIL-E-17555 with the following exceptions: Fiberboard containers are not acceptable for level A packing, and fiberboard containers used for level B packing shall be weather resistant. Preservation and packaging shall be level A or C and packing shall be level A, B, or C as specified.

6. NOTES

6.1 Intended use. The dimmer is intended for use in dimming 60-watt incandescent lamps to meet blackout illumination requirements in tents, shelters, dugouts, and similar field installations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame and number of units required for submission of preproduction model (see 3.2).
(c) Level of preservation and packaging and level of packing required (see 5.1).

6.3 Preproduction model. Any changes or deviations of production dimmers from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish dimmers conforming to this specification.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 6250-A118

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.

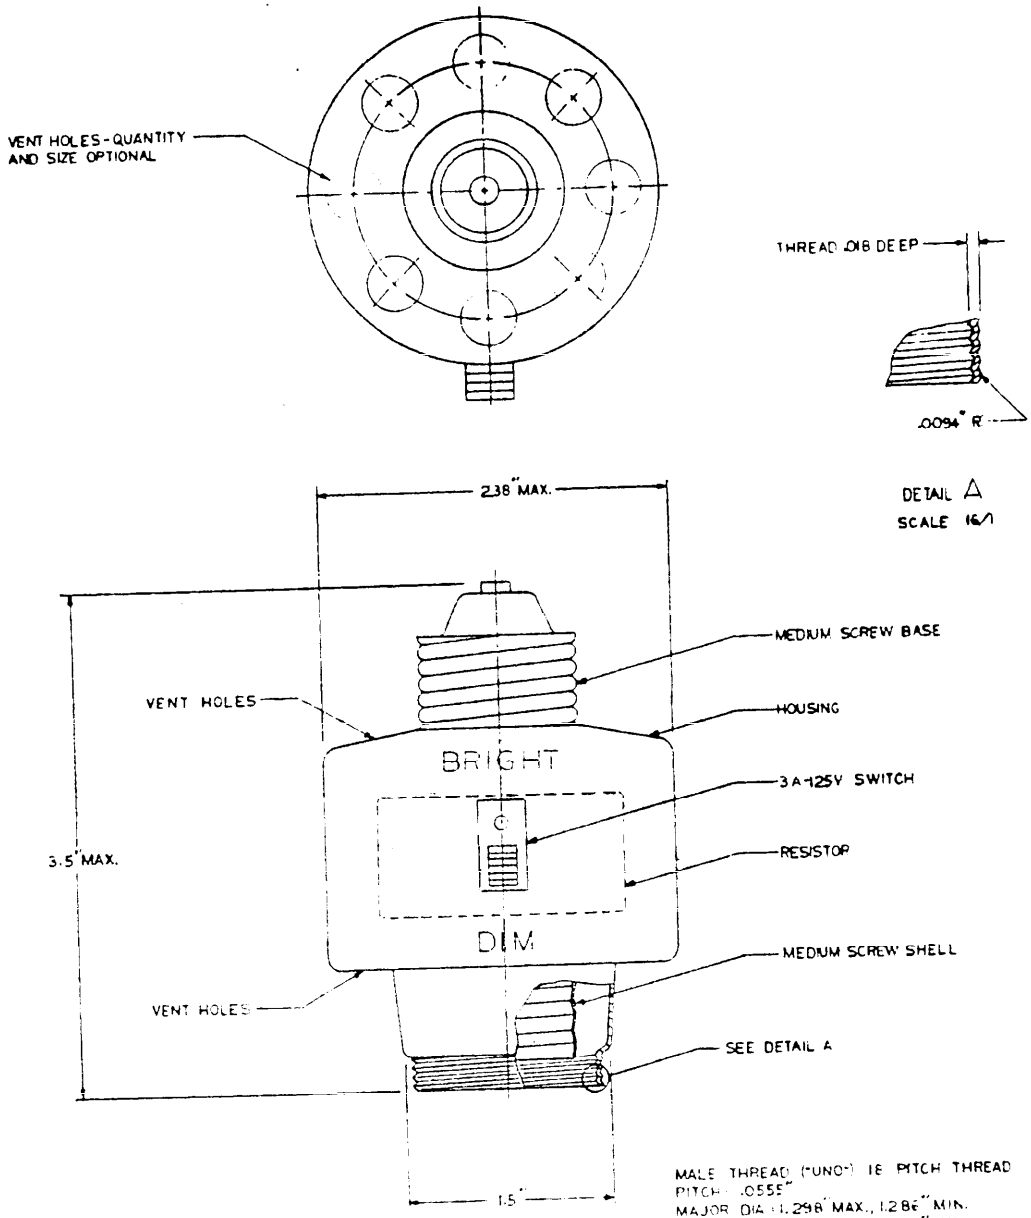


FIGURE 1.
DIMMER, LAMP

X-824

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION: MIL-D-12313C(ME) Dimmer, Electric Light

ORGANIZATION:

CITY AND STATE:

CONTRACT NUMBER:

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZG
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES P

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZG
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.