NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/54
27 June 1996
SUPERSEDING
MIL-I-3575/10G
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, AIDE, GENERAL OFFICERS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

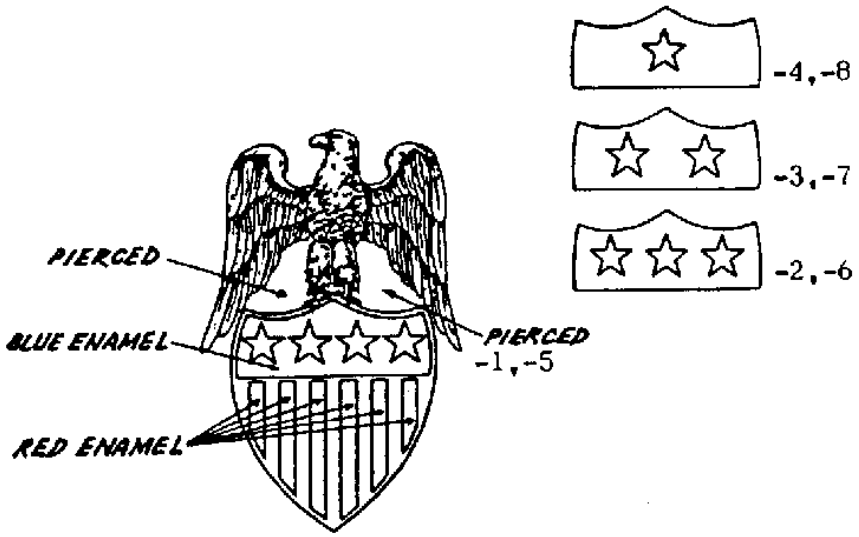

DASH NO.
-1: Aide, General, Regular
-2: Aide, Lieutenant General, Regular
-3: Aide, Major General, Regular
-4: Aide, Brigadier General, Regular
-5: Aide, General, Subdued
-6: Aide, Lieutenant General, Subdued
-7: Aide, Major General, Subdued
-8: Aide, Brigadier General, Subdued

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:48Z
Check the source to verify that this is the current version before use.

MATERIAL:
-1, -2, -3, -4: Gilding Metal
-5, -6, -7, -8: Red Brass or Zinc Aluminum

FINISH:
-1, -2, -3, -4: EAGLE (Front and Edges): Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 8.
SHIELD: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 16.
-5, -6, -7, -8: Dull Flat Black Enamel

DIMENSIONS:
EAGLE AND SHIELD:
HEIGHT (Overall): 1-1/4 inches (3.18 cm) (REF)
WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
THICKNESS (Thickest Point on Shield): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. All insignia are identical with the exception of the location and number of stars on the chief of the shield.

4. Enameled colors for Dash No. 1 through 4 shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Blue	18

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

6. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

7. The dull flat black enamel for Dash No. -5 through -8 shall match FED-STD-595 Chip No. 37038.

8. Shield for Dash No. -1 through -4 may be rhodium plated, mirror-like polished at the option of the manufacturer.

9. Insignia for Dash No. -1 through 4 may be manufactured using 22 karat gold plate with nickel underplating as follows for commercial sale only:

EAGLE (Front and Edges): Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Chip Number 11.
SHIELD: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:48Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:48Z
Check the source to verify that this is the current version before use.