NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/58
27 June 1996
SUPERSEDING
MIL-I-3575/13D
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHAPLAIN, CHRISTIAN FAITH, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

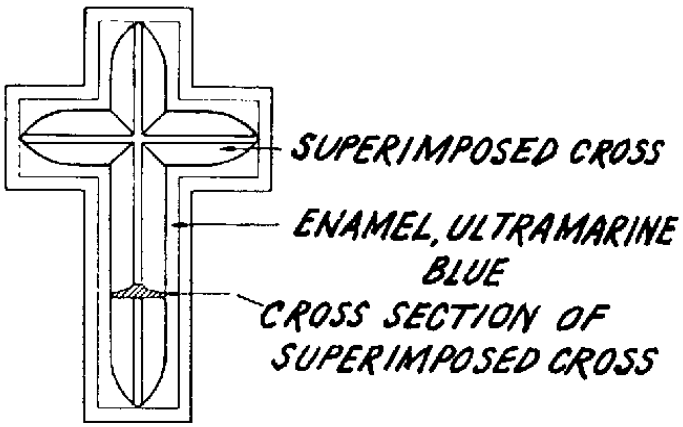

MATERIAL:
BASE: Gilding Metal
DEVICE: Red Brass or Nickel Silver

FINISH:
BASE: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Nickel Plated (Red Brass only), Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
BASE:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (Overall): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:49Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 15/16 inch (2.38 cm) (REF)
WIDTH (Overall): 1/2 inch (1.27 cm) (REF)
THICKNESS (Overall): 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Overall): 0.110 inch ± 0.010 inch (0.279 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enameled color shall be blue as indicated. The enamel color shall conform to the TIOH color chip number 18 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, soft solder shall not be used to attach the device to the base.

4. The device (cross) shall be superimposed and secured to the base by two rivets or soft solder. When rivets are used, they shall be solid and be fabricated from any type brass. The rivets shall be soldered to the vertical center line of the device. The device shall be located on the insignia as shown.

5. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:49Z
Check the source to verify that this is the current version before use.