NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/59B
4 January 2021
SUPERSEDING
MIL-DTL-15665/59A
14 March 2016

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHAPLAIN, CHRISTIAN FAITH, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

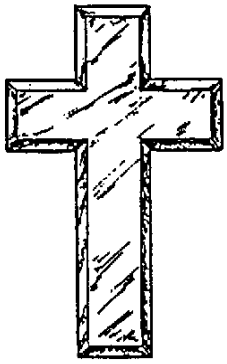

DASH NO.
-1: Regular
-2: Subdued

MATERIAL:
-1: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

-2: Red Brass 85/15 (UNS Alloy No. C230) or Zinc Aluminum.

FINISH:
-1: 24K Gold Plated, Mirror-liked Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-2: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
BASE AND SHIELD:
HEIGHT (Overall): 1 inch (REF)
WIDTH (Overall): 5/8 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:49Z
Check the source to verify that this is the current version before use.

THICKNESS (At thickest point): 0.070 inch ± 0.005 inch.

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Prongs shall be located on the vertical center line, equidistant from each end and 7/8 inch ± 1/64 inch apart.

NOTE:
The term (REF) refers to measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-151)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:49Z
Check the source to verify that this is the current version before use.