NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/61
27 June 1996
SUPERSEDING
MIL-I-3575/14D
23 May 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, CHAPLAIN, JEWISH FAITH, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

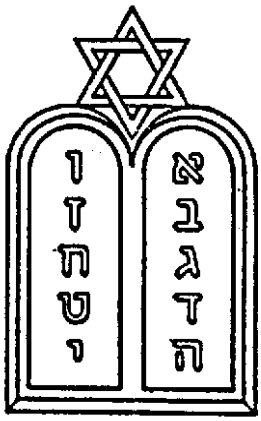

MATERIAL:
-1: Red Brass or Nickel Silver
-2: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular
-2: Subdued

FINISH:
-1: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Polished Highlights and shall match TIOH Metal Finish Chip Number 15.
-2: Dull Flat Black Enamel.

DIMENSIONS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
WIDTH (Overall): 5/8 inch (1.59 cm) (REF)
THICKNESS (At Thickest Point): 0.070 inch ± 0.005 inch (0.177 cm ± ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the center vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

3. The dull flat black enamel for Dash No. -2 shall match FED-STD-595 Chip No. 37038.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0844)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:50Z
Check the source to verify that this is the current version before use.