NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/66F
10 June 2024
SUPERSEDING
MIL-DTL-15665/66E
8 August 2019

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, OFFICERS, ARMY, MALE AND AIR FORCE, MALE AND FEMALE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.



DASH NO.
-1: Army Service Cap, Officers, Gold, (Male only)
-2: Army Service Cap, Officers, Brass (Male only)
-3: Air Force Service Cap, Officers

MATERIAL:
-1 and -2: Red Brass 85/15 (UNS Alloy No. C-230)
-3: Red Brass 85/15 (UNS Alloy No. C230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

FINISH:
-1: 24K Gold Plated, Matte Finished, Polished Highlights, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
-2: Brass, Oxidized, Buffed Relieved and shall match TIOH Metal Finish Chip Number 4.
-3: Nickel Plated, Antiqued with Glossy Black Lacquer and Brightly Polished Highlights

DIMENSIONS:
HEIGHT (Overall): 2-3/8 inches (REF)
WIDTH (Overall): 2-3/16 inches (REF)
THICKNESS (At wing tip and tail feather tips): 0.047 inch + 0.016 inch - 0 inch.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:51Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:


1: Attaching device for -1 Army, -2 Army and -3 Air Force Male insignia shall be screw post with thumb nut and two registering prongs as shown.

2: As an alternate, attaching device for -1, -2 and -3 Male insignia may be screw post with thumb nut and one registering prong centered on the reverse of the cloud (not shown). The registering prong(s) shall be 1/4 inch ± 1/64 inch in length and 0.045 inch ± 0.10 inch in diameter.

3: Attaching device for -3 Air Force Female insignia shall be prong and clutch type. The prongs shall be located as shown and be 5/16 inch ± 1/64 inch in length and 0.045 inch ± 0.10 inch in diameter.

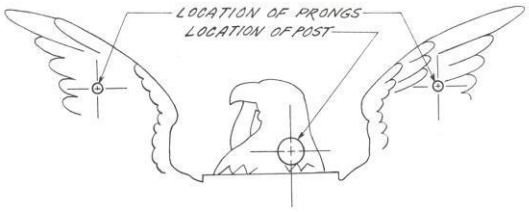

-1 & -2 MALE (Notes 1 & 2)

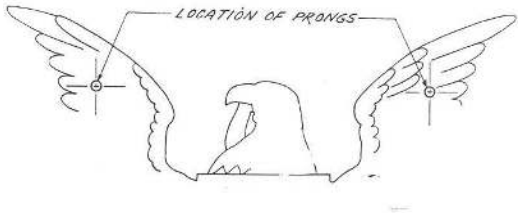

-2 FEMALE (Note 3)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated.

3. A forcer may be used to bring up the design provided the use of the forcer does not result in a thickness through the shield of less than 0.060 inch.

4. Insignia shall be dapped in the horizontal direction along a 4 inch ± 1/64 inch radius.

5. -1 insignia may be manufactured for commercial sale only using 22 karat gold plate with nickel underplating, matte finish, and polished highlights which shall match TIOH Metal Finish Chip Number 11.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-176)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:51Z
Check the source to verify that this is the current version before use.