MILITARY SPECIFICATION

MICROCIRCUITS, MONOLITHIC SILICON, BIPOLAR, INTERFACE, MEMORY CORE DRIVERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon bipolar interface memory core drivers. Two product assurance classes and a choice of case outline/lead finish are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Dual source and dual sink (positive-OR)
02	Quad sink (positive-OR)
03	Quad source/sink (positive-OR)

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Letter	Case outline, MIL-M-38510, Appendix C
E	D-2 (16-lead, 1/4" x 7/8" dual-in-line package)

1.3 Absolute maximum ratings:

Supply voltage (V_{CC1})	7.0 V
Supply voltage (V_{CC2}) (device types 01, 03)	25 V
Input voltage (V_{IN})	5.5 V
Output collector voltage (V_{OCV}) Device types 02, 03	25 V
Output clamp voltage (V_{OC}) (device type 02)	25 V
Output collector current (I_{OC})	750 mA
Duty cycle for each output transistor	20% 1/
Continuous total dissipation at 25°C ambient	1375 mW
Storage temperature range	-65°C to +150°C
Junction temperature (T_J)	150°C
Lead temperature 1/16 inch from case, 60 seconds	300°C

1/ Warning: These devices do not pass the requirement for the glassivation layer integrity test (MIL-STD-883, method 2021) as specified in MIL-M-38510, 3.5.5.4. Therefore the glassivation layer integrity test is waived. Operation of these devices above the 20% duty cycle rating for each output transistor may result in device reliability problems.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:31Z
Check the ASSIST to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1.4 Recommended operating conditions:

Supply voltage range - - - - - - - - - - - - - - - 4.5 V to 5.5 V
Ambient operating temperature range- - - - - - - -55°C to +125°C

1.5 Power and thermal characteristics.

Package	Case outline	Maximum allowable power dissipation 2/	Maximum θ_{JC}	Maximum θ_{JA}
16-lead dual-in-line package	E	275 mW @ T_A = 125°C	29°C/W	91°C/W

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifictions, and standards. The following specification and standard, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARDS

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification, and standard required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Detail specifications. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Logic diagrams and terminal connections. The logic diagram and terminal connections shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Functional schematic circuits. The schematic circuits shall be as specified on figure 3.

3.2.4 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of manufacturer's device in this specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturer's schematics shall be maintained by the agent activity and will be available upon request.

2/ All leads welded or soldered to P.C. board.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \leq T_A \leq 125°C$ unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Input clamp voltage	V_{IC}	V_{CC1} = 4.5 V, I_{IN} = -10 mA	01,02,03	-	-1.7	V
Collectors terminal off-state current	I_{OFF}	V_{CC1} = 4.5 V, V_{COL} = 24 V	01,03	-	500	µA
High-level input currents	I_{IH1}	V_{CC1} = 5.5 V, V_{IN} = 2.4 V	01	-	40	µA
Address inputs	I_{IH2}	V_{CC1} = 5.5 V, V_{IN} = 5.5 V	01	-	1	mA
	I_{IH3}	V_{CC1} = 5.5 V, V_{IN} = 2.4 V	02,03	-	40	µA
	I_{IH4}	V_{CC1} = 5.5 V, V_{IN} = 5.5 V	02,03	-	1	mA
Strobe inputs	I_{IH5}	V_{CC1} = 5.5 V, V_{IN} = 2.4 V	01	-	80	µA
			02,03	-	160	µA
	I_{IH6}	V_{CC1} = 5.5 V, V_{IN} = 5.5 V	01	-	2	mA
			02,03	-	4	mA
Low-level input currents	I_{IL1}	V_{CC1} = 5.5 V, V_{IN} = .4 V	01	-	-3.2	mA
Address inputs	I_{IL2}	V_{CC1} = 5.5 V, V_{IN} = .4 V	02,03	-	-6.4	mA
Strobe inputs	I_{IL3}	V_{CC1} = 5.5 V, V_{IN} = .4 V	01,02,03	-	-1.6	mA
Supply current from V_{CC1}	I_{CC1}	V_{CC1} = 5.5 V, V_{CC2} = 24 V	01	-	22	mA
All sources and sinks off	I_{CC2}	V_{CC1} = 5.5 V	02	-	25	mA
	I_{CC3}	V_{CC1} = 5.5 V, V_{CC2} = 24 V	03	-	10	mA
One sink on	I_{CC4}	V_{CC1} = 5.5 V, V_{CC2} = 24 V	01	-	70	mA
	I_{CC5}	V_{CC1} = 5.5 V	02	-	75	mA
One output on	I_{CC6}	V_{CC1} = 5.5 V, V_{COL} = 6 V, I_S = -50 mA	03	-	12	mA

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \le T_A \le 125°C$ unless otherwise specified	Device type	Limits Min	Limits Max	Unit
Supply current from V_{CC2}, All sources and sinks off	I_{CC7}	V_{CC1} = 5.5 V, V_{CC2} = 24 V*	01,03	-	20	mA
One source on	I_{CC8}	V_{CC1} = 5.5 V, V_{CC2} = 24 V, I_S = -50 mA*	01	-	50	mA
One ouput on	I_{CC9}	V_{CC1} = 5.5 V, I_S = -50 mA, V_{CC2} = 6 V*	03	-	55	mA
Saturation voltage Source outputs	V_{CESAT1}	V_{CC1} = 4.5 V, V_{CC2} = 15 V, I_S = -600 mA*	01,03	-	.9	V
Sink outputs	V_{CESAT2}	V_{CC1} = 4.5 V, V_{CC2} = 15 V, I_S = -600 mA*	01,02	-	.9	V
High-level sink output voltage	V_{OH}	V_{CC1} = 4.5 V, V_{CC2} = 24 V, I_o = 0	01,02	19	-	V
Output clamp diode forward voltage	V_{OC}	V_C = 0, I_C = -10 mA	02	-	1.5	V
Output clamp current, one output on	I_{OC}	I_S = 50 mA	02	-	7	mA
Propagation delay time (low-to-high level output) Source collectors	t_{PLH1}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,03	-	50	ns
Sink outputs	t_{PLH2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,02	-	45	ns
Propagation delay time (high-to-low level output) Source collectors	t_{PHL1}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,03	-	50	ns
Sink outputs	t_{PHL2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,02	-	30	ns

* Pulse technique.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \leq T_A \leq 125°C$ unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Transition time (low-to-high level output) Source outputs	t_{TLH1}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100 kΩ T_A = 25°C	01	-	30	ns
	t_{TLH2}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100Ω T_A = 25°C	03	-	15	ns
Sink outputs	t_{TLH3}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,02	-	15	ns
Transition time (high-to-low level output) Source outputs	t_{THL1}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100 kΩ T_A = 25°C	01	-	25	ns
	t_{THL2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 100Ω T_A = 25°C	03	-	18	ns
Sink outputs	t_{THL3}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,02	-	15	ns
Storage time, sink outputs	t_S	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω T_A = 25°C	01,02	-	35	ns
High-level output voltage	V_{OH}	V_{CC1} = 5 V, V_S = V_{CLAMP} = 24 V, C_L = 100 pF, R_L = 470Ω T_A = 25°C	02,03	V_S -0.25		V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \le T_A \le 125°C$ unless otherwise specified	Device type	Limits		Unit
				Min	Max	
Propagation delay time (low-to-high level output) Source collectors	t_{PLH1}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,03	-	90	ns
Sink outputs	t_{PLH2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,02	-	65	ns
Propagation delay time (high-to-low level output) Source collectors	t_{PHL1}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,03	-	65	ns
Sink outputs	t_{PHL2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,02	-	45	ns
Transition time (low-to-high level output) Source outputs	t_{TLH1}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100 kΩ	01	-	45	ns
	t_{TLH2}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100Ω	03	-	20	ns
Sink outputs	t_{TLH3}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,02	-	20	ns
Transition time (high-to-low level output) Source outputs	t_{THL1}	V_{CC1} = 5 V, V_{CC2} = 20 V, C_L = 100 pF, R_L = 100 kΩ	01	-	27	ns
	t_{THL2}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 100Ω	03	-	20	ns
Sink outputs	t_{THL3}	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,02	-	20	ns
Storage time, sink outputs	t_s	V_{CC1} = 5 V, V_{CC2} = 15 V, C_L = 100 pF, R_L = 24Ω	01,02	-	55	ns
High-level output voltage	V_{OH}	V_{CC1} = 5 V, V_S = V_{CLAMP} = 24 V, C_L = 100 pF, R_L = 470Ω	02,03	V_S -0.25		V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

3.2.5 Case outlines. The case outlines shall be as specified in 1.2.3 herein.

3.2.6 Package and sealing material. Package and sealing material shall be in accordance with MIL-M-38510.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended ambient operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements shall be as specified in table II. The subgroups of table III which constitute the minimum electrical test requirements for screening, qualification, and quality conformance by device class are specified in table II.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein.

3.6.1 Serialization. All class S devices shall be serialized in accordance with MIL-M-38510.

3.6.2 Correctness of indexing and marking. All devices shall be subjected to the final electrical tests specified in table II after part marking to verify that they are correctly indexed and identified by part number. Optionally, an approved electrical test may be devised especially for this requirement.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 55 (see MIL-M-38510, Appendix E).

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (method 5004)	1	1
Final electrical test parameters (method 5004)	1*,2,3,9	1*,2,3,9
Group A test requirements (method 5005)	1,2,3,9,10,11	1,2,3,9
Group C end-point and group B class S, electrical parameters (method 5005)	1,2,3, and table IV delta limits	See 4.4.3
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3
Additional electrical subgroups for group C periodic inspection	N/A	10,11

(*) PDA applies to subgroup 1 (see 4.2c).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01

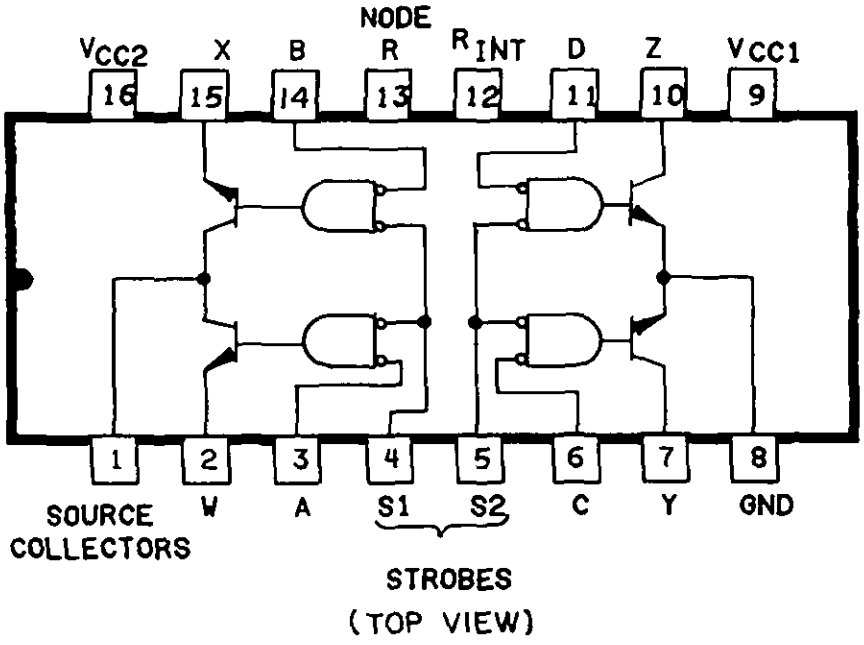


FIGURE 1. Logic diagram and terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 02

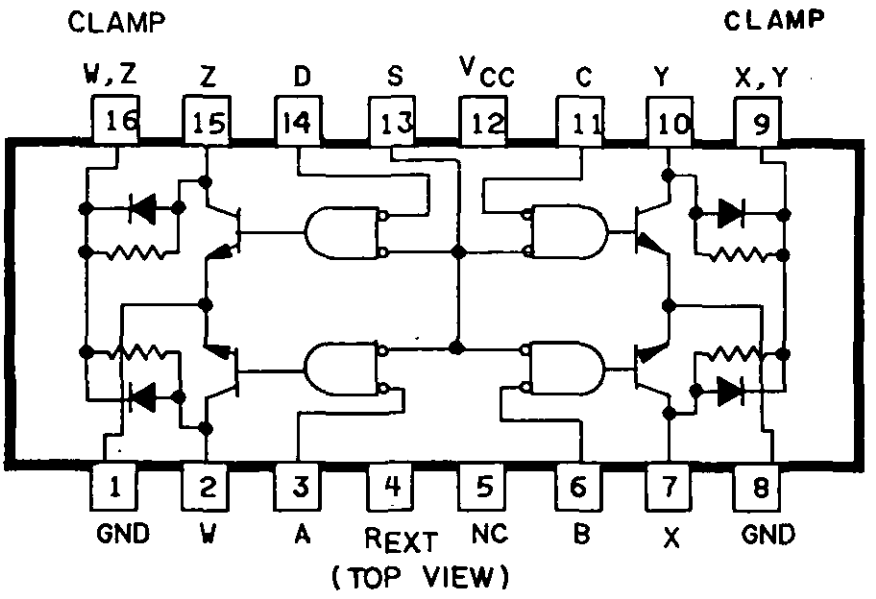


FIGURE 1. Logic diagram and terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 03

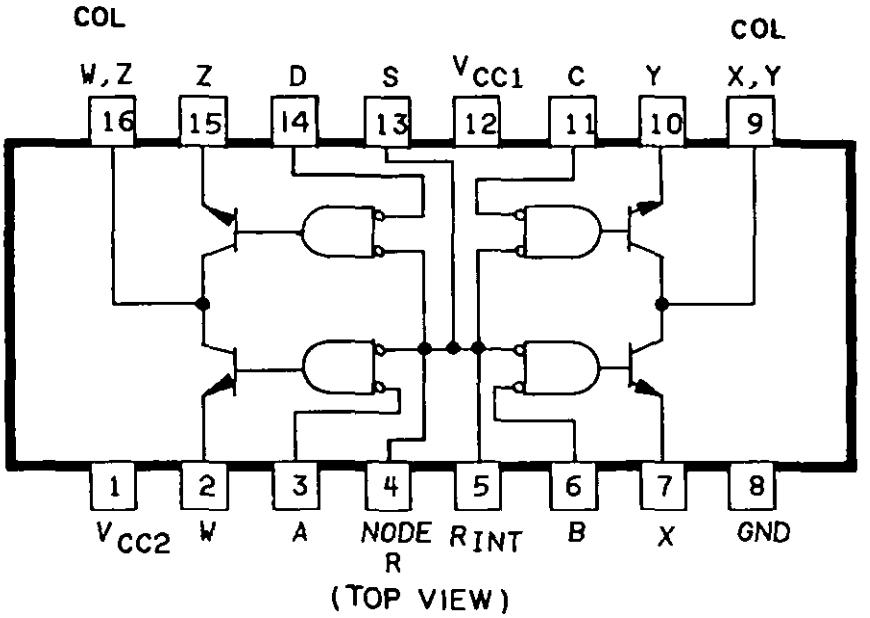


FIGURE 1. Logic diagram and terminal connections - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01

TRUTH TABLE

ADDRESS INPUTS				STROBE INPUTS		OUTPUTS			
SOURCE		SINK		SOURCE	SINK	SOURCE		SINK	
A	B	C	D	S1	S2	W	X	Y	Z
L	H	X	X	L	H	ON	OFF	OFF	OFF
H	L	X	X	L	H	OFF	ON	OFF	OFF
X	X	L	H	H	L	OFF	OFF	ON	OFF
X	X	H	L	H	L	OFF	OFF	OFF	ON
X	X	X	X	H	H	OFF	OFF	OFF	OFF
H	H	H	H	X	X	OFF	OFF	OFF	OFF

H = High level, L = low level, X = irrelevant

NOTE: Not more than one output is to be on at any one time.

Device type 02

TRUTH TABLE

INPUTS					OUTPUTS			
ADDRESS				STROBE	W	X	Y	Z
A	B	C	D	S				
L	H	H	H	L	ON	OFF	OFF	OFF
H	L	H	H	L	OFF	ON	OFF	OFF
H	H	L	H	L	OFF	OFF	ON	OFF
H	H	H	L	L	OFF	OFF	OFF	ON
H	H	H	H	X	OFF	OFF	OFF	OFF
X	X	X	X	H	OFF	OFF	OFF	OFF

H = High level, L = low level, X = irrelevant

NOTE: Not more than one output is to be on at any one time.

Device type 03

TRUTH TABLE

INPUTS					OUTPUTS			
ADDRESS				STROBE	W	X	Y	Z
A	B	C	D	S				
L	H	H	H	L	ON	OFF	OFF	OFF
H	L	H	H	L	OFF	ON	OFF	OFF
H	H	L	H	L	OFF	OFF	ON	OFF
H	H	H	L	L	OFF	OFF	OFF	ON
H	H	H	H	X	OFF	OFF	OFF	OFF
X	X	X	X	H	OFF	OFF	OFF	OFF


H = High level, L = low level, X = irrelevant

NOTE: Not more than one output is to be on at any one time.

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01

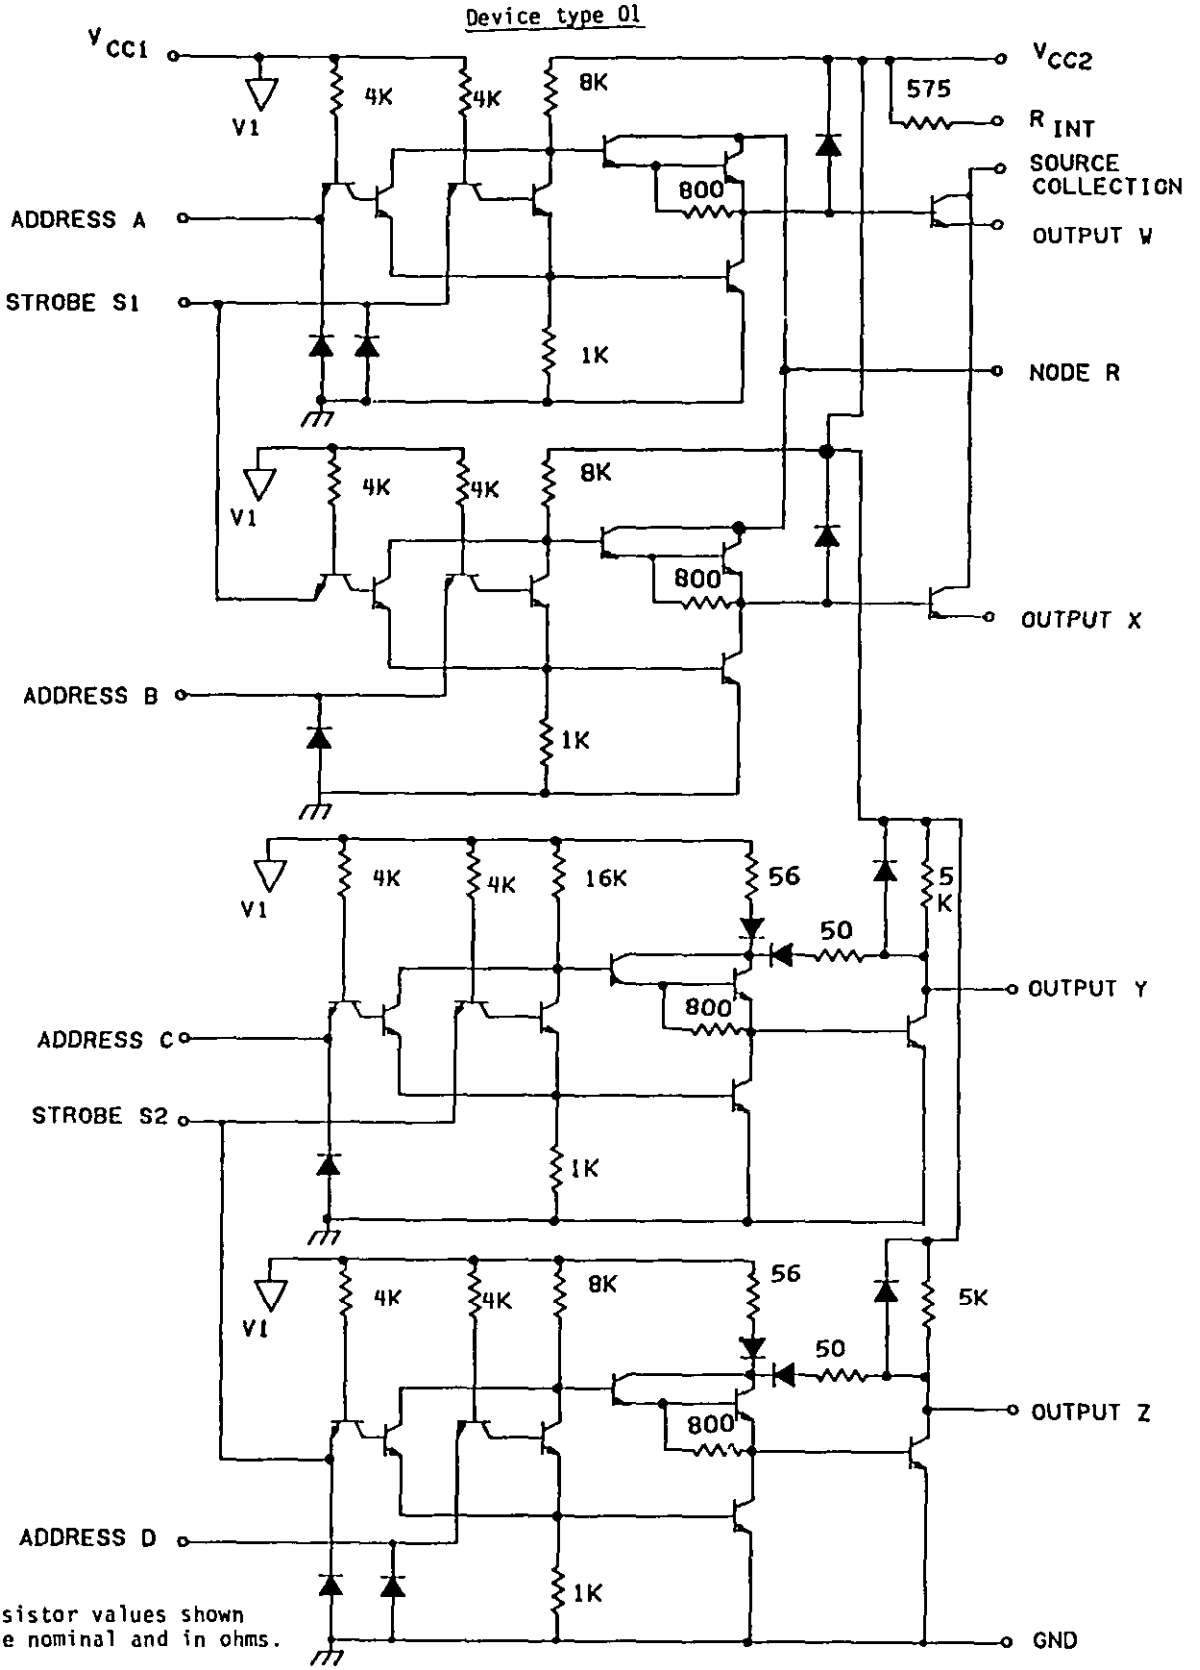

NOTE: Resistor values shown are nominal and in ohms.

FIGURE 3. Functional schematic circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

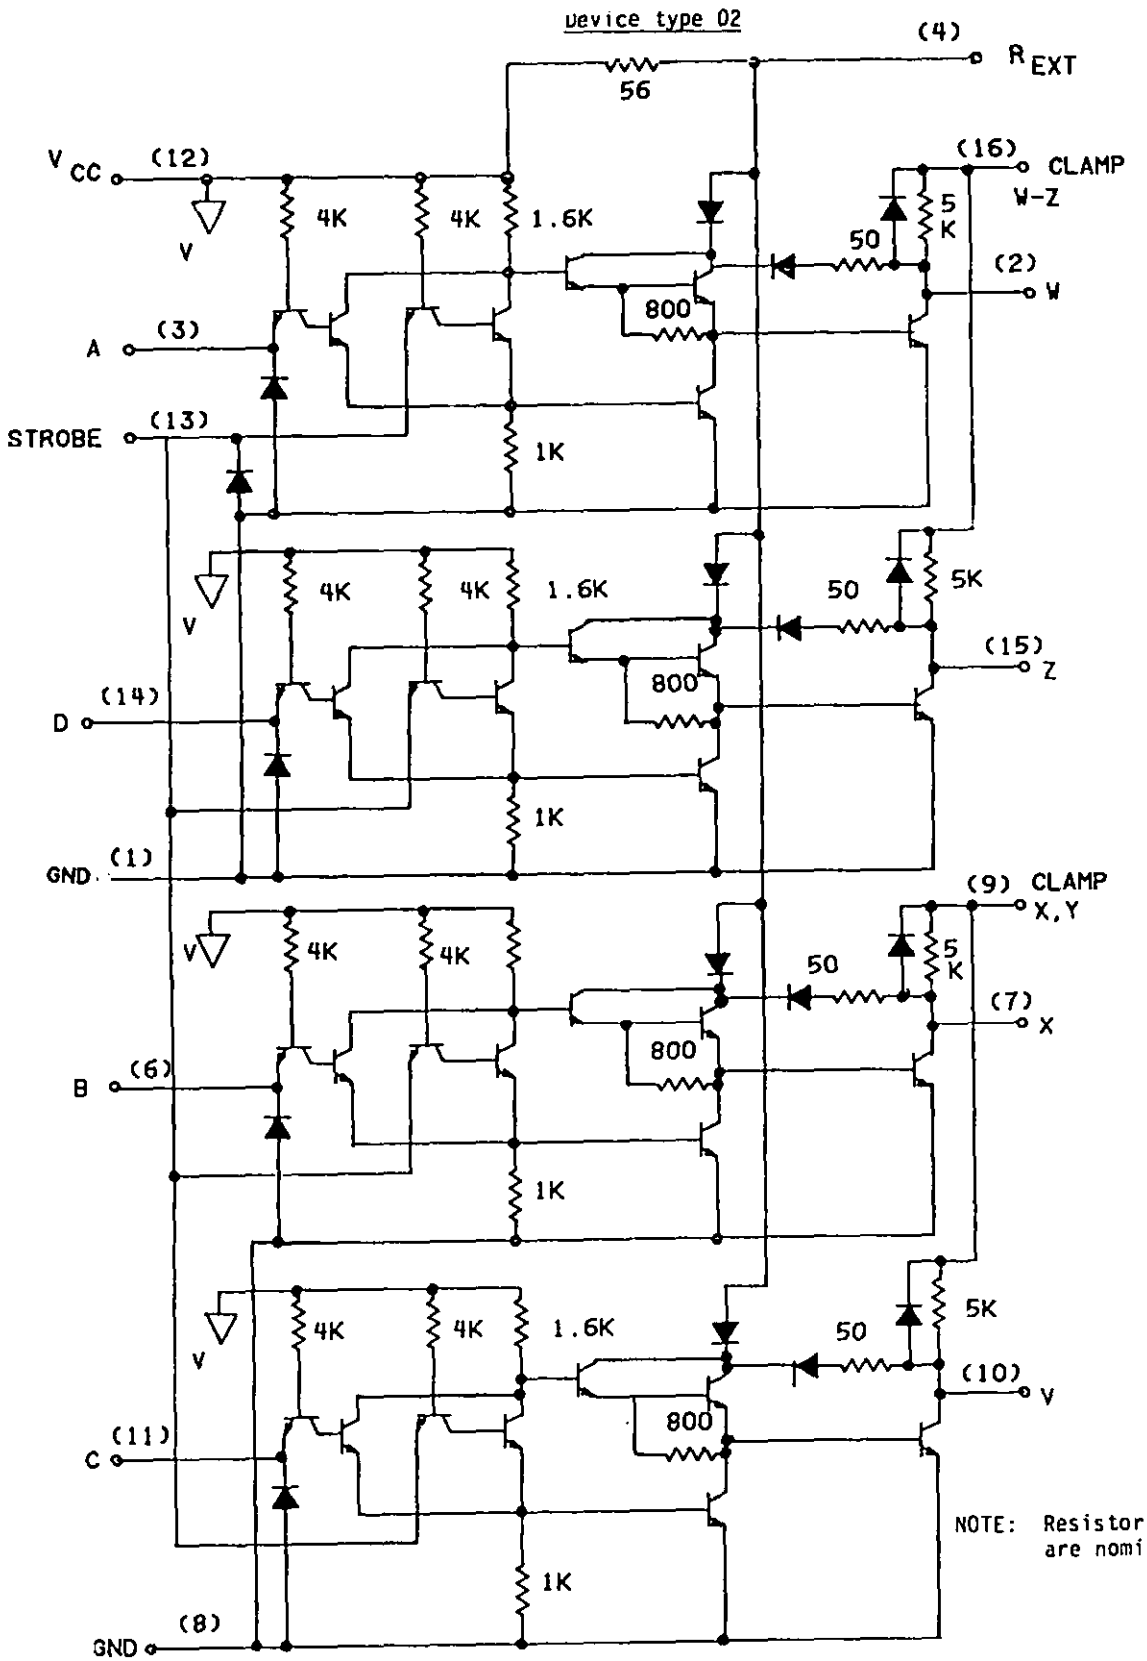


FIGURE 3. Functional schematic circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 03


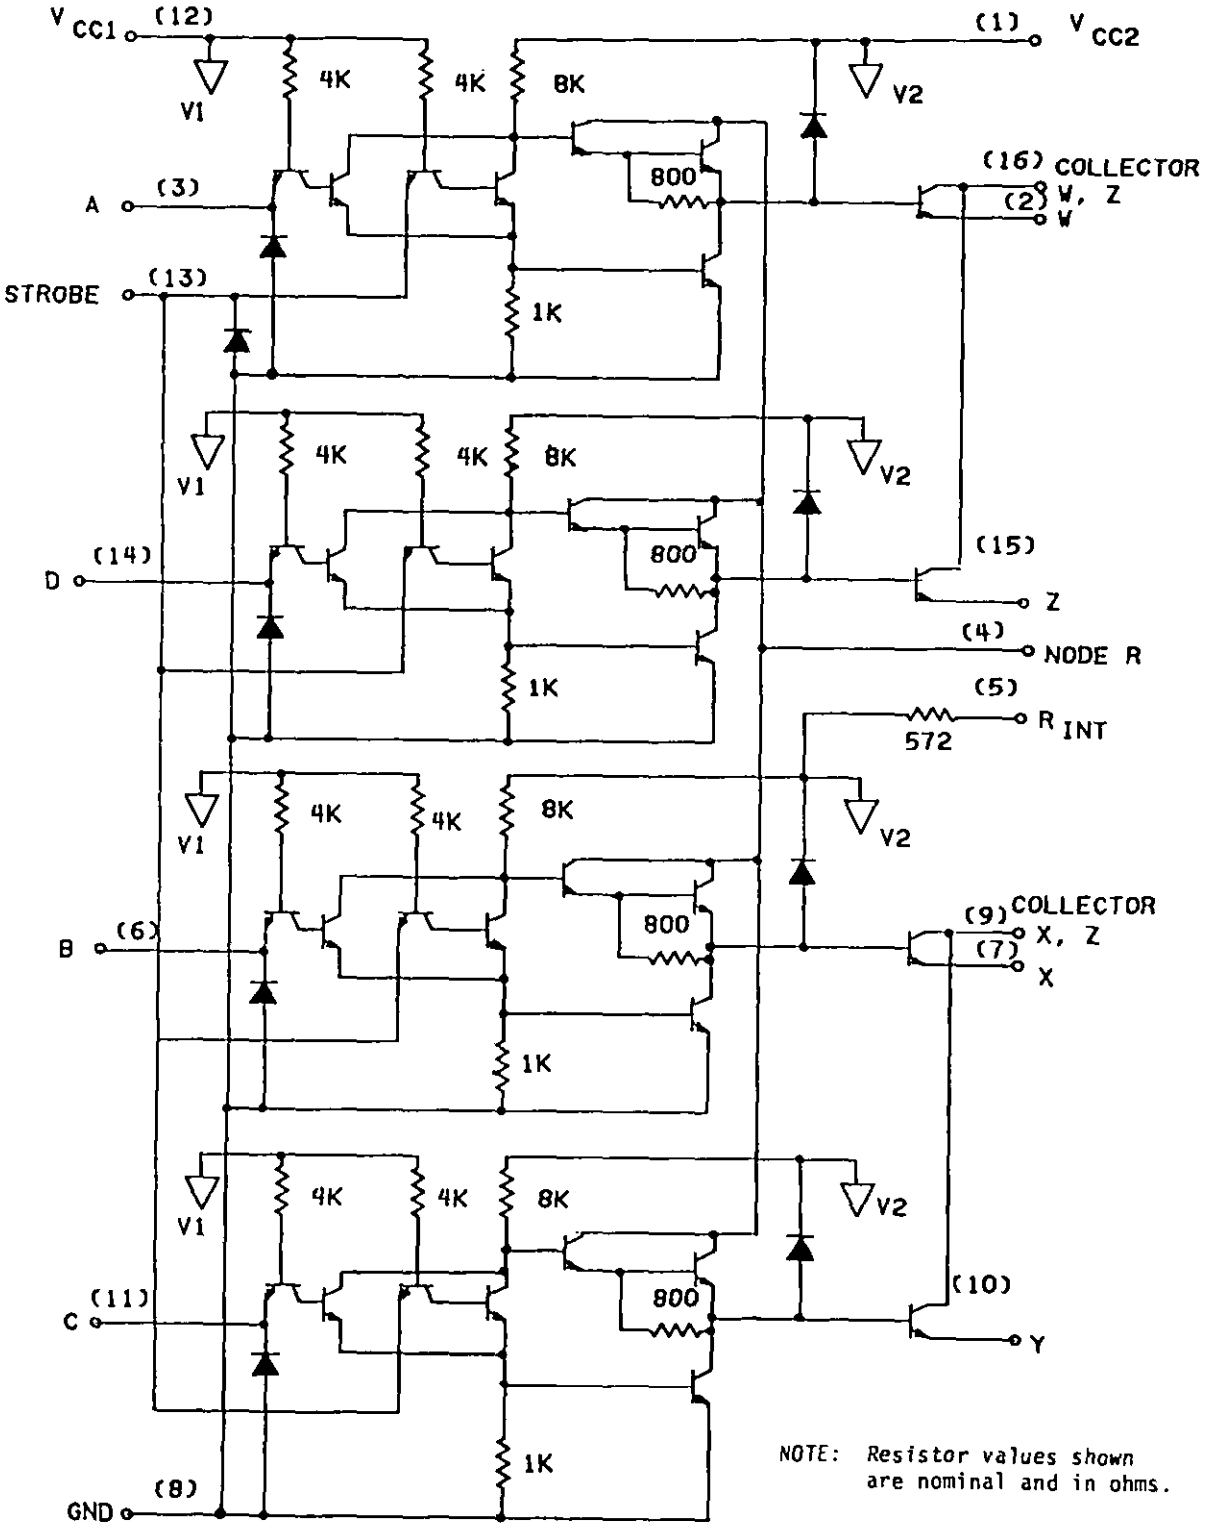


FIGURE 3. Functional schematic circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01



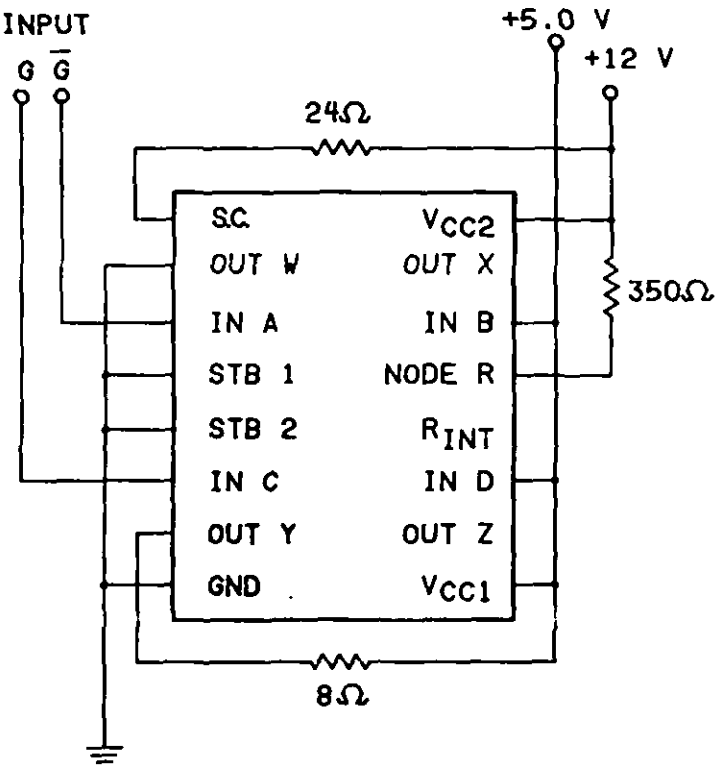


5 Hz, 50% DUTY CYCLE

FIGURE 4. Test circuit dynamic burn-in (two output on) and steady state life test.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the currentversion before use.

Device type 02

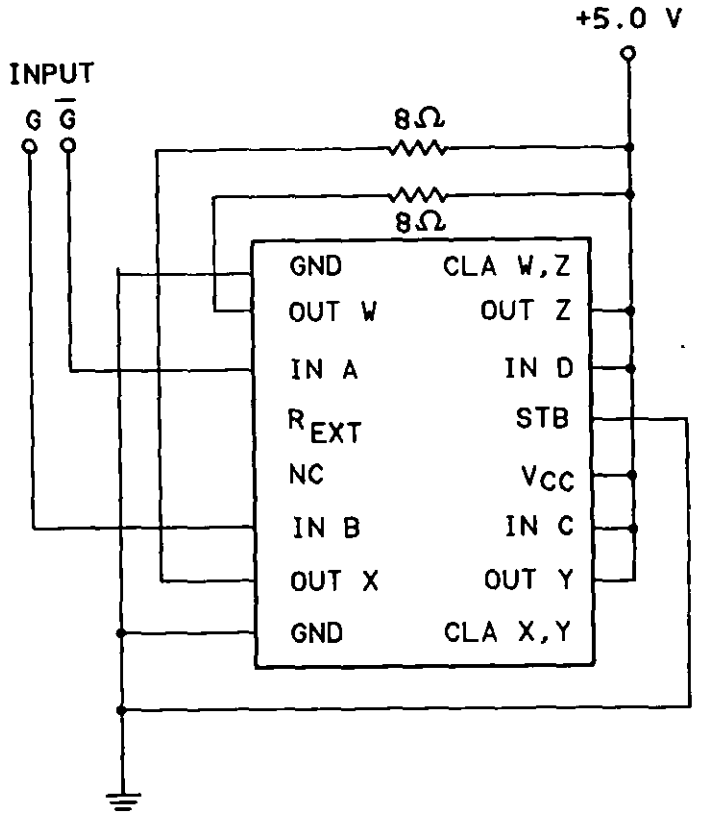



5 Hz, 50% DUTY CYCLE

FIGURE 4. Test circuit dynamic burn-in (two output on) and steady state life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 03

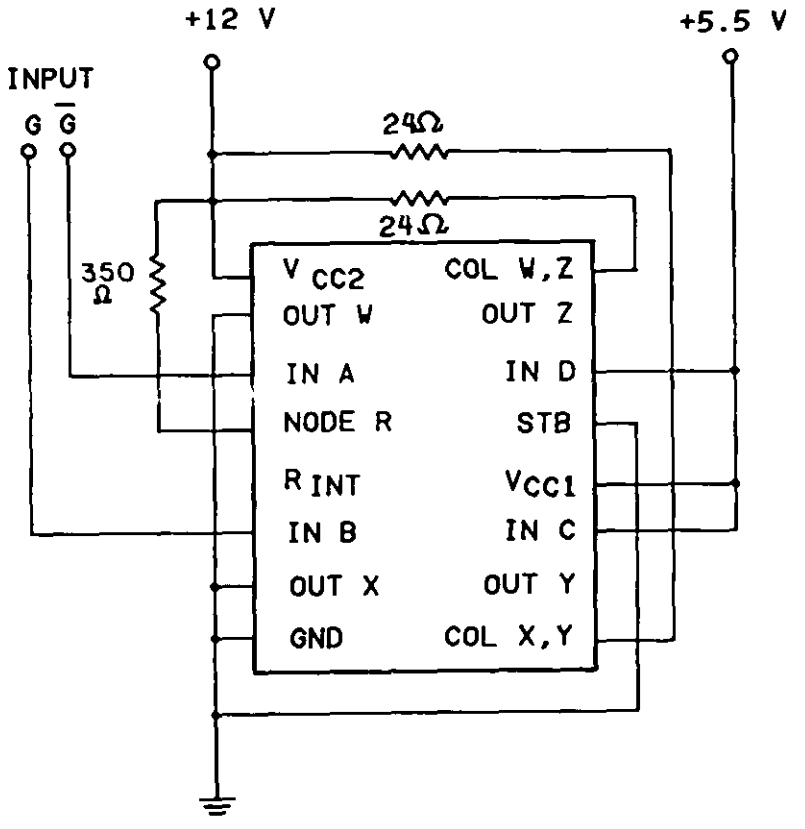


FIGURE 4. Test circuit dynamic burn-in (two output on) and steady state life test - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

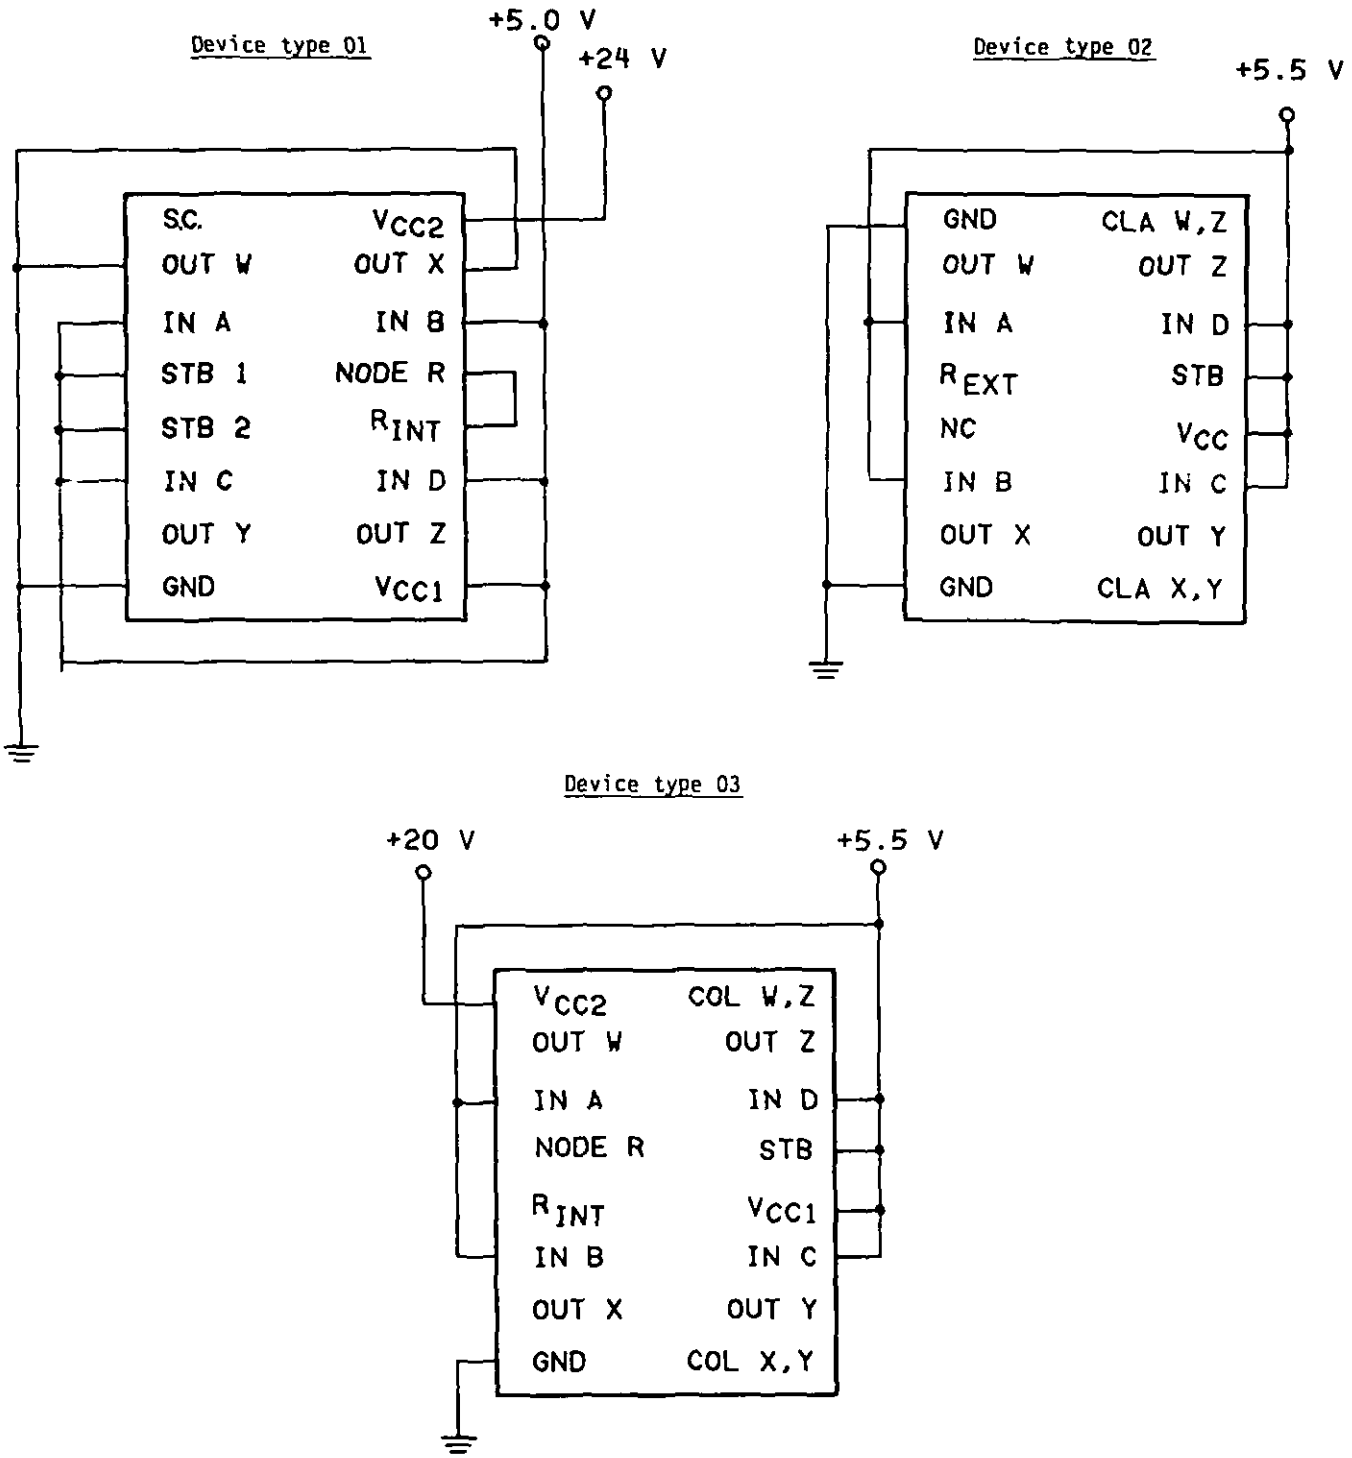


FIGURE 5. Test circuit burn-in (reverse bias) and steady state life test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01

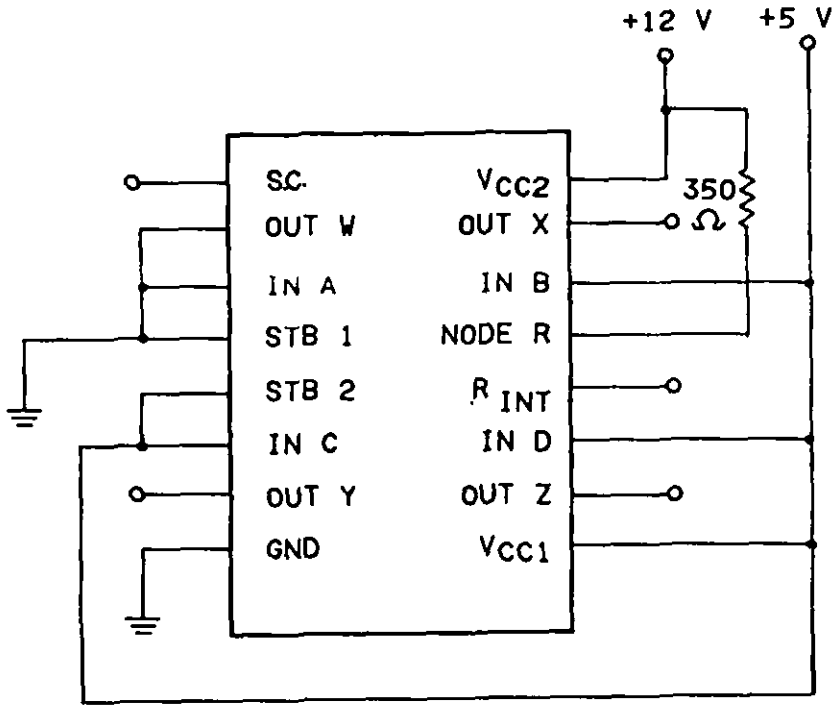


FIGURE 6. Accelerated burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 02

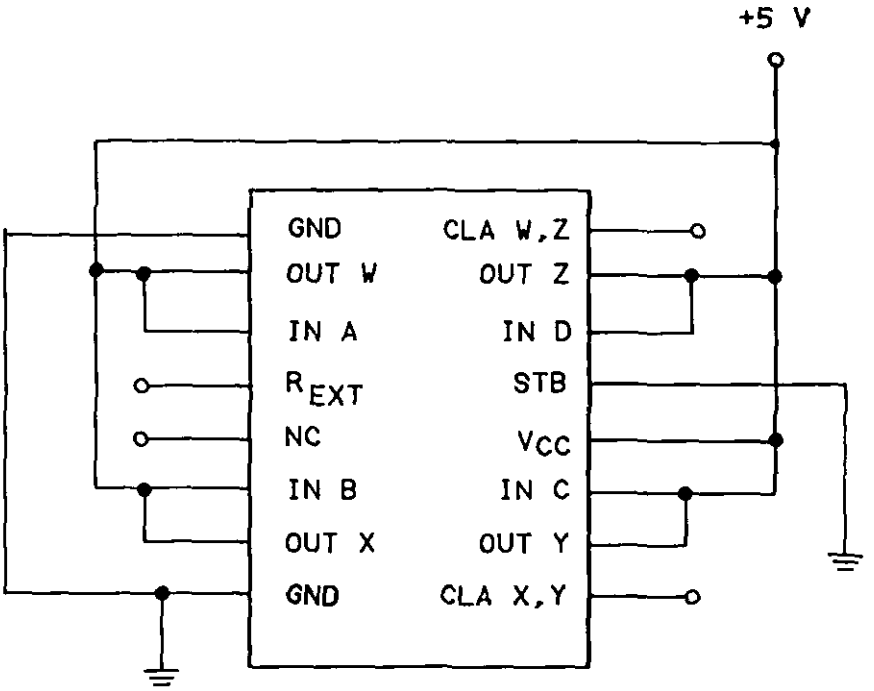


FIGURE 6. Accelerated burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 03


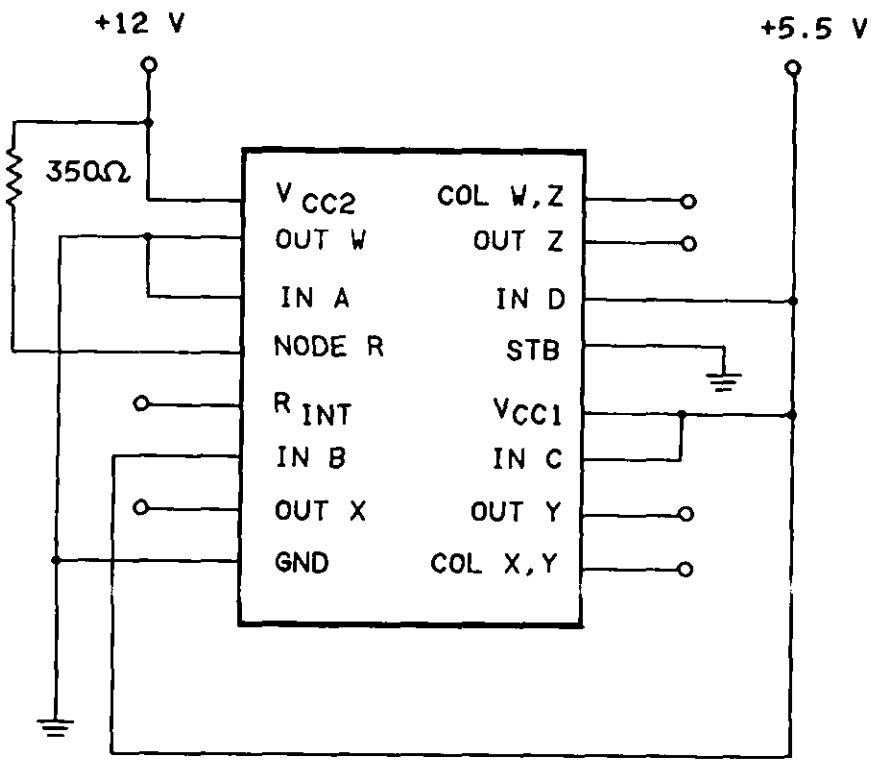


FIGURE 6. Accelerated burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

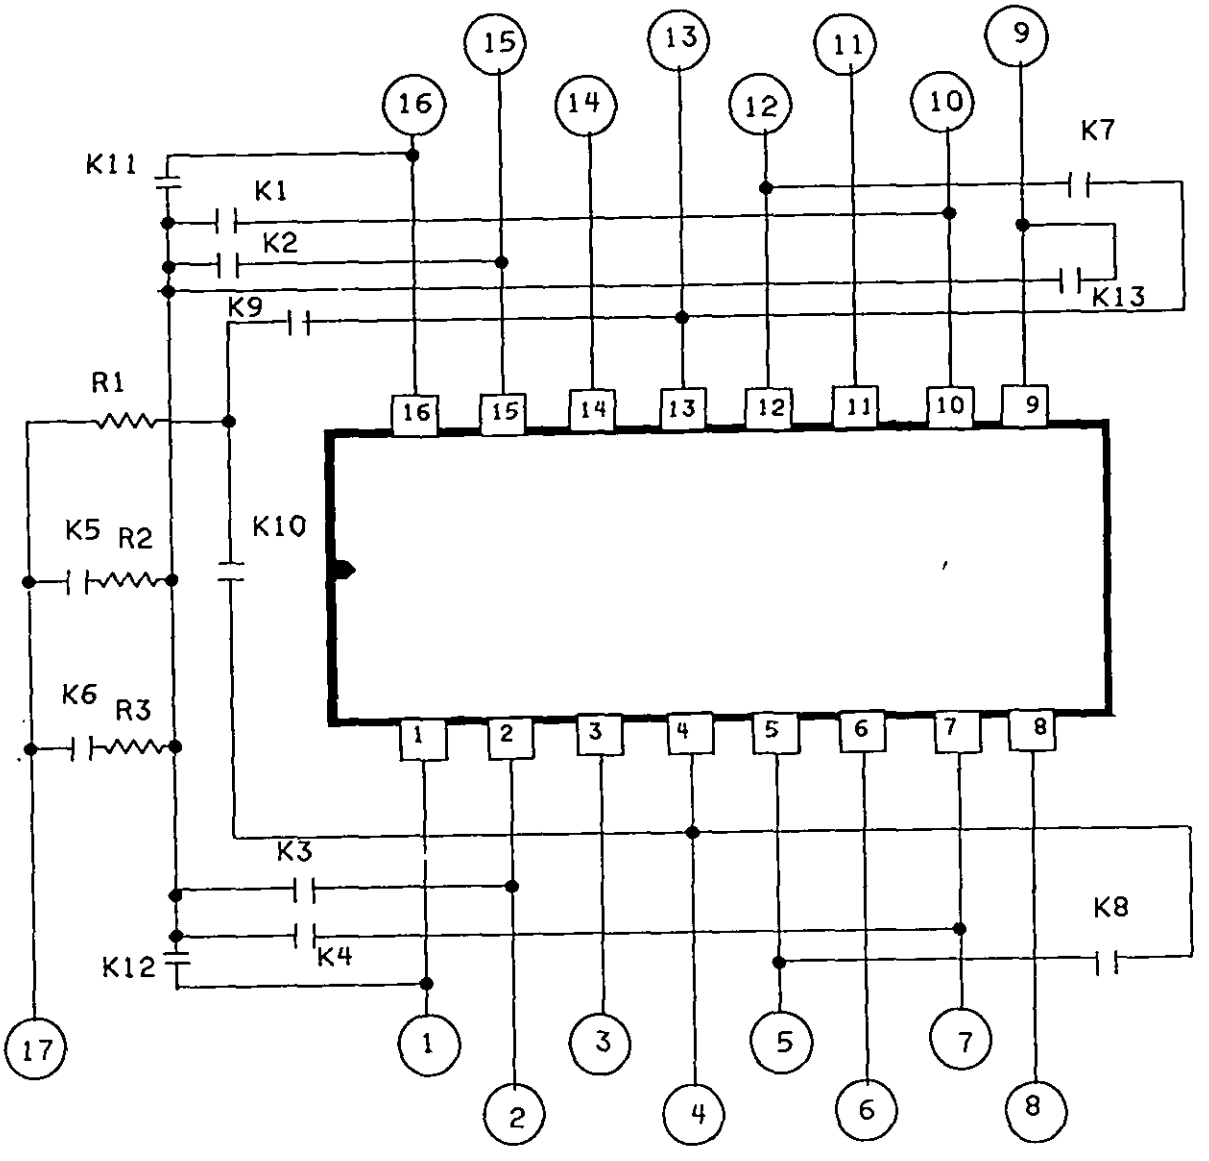


NOTES:
1. All relays are in the de-energized position.
2. R1 = 360 ohms ±5% carbon.
3. R2 = 39 ohms ±5% carbon.
4. R3 = 22 ohms ±5% carbon.

FIGURE 7. Static test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 01

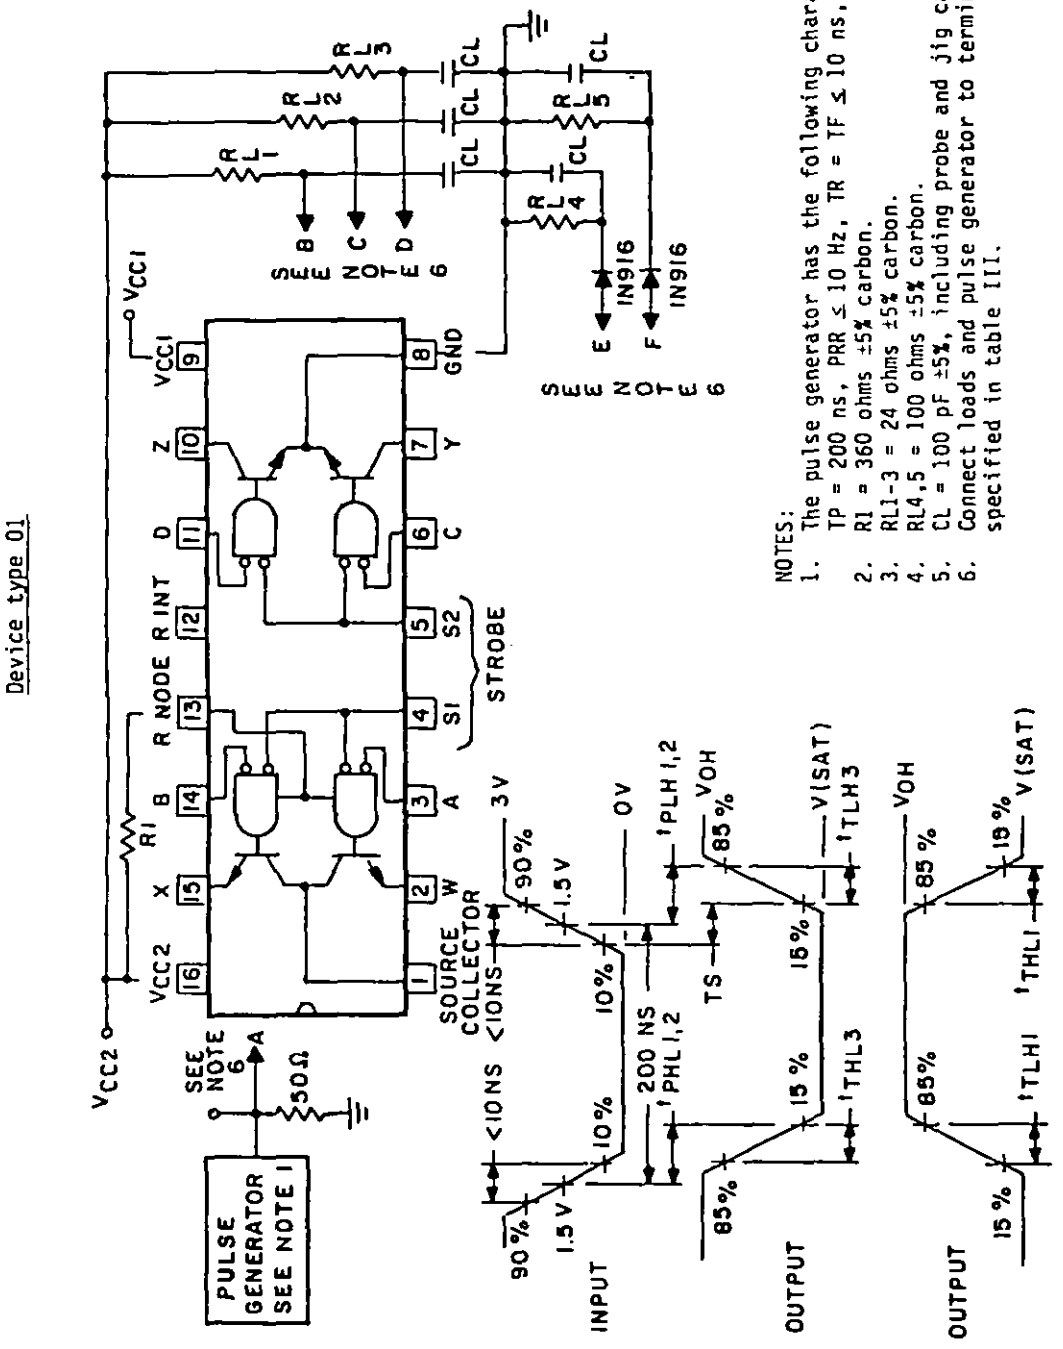


NOTES:
1. The pulse generator has the following characteristics: TP = 200 ns, PRR ≤ 10 Hz, TR = TF ≤ 10 ns, Z_{OUT} = 50Ω.
2. R1 = 360 ohms ±5% carbon.
3. RL1-3 = 24 ohms ±5% carbon.
4. RL4,5 = 100 ohms ±5% carbon.
5. CL = 100 pF ±5%, including probe and jig capacitance.
6. Connect loads and pulse generator to terminals as specified in table III.

FIGURE 8. Switching time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

Device type 02

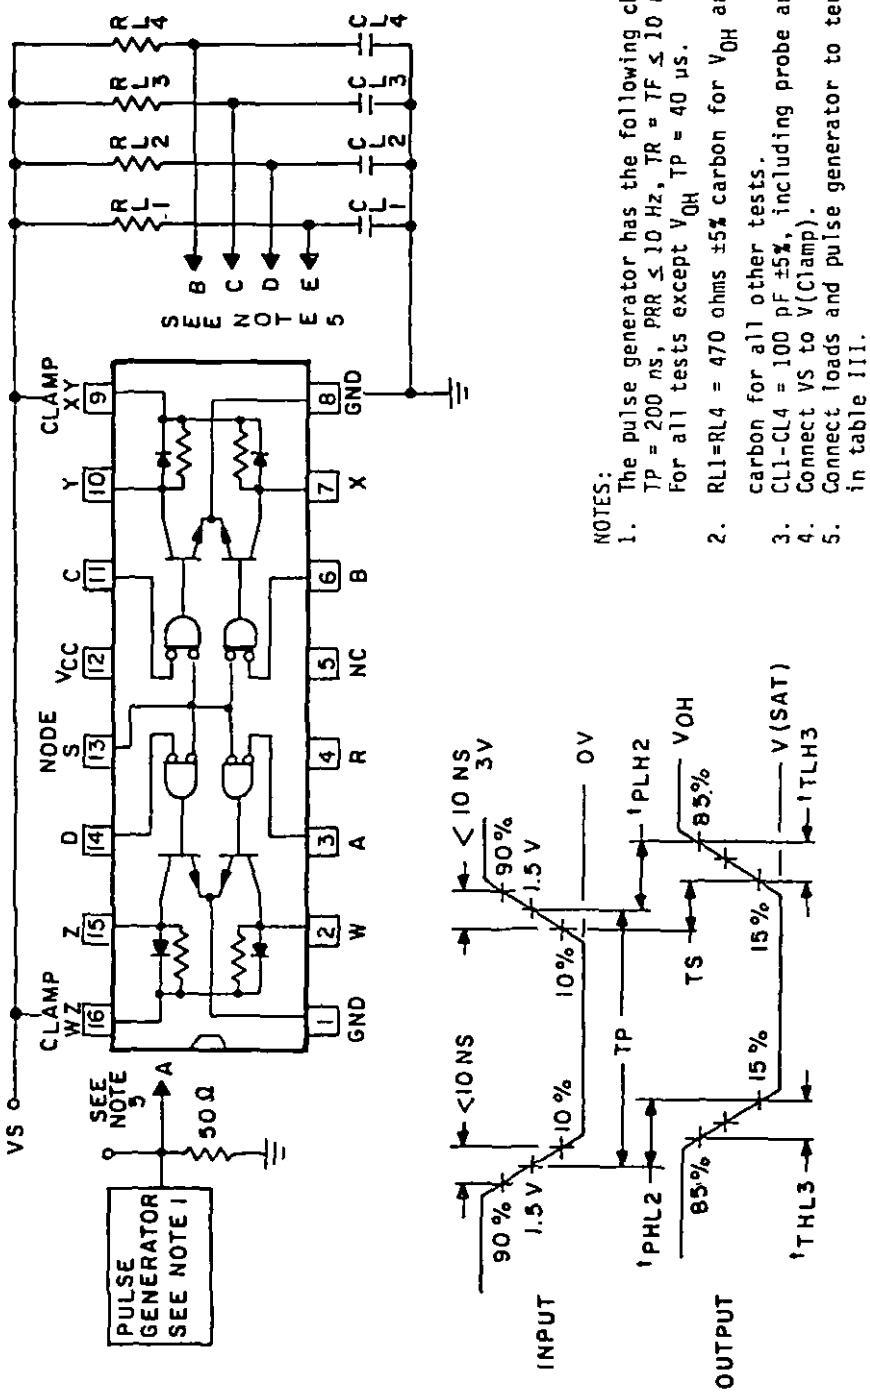

NOTES:
1. The pulse generator has the following characteristics: TP = 200 ns, PRR ≤ 10 Hz, TR = TF ≤ 10 ns, Z_{OUT} = 50Ω. For all tests except V_{OH} TP = 40 µs.
2. RL1=RL4 = 470 ohms ±5% carbon for V_{OH} and 24 ohms ±5% carbon for all other tests.
3. CL1-CL4 = 100 pF ±5%, including probe and jig capacitance.
4. Connect VS to V(Clamp).
5. Connect loads and pulse generator to terminals as specified in table III.

FIGURE 8. Switching time - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the current version before use.

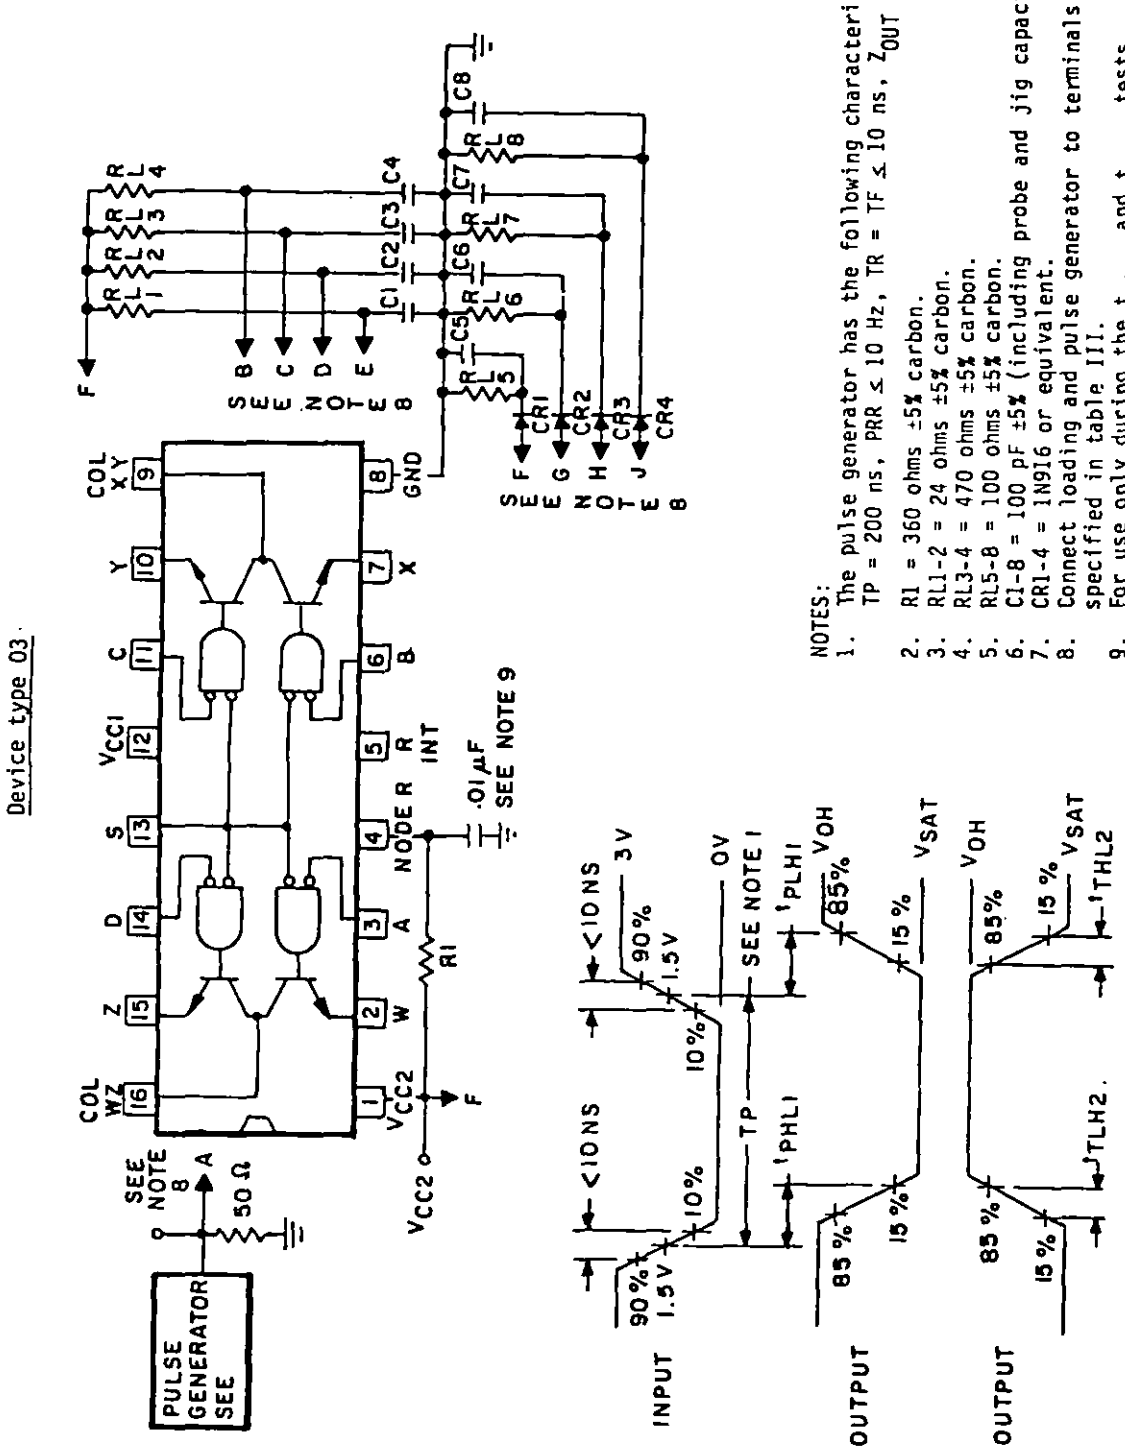


FIGURE 8. Switching time - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Test limits Max	Unit
1 T_A = 25°C	V_{IC}	1		GND	-10 mA	4.5 V	4.5 V	4.5 V		GND	4.5 V		4.5 V			4.5 V	GND	24 V		K_7	3		7		-1.7	V
		2		"	4.5 V	"	"	-10 mA		"	"		4.5 V			"	"	"		"	6		"		"	"
		3		"	"	"	"	4.5 V		"	"		-10 mA			"	"	"		"	11	01	"		"	"
		4		"	"	"	"	"		"	"		4.5 V			-10 mA	"	"		"	14		"		"	"
		5		"	"	-10 mA	"	"		"	"		"			4.5 V	"	"		"	4		"		"	"
		6		"	"	4.5 V	-10 mA	"		"	"		"			"		"		"	5		"		"	"
		7	GND		-10 mA	"		"		"	24 V		"	4.5 V	4.5 V	"				"	3		"		"	"
		8	"		4.5 V	"		-10 mA		"	"		"	"	"	"				"	6		"		"	"
		9	"		"	"		4.5 V		"	"		-10 mA	"	"	"				"	11	02	"		"	"
		10	"		"	"		"		"	"		4.5 V	"	"	-10 mA				"	14		"		"	"
		11	"		"	"		"		"	"		"	"	-10 mA	4.5 V				"	13		"		"	"
		12	24 V		-10 mA	"		"		"	"		"	"	4.5 V	"				"	3		"		"	"
		13	"		4.5 V	"		-10 mA		"	"		"	"	"	"				"	6		"		"	"
		14	"		"	"		4.5 V		"	"		-10 mA	"	"	"				"	11	03	"		"	"
		15	"		"	"		"		"	"		4.5 V	"	"	-10 mA				"	14		"		"	"
		16	"		"	"		"		"	"		4.5 V	"	-10 mA	4.5 V				"	23		"		"	"
	I_{OFF}	17	24 V	GND	GND	2 V	4.5 V	4.5 V		"	4.5 V					GND	GND	"		K7	1	01	"		500	µA
		18	"	"	2 V	GND	4.5 V	4.5 V		"	4.5 V					2 V	"	"		K7	1		"		"	"
		19	"	"	GND				GND	"	24 V	GND		4.5 V	2 V	GND	"	"		K8	16		"		"	"
		20	"	"	2 V				"	"	"	"		"	GND	2 V	"	"		"	16	03	"		"	"
		21	"	"				GND	"	"	"	"	GND	"	2 V		"	"		"	9		"		"	"
		22	"	"				2 V	"	"	"	"	2 V	"	GND		"	"		"	9		"		"	"
	V_{OH}	23	"	"	4.5 V	4.5 V	GND	2 V		"	4.5 V		4.5 V			4.5 V	"	"		K7	7		"	19		V
		24	"	"	"	"	2 V	GND		"	"		4.5 V			"	"	"		"	7	01	"	"		"
		25	"	"	"	"	GND	4.5 V		"	"		2 V			"	"	"		"	10		"	"		"
		26	"	"	"	"	2 V	4.5 V		"	"		GND			"	"	"		"	10		"	"		"
		27	GND		2 V					"	24 V			4.5 V	GND	"		"			2		"	"		"
		28	"		GND					"	"			"	2 V	"		"			2		"	"		"
		29	"		4.5 V					"	"			"	GND	2 V		"			15		"	"		"
		30	"		4.5 V					"	"			"	2 V	GND		"			15	02	"	"		"
		31	"					2 V		"	"		4.5 V	"	GND			"			7		"	"		"
		32	"					GND		"	"		4.5 V	"	2 V			"			7		"	"		"
		33	"					4.5 V		"	"		2 V	"	GND			"			10		"	"		"
		34	"					4.5 V		"	"		GND	"	2 V			"			10		"	"		"
	V_{CESAT1}	35		GND	0.8 V	0.8 V				"	4.5 V					4.5 V	GND	15 V	15 V	K6,K9,K12	1	01	"		0.9	"
		36		"	4.5 V	0.8 V				"	4.5 V					0.8 V	GND	15 V	15 V	K6,K9,K12	1		"		"	"
		37	24 V	GND				4.5 V	GND	"		GND	0.8 V	4.5 V	0.8 V		"	24 V	24 V	K5,K10,K13	9		"		"	"
		38	"	"				0.8 V	"	"		"	4.5 V	"	"		"	24 V	"	K5,K10,K13	9	03	"		"	"
		39	"	"	4.5 V				"	"	24 V	"		"	"	0.8 V	"		"	K5,K10,K11	16		"		"	"
		40	"	"	0.8 V				"	"	24 V	"		"	"	4.5 V	"		"	K5,K10,K11	16		"		"	"
	V_{CESAT2}	41					0.8 V	4.5 V		"	4.5 V		0.8 V					15 V	15 V	K1,K6,K7	10	01	"		"	"
		42					0.8 V	0.8 V		"	4.5 V		4.5 V					"	15 V	K1,K6,K7	7		"		"	"
		43	GND		0.8 V					"	15 V			4.5 V	0.8 V	4.5 V		"	24 V	K3,K5	2		"		"	"
		44	"					0.8 V		"	"		4.5 V	"	"			"	"	K4,K5	7	02	"		"	"
		45	"					4.5 V		"	"		0.8 V	"	"			"	"	K1,K5	10		"		"	"
		46	"		4.5 V					"	"			"	"	0.8 V		"	"	K2,K5	15		"		"	"
	V_{OC}	47	"	10 mA	"			4.5 V		"	GND		4.5 V	5.5 V	4.5 V	4.5 V		GND			2		"		1.5	"
		48	"		"				10 mA	"	"		"	"	"	"		"			7	02	"		"	"
		49	"		"				"	"	"	10 mA	"	"	"	"		"			10		"		"	"
		50	"		"				"	"	"	"	"	"	"	"	10 mA	"			15		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open)																Relays energized	Measured terminal	Device	Test figure	Test limits		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17				Min	Max	
1 T_A = 25°C	I_{OC}	51	GND		4.5 V					GND				5.5 V	0.8 V	0.8 V	50	24 V			16		7		7	mA
		52	"	50 mA	0.8 V					"				"	"	4.5 V		24 V			16	02	"		"	"
		53	"					4.5 V		"	24 V	50 mA	0.8 V	"	"						9		"		"	"
		54	"					0.8 V	50 mA	"	24 V		4.5 V	"	"						9		"		"	"
	I_{IH1}	55			2.4 V	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			5.5 V		24 V		K7	3		"		40	uA
		56			5.5 V	GND	5.5 V	5.5 V		"	"		"			2.4 V		"		"	14	01	"		"	"
		57			"	5.5 V	GND	2.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		58			"	5.5 V	GND	5.5 V		"	"		2.4 V			"		"		"	11		"		"	"
	I_{IH2}	59			5.5 V	GND	5.5 V	"		"	"		5.5 V			"		"		"	3		"		1	mA
		60			"	GND	5.5 V	"		"	"		"			"		"		"	14	01	"		"	"
		61			"	5.5 V	GND	"		"	"		"			"		"		"	6		"		"	"
		62			"	5.5 V	GND	"		"	"		"			"		"		"	11		"		"	"
	I_{IH3}	63	GND		2.4 V			"		"			"	5.5 V	GND	"					3		"		40	uA
		64	"		5.5 V			2.4 V		"			"	"	"	"					6	02	"		"	"
		65	"		5.5 V			5.5 V		"			2.4 V	"	"	"					11		"		"	"
		66	"		5.5 V			5.5 V		"			5.5 V	"	"	2.4 V					14		"		"	"
		67	24 V		2.4 V			5.5 V		"			"	"	"	5.5 V				K8	3		"		"	"
		68	"		5.5 V			2.4 V		"			"	"	"	"				"	6	03	"		"	"
		69	"		"			5.5 V		"			2.4 V	"	"	"				"	11		"		"	"
		70	"		"			"		"			5.5 V	"	"	2.4 V				"	14		"		"	"
	I_{IH4}	71	GND		5.5 V			"		"			"	"	"	5.5 V					3		"		1	mA
		72	"		"			"		"			"	"	"	"					6	02	"		"	"
		73	"		"			"		"			"	"	"	"					11		"		"	"
		74	"		"			"		"			"	"	"	"					14		"		"	"
		75	24 V		"			"		"			"	"	"	"				K8	3		"		"	"
		76	"		"			"		"			"	"	"	"				"	6	03	"		"	"
		77	"		"			"		"			"	"	"	"				"	11		"		"	"
		78	"		"			"		"			"	"	"	"				"	14		"		"	"
	I_{IH5}	79			GND	2.4 V	5.5 V	"		"	5.5 V		"			GND		24 V		K7	4	01	"		80	uA
		80			5.5 V	5.5 V	2.4 V	GND		"			GND			5.5 V		24 V		K7	5		"		80	"
		81	GND		GND			"		"			"	5.5 V	2.4 V	GND					13	02	"		160	"
		82	24 V		"			"		"			"	5.5 V	2.4 V	"				K8	13	03	"		160	"
	I_{IH6}	83			"	5.5 V	5.5 V	5.5 V		"	5.5 V		5.5 V			"		24 V		K7	4	01	"		2	mA
		84			5.5 V	5.5 V	5.5 V	GND		"	5.5 V		GND			5.5 V		24 V		K7	5		"		2	"
		85	GND		GND			"		"			"	5.5 V	5.5 V	GND					13	02	"		4	"
		86	2.4 V		GND			"		"			"	5.5 V	5.5 V	GND				K8	13	03	"		4	"
	I_{IL1}	87			5.5 V	0.4 V	5.5 V	5.5 V		"	5.5 V		5.5 V			5.5 V		24 V		K7	4	01	"		-3.2	"
		88			"	5.5 V	0.4 V	"		"	5.5 V		"			"		24 V		K7	5		"		-3.2	"
	I_{IL2}	89	GND		"			"		"			"	5.5 V	0.4 V	"					13	02	"		-6.4	"
		90	2.4 V		"			"		"			"	5.5 V	0.4 V	"				K8	13	03	"		-6.4	"

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open)																Relays energized	Measured terminal	Device	Test figure	Test limits Min	Test limits Max	Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14		16	17							
1 T_A = 25°C	I_{IL3}	91			0.4 V	5.5 V	5.5 V	5.5 V		GND	5.5 V		5.5 V			5.5 V		24 V		K7	3		7		-1.6	mA
		92			5.5 V	"	"	5.5 V		"	"		"			0.4 V		"		"	14	01	"		"	"
		93			"	"	"	0.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		94			"	"	"	5.5 V		"	"		0.4 V			"		"		"	11		"		"	"
		95	GND		0.4 V			"		"			5.5 V	5.5 V	5.5 V	"					3		"		"	"
		96	"		5.5 V			"		"			"	"	"	0.4 V					14	02	"		"	"
		97	"		"			0.4 V		"			"	"	"	5.5 V					6		"		"	"
		98	"		"			5.5 V		"			0.4 V	"	"	"					11		"		"	"
		99	24 V		0.4 V			"		"			5.5 V	"	"	"				K8	3		"		"	"
		100	"		5.5 V			"		"			"	"	"	0.4 V				"	14	03	"		"	"
		101	"		"			0.4 V		"			"	"	"	5.5 V				"	6		"		"	"
		102	"		"			5.5 V		"			0.4 V	"	"	5.5 V				"	11		"		"	"
	I_{CC1}	103		GND	5 V	5 V	5 V	5 V		"	5.5 V		5 V			5 V	GN	24 V		K7	9	01	"		22	"
	I_{CC2}	104	GND		5 V			5 V		"			"	5.5 V	5 V	5 V					12	02	"		25	"
	I_{CC3}	105	24 V	GND	5 V			5 V	GND	"		GND	"	5.5 V	5 V	5 V	GN			K8	12	03	"		10	"
	I_{CC4}	106		"	4.5 V	4.5 V	GND	GND	50 mA	"	5.5 V		"			4.5 V	GN	24 V		K7	9	01	"		70	"
		107		"	4.5 V	4.5 V	GND	5 V		"	5.5 V	50 mA	GND					"			9		"		70	"
	I_{CC5}	108	GND	50 mA	GND			5 V		"	24 V		5 V	5.5 V	GND	5 V		"			12		"		75	"
		109	"		5 V			GND	50 mA	"	"		5 V	"	"	"		"			"	02	"		"	"
		110	"		"			5 V		"	"	50 mA	GND	"	"	"		"			"		"		"	"
		111	"		"			"		"	"		5 V	"	"	GND	50	"			"		"		"	"
	I_{CC6}	112	24 V	-50 mA	GND			"		"	6 V		"	"	"	5 V		6 V		K8	"		"		12	"
		113	"		5 V			GND	-50 mA	"	"		"	"	"	"		"		"	"	03	"		"	"
		114	"		"			5 V		"	"	-50 mA	GND	"	"	"		"		"	"		"		"	"
		115	"		"			"		"	"		5 V	"	"	GND	-50	"	A	"	"		"		"	"
	I_{CC7}	116		GND	"	5 V	5 V	"		"	5.5 V		5 V			5 V	GN	24 V		K7	16	01	"		20	"
		117	24 V	GND	"			"	GND	"		GND	5 V	5.5 V	5 V	5 V	GN			K8	1	03	"		20	"
	I_{CC8}	118	50 mA	GND	GND	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			5 V		24 V		K7	16	01	"		50	"
		119	50 mA		5 V	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			GND	GN	24 V		K7	16		"		50	"
	I_{CC9}	120	24 V	-50 mA	GND			5 V		"	6 V		5 V	5.5 V	GND	5 V		6 V		K8	1		"		55	"
		121	"		5 V			GND	-50 mA	"	"		5 V	"	"	"		"		"	"	03	"		"	"
		122	"		"			5 V		"	"	-50 mA	GND	"	"	"		"		"	"		"		"	"
		123	"		"			5 V		"	"		5 V	"	"	GND	-50	"	A	"	"		"		"	"

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Test limits Max	Unit
2 T_A = 125°C	V_{IC}	124		GND	-10 mA	4.5 V	4.5 V	4.5 V		GND	4.5 V		4.5 V			4.5 V	GN	24 V		K7	3		7		-1.7	V
		125		"	4.5 V	"	"	-10 mA		"	"		4.5 V			"	"	"		"	6		"		"	"
		126		"	"	"	"	4.5 V		"	"		-10 mA				"	"		"	11	01	"		"	"
		127		"	"	"	"	"		"	"		4.5 V			-10 mA	"	"		"	14		"		"	"
		128		"	"	-10 mA	"	"		"	"		"			4.5 V	"	"		"	4		"		"	"
		129		"	"	4.5 V	-10 mA	"		"	24 V		"			"	"	"		"	5		"		"	"
		130	GND	"	-10 mA	"	"	"		"	"		"	4.5 V	4.5 V	"	"	"		"	3		"		"	"
		131	"	"	4.5 V	"	"	-10 mA		"	"		"	"	"	"	"	"		"	6		"		"	"
		132	"	"	"	"	"	4.5 V		"	"		-10 mA	"	"	"	"	"		"	11	02	"		"	"
		133	"	"	"	"	"	"		"	"		4.5 V	"	"	-10 mA	"	"		"	14		"		"	"
		134	"	"	"	"	"	"		"	"		"	"	-10 mA	4.5 V	"	"		"	13		"		"	"
		135	24 V	"	-10 mA	"	"	"		"	"		"	"	4.5 V	"	"	"		"	3		"		"	"
		136	"	"	4.5 V	"	"	-10 mA		"	"		"	"	"	"	"	"		"	6		"		"	"
		137	"	"	"	"	"	4.5 V		"	"		-10 mA	"	"	"	"	"		"	11	03	"		"	"
		138	"	"	"	"	"	"		"	"		4.5 V	"	"	-10 mA	"	"		"	14		"		"	"
		139	"	"	"	"	"	"		"	"		4.5 V	"	-10 mA	4.5 V	"	"		"	13		"		"	"
	I_{OFF}	140	"	GND	GND	2 V	4.5 V	4.5 V		"	4.5 V					GND	GN	"		K7	1	01	"		500	µA
		141	"	"	2 V	GND	4.5 V	4.5 V		"	4.5 V					2 V	"	"		K7	1		"		"	"
		142	"	"	GND				GND	"	2.4 V	GND		4.5 V	2 V	GND	"	"		K8	16		"		"	"
		143	"	"	2 V				"	"	"	"		"	GND	2 V	"	"		"	16	03	"		"	"
		144	"	"				GND	"	"	"	"	GND	"	2 V		"	"		"	9		"		"	"
		145	"	"				2 V	"	"	"	"	2 V	"	GND		"	"		"	9		"		"	"
	V_{OH}	146	"	"	4.5 V	4.5 V	GND	2 V		"	4.5 V		4.5 V			4.5 V	"	"		K7	7		"	19		V
		147	"	"	"	"	2 V	GND		"	"		4.5 V			"	"	"		"	7	01	"	"		"
		148	"	"	"	"	GND	4.5 V		"	"		2 V			"	"	"		"	10		"	"		"
		149	"	"	"	"	2 V	4.5 V		"	"		GND			"	"	"		"	10		"	"		"
		150	GND		2 V					"	24 V			4.5 V	GND	"	"	"		"	2		"	"		"
		151	"		GND					"	"			"	2 V	"	"	"		"	2		"	"		"
		152	"		4.5 V					"	"			"	GND	2 V	"	"		"	15		"	"		"
		153	"		4.5 V					"	"			"	2 V	GND	"	"		"	15	02	"	"		"
		154	"					2 V		"	"		4.5 V	"	GND		"	"		"	7		"	"		"
		155	"					GND		"	"		4.5 V	"	2 V		"	"		"	7		"	"		"
		156	"					4.5 V		"	"		2 V	"	GND		"	"		"	10		"	"		"
		157	"					4.5 V		"	"		GND	"	2 V		"	"		"	10		"	"		"
	V_{CESAT1}	158		GND	0.8 V	0.8 V				"	4.5 V					4.5 V	GN	15 V	15 V	K6,K9,K12	1	01	"		0.9	"
		159		"	4.5 V	0.8 V				"	4.5 V					0.8 V	GN	15 V	15 V	K6,K9,K12	1		"		"	"
		160	24 V	GND				4.5 V	GND	"		GND	0.8 V	4.5 V	0.8 V		"	24 V	24 V	K5,K10,K13	9		"		"	"
		161	"	"				0.8 V	"	"		"	4.5 V	"	"		"	24 V	"	K5,K10,K13	9	03	"		"	"
		162	"	"	4.5 V				"	"	24 V	"		"	"	0.8 V	"		"	K5,K10,K11	16		"		"	"
		163	"	"	0.8 V				"	"	24 V	"		"	"	4.5 V	"		"	K5,K10,K11	16		"		"	"
	V_{CESAT2}	164					0.8 V	4.5 V		"	4.5 V		0.8 V					15 V	15 V	K1,K6,K7	10	01	"		"	"
		165					0.8 V	0.8 V		"	4.5 V		4.5 V					"	15 V	K1,K6,K7	7		"		"	"
		166	GND		0.8 V					"	15 V			4.5 V	0.8 V	4.5 V		"	24 V	K3,K5	2		"		"	"
		167	"					0.8 V		"	"		4.5 V	"	"			"	"	K4,K5	7	02	"		"	"
		168	"					4.5 V		"	"		0.8 V	"	"			"	"	K1,K5	10		"		"	"
		169	"		4.5 V					"	"			"	"	0.8 V		"	"	K2,K5	15		"		"	"
	V_{OC}	170	"	10 mA	"			4.5 V		"	GND		4.5 V	5.5 V	4.5 V	4.5 V		GND			2		"		1.5	"
		171	"		"			"	10 mA	"	"		"	"	"	"		"			7	02	"		"	"
		172	"		"			"		"	"	10 mA	"	"	"	"		"			10		"		"	"
		173	"		"			"		"	"		"	"	"	"	10 n	"			15		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Test limits Max	Unit
2 T_A = 125°C	I_{OC}	174	GND		4.5 V					GND				5.5 V	0.8 V	0.8 V	50	24 V			16		7		7	mA
		175	"	50 mA	0.8 V					"				"	"	4.5 V		24 V			16	02	"		"	"
		176	"					4.5 V		"	24 V	50 mA	0.8 V	"	"						9		"		"	"
		177	"					0.8 V	50 mA	"	24 V		4.5 V	"	"						9		"		"	"
	I_{IH1}	178			2.4 V	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			5.5 V		24 V		K7	3		"		40	µA
		179			5.5 V	GND	5.5 V	5.5 V		"	"		"			2.4 V		"		"	14	01	"		"	"
		180			"	5.5 V	GND	2.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		181			"	5.5 V	GND	5.5 V		"	"		2.4 V			"		"		"	11		"		"	"
	I_{IH2}	182			5.5 V	GND	5.5 V	"		"	"		5.5 V			"		"		"	3		"		1	mA
		183			"	GND	5.5 V	"		"	"		"			"		"		"	14	01	"		"	"
		184			"	5.5 V	GND	"		"	"		"			"		"		"	6		"		"	"
		185			"	5.5 V	GND	"		"	"		"			"		"		"	11		"		"	"
	I_{IH3}	186	GND		2.4 V			"		"			"	5.5 V	GND	"					3		"		40	µA
		187	"		5.5 V			2.4 V		"			"	"	"	"					6	02	"		"	"
		188	"		"			5.5 V		"			2.4 V	"	"	"					11		"		"	"
		189	"		"			5.5 V		"			5.5 V	"	"	2.4 V					14		"		"	"
		190	24 V		2.4 V			5.5 V		"			"	"	"	5.5 V				K8	3		"		"	"
		191	"		5.5 V			2.4 V		"			"	"	"	"				"	6	03	"		"	"
		192	"		"			5.5 V		"			2.4 V	"	"	"				"	11		"		"	"
		193	"		"			"		"			5.5 V	"	"	2.4 V				"	14		"		"	"
	I_{IH4}	194	GND		"			"		"			"	"	"	5.5 V					3		"		1	mA
		195	"		"			"		"			"	"	"	"					6	02	"		"	"
		196	"		"			"		"			"	"	"	"					11		"		"	"
		197	"		"			"		"			"	"	"	"					14		"		"	"
		198	24 V		"			"		"			"	"	"	"				K8	3		"		"	"
		199	"		"			"		"			"	"	"	"				"	6	03	"		"	"
		200	"		"			"		"			"	"	"	"				"	11		"		"	"
		201	"		"			"		"			"	"	"	"				"	14		"		"	"
	I_{IH5}	202			GND	2.4 V	5.5 V	"		"	5.5 V		"			GND		24 V		K7	4	01	"		80	µA
		203			5.5 V	5.5 V	2.4 V	GND		"			GND			5.5 V		24 V		K7	5		"		80	"
		204	GND		GND			"		"			"	5.5 V	2.4 V	GND					13	02	"		160	"
		205	24 V		GND			"		"			"	5.5 V	2.4 V	"				K8	13	03	"		160	"
	I_{IH5}	206			GND	5.5 V	5.5 V	5.5 V		"	5.5 V		5.5 V			"		24 V		K7	4	01	"		2	mA
		207			5.5 V	5.5 V	5.5 V	GND		"	5.5 V		GND			5.5 V		24 V		K7	5		"		2	"
		208	GND		GND			"		"			"	5.5 V	5.5 V	GND					13	02	"		4	"
		209	2.4 V		GND			"		"			"	5.5 V	5.5 V	GND				K8	13	03	"		4	"
	I_{IL1}	210			5.5 V	0.4 V	5.5 V	5.5 V		"	5.5 V		5.5 V			5.5 V		24 V		K7	4	01	"		-3.2	"
		211			"	5.5 V	0.4 V	"		"	5.5 V		"			"		24 V		K7	5		"		-3.2	"
	I_{IL2}	212	GND		"			"		"			"	5.5 V	0.4 V	"					13	02	"		-6.4	"
		213	2.4 V		"			"		"			"	5.5 V	0.4 V	"				K8	13	03	"		-6.4	"

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Limits Min	Limits Max	Unit
2 T_A = 125°C	I_{IL3}	214			0.4 V	5.5 V	5.5 V	5.5 V		GND	5.5 V		5.5 V			5.5 V		24 V		K7	3		7		-1.6	mA
		215			5.5 V	"	"	5.5 V		"	"		"			0.4 V		"		"	14	01	"		"	"
		216			"	"	"	0.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		217			"	"	"	5.5 V		"	"		0.4 V			"		"		"	11		"		"	"
		218	GND		0.4 V			"		"			5.5 V	5.5 V	5.5 V	"					3		"		"	"
		219	"		5.5 V			"		"			"	"	"	0.4 V					14	02	"		"	"
		220	"		"			0.4 V		"			"	"	"	5.5 V					6		"		"	"
		221	"		"			5.5 V		"			0.4 V	"	"	"					11		"		"	"
		222	24 V		0.4 V			"		"			5.5 V	"	"	"				K8	3		"		"	"
		223	"		5.5 V			"		"			"	"	"	0.4 V				"	14	03	"		"	"
		224	"		"			0.4 V		"			"	"	"	5.5 V				"	6		"		"	"
		225	"		"			5.5 V		"			0.4 V			5.5 V				"	11		"		"	"
	I_{CC1}	226		GND	5 V	5 V	5 V	5 V		"	5.5 V		5 V			5 V	GND	24 V		K7	9	01	"		22	"
	I_{CC2}	227	GND		5 V			5 V		"			"	5.5 V	5 V	5 V					12	02	"		25	"
	I_{CC3}	228	24 V	GND	5 V			5 V	GND	"		GND	"	5.5 V	5 V	5 V	GND			K8	12	03	"		10	"
	I_{CC4}	229		GND	4.5 V	4.5 V	GND	GND	50 mA	"	5.5 V		"			4.5 V	GND	24 V		K7	9	01	"		70	"
		230		GND	4.5 V	4.5 V	GND	5 V		"	5.5 V	50 mA	GND					"			9		"		70	"
	I_{CC5}	231	GND	50 mA	GND			5 V		"	24 V		5 V	5.5 V	GND	5 V		"			12		"		75	"
		232	"		5 V			GND	50 mA	"	"		5 V	"	"	"		"			"	02	"		"	"
		233	"		"			5 V		"	"	50 mA	GND	"	"	"		"			"		"		"	"
		234	"		"			"		"	"		5 V	"	"	GND	50 mA	"			"		"		"	"
	I_{CC6}	235	24 V	-50 mA	GND			"		"	6 V		"	"	"	5 V		6 V		K8	"		"		12	"
		236	"		5 V			GND	-50 mA	"	"		"	"	"	"		"		"	"	03	"		"	"
		237	"		"			5 V		"	"	-50 mA	GND	"	"	"		"		"	"		"		"	"
		238	"		"			"		"	"		5 V	"	"	GND	-50 mA	"			"		"		"	"
	I_{CC7}	239		GND	"	5 V	5 V	"		"	5.5 V		5 V			5 V	GND	24 V		K7	16	01	"		20	"
		240	24 V	GND	"			"	GND	"		GND	5 V	5.5 V	5 V	5 V	GND			K8	1	03	"		20	"
	I_{CC8}	241	50 mA	GND	GND	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			5 V		24 V		K7	16	01	"		50	"
		242	50 mA		5 V	GND	5.5 V	5.5 V		"	5.5 V		5.5 V			ND	GND	24 V		K7	16		"		50	"
	I_{CC9}	243	24 V	-50 mA	GND			5 V		"	6 V		5 V	5.5 V	GND	5 V		6 V		K8	1		"		55	"
		244	"		5 V			GND	-50 mA	"	"		5 V	"	"	"		"		"	"	03	"		"	"
		245	"		"			5 V		"	"	-50 mA	GND	"	"	"		"		"	"		"		"	"
		246	"		"			5 V		"	"		5 V	"	"	GND	-50 mA	"			"		"		"	"
3 T_A = -55°C	V_{IC}	247		GND	-10 mA	4.5 V	4.5 V	4.5 V		"	4.5 V		4.5 V			5 V	GND	24 V		K7	3		"		-1.7	V
		248		"	4.5 V	"	"	-10 mA		"	"		4.5 V			"	"	"		"	6		"		"	"
		249		"	"	"	"	4.5 V		"	"		-10 mA			"	"	"		"	11	01	"		"	"
		250		"	"	"	"	"		"	"		4.5 V			1 mA	"	"		"	14		"		"	"
		251		"	"	-10 mA	"	"		"	"		"			4.5 V	"	"		"	4		"		"	"
		252		"	"	4.5 V	-10 mA	"		"	"		"			"	"	"		"	5		"		"	"
		253	GND	"	-10 mA	"		"		"	24 V		"	4.5 V	4.5 V	"	"	"		"	3		"		"	"
		256	"	"	4.5 V	"		-10 mA		"	"		"	"	"	"	"	"		"	6	02	"		"	"
		255	"	"	4.5 V	"		4.5 V		"	"		-10 mA	"	"	"	"	"		"	11		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Max	Unit
3 T_A = -55°C	V_{IC}	256	GND		4.5 V	4.5 V		4.5 V		GND	24 V		4.5 V	4.5 V	4.5 V	-10 mA		24 V			14	02	7		-1.7	V
		257	GND		4.5 V	"		"		"	"		"	"	-10 mA	4.5 V		"			13		"		"	"
		258	24 V		-10 mA	"		"		"	"		"	"	4.5 V	"		"			3		"		"	"
		259	"		4.5 V	"		-10 mA		"	"		"	"	"	"		"			6		"		"	"
		260	"		"	"		4.5 V		"	"		-10 mA	"	"	"		"			11	03	"		"	"
		261	"		"	"		"		"	"		4.5 V	"	"	-10 mA		"			14		"		"	"
		262	"		"	"		"		"	"		4.5 V	"	-10 mA	4.5 V		"			13		"		"	"
	I_{OFF}	263	24 V	GND	GND	2 V	4.5 V	4.5 V		"	4.5 V					GND	GND	"		K7	1	01	"		500	uA
		264	"	"	2 V	GND	4.5 V	4.5 V		"	4.5 V					2 V	"	"		K7	1		"		"	"
		265	"	"	GND				GND	"	24 V	GND		4.5 V	2 V	GND	"	"		K8	16		"		"	"
		266	"	"	2 V				"	"	"	"		"	GND	2 V	"	"		"	16	03	"		"	"
		267	"	"				GND	"	"	"	"	GND	"	2 V		"	"		"	9		"		"	"
		268	"	"				2 V	"	"	"	"	2 V	"	GND		"	"		"	9		"		"	"
	V_{OH}	269	"	"	4.5 V	4.5 V	GND	2 V		"	4.5 V		4.5 V			4.5 V	"	"		K7	7		"	19		V
		270	"	"	"	"	2 V	GND		"	"		4.5 V			"	"	"		"	7	01	"	"		"
		271	"	"	"	"	GND	4.5 V		"	"		2 V			"		"		"	10		"	"		"
		272	"	"	"	"	2 V	4.5 V		"	"		GND			"	-	"		"	10		"	"		"
		273	GND		2 V					"	24 V			4.5 V	GND	"		"			2		"	"		"
		274	"		GND					"	"			"	2 V	"		"			2		"	"		"
		275	"		4.5 V					"	"			"	GND	2 V		"			15		"	"		"
		276	"		4.5 V					"	"			"	2 V	GND		"			15	02	"	"		"
		277	"					2 V		"	"		4.5 V	"	GND			"			7		"	"		"
		278	"					GND		"	"		4.5 V	"	2 V			"			7		"	"		"
		279	"					4.5 V		"	"		2 V	"	GND			"			10		"	"		"
		280	"					4.5 V		"	"		GND	"	2 V			"			10		"	"		"
	V_{CESAT1}	281		GND	0.8 V	0.8 V				"	4.5 V					4.5 V	GND	15 V	15 V	K6,K9,K12	1	01	"		0.9	"
		282			4.5 V	0.8 V				"	4.5 V					0.8 V	GND	15 V	15 V	K6,K9,K12	1		"		"	"
		283	24 V	GND				4.5 V	GND	"		GND	0.8 V	4.5 V	0.8 V		-	24 V	24 V	K5,K10,K13	9		"		"	"
		284	"	"				0.8 V	"	"		"	4.5 V	"	"		"	24 V	"	K5,K10,K13	9	03	"		"	"
		285	"	"	4.5 V				"	"	24 V	"		"	"	0.8 V	"		"	K5,K10,K11	16		"		"	"
		286	"	"	0.8 V				"	"	24 V	"		"	"	4.5 V	-		"	K5,K10,K11	16		"		"	"
	V_{CESAT2}	287					0.8 V	4.5 V		"	4.5 V		0.8 V					15 V	15 V	K1,K6,K7	10	01	"		"	"
		288					0.8 V	0.8 V		"	4.5 V		4.5 V					"	15 V	K1,K6,K7	7		"		"	"
		289	GND		0.8 V					"	15 V			4.5 V	0.8 V	4.5 V		"	24 V	K3,K5	2		"		"	"
		290	"					0.8 V		"	"		4.5 V	"	"			"	"	K4,K5	7	02	"		"	"
		291	"					4.5 V		"	"		0.8 V	"	"			"	"	K1,K5	10		"		"	"
		292	"		4.5 V					"	"			"	"	0.8 V		"	"	K2,K5	15		"		"	"
	V_{OC}	293	"	10 mA	"			4.5 V		"	GND		4.5 V	5.5 V	4.5 V	4.5 V		GND			2		"		1.5	"
		294	"		"			"	10 mA	"	"		"	"	"	"		"			7	02	"		"	"
		295	"		"			"		"	"	10 mA	"	"	"	"		"			10		"		"	"
		296	"		"			"		"	"		"	"	"	"	10 mA	"			15		"		"	"
	I_{OC}	297	"		"					"				"	0.8 V	0.8 V	50 mA	24 V			16		"		7	mA
		298	"	50 mA	0.8 V					"				"	"	4.5 V		24 V			16	02	"		"	"
		299	"	"				4.5 V		"	24 V	50 mA	0.8 V	"	"						9		"		"	"
		300	"	"				0.8 V	50 mA	"	24 V		4.5 V	"	"						9		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Max	Unit
3 T_A = -55°C	I_{IH1}	301			2.4 V	GND	5.5 V	5.5 V		GND	5.5 V		5.5 V			5.5 V		24 V		K7	3		7		40	uA
		302			5.5 V	GND	5.5 V	5.5 V		"	"		"			2.4 V		"		"	14	01	"		"	"
		303			"	5.5 V	GND	2.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		304			"	5.5 V	GND	5.5 V		"	"		2.4 V			"		"		"	11		"		"	"
	I_{IH2}	305			"	GND	5.5 V	"		"	"		5.5 V			"		"		"	3		"		1	mA
		306			"	GND	5.5 V	"		"	"		"			"		"		"	14	01	"		"	"
		307			"	5.5 V	GND	"		"	"		"			"		"		"	6		"		"	"
		308			"	5.5 V	GND	"		"	"		"			"		"		"	11		"		"	"
	I_{IH3}	309	GND		2.4 V			"		"			"	5.5 V	GND	"					3		"		40	uA
		310	"		5.5 V			2.4 V		"			5.5 V	"	"	"					6	02	"		"	"
		311	"		5.5 V			5.5 V		"			2.4 V	"	"	"					11		"		"	"
		312	"		5.5 V			5.5 V		"			5.5 V	"	"	2.4 V					14		"		"	"
		313	24 V		2.4 V			5.5 V		"			"	"	"	5.5 V				K8	3		"		"	"
		314	"		5.5 V			2.4 V		"			"	"	"	"				"	6	03	"		"	"
		315	"		"			5.5 V		"			2.4 V	"	"	"				"	11		"		"	"
		316	"		"			"		"			5.5 V	"	"	2.4 V				"	14		"		"	"
	I_{IH4}	317	GND		"			"		"			"	"	"	5.5 V					3		"		1	mA
		318	"		"			"		"			"	"	"	"					6	02	"		"	"
		319	"		"			"		"			"	"	"	"					11		"		"	"
		320	"		"			"		"			"	"	"	"					14		"		"	"
		321	24 V		"			"		"			"	"	"	"				K8	3		"		"	"
		322	"		"			"		"			"	"	"	"				"	6	03	"		"	"
		323	"		"			"		"			"	"	"	"				"	11		"		"	"
		324	"		"			"		"			"	"	"	"				"	14		"		"	"
	I_{IH5}	325			GND	2.4 V	5.5 V	"		"	5.5 V		"			GND		24 V		K7	4	01	"		80	uA
		326			5.5 V	5.5 V	2.4 V	GND		"	"		GND			5.5 V		24 V		K7	5		"		80	"
		327	GND		GND			"		"	"		"	5.5 V	2.4 V	GND					13	02	"		160	"
		328	24 V		GND			"		"	"		"	5.5 V	2.4 V	"				K8	13	03	"		160	"
	I_{IH6}	329			GND	5.5 V	5.5 V	5.5 V		"	5.5 V		5.5 V			"		24 V		K7	4	01	"		2	mA
		330			5.5 V	5.5 V	5.5 V	GND		"	5.5 V		GND			5.5 V		24 V		K7	5		"		2	"
		331	GND		GND			"		"	"		"	5.5 V	5.5 V	GND					13	02	"		4	"
		332	2.4 V		GND			"		"	"		"	5.5 V	5.5 V	GND				K8	13	03	"		4	"
	I_{IL1}	333			5.5 V	0.4 V	5.5 V	5.5 V		"	5.5 V		5.5 V			5.5 V		24 V		K7	4	01	"		-3.2	"
		334			"	5.5 V	0.4 V	"		"	5.5 V		"			"		24 V		K7	5		"		-3.2	"
	I_{IL2}	335	GND		"			"		"			"	5.5 V	0.4 V	"					13	02	"		-6.4	"
		336	2.4 V		"			"		"			"	5.5 V	0.4 V	"				K8	13	03	"		-6.4	"
	I_{IL3}	337			0.4 V	5.5 V	5.5 V	"		"	5.5 V		"			"		24 V		K7	3		"		-1.6	"
		338			5.5 V	"	"	"		"	"		"			0.4 V		"		"	14	01	"		"	"
		339			"	"	"	0.4 V		"	"		"			5.5 V		"		"	6		"		"	"
		340			"	"	"	5.5 V		"	"		0.4 V			"		"		"	11		"		"	"
		341	GND		0.4 V			"		"			5.5 V	5.5 V	5.5 V	"					3		"		"	"
		342	"		5.5 V			"		"			"	"	"	0.4 V					14	02	"		"	"
		343	"		"			0.4 V		"			"	"	"	5.5 V					6		"		"	"
		344	"		"			5.5 V		"			0.4 V	"	"	"					11		"		"	"
		345	24 V		0.4 V			"		"			5.5 V	"	"	"				K8	3		"		"	"
		346	"		5.5 V			"		"			"	"	"	0.4 V				"	14	03	"		"	"
		347	"		"			0.4 V		"			"	"	"	5.5 V				"	6		"		"	"
		348	"		"			5.5 V		"			0.4 V	"	"	5.5 V				"	11		"		"	"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open)																	Relays energized	Measured termina)	Device	Test figure	Limits		Unit
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17					Min	Max	
3 T_A = -55°C	I_{CC1}	349		GND	5 V	5 V	5 V	5 V		GND	5.5 V		5 V			5 V	GND	24 V		K7	9	01	7		22	mA
	I_{CC2}	350	GND		5 V			5 V		"			"	5.5 V	5 V	5 V					12	02	"		25	"
	I_{CC3}	351	24 V	GND	5 V			5 V	GND	"		GND	"	5.5 V	5 V	5 V	GND			K8	12	03	"		10	"
	I_{CC4}	352 353		GND GND	4.5 V 4.5 V	4.5 V 4.5 V	GND GND	GND 5 V	50 mA	" "	5.5 V 5.5 V	50 mA	" GND			4.5 V	GND	24 V "		K7	9 9	01	" "		70 70	" "
	I_{CC5}	354 355 356 357	GND " " "	50 mA	GND 5 V " "			5 V GND 5 V "	50 mA	" " " "	24 V " " "	50 mA	5 V 5 V GND 5 V	5.5 V " " "	GND " " "	5 V " " GND	50 mA	" " " "			12 " " "	02	" " " "		75 " " "	" " " "
	I_{CC6}	358 359 360 361	24 V " " "	-50 mA	GND 5 V " "			" GND 5 V "	-50 mA	" " " "	6 V " " "	-50 mA	" " GND 5 V	" " " "	" " " "	5 V " " GND	-50 mA	6 V " " "		K8 " " "	" " " "	03	" " " "		12 " " "	" " " "
	I_{CC7}	362 363	24 V	GND GND	" "	5 V	5 V	" "	GND	" "	5.5 V	GND	" "	5.5 V	5 V	5 V 5 V	GND GND	24 V		K7 K8	16 1	01 03	" "		20 20	" "
	I_{CC8}	364 365	50 mA 50 mA	GND	GND 5 V	GND GND	5.5 V 5.5 V	5.5 V 5.5 V		" "	5.5 V 5.5 V		5.5 V 5.5 V			5 V GND	GND	24 V 24 V		K7 K7	16 16	01	" "		50 50	" "
	I_{CC9}	366 367 368 369	24 V " " "	-50 mA	GND 5 V 5 V 5 V			5 V GND 5 V 5 V	-50 mA	" " " "	6 V	-50 mA	5 V 5 V GND 5 V	5.5 V " " "	GND " " "	5 V " " GND	-50 mA	6 V " " "		K8 " " "	1 " " "	03	" " " "		55 " " "	" " " "
9 T_A = 25°C	t_{PLH1}	370 371 372 373 374 375	B B 15 V " " "	GND " " " " "	A 5 V " " A 5 V	A A R1 " " "	5 V 5 V	5 V 5 V A 5 V " "	D D GND " " "	" " " " " "	5 V 5 V D D	C C GND " " "	5 V " " A 5 V	5 V " " "	R1 R1 A " " "	5 V A 5 V " " A	GND " " " " "	15 V 15 V " " E E			" " 9 9 16 16	01 03	8 " " " " "		50 " " " " "	ns " " " " "
	t_{PLH2}	376 377 378 379 380 381	B B GND " " "	" " B " " "	5 V 5 V A 5 V " "	5 V 5 V	A A	A 5 V 5 V A 5 V "	C C C	" " " " " "	5 V 5 V 15 V " " "	D D D	" A 5 V 5 V A 5 V	5 V " " "	R1 R1 A " " "	5 V " " " " A	GND GND E	15 V " " " " "			7 10 2 7 10 15	01 02	" " " " " "		45 " " " " "	" " " " " "
	t_{PHL1}	382 383 384 385 386 387	B B 15 V " " "	GND " " " " "	A 5 V " " A 5 V	A A R1 " " "	5 V 5 V	" " A 5 V " "	D D GND " " "	" " " " " "	5 V 5 V D D	C C GND " " "	" " " A 5 V 5 V	5 V " " "	R1 R1 A " " "	5 V A 5 V " " A	GND " " " " "	" E E			1 1 9 9 16 16	01 03	" " " " " "		50 " " " " "	" " " " " "

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Test limits Max	Unit
9 T_A = 25°C	t_{PHL2}	388	B	GND	5 V	5 V	A	A	C	GND	5 V	D	5 V		R1	5 V	GND	15 V			7	01	8		30	ns
		389	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		390	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		391	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		392	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		393	"		"			5 V		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_{TLH1}	394	20 V	E	A	A	5 V	5 V		"	5 V		"		R1	5 V	F	20 V			2	01	"		30	"
		395	"	E	5 V	A				"	5 V		"		R1	A	F	"			15		"		30	"
	t_{TLH2}	396	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		15	"
		397	"		5 V	"		A	G	"	"		"	"	"	"		"			7	03	"		"	"
		398	"		"	"		5 V		"	"	H	A	"	"	"		"			10		"		"	"
		399	"		"	"		5 V		"	"		5 V	"	"	A	J	"			15		"		"	"
	t_{TLH3}	400	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		15	"
		401	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		402	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		403	"		5 V	"		A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		404	"		"	"		5 V		"	"	D	A	"	"	"		"			10		"		"	"
		405	"		"	"		5 V		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_{THL1}	406	20 V	E	A	A	5 V	5 V		"	5 V		"		R1	5 V	F	20 V			2	01	"		25	"
		407	"	E	5 V	A				"	5 V		"		R1	A	F	"			15		"		25	"
	t_{THL2}	408	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		18	"
		409	"		5 V	"		A	G	"	"		"	"	"	"		"			7	03	"		"	"
		410	"		"	"		5 V		"	"	H	A	"	"	"		"			10		"		"	"
		411	"		"	"		5 V		"	"		5 V	"	"	A	J	"			15		"		"	"
	t_{THL3}	412	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		15	"
		413	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		414	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		415	"		5 V	"		A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		416	"		"	"		5 V		"	"	D	A	"	"	"		"			10		"		"	"
		417	"		"	"		5 V		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_s	418	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	"			7	01	"		35	"
		419	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		420	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		421	"		5 V	"		A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		422	"		"	"		5 V		"	"	D	A	"	"	"		"			10		"		"	"
		423	"		"	"		5 V		"	"		5 V	"	"	A	B	"			15		"		"	"
	V_{OH}	424	"	B	A			5 V	C	"	24 V		"	"	GND	5 V		24 V			2	02	"	V_S		V
		425	"		5 V			A		"	"	D	A	"	"	"	E	"			7		"	-0.25		"
		426	"		"			5 V		"	"		5 V	"	"	A		"			10		"			"
		427	"		"			"		"	"		"	"	"	"		"			15		"			"
		428	24 V	GND	A	R1		"	GND	"	"	GND	"	"	"	5 V	GND	B			16	03	"			"
		429	"	"	5 V	"		"	"	"	"	"	"	"	"	A	"	B			16		"			"
		430	"	"	"	"		A	"	"	C	"	"	"	"	5 V	"				9		"			"
		431	"	"	"	"		5 V		"	C		A			5 V					9		"			"

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Max	Unit
10 T_A = 125°C	t_{PLH1}	432	B	GND	A	A	5 V	5 V	D	GND	5 V	C	5 V		R1	5 V	GND	15 V			1	01	B		90	ns
		433	B	"	5 V	A	5 V	5 V	D	"	5 V	C	"		R1	A	"	15 V			1		"		"	"
		434	15 V	"	"	R1		A	GND	"	D	GND	"	5 V	A	5 V	"				9		"		"	"
		435	"	"	"			5 V	"	"	D	"	A	"	"	"	"				9	03	"		"	"
		436	"	"	A			"	"	"		"	5 V	"	"	"	"	E			16		"		"	"
		437	"	"	5 V			"	"	"		"	5 V	"	"	A	"	E			16		"		"	"
	t_{PLH2}	438	B	GND	5 V	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		65	"
		439	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		440	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		441	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		442	"		"			5 V		"		D	A	"	"	"		"			10		"		"	"
		443	"		"			"		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_{PHL1}	444	B	GND	A	A	5 V		D	"	5 V	C	"		R1	5 V	GND	"			1	01	"		"	"
		445	B	"	5 V	A	5 V		D	"	5 V	C	"		R1	A	"				1		"		"	"
		446	15 V	"	"	R1		A	GND	"	D	GND	"	5 V	A	5 V	"				9		"		"	"
		447	"	"	"			5 V	"	"	0	"	A	"	"	"	"				9	03	"		"	"
		448	"	"	A			"	"	"		"	5 V	"	"	"	"	E			16		"		"	"
		449	"	"	5 V			"	"	"		"	"	"	"	A	"	E			16		"		"	"
	t_{PHL2}	450	B	GND	5 V	5 V	A	A	C	"	5 V	D	"		R1	5 V	GND	15 V			7	01	"		45	"
		451	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		452	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		453	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		454	"		"			5 V		"		D	A	"	"	"		"			10		"		"	"
		455	"		"			5 V		"			5 V	"	"	A	E	"			15		"		"	"
	t_{TLH1}	456	20 V	E	A	A	5 V	5 V		"			"		R1	5 V	F	20 V			2	01	"		45	"
		457	"	E	5 V	A				"			"		R1	A	F	"			15		"		45	"
	t_{TLH2}	458	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		20	"
		459	"		5 V	"		A	G	"	"		"	"	"	"		"			7	03	"		"	"
		460	"		"	"		5 V		"	"	H	A	"	"	"		"			10		"		"	"
		461	"		"	"		5 V		"	"		5 V	"	"	A	J	"			15		"		"	"
	t_{TLH3}	462	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		20	"
		463	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		464	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		465	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		466	"		"			5 V		"		0	A	"	"	"		"			10		"		"	"
		467	"		"			5 V		"			5 V	"	"	A	E	"			15		"		"	"
	t_{THL1}	468	20 V	E	A	A	5 V	5 V		"	5 V		"		R1	5 V	F	20 V			2	01	"		27	"
		469	"	E	5 V	A				"	5 V		"		R1	A	F	"			15		"		27	"
	t_{THL2}	470	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		20	"
		471	"		5 V			A	G	"	"		"	"	"	"		"			7	03	"		"	"
		472	"		"			5 V		"	"	H	A	"	"	"		"			10		"		"	"
		473	"		"			5 V		"			5 V	"	"	A	J	"			15		"		"	"

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Max	Unit
10 T_A = 125°C	t_{THL3}	474	B	GND	5 V	5 V	A	A	C	GND	5 V	D	5 V		R1	5 V	GND	15 V			7	01	8		20	ns
		475	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10				"	"
		476	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2				"	"
		477	"		5 V			A	C	"	"			"	"	"		"			7	02	"		"	"
		478	"		"			5 V		"	"	D	A	"	"	"		"			10				"	"
		479	"		"			5 V		"	"		5 V	"	"	A	E	"			15				"	"
	t_s	480	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	"			7	01	"		55	"
		481	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		482	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		483	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		484	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		485	"		"			"		"	"		5 V	"	"	A	E	"			15		"		"	"
	V_{OH}	486	"	B	A			"	C		24 V		"	"	GND	5 V		24 V			2	02	"	V_S -0.25		V
		487	"		5 V			A			"		"	"	"	"		"			7		"			"
		488	"		5 V			5 V			"	D	A	"	"	"		"			10		"			"
		489	"		5 V			"			"		5 V	"	"	A	E	"			15		"			"
		490	24 V	GND	A	R1		"	GND			GND	"	"	"	5 V	GND	B			16		"			"
		491	"	"	5 V	"		"	"			"	"	"	"	A	"	B			16	03	"			"
		492	"	"	"	"		A	"		C	"	"	"	"	5 V	"				9		"			"
		493	"	"	"	"		5 V	"		C		A	"	"	"	"				9		"			"
11 T_A = -55°C	t_{PLH1}	494	B	"	A	A	5 V	5 V	D	"	5 V	C	5 V		R1	"	GND	15 V			1	01	"		90	ns
		495	B	"	5 V	A	5 V	5 V	D	"	5 V	C	"		R1	A	"	15 V			1		"		"	"
		496	15 V	"	"	R1		A	GND	"	D	GND	"	5 V	A	5 V	"	"			9		"		"	"
		497	"	"	"	"		5 V	"	"	D	"	A	"	"	"	"	"			9	03	"		"	"
		498	"	"	A	"		"	"	"		"	5 V	"	"	"	"	E			16		"		"	"
		499	"	"	5 V	"		"	"	"		"	"	"	"	A	"	E			16		"		"	"
	t_{PLH2}	500	B	GND	5 V	5 V	A	A	C	"	5 V	D	"		R1	5 V	GND	15 V			7	01	"		65	"
		501	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		502	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		503	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		504	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		505	"		"			"		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_{PHL1}	506	B	GND	A	A	5 V	"	D	"	5 V	C	"		R1	5 V	GND	"			1	01	"		"	"
		507	B	"	5 V	A	5 V	"	D	"	5 V	C	"		R1	A	"				1		"		"	"
		508	15 V	"	"	R1		A	GND	"	D	GND	"	5 V	A	5 V	"	"			9		"		"	"
		509	"	"	"			5 V	"	"	D	"	A	"	"	"	"	"			9	03	"		"	"
		510	"	"	A			"	"	"		"	5 V	"	"	"	"	E			16		"		"	"
		511	"	"	5 V			"	"	"		"	"	"	"	A	"	E			16		"		"	"
	t_{PHL2}	512	B	GND	5 V	5 V	A	A	C	"	5 V	D	"		R1	5 V	GND	15 V			7	01	"		45	"
		513	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		514	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		515	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		516	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		517	"		"			5 V		"	"		5 V	"	"	A	E	"			15		"		"	"

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:31Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection - Continued.

Subgroup	Symbol	Test no.	Test conditions (undesignated terminals are open) 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Relays energized	Measured terminal	Device	Test figure	Test limits Min	Max	Unit
11 T_A = -55°C	t_{TLH1}	518	20 V	E	A	A	5 V	5 V		GND	5 V		5 V		R1	5 V	F	20 V			2	01	B		45	ns
		519	"	E	5 V	A				"	5 V		"		R1	A	F	"			15		"		45	"
	t_{TLH2}	520	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		20	"
		521	"		5 V	"		A	G	"	"		"	"	"	"		"			7	03	"		"	"
		522	"		"	"		5 V		"	"	H	A	"	"	"		"			10		"		"	"
		523	"		"	"		5 V		"	"		5 V	"	"	A	J	"			15		"		"	"
	t_{TLH3}	524	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		20	"
		525	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		526	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		527	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		528	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		529	"		"			5 V		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_{THL1}	530	20 V	E	A	A	5 V	5 V		"	5 V		5 V		R1	5 V	F	20 V			2	01	"		27	"
		531	"	E	5 V	A				"	5 V		"		R1	A	F	"			15		"		27	"
	t_{THL2}	532	"	F	A	R1		5 V		"	20 V		"	5 V	A	5 V		"			2		"		20	"
		533	"		5 V			A	G	"	"		"	"	"	"		"			7	03	"		"	"
		534	"		"			5 V		"	"	H	A	"	"	"		"			10		"		"	"
		535	"		"			5 V		"	"		5 V	"	"	A	J	"			15		"		"	"
	t_{THL3}	536	B	GND	5 V	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	15 V			7	01	"		20	"
		537	B	GND	5 V	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		538	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		539	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		540	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		541	"		"			5 V		"	"		5 V	"	"	A	E	"			15		"		"	"
	t_s	542	B	GND	"	5 V	A	A	C	"	5 V	D	5 V		R1	5 V	GND	"			7	01	"		55	"
		543	B	GND	"	5 V	A	5 V	C	"	5 V	D	A		R1	"	GND	"			10		"		"	"
		544	GND	B	A			5 V		"	15 V		5 V	5 V	A	"		"			2		"		"	"
		545	"		5 V			A	C	"	"		5 V	"	"	"		"			7	02	"		"	"
		546	"		"			5 V		"	"	D	A	"	"	"		"			10		"		"	"
		547	"		"			"		"	"		5 V	"	"	A	E	"			15		"		"	"
	V_{OH}	548	"	B	A			"		"	24 V		"	"	GND	5 V		24 V			2		"	V_S		V
		549	"		5 V			A	C	"	"		"	"	"	"		"			7	02	"	-0.25		"
		550	"		"			5 V		"	"	D	A	"	"	"		"			10		"			"
		551	"		"			"		"	"		5 V	"	"	A	E	"			15		"			"
		552	24 V	GND	A	R1		"	GND	"	"	GND	"	"	"	5 V	GND	B			16		"			"
		553	"	"	5 V	"		"	"	"	"	"	"	"	"	A	"	B			16	03	"			"
		554	"	"	"	"		A	"	"	C	"	"	"	"	5 V	"				9		"			"
		555	"	"	"	"		5 V	"	"	C	"	A	"	"	5 V	"				9		"			"

Source: https://assist.dla.mil -- Downloaded: 202640-21T13:31Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in tests (method 1015 of MIL-STD-883).

1. For class S devices, dynamic tests (test condition D or E) using the circuit shown on figure 4; test duration shall be 240 hours minimum. Static tests (test condition A) using the circuit shown on figure 5; test duration shall be 48 hours minimum.

2. For class B devices, test condition A, using the circuit shown on figure 5; or test condition D, using the circuit shown on figure 4; or test condition F, using the circuit shown on figure 6.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) for class S and class B devices shall be as specified in MIL-M-38510, based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883 and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1 after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein. For class S devices, delta limits shall apply only to subgroup 5 of group B inspection.

b. Steady state life test for class S devices shall be in accordance with table IIa of method 5005 of MIL-STD-883, using the circuit shown on figure 5. If the alternate burn-in conditions are used, the circuit shown on figure 4 shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. For class B devices: Subgroup 1 end points shall consist of group A, subgroup 1 tests as specified in table III herein, and delta limits as specified in table IV herein. Subgroup 2 end points shall consist of group A, subgroups 1, 2, and 3 tests as specified in table III herein.

b. Steady state life test (method 1005 of MIL-STD-883) conditions, or equivalent:

1. Test condition A, using the circuit shown on figure 5; or test conditions D, using the circuit shown on figure 4; or test condition F, using the circuit shown on figure 6.

2. T_A = 125°C minimum.

3. Test duration: 1000 hours, except as permitted by appendix B of MIL-M-38510 and method 1005 of MIL-STD-883.

c. Special subgroups shall be added to the group C inspection requirements for class B devices, and shall consist of the tests, conditions, and limits of subgroups 10 and 11 as specified in table III herein.

TABLE IV. Group C end-point electrical parameters
T_A = 25°C

Test	Device 01, 03 limits		Device 02 limits		Delta		Unit
	Min	Max	Min	Max	Min	Max	
I_{OFF}	-	500	-	-	-50	50	µA
I_{OC}	-	-	-	700	-70	70	µA

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables. Electrical test circuits as prescribed herein or in the referenced test methods of MIL-STD-883 shall be acceptable. Other test circuits shall require the approval of the qualifying activity.

4.5.1 Voltage and current. All voltage values given are referenced to pin 3 ground terminal of the device under test (DUT). Current values given are for conventional current and are positive when flowing into the referenced terminal.

4.5.2 Burn-in and life test cooldown procedures. When these tests are completed and prior to removal of bias voltages, the devices under test (DUT) shall be cooled to within 10°C of their power stable condition, and the electrical parameter end-point measurements shall then be performed. Alternatively, the bias may be removed during cooling if the case temperature is reduced to 35°C maximum within 30 minutes after removal of the test conditions, and the electrical parameter end-point measurements shall then be performed.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

6.2 *Ordering data*. *The acquisition document should specify the following:*

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. *Requirements for certificate of compliance, if applicable.*

d. Requirements for notification of change of product to the procuring activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

V_{IC}	Input clamp voltage.
I_{OFF}	Collector off-state current.
I_{IL}	Low level input current (with V_{IN} = .4)
I_{CCH}	High level supply current. This is the supply current with the output high.
I_{CCL}	Low level supply current. This is the supply current with the output low.
V_{OL}	Low level output voltage. This at rated load for the TTL gates.
I_{OH}	High level output current.
V_{OH}	High level output voltage, TTL gate.
I_{OS}	Short-circuit output current TTL gate.
V_{OC}	Output clamp diode forward voltage.
I_{OC}	Output clamp current (one output on).
t_s	Storage time.
t_{PLH}	Propagation delay time (low to high level output transition).
t_{PHL}	Propagation delay time (high to low level output transition).
t_{TLH}	Transition time (low to high level output transition).
t_{THL}	Transition time (high to low level output transition).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

6.4 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification shall functionally replace the generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variation in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	55325
02	55326
03	55327

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - MI, AR
Air Force - 11, 19, 85, 99
DLA - ES
Navy - OS, SH

User activities:
Army - SM
Navy - AS, CG, MC,

Civil agencies coordinating activities:
NASA - NA

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-0788)

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 605-036/41129

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:31Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

Rome Air Development Center
Griffiss AFB NY 13441

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/130B	Microcircuits, Monolithic Silicon, Bipolar, Interface, Memory Core Drivers

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-21T13:31Z
Check the source to verify that this is the current version before use.