MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE (NEGATIVE GRID)

TYPE 8533W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode, planar ceramic-metal
See figure 1
Mounting position: Any
Weight: 2.5 ounces (71 grams) nominal

ABSOLUTE RATINGS:

Parameter: / Unit:	F GHz	Ef V (Note 1)	Eb kVdc	epy kv	Ec Vdc	Ib mAdc	ib a (Note 2)	ic a	tp µs
Maximum:									
Anode pulsed osc or amp:	3.0	6.3 ±5%	---	10.0	-150	---	5.0	2.5	3.5
Grid pulsed osc or amp:	3.0	6.3 ±5%	8.0	---	-150	---	5.0	2.5	---
TEST CONDITIONS:	---	6.3	1.0	---	Adj	100	---	---	---

ABSOLUTE RATINGS:

Parameter: / Unit:	Du ---	Pp W	Pq W (Note 3)	tk sec (min)	TE °C (Note 4)	T (anode shank) °C (Note 4)	Cooling --- (Notes 4,5)	(A) Barometric pressure, reduced mmHg (Note 19)
Maximum:								
Anode pulsed osc or amp:	0.0025	100	1.5	60	250	250	---	35
Grid pulsed osc or amp:	---	100	1.5	60	250	250	---	35
TEST CONDITIONS:	---	---	---	300	---	---	(Note 6)	---

GENERAL:

Qualification - Required

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1								
1301	Heater current	-		0.65	II	If	1.2	1.4	A
1261	Electrode voltage (1) (grid)	9		0.65	II	Ec	-2.0	-7.0	Vdc
1211	Insulation of electrodes	-	Eb = Ek = 0; Ec = -500 Vdc	0.65	II	R	50	---	Meg
1266	Total grid current	7,9		0.65	II	Ic	---	-8.0	µAdc
1231	Pulsing emission	-	eb = ec = etd/is = 10.0a; tp = 3 µs (max); prr = 600 (max)	0.65	II	etd	---	200	v
(A)---	High-voltage hold off	8	Eb = 10.0 kVdc; Ec = -150 Vdc;	0.65	II	Ib	---	1.0	mAdc
	Quality conformance inspection, part 2								
1261	Electrode voltage (2) (grid)	-	Ec/Ib = 1.0 mAdc	---	---	Eco	---	-30.0	Vdc
---	Power gain	10,11	F = 1,100 ±50 MHz; Ebb = 3.0 kVdc (min); Ecc = -40 Vdc; tp = 3 µs (min); Du = 0.002 (min); pd = 400w	---	---	G	7.0	---	dB
1331	Direct-interelectrode capacitance	10	No voltages applied; use fixture per Drawing 158-JAN	---	---	Cin Cgp Cout	7.0 1.5 ---	9.0 1.8 0.05	pF pF pF
---	Resonance	10,12	No voltages applied	---	---	---	---	---	---
	Quality conformance inspection, part 3								
(A)---	Life test	18	Group C; filament standby; t = 500 hrs	---	---	---	---	---	---
---	Life-test end point	18		---	---	Δ1b	---	25	%
---	Variable-frequency vibration	10,13 14	F = 55 to 500 Hz; accel = 10 G (peak); Ebb = 400 Vdc; Rp = 10,000 ohms; Ec/Ib= 10 mAdc	---	---	Ep	---	250	mVac
---	Torque	10,13 15	No voltages applied	---	---	---	---	---	---
1042	Shock	13,16	Condition A; no voltages applied	---	---	---	---	---	---
---	Torque and shock-test end point:								
1266	Total grid current	-		---	---	Ic	---	-10	µAdc
1002	Barometric pressure, reduced	13,17	Pressure = 35 mmHg (max); voltage = 1,800 Vac; TA = 30° ±10°C	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.

NOTES:

1. The transit-time heating effect of the cathode may require compensation by a reduction in heater voltage after dynamic operation of the tube has started. The back heating is a function of frequency, grid current, grid bias, anode current, duty cycle, and circuit design and adjustment. There is an optimum heater voltage which will maintain the cathode at the correct operating temperature for a particular set of operating conditions. A maximum variation of ±5 percent from optimum is permitted. No reduction in heater voltage is required up to and including 500 MHz.

2. The regulation or series-anode-supply impedance, or both, shall limit the instantaneous peak current, with the tube considered as a short circuit, to a maximum of 10 times the specified maximum current rating.

3. The maximum instantaneous peak grid voltage CW ratings shall be within the range of +30 to -400 volts. The maximum instantaneous peak grid voltage for grid-pulse conditions shall be within the range of +250 to -750 volts.

4. Sufficient conduction, convection, and forced-air cooling shall be provided to limit the envelope and anode shank temperatures to the specified value under all operating conditions. Reliability will be seriously impaired if the maximum is exceeded. Where emphasis is placed on long and reliable life, lower temperatures should be used.

5. At an anode dissipation of 100 watts and with an incoming air temperature of 25°C maximum at sea level, a minimum airflow of 12.5 cfm (unless otherwise specified) shall be directed across the anode cooler, using the cowl as shown on Drawing 157-JAN.

6. Sufficient conduction, convection, and forced-air cooling may be used in all electrical tests involving application of heater voltage to maintain the anode shank and seal temperatures within the specified maximum value.

7. This test is to be the first test performed at the conclusion of the holding period.

(A) 8. After heater warmup, the anode voltage shall be raised slowly to 10 kVdc. Intermittent arcing may occur as the anode voltage is increased, but more than 5 arcs shall be cause for rejection. The voltage shall be held at the 10 kVdc level for 60 seconds; if any arcs occur during this time, or Ib exceeds the specified limit of 1.0 mAdc, the tube shall be rejected.

9. Airflow through the anode radiator shall be between 3.5 and 4.0 cfm with the cowl as shown on Drawing 157-JAN. The grid current shall be measured not less than 5 minutes after the anode dissipation has been set at 100 watts.

10. Other tube contact configurations may be used provided the tube contact area remains unchanged and the socket, jig, or cavity gives equal performance. Mounting of the socket, jig, or cavity may be at the option of the manufacturer.

11. Test to be conducted in power amplifier cavity as shown on Fidelitone Microwave Inc., Drawing JVM-D8819, or equivalent. Driving power is defined as the net power delivered to the amplifier cavity input terminals and the reflected power shall be subtracted from the incident power to obtain the net driving power. The output tuning shall be adjusted for maximum power output.

12. Grid-anode resonance: Test in cavity in accordance with Drawing 278-JAN. Cavity shall resonant at 1,354 ±2.0 MHz with tuning slug in accordance with Drawing 277-JAN at TA = 25° ±5°C.

    Grid-cathode resonance: Test in cavity in accordance with Drawing 283-JAN. Cavity shall resonate at 1,719 ±2.0 MHz with tuning slug in accordance with Drawing 277-JAN at TA = 25° ±5°C.

    When plotted on graphs of resonant frequency versus grid-anode capacitance and resonant frequency versus grid-cathode capacitance, the tube under test shall be represented by a point within the parallelogram whose four corners are located by the following points:

Points	Capacitance (pF)		Frequency (MHz)	
	Cgp	Cgk	Fgp	Fgk
1	1.5	7.0	2,115	1,765
2	1.5	7.0	2,145	1,795
3	1.8	9.0	2,040	1,725
4	1.8	9.0	2,070	1,755

(A) 13. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted. None of the testing shall be considered as destructive except in case of failure.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:25Z
Check the source to verify that this is the currentversion before use.

NOTES:

14. The tube shall be mounted in a socket in accordance with Drawing 276-JAN and vibrated with simple harmonic motion. The peak acceleration over the frequency range shall be within ±20 percent of reference acceleration at 100 Hz. The frequency shall vary from 55 to 500 Hz and return to 55 Hz with approximately logarithmic progression and shall require 4 minutes minimum, 6 minutes maximum to traverse the range. Each tube shall be vibrated for 30 minutes in each position X and Z except that if the cumulative results of tests on 50 or more tubes of a construction show that more than 75 percent of the tubes have higher output voltages in one position, subsequent measurements need to be taken only in the position giving the higher readings. The voltages specified herein shall be applied to the tube during vibration. The value of the alternating voltage, Ep, produced across the resistor, Rp, as a result of vibration, shall be measured with a suitable device. This device shall have an appropriate voltage range, and shall have the ability to measure, with an error of less than 10 percent, the rms value of a sine wave of voltage at all frequencies from 20 to 20,000 Hz. The value of the vibrational output, Ep, shall not exceed the limit specified herein at any point in the sweep-frequency range during the last complete cycle of the cycling vibration.

15. The torque test shall be performed as follows:

    (a) The tube shall be held securely at the cathode connection. A force of 5 pounds shall be applied to the heater cup without perceptible shock. This test may be made by applying the force at right angles to the inside of the cup at a point 7/64 (2.77 mm) ±1/64 (0.41 mm) inch from the cathode end of the tube. An approved equivalent method may be used. The heater cup shall not loosen or short circuit to the cathode connection.
    (b) A torque of 15-inch pounds shall be applied between anode and cathode without shock.
    (c) A torque of 40-inch pounds shall be applied between anode and grid without shock.
    (d) A torque of 30-inch pounds shall be applied, both clockwise and counter-clockwise, between the anode cooler and the anode contact surface, with no resulting loosening of the cooler or damage to the tube.

16. Test in jig made in accordance with Drawing 280-JAN.

17. Voltage to be 60 Hz ac applied between the anode and grid. No other voltages shall be applied. There shall be no evidence of failure as indicated by arc-over.

18. At zero hours, establish the drive conditions necessary to obtain 3.0 amperes peak anode current with an anode voltage of 2,000 Vdc and a bias voltage of -40 Vdc. The pulse width of the modulator shall be 2 µs minimum and the duty cycle shall be 0.0025 maximum. With the drive level determined at zero hours, check the anode current at the end of life. The maximum allowable drop in anode current (Δib) is as specified.

19. Operation at this altitude is possible in a suitably designed circuit.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 17
DSA - ES

User activities:
Army - MU, WC
Navy - AS, OS, MC, CG
Air Force - 11

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-3091)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	1.815(46.10)	1.875(47.63)
B		1.534(38.96)
C		1.475(37.47)
D	1.289(32.74)	1.329(33.76)
F	.970(24.64)	1.010(25.65)
G	.462(11.73)	.477(12.12)
J	.766(19.46)	.826(20.98)
N	1.025(26.04)	1.035(26.29)
R	.855(18.54)	.865(18.89)
T	.213 (5.41)	.223 (5.66)
U	.315 (8.00)	.325 (8.26)
Z	1.120(28.45)	1.130(28.70)
Quality conformance inspection, part 3 (see note b) Ⓐ		
E	.125 (3.18)	.185 (4.70)
H		.040 (1.02)
K	.025 (.64)	.046 (1.17)
L	1.234(31.34)	1.264(32.11)
M	1.180(29.97)	1.195(30.35)
P	.772(19.61)	.792(20.12)
Q	.650(16.51)	.850(21.59)
S		.545(13.84)
V		.086 (2.18)
W		.100 (2.54)RAD
X		.035 (.89)RAD
Y	.105 (2.67)	.145 (3.68)
AE	.420 (10.67)	
Electrode contact areas-see note n		
AA	.035 (.89)	.361 (9.17)
AB	1.185(30.10)	1.265(32.13)
AC	1.534(38.96)	1.728(43.89)
AD	1.475(37.47)	1.815(46.10)

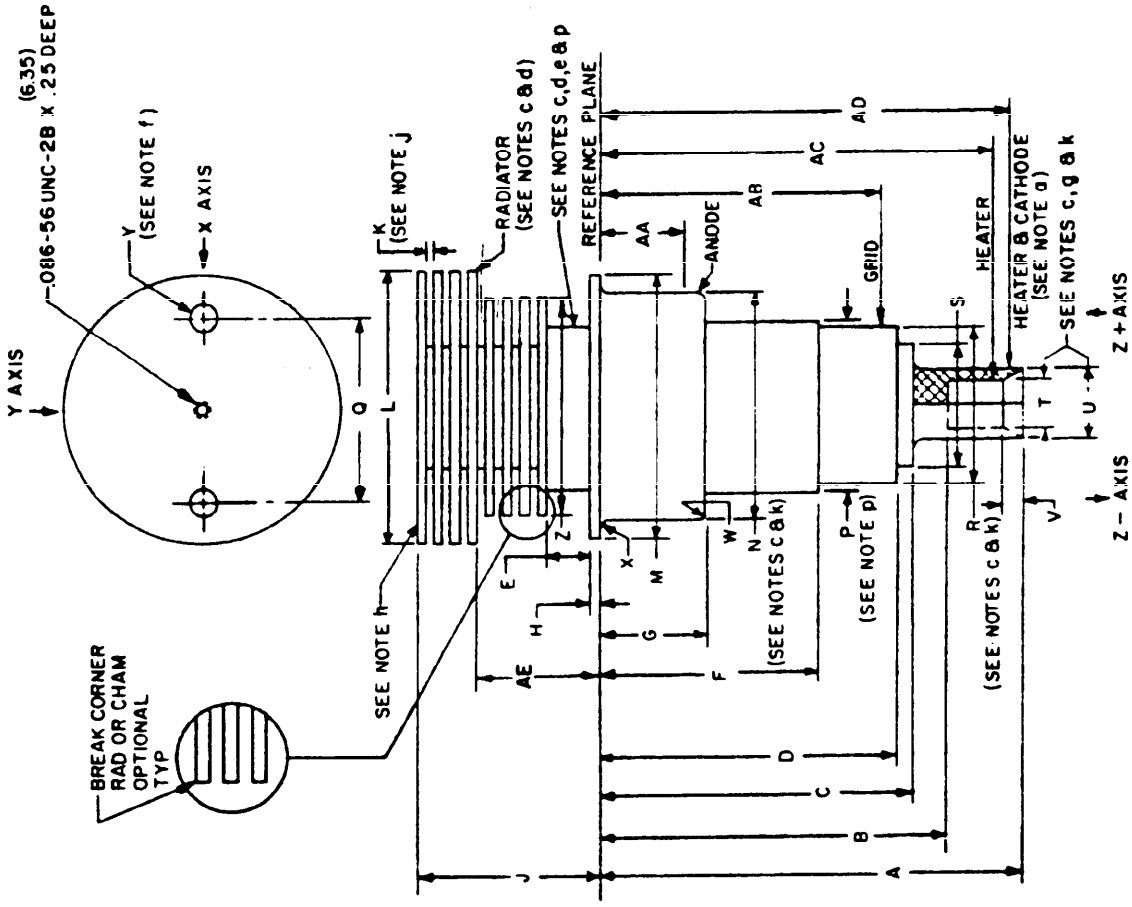


FIGURE 1. Outline drawing of electron tube type 8533W.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:25Z
Check the source to verify that this is the currentversion before use.

NOTES:

a. Insulation material is required between heater and heater-cathode and shall be securely affixed.

(A) b. Dimensions shall be checked during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

c. Silver plated 30 MSI minimum.

d. Plating not required over radiator and radiator support of copper, aluminum, or approved equivalent.

e. This surface shall be used for measurement of anode shank temperature.

f. Holes for tube extractor through top fin only.

g. Inner edge of heater and outer edge of cathode rf connection shall be free from burrs and sharp edges.

h. This fin shall withstand a 6-inch drop test without loosening and without distortion as judged by ability to maintain dimension K. Note b shall apply.

j. Distortion of fins permissible provided distance between adjacent fins at any point on circumference meets tolerances for dimension K.

k. Eccentricity of contact surfaces shall be gaged from center line of reference and shall be as follows. Note b shall apply.

Contact surface	TIR maximum	Reference
Anode	.020	Cathode
Grid	.020	Cathode
Heater	.012	Cathode

m. Diameters N, R, T and U shall apply throughout entire contact areas as defined by dimensions AA, AB, AC and AD, respectively.

n. Dimensions in electrode contact areas table are for socket design purposes and are not intended for inspection purposes.

p. This surface shall not be used for clamping or locating.

FIGURE 1. Outline drawing of electron tube type 8533W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)* .

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:25Z
Check the source to verify that this is the current version before use.