MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE, NEGATIVE GRID
TYPE DOD-018

This amendment forms a part of MIL-E-1/1727(NAVY), dated 9 October 1972, and is approved for use within the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

* Method 1002, barometric pressure, reduced (1), conditions column: Delete "3,000 Vac" and substitute "2,000 Vac".

PAGE 5

* Note 18, delete in its entirety and substitute:

"18. The specified voltage shall be applied between anode and grid. No other voltages shall be applied. The TUT shall be excited under specified conditions at atmospheric pressure for 10 seconds minimum. There shall be no evidence of arc-over or instability as evidenced by significant variations observed in the waveform of the applied voltage. Should arcing occur during the 10-second period, the TUT shall subsequently operate for 60 seconds minimum without arcing. The pressure shall then be reduced to specified conditions and the TUT must operate for another 60 seconds minimum without visible arc-over."

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
7	7
8	8

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

User activities:
Navy - AS, CG, MC, OS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-N202)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

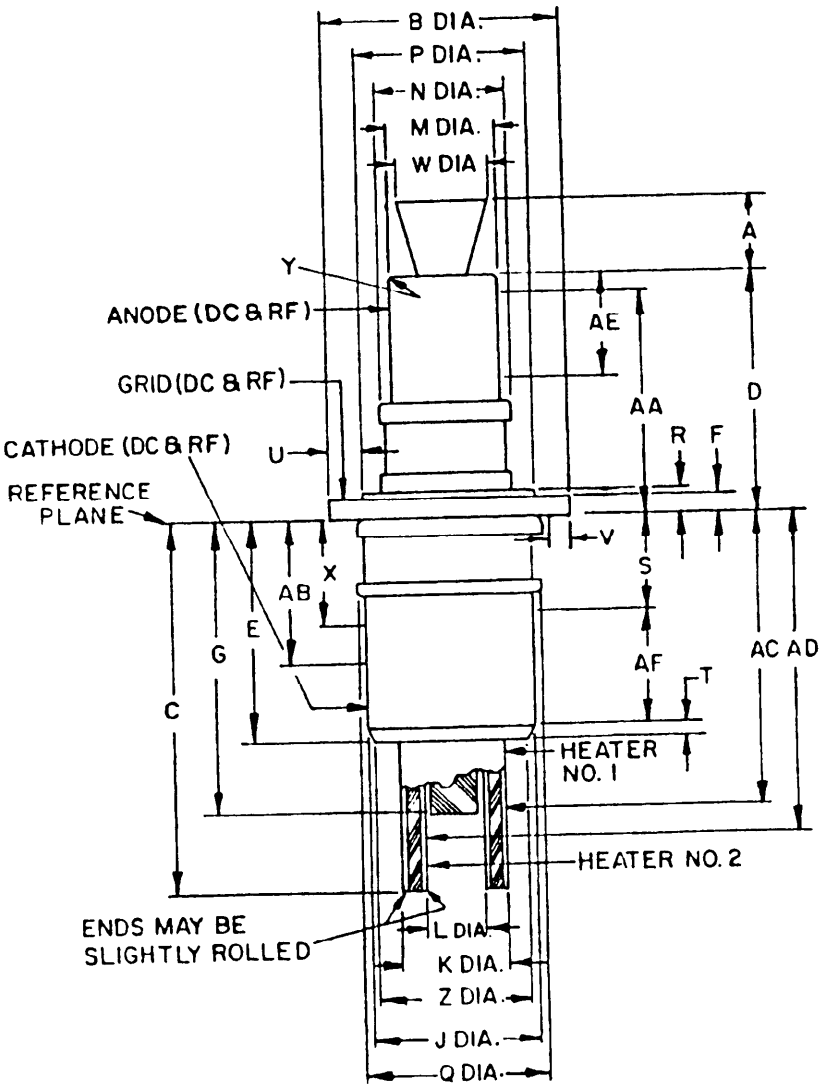


FIGURE 1. Outline drawing of electron tube type DOD-018.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 2			
A		0.250(6.35)	
B	.810(20.57)	.818(20.77)	
C	1.219(30.96)	1.281(32.53)	
D	.953(24.21)	.984(24.99)	
E	.750(19.05)	.815(20.65)	
F	.070 (1.78)	.078 (1.98)	d, e
G		1.016(25.80)	
J	.539(13.69)	.549(13.94)	f
K	.316 (8.08)	.328 (8.33)	
L	.180 (4.57)	.190 (4.82)	
M	.365 (9.27)	.371 (9.42)	
AE	.429(10.90)		d
Quality conformance inspection, part 3 (periodic check)			c
N		.453(11.50)	
P	.560(14.22)	.570(14.47)	
Q		.609(15.46)	
R	.077 (1.96)	.097 (2.46)	
S		.266 (6.75)	
T	.015 (.38)	.090 (2.28)	
W		.285 (7.24)	a
X		.375 (9.52)	g
Z	.490(12.45)	.520(13.20)	
Reference dimensions			
U	.094 (2.39)		d, e
V	.094 (2.39)		d, e
Y	.016 (.41) R		
AA	.750(19.05)		b
AB	.547(13.89)		b
AC	1.000(25.40)		b
AD	1.109(28.17)		b
AF	.453(11.51)		d

NOTES:
a. Exhaust tubulation shall not be subjected to any mechanical stress.
b. Eccentricity shall be gaged at points designated and shall be as follows (note c shall apply):

Contact	Eccentricity		Reference
	Inches	Millimeters	
Anode	.010 max	.25	Grid contact
Cathode	.010 max	.25	Grid contact
Anode-cathode	.020 TIR	.51	Grid contact
Heater No. 1	.015 max	.38	Grid contact
Heater No. 2	.015 max	.38	Grid contact
Heater No. 1 and 2	.030 TIR	.76	Grid contact

c. These dimensions shall be tested on 10 tubes per month when in continuous production. Failure of more than one tube to meet tolerances for any dimension shall cause that dimension to become, for all lots in process, part of quality conformance inspection, part 2.
d. Contact surface shall be confined to this area.
e. Only these surfaces shall be used for tube stops or clamping.
f. Maximum diameter shall not be increased by solder.
g. Tube marking shall be confined to this area.

FIGURE 1. Outline drawing of electron tube type DOD-018 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.