MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE, NEGATIVE GRID

TYPE DOD-018[1/]

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode, planar
See figure 1
Mounting position: Any
Weight: 1 ounce nominal

ABSOLUTE RATINGS:

Parameter: / Unit:	Ef V	Fl GHz	Eb Vdc	Ec Vdc	Ehk Vdc	ib a	Ib mAdc	Ic mAdc	ik a	ic a	Pp W	Pi W	tp us	Du —	tk sec	T(seal) °C (Note 1)	Barometric pressure, reduced mmHg (Note 2)
Osc or amp (Note 3)																	
Maximum:	5.7 (Note 4)	2.5	350	-50	±90	—	35	15	—	—	8.0	12	—	—	—	175	20
Minimum:	4.5	—	—	—	—	—	—	—	—	—	—	—	—	—	30	—	—
Pulse modulated Osc or amp (Note 5)																	
Maximum:	5.7 (Note 4)	2.5	275	-50	±90	—	35	15	—	—	6.0	9.5	—	—	—	175	20
Minimum:	4.5	—	—	—	—	—	—	—	—	—	—	—	—	—	30	—	—
Anode pulsed Osc or amp (Note 6)																	
Maximum:	6.3 (Note 4)	3.5	—	-100	±90	2.5 (Note 7)	2.5	1.25	3.75	1.25	7.5	7.5	2.0	0.001	—	175	250
Minimum:	5.7	—	—	—	—	—	—	—	—	—	—	—	—	—	60	—	—
Class A RF amp																	
Maximum:	6.6	—	350	-25	±90	—	35	—	—	—	8.0	12	—	—	—	175	20
Minimum:	5.7	—	—	—	—	—	—	—	—	—	—	—	—	—	0	—	—
TEST CONDITIONS:	6.3	—	350	Adj	—	—	35	—	—	—	—	—	—	—	120 min	— (Note10)	—

GENERAL:

Qualification - Required
Holding period - t = 168 hours

1/ Replaces G. E. tube type Y-2052

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:26Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1	12							
---	Pulsed oscillation	14,15	F=3.45 GHz(min); epy=3,000v; Rg/Ib=2.5mAdc; tpv=1.0us ±10%; trv=0.1us(max); tfv=0.2us(max); prr/Du=0.001±5%; Ef=6.0V	0.65	II	Po	1.90	---	W (useful)
1211	Insulation of electrodes	16	Ef=6.3V	0.65	II	Rgp Rgk	250 25	--- ---	Meg Meg
1231	Emission	-	Eb=Ec/Is=40mAdc	0.65	II	Eb = Ec	---	4.0	Vdc
1231	Pulsing emission	-	Prr = 500 ±10% tp=1±0.1us; eb=ec/is=5a	0.65	II	eb= ec	---	110	v
1261	Electrode voltage (1) (grid)	-		0.65	II	Ec	-1.90	-4.40	Vdc
1266	Total grid current	-		0.65	II	Ic	---	0.5	uAdc
	Quality conformance inspection, part 2								
1261	Electrode voltage(2) (grid)	-	Ec/Ib=2mAdc	---	---	Ec	-3.60	-8.50	Vdc
1301	Heater current	-		---	---	If	840	960	mA
1306	Transconductance	-		---	---	Sm	21,000	30,000	umhos
---	Resonance test	8,13	No voltages	---	---	---	---	---	---
1316	Amplification factor	-		---	---	Mu	60	110	---
1331	Direct-interelectrode capacitance	-	No voltages: use shielded socket in accordance with Drawing No. 260-JAN	---	---	Cgp Cgk Cpk	2.10 4.85 ---	2.45 5.75 0.045	pF pF pF
1336	Heater-cathode leakage	-	Eb=Ec=0	---	---	Ihk	---	100	uAdc
	Quality conformance inspection, part 3								
---	Life test	20	Group 8;t=1000 hours; Ef=6.3V (no other voltages)	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:26Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
---	Life-test end point;								
---	Pulsed oscillation	-		---	---	ΔPo	---	25	%
---	Interelectrode capacitance (gk)	-		---	---	ΔCgk	---	0.35	pF
	Periodic-check tests								
1002	Barometric pressure, reduced (1)	11,18	Pressure = 250 mmHg(max): voltage=3,000 Vac;TA=30°±10°C	---	---	---	---	---	---
1002	Barometric pressure, reduced (2)	11,18	Pressure = 20 mmHg(max): voltage=500 Vac: TA = 30°±10°C	---	---	---	---	---	---
1031	High-frequency vibration	17	Ebb=300Vdc; Ec/Ib=10mAdc:Rp=10,000 ohms; use socket in accordance with Drawing No.261-JAN	---	---	Ep	---	100	mVac
---	Shock	11,21	No voltages:Accel=400 G peak (min);0.5ms duration(min); use socket in accordance with Drawing No.261-JAN	---	---	---	---	---	---
---	Shock-test end point:								
1266	Total grid current			---	---	Ic	---	-0.6	uAdc
---	Torque	9,17	No voltages	---	---	---	---	---	---
---	Torque-test end points:								
1266	Total grid current			---	---	Ic	---	-0.6	uAdc
1301	Heater current			---	---	If	840	960	mA
---	Storage	19		---	---	---	---	---	---
	Storage-test end points:								
1266	Total grid current			---	---	Ic	---	-1.0	uAdc
1301	Heater current			---	---	If	840	960	mA

NOTES:

1. Sufficient conduction and convection cooling shall be provided to limit the envelope temperature to the specified maximum to 175°C under all operating conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

NOTES: - Continued

2. Operation at this altitude is possible in a suitably designed circuit.

3. Modulation essentially negative may be used if the positive peak of the audio frequency envelope does not exceed 115 percent of the carrier conditions.

4. This tube operates at frequencies where transit-time effects of the electron current shall be considered. The principal effects influencing the tube operation are the decrease in power output and operating efficiency with increase in frequency, and the bombardment and heating of the cathode by electrons from the region of the grid, which can be sufficiently severe to result in short tube life and erratic operation. Operating frequency, circuit design and adjustment, grid bias, grid current, average power input and the operating voltage contribute to some degree to the magnitude of the resulting cathode bombardment. There is a heater voltage which will maintain the cathode at the correct operating temperature for a set of operating conditions. If the conditions of operation result in appreciable cathode back-heating, it may be necessary to initiate dynamic operation of the tube at normal heater voltage, followed by a reduction of heater voltage to the proper value. A maximum variation of ±5 percent in heater voltage is recommended where consistent operation and extended tube life is a factor.

5. Carrier conditions for use with a maximum modulation factor of 1.0.

6. Tube shall not be operated for more than 4 microseconds in any 2,000 microsecond interval. Tube shall not be grid-pulsed beyond the CW ratings.

7. The regulation of series-anode-supply impedance, or both, shall limit the instantaneous peak current, with the tube considered as a short circuit, to a maximum of 10 times the specified maximum current rating.

8. Other tube contact configurations may be used provided the tube contact area remains unchanged and the socket, jig, or cavity gives equal performance. Mounting of the socket, jig, or cavity may be at the option of the manufacturer.

9. Torque test shall be performed as follows:

   (a) A torque of 15 inch-pounds shall be applied between the anode and heater terminal No. 1 without shock.

   (b) A torque of 5 inch-pounds shall be applied between heater terminal No. 1 and heater terminal No. 2 without shock.

10. During any test the maximum temperature of any part of the envelope shall be limited to 175°C maximum by conduction or forced convection cooling.

11. Perform test on 10 tubes selected at random from the first production lot of each calendar year. If more than one tube fails, the test shall become part of quality conformance inspection, part 2, with AQL 6.5, inspection level S3. After three consecutive successful submissions, the test shall revert to an annual 10-tube test.

12. All tests listed under quality conformance inspection, part 1, are to be performed at the conclusion of the holding period.

13. Grid-anode resonance: Test in cavity in accordance with DESC Drawing No. D64102. Cavity shall resonate at 1.74 GHz ±2.5 MHz with tuning slug in accordance with DESC Drawing No. B64103 at TA = 25° ±5°C.

    Grid-cathode resonance: Test in cavity in accordance with DESC Drawing No. D64102. Cavity shall resonate at 1.793 GHZ ±2.5 MHz with tuning slug in accordance with DESC Drawing No. B64103 at TA = 25° ±5°C.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:26Z
Check the source to verify that this is the current version before use.

NOTES: - Continued

When plotted on graphs of resonant frequency versus grid-anode capacitance and resonant frequency versus grid-cathode capacitance, the tube under test shall be represented by a point within a parallelogram whose four corners are located by the following points:

Points	Capacitance (pF)		Frequency (GHz)	
	C-gp	C-gk	F-gp	F-gk
1	2.10	4.85	1.928	1.879
2	2.10	4.85	1.947	1.903
3	2.45	5.75	1.895	1.845
4	2.45	5.75	1.914	1.869

14. Test in cavity in accordnace with Drawing No. 253-JAN. Measure useful power output with the coupling and tuning adjusted for maximum power output. The tube shall operate under the given conditions and after the required circuit adjustments for a minimum of 10 seconds without arcing or instability, as evidenced by pronounced variations in the average anode current meter or the power output meter. If temporary arcing does occur during the 10-second period, the tube shall subsequently operate for 60 seconds without arcing. The test may be discontinued at the end of the 10-second period if the power output has not completely stabilized but is rising. If the power output is falling, the test will be continued until a stable reading is obtained. For qualification purposes, a stabilized reading shall be obtained. All readings shall be "nonsquegging" power.

15. The pulse characteristics are defined as follows:

    (a) epy is the smooth peak voltage excluding spike (see method 1296).

    (b) The interval of trv and tfv is bwtween 20 and 85 percent of the smooth peak value of the voltage pulse.

    (c) The definition of tp is applicable to tpv.

    (d) The parameter tpv, tfv, and trv may be measured with the tube replaced by a 1,000-ohm noninductive resistor.

    The load VSWR shall be 1.5 maximum.

16. The insulation between the grid and the cathode shall be measured with a voltage of 100 Vdc. The other insulation test shall be made in accordance with method 1211.

17. Test 10 tubes selected a random from the first production lot of each calendar year and approximately every 90 days during the year. If more than one tube fails to pass the specified end points, the failed test shall become a part of quality conformance inspection, part 2, with AQL 6.5, inspection level S3, on all lots in process. After three consecutive successful submissions, the test shall revert to a 10-tube quarterly test.

18. Voltage shall be applied between anode and grid. No other voltages shall be applied. There shall be no evidence of failure as indicated by visual arc-over

19. The tube under test shall be placed in storage under room ambient conditions. The total grid current of the tube shall be measured every 30 days until a total storage period of 90 days has elapsed. Heater warm up shall be not less than 2 minutes and total test time shall not exceed 5 minutes including warm up, This test shall be performed on 4 tubes per month when tube is in production, but shipments of that month's production shall not be held pending completion of the 90 day test. So long as 3 of the 4 tubes for each of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

NOTES: - Continued

first 3 months of a production run pass the tests, and 80 percent of the cumulative quantity of tubes tested pass the tests, tubes shall be considered to conform to this specification. If any of the above conditions are not met, shipments shall be halted until 3 of 4 tubes of current production pass the 90 day test.

20. The test shall be conducted under room ambient conditions. No cooling of the tube and no heat sink shall be permitted. The filement voltage shall be cycled "ON" 1 hr. 45-min. and "OFF" 15 min. The specified life test duration applies to accumulated "ON" time.

21. Each tube shall be subjected to a total of 20 shocks; that is, 5 shocks in each position X, Y, Z plus, and Z minus in any sequence. This is a destructive test.

User activities:
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC
(Project 5960-N962)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

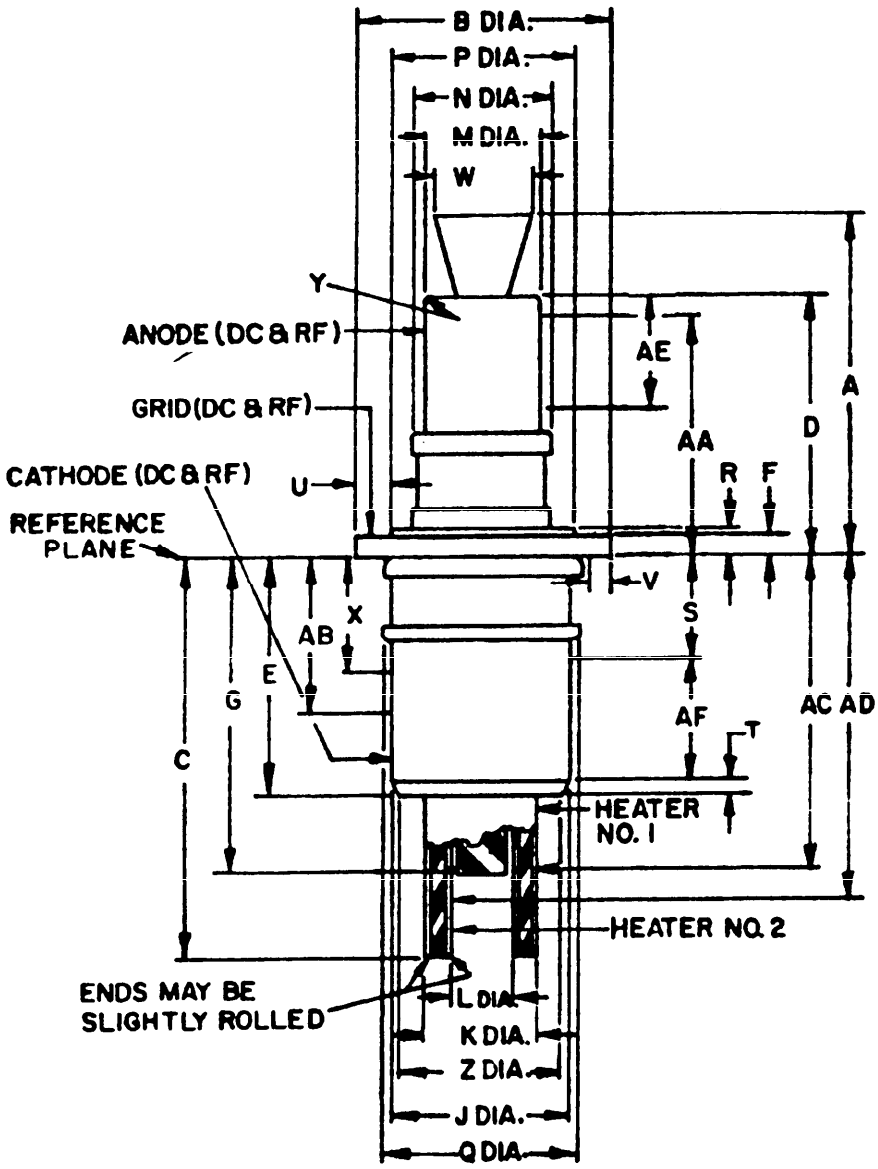


FIGURE 1. Outline drawing of electron tube type DOD-018

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses		Notes
	Minimum	Maximum	
Quality conformance inspection, part 2			
A		1.328(33.73)	
B	.810(20.57)	.818(20.77)	
C	1.219(30.96)	1.281(32.53)	
D	.953(24.21)	.984(24.99)	
E	.750(19.05)	.813(20.65)	
F	.070 (1.78)	.078 (1.98)	d,e
G		1.016(25.80)	
J	.539(13.69)	.549(13.94)	f
K	.318 (8.08)	.328 (8.33)	
L	.180 (4.57)	.190 (4.82)	
M	.365 (9.27)	.371 (9.42)	
AE	.429(10.90)		d
Quality conformance inspection, part 3 (periodic check)			c
N		.453(11.50)	
P	.560(14.22)	.570(14.47)	
Q		.609(15.46)	
R	.077 (1.96)	.097 (2.46)	
S		.266 (6.75)	
T	.015 (.38)	.090 (2.28)	
W		.285 (7.24)	e
X		.375 (9.52)	g
Z	.490(12.45)	.520(13.20)	
Reference dimensions			
U	.094 (2.39)		d,e
V	.094 (2.39)		d,e
Y	.016 (.41) R		
AA	.750(19.05)		b
AB	.547(13.89)		b
AC	1.000(25.40)		b
AD	1.109(28.17)		b
AF	.453(11.51)		d

NOTES:

a. Exhaust tubulation shall not be subjected to any mechanical stress.
b. Eccentricity shall be gaged at points designated and shall be as follows (note c shall apply):

Contact	Eccentricity		Reference
	Inches	Millimeters	
Anode	.010 max	.25	Grid contact
Cathode	.010 max	.25	Grid contact
Anode-cathode	.020 TIR	.51	Grid contact
Heater No. 1	.015 max	.38	Grid contact
Heater No. 2	.015 max	.38	Grid contact
Heater No. 1 and 2	.030 TIR	.76	Grid contact

c. These dimensions shall be tested on 10 tubes per month when in continuous production. Failure of more than one tube to meet tolerances for any dimension shall cause that dimension to become, for all lots in process, part of quality conformance inspection, part 2.
d. Contact surface shall be confined to this area.
e. Only these surfaces shall be used for tube stops or clamping.
f. Maximum diameter shall not be increased by solder.
g. Tube marking shall be confined to this area.

FIGURE 1. Outline drawing of electron tube type DOD-018 Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:26Z
Check the source to verify that this is the current version before use.