INCH-POUND
A-A-59126 /10A
31 May 2011
SUPERSEDING
A-A-59126 /10
26 September 1997

# COMMERCIAL ITEM DESCRIPTION SHEET

## TERMINALS, STUD (INSULATED)
## STYLE SE10

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE10 of MIL-T-55155/10 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

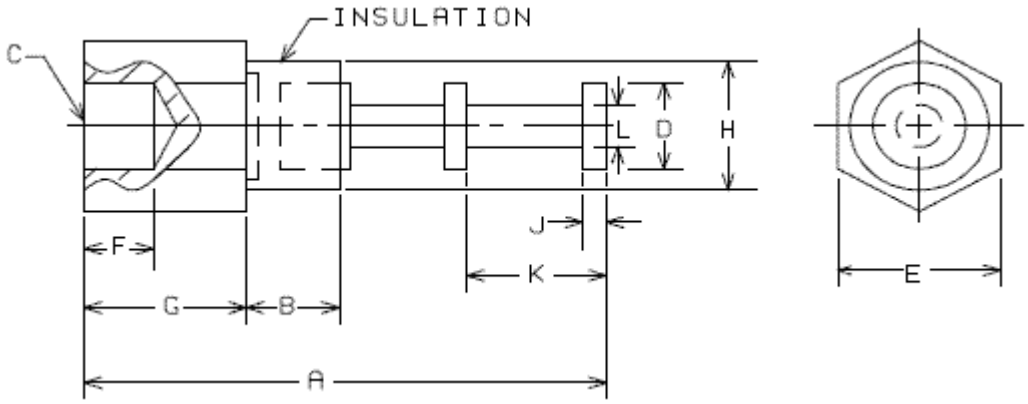


Figure 1. Configuration and Dimensions.

Comments, suggestions, or questions on this document should be emailed to michael.g.williams31.civ@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil/

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

| PART NUMBER | DIMENSIONS | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J | K | L |
| AA59126/10--01 | .546 | .218 | #4-40 UNC-2B | .066 | .156 | .100 | .181 | .125 | .018 | .049 | .045 |
| AA59126/10--02 | .718 | .156 | #6-32 UNC-2B | .140 | .250 | .156 | .258 | .245 | .025 | .125 | .069 |

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.015 inch.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Insulation material: Polytetrafluoroethylene.

Dielectric withstanding voltage: see Table I

Table I. Dielectric withstanding voltage.

| Part Number | Pressure | Volts ac (rms) (min) |
|---|---|---|
| AA59126/10--01 | Atmospheric<br>Reduced barometric | 3,500<br>1,450 |
| AA59126/10--02 | Atmospheric<br>Reduced barometric | 3,300<br>1,400 |

Pull: AA59126/10--01 - 7 pounds minimum.
AA59126/10--02 - 15 pounds minimum.
Torque: AA59126/10--01 - 1 ounce-inches, minimum.
AA59126/10--02 - 3 ounce-inches, minimum
Type of mounting: tapped hole.

Table II. Substitutability data.

| Part number in A-A-59126/10 1/ | Part number in MIL-T-55155/10B 1/ |
|---|---|
| AA59126/10--01 | M55155/10--01 |
| AA59126/10--02 | M55155/10--02 |

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – AS
Air Force – 85
Reviewer:
DLA – GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR
(Project No. 5940-2011-029)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.