INCH-POUND
A-A-59126/9
26 September 1997
SUPERSEDING
MIL-T-55155/9B
19 March 1990

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (INSULATED)
STYLE SE09

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE09 of MIL-T-55155/9 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

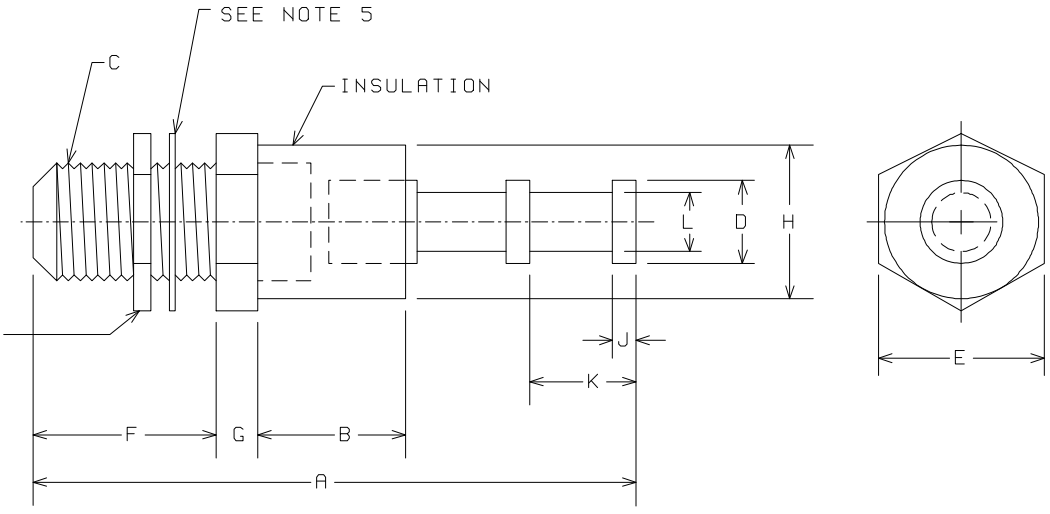

Figure 1. Drawing.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS										
	A	B	C	D	E	F	G	H	J	K	L
AA59126/09-01	0.750	0.230	#4-40 UNC-2A	0.066	0.156	0.250	0.128	0.125	0.018	0.049	0.045
AA59126/09-02	0.890	0.156	#6-32 UNC-2A	0.140	0.250		0.180	0.245	0.025	0.125	0.069
AA59126/09-03	0.688	0.200	#4-40 UNC-2A	0.090		0.188	0.060	0.219	0.020	0.110	0.050
AA59126/09-04	0.750					0.250					
AA59126/09-05	0.875					0.325					

Insulation material: AA59126/09-01 and 02 - polytetrafluoroethylene
AA59126/09-03, 04 and 05 - diallyl phthalate.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±0.015 inch.
3. Hex nut, brass, #4-40 UNC-2B x 0.09 inch thick x 0.25 inch across flats (AA59126/09-01, 03, 04, and 05); hex nut, #6-32 UNC-2B x 0.11 inch thick x 0.31 across flats AA59126/09-02).
4. The washer and the hex nut shall be plated with a finish that is electrolytically compatible with the finish on the mounting base so as to avoid dissimilar metal corrosion. Pure tin should not be used so as to avoid the potential for whiskering.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Dielectric withstanding voltage: see Table 1.

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac (rms) (min)
AA59126/09-01	Atmospheric	3,500
	Reduced barometric	1,450
AA59126/09-02	Atmospheric	3,300
	Reduced barometric	1,400
AA59126/09-03, 04, and 05	Atmospheric	3,500
	Reduced barometric	1,400

Pull: AA59126/09-01, 03, 04, and 05 - 7 pounds minimum.
AA59126/09-2 - 15 pounds minimum.
Torque: AA59126/09-01 - 1 ounce-inches, minimum.
AA59126/09-02, 03, 04, and 05 - 3.0 ounce-inches minimum.
Type of mounting: threaded stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Table II. Substitutability data.

Part number in A-A-59126/9	Part number in MIL-T-55155/9B
AA59126/09-01	M55155/09-01
AA59126/09-02	M55155/09-02
AA59126/09-03	M55155/09-03
AA59126/09-04	M55155/09-04
AA59126/09-05	M55155/09-05

The complete part number shall include the symbol for the insulation color.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy -EC
Air Force - 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-7FXE

Preparing activity:
Army - CR

(Project No. 5940-1191-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.