INCH-POUND
A-A-59126/9B
22 March 2021
SUPERSEDING
A-A-59126/9A
31 May 2011

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (INSULATED)
STYLE SE09

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE09 of MIL-T-55155/9 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

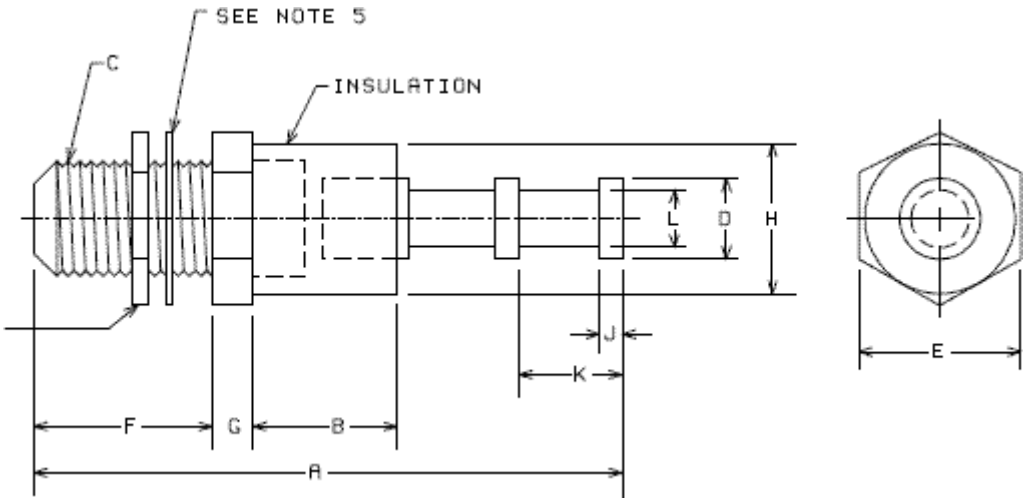


Figure 1. Configuration and Dimensions

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.ccdc-c5isr.mbx.standardization-crx@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS										
	A	B	C	D	E	F	G	H	J	K	L
AA59126/09--01	.750	.230	#4-40 UNC-2A	.066	.156	.250	.128	.125	.018	.049	.045
AA59126/09--02	.890	.156	#6-32 UNC-2A	.140	.250		.180	.245	.025	.125	.069
AA59126/09--03	.688	.200	#4-40 UNC-2A	.090		.188	.060	.219	.020	.110	.050
AA59126/09--04	.750					.250					
AA59126/09--05	.875					.325					

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.015 inch.
3. Hex nut, brass, #4-40 UNC-2B x 0.09 inch thick x 0.25 inch across flats (AA59126/09--01, --03, --04, and --05); hex nut, #6-32 UNC-2B x 0.11 inch thick x 0.31 across flats (AA59126/09--02).
4. The washer and hex nut shall be plated with a finish that is electrolytically compatible with the finish on the mounting base so as to avoid dissimilar metal corrosion. Pure tin should not be used so as to avoid the potential for whiskering.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Insulation material: AA59126/09--01 and --02 - Polytetrafluoroethylene.
AA59126/09--03, --04 and --05 - diallyl phthalate.

Dielectric withstanding voltage: see Table 1.

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac (rms) (min)
AA59126/09--01	Atmospheric Reduced barometric	3,500 1,450
AA59126/09--02	Atmospheric Reduced barometric	3,300 1,400
AA59126/09--03, --04, and --05	Atmospheric Reduced barometric	3,500 1,400

Pull: AA59126/09--01, --03, --04, and --05 - 7 pounds minimum.
AA59126/09--02 - 15 pounds minimum.
Torque: AA59126/09--01 - 1 ounce-inches, minimum.
AA59126/09--02 thru --05 - 3 ounce-inches, minimum
Type of mounting: Threaded stud.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Table II. Substitutability data.

Part number in A-A-59126/9 1/	Part number in MIL-T-55155/9A 1/
AA59126/09--01	M55155/09--01
AA59126/09--02	M55155/09--02
AA59126/09--03	M55155/09--03
AA59126/09--04	M55155/09--04
AA59126/09--05	M55155/09--05

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2021-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.